

# Data Structures, Estimation and Optimization with R

Fan Wang

2021-01-08



# Contents

<b>Preface</b>	<b>5</b>
<b>1 Array, Matrix, Dataframe</b>	<b>7</b>
1.1 List . . . . .	7
1.2 Array . . . . .	12
1.3 Matrix . . . . .	20
1.4 Variables in Dataframes . . . . .	22
<b>2 Summarize Data</b>	<b>35</b>
2.1 Counting Observation . . . . .	35
2.2 Sorting, Indexing, Slicing . . . . .	36
2.3 Group Statistics . . . . .	40
2.4 Distributional Statistics . . . . .	50
2.5 Summarize Multiple Variables . . . . .	55
<b>3 Functions</b>	<b>59</b>
3.1 Dataframe Mutate . . . . .	59
3.2 Dataframe Do Anything . . . . .	66
3.3 Apply and pmap . . . . .	73
<b>4 Panel</b>	<b>83</b>
4.1 Generate and Join . . . . .	83
4.2 Wide and Long . . . . .	89
<b>5 Linear Regression</b>	<b>93</b>
5.1 OLS and IV . . . . .	93
5.2 Decomposition . . . . .	105
<b>6 Nonlinear Regression</b>	<b>111</b>
6.1 Logit Regression . . . . .	111
6.2 Quantile Regression . . . . .	118
<b>7 Optimization</b>	<b>123</b>
7.1 Bisection . . . . .	123
<b>8 Mathematics and Statistics</b>	<b>131</b>
8.1 Distributions . . . . .	131
8.2 Analytical Solutions . . . . .	138
8.3 Inequality Models . . . . .	139
<b>9 Tables and Graphs</b>	<b>149</b>
9.1 R Base Plots . . . . .	149
9.2 Write and Read Plots . . . . .	153
<b>10 Get Data</b>	<b>159</b>
10.1 Environmental Data . . . . .	159

<b>11 Code and Development</b>	<b>165</b>
11.1 File in and Out . . . . .	165
11.2 Python with R . . . . .	172
11.3 Command Line . . . . .	173
<b>A Index and Code Links</b>	<b>175</b>
A.1 Array, Matrix, Dataframe links . . . . .	175
A.2 Summarize Data links . . . . .	176
A.3 Functions links . . . . .	177
A.4 Panel links . . . . .	178
A.5 Linear Regression links . . . . .	178
A.6 Nonlinear Regression links . . . . .	179
A.7 Optimization links . . . . .	179
A.8 Mathematics and Statistics links . . . . .	179
A.9 Tables and Graphs links . . . . .	180
A.10 Get Data links . . . . .	180
A.11 Code and Development links . . . . .	180

# Preface

This is a work-in-progress [website](#) consisting of R panel data and optimization examples for Statistics/Econometrics/Economic Analysis. Materials gathered from various [projects](#) in which R code is used. Files are from the [R4Econ](#) repository. This is not a R package, but a list of examples in PDF/HTML/Rmd formats. [REconTools](#) is a package that can be installed with tools used in [projects](#) involving R.

Bullet points show which [base R](#), [tidyverse](#) or other functions/commands are used to achieve various objectives. An effort is made to use only [base R](#) ([R Core Team, 2019](#)) and [tidyverse](#) ([Wickham, 2019](#)) packages whenever possible to reduce dependencies. The goal of this repository is to make it easier to find/re-use codes produced for various projects. Some functions also rely on or correspond to functions from [REconTools](#) ([Wang, 2020](#)).

From other repositories: For dynamic borrowing and savings problems, see [MEconTools](#) and [Dynamic Asset Repository](#); For code examples, see also [Matlab Example Code](#), [Stata Example Code](#), [Python Example Code](#); For intro econ with Matlab, see [Intro Mathematics for Economists](#), and for intro stat with R, see [Intro Statistics for Undergraduates](#). See [here](#) for all of [Fan](#)'s public repositories.

The site is built using [Bookdown](#) ([Xie, 2020](#)).

Please contact [FanWangEcon](#) for issues or problems.



# Chapter 1

## Array, Matrix, Dataframe

### 1.1 List

#### 1.1.1 Multiple Dimensional List

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

- r list tutorial
- r vector vs list
- r initialize empty multiple element list
- r name rows and columns of 2 dimensional list
- r row and column names of list
- list dimnames
- r named list to string

##### 1.1.1.1 Named List of Matrixes

Save a list of matrixes. Retrieve Element of that list via loop.

```
# Define an array to loop over
ar_fl_mean <- c(10, 20, 30)

# store results in named list
ls_mt_res = vector(mode = "list", length = length(ar_fl_mean))
ar_st_names <- paste0('mean', ar_fl_mean)
names(ls_mt_res) <- ar_st_names

# Loop and generate a list of dataframes
for (it_fl_mean in seq(1, length(ar_fl_mean))) {
  fl_mean = ar_fl_mean[it_fl_mean]

  # dataframe
  set.seed(it_fl_mean)
  tb_combine <- as_tibble(
    matrix(rnorm(4, mean=fl_mean, sd=1), nrow=2, ncol=3)
  ) %>%
  rowid_to_column(var = "id") %>%
  rename_all(~c(c('id', 'var1', 'varb', 'vartheta'))))

  ls_mt_res[[it_fl_mean]] = tb_combine
}

# Retrieve elements
```

```

print(ls_mt_res[[1]])
print(ls_mt_res$mean10)
print(ls_mt_res[['mean10']])

# Print via Loop
for (it_fl_mean in seq(1, length(ar_fl_mean))) {
  tb_combine = ls_mt_res[[it_fl_mean]]
  print(tb_combine)
}

```

### 1.1.1.2 One Dimensional Named List

1. define list
2. slice list
3. print r named list as a single line string
  - [R Unlist named list into one string with preserving list names](#)

```

# Define Lists
ls_num <- list(1,2,3)
ls_str <- list('1','2','3')
ls_num_str <- list(1,2,'3')

# Named Lists
ar_st_names <- c('e1','e2','e3')
ls_num_str_named <- ls_num_str
names(ls_num_str_named) <- ar_st_names

# Add Element to Named List
ls_num_str_named$e4 <- 'this is added'

```

Initiate an empty list and add to it

```

# Initiate List
ls_abc <- vector(mode = "list", length = 0)
# Add Named Elements to List Sequentially
ls_abc$a = 1
ls_abc$b = 2
ls_abc$c = 'abc\'s third element'
# Get all Names Added to List
ar_st_list_names <- names(ls_abc)
# Print list in a loop
print(ls_abc)

## $a
## [1] 1
##
## $b
## [1] 2
##
## $c
## [1] "abc's third element"

for (it_list_ele_ctr in seq(1,length(ar_st_list_names))) {
  st_list_ele_name <- ar_st_list_names[it_list_ele_ctr]
  st_list_ele_val <- ls_abc[it_list_ele_ctr]
  print(paste0(st_list_ele_name,'=',st_list_ele_val))
}

## [1] "a=1"
## [1] "b=2"

```



```
## [1] "c=abc's third element"
```

### 1.1.1.3 Named List Print Function

- r print input as string
- r print parameter code as string
- [How to convert variable \(object\) name into String](#)

The function below `ffi_lst2str` is also a function in [REconTools](#): `ff_sup_lst2str`.

```
# list to String printing function
ffi_lst2str <- function(ls_list, st_desc, bl_print=TRUE) {

  # string desc
  if(missing(st_desc)){
    st_desc <- deparse(substitute(ls_list))
  }

  # create string
  st_string_from_list = paste0(paste0(st_desc, ':'),
                               paste(names(ls_list), ls_list, sep="=", collapse=";" ))

  if (bl_print){
    print(st_string_from_list)
  }
}

# print full
ffi_lst2str(ls_num)
```

```
## [1] "ls_num:=1:=2:=3"
```

```
ffi_lst2str(ls_str)
```

```
## [1] "ls_str:=1:=2:=3"
```

```
ffi_lst2str(ls_num_str)
```

```
## [1] "ls_num_str:=1:=2:=3"
```

```
ffi_lst2str(ls_num_str_named)
```

```
## [1] "ls_num_str_named:e1=1;e2=2;e3=3;e4=this is added"
```

```
# print subset
ffi_lst2str(ls_num[2:3])
```

```
## [1] "ls_num[2:3]:=2:=3"
```

```
ffi_lst2str(ls_str[2:3])
```

```
## [1] "ls_str[2:3]:=2:=3"
```

```
ffi_lst2str(ls_num_str[2:4])
```

```
## [1] "ls_num_str[2:4]:=2:=3=NULL"
```

```
ffi_lst2str(ls_num_str_named[c('e2', 'e3', 'e4')])
```

```
## [1] "ls_num_str_named[c(\"e2\", \"e3\", \"e4\")]:e2=2;e3=3;e4=this is added"
```

### 1.1.1.4 Two Dimensional Unnamed List

Generate a multiple dimensional list:

1. Initiate with an N element empty list

2. Reshape list to M by Q
3. Fill list elements
4. Get list element by row and column number

List allows for different data types to be stored together.

Note that element specific names in named list are not preserved when the list is reshaped to be two dimensional. Two dimensional list, however, could have row and column names.

```
# Dimensions
it_M <- 2
it_Q <- 3
it_N <- it_M*it_Q

# Initiate an Empty MxQ=N element list
ls_2d_flat <- vector(mode = "list", length = it_N)
ls_2d <- ls_2d_flat

# Named flat
ls_2d_flat_named <- ls_2d_flat
names(ls_2d_flat_named) <- paste0('e',seq(1,it_N))
ls_2d_named <- ls_2d_flat_named

# Reshape
dim(ls_2d) <- c(it_M, it_Q)
# named 2d list can not carry 1d name after reshape
dim(ls_2d_named) <- c(it_M, it_Q)
```

Print Various objects generated above, print list flattened.

```
# display
ffi_lst2str(ls_2d_flat_named)

## [1] "ls_2d_flat_named:e1=NULL;e2=NULL;e3=NULL;e4=NULL;e5=NULL;e6=NULL"

# print(ls_2d_flat_named)
ffi_lst2str(ls_2d_named)

## [1] "ls_2d_named:=NULL;=NULL;=NULL;=NULL;=NULL;=NULL"
print(ls_2d_named)

##      [,1] [,2] [,3]
## [1,] NULL NULL NULL
## [2,] NULL NULL NULL

Select element from list:

# Select Values, double bracket to select from 2dim list
print('ls_2d[[1,2]]')

## [1] "ls_2d[[1,2]]"
print(ls_2d[[1,2]])

## NULL
```

#### 1.1.1.5 Define Two Dimensional Named Llist

For naming two dimensional lists, *rowname* and *colname* does not work. Rather, we need to use *dimnames*. Note that in addition to *dimnames*, we can continue to have element specific names. Both can co-exist. But note that the element specific names are not preserved after dimension transform, so need to be redefined afterwards.

How to select an element of a two dimensional list:

1. row and column names: `dimnames, ls_2d_flat_named[['row2','col2']]`
2. named elements: `names, ls_2d_flat_named[['e5']]`
3. select by index: `index, ls_2d_flat_named[[5]]`
4. converted two dimensional named list to tibble/matrix

Neither `dimnames` nor `names` are required, but both can be used to select elements.

```
# Dimensions
it_M <- 3
it_Q <- 4
it_N <- it_M*it_Q

# Initiate an Empty MxQ=N element list
ls_2d_flat_named <- vector(mode = "list", length = it_N)
dim(ls_2d_flat_named) <- c(it_M, it_Q)

# Fill with values
for (it_Q_ctr in seq(1,it_Q)) {
  for (it_M_ctr in seq(1,it_M)) {
    # linear index
    ls_2d_flat_named[[it_M_ctr, it_Q_ctr]] <- (it_Q_ctr-1)*it_M+it_M_ctr
  }
}

# Replace row names, note rownames does not work
dimnames(ls_2d_flat_named)[[1]] <- paste0('row',seq(1,it_M))
dimnames(ls_2d_flat_named)[[2]] <- paste0('col',seq(1,it_Q))

# Element Specific Names
names(ls_2d_flat_named) <- paste0('e',seq(1,it_N))

# Convert to Matrix
tb_2d_flat_named <- as_tibble(ls_2d_flat_named) %>% unnest()
mt_2d_flat_named <- as.matrix(tb_2d_flat_named)
```

Print various objects generated above:

```
# These are not element names, can still name each element
# display
print('ls_2d_flat_named')

## [1] "ls_2d_flat_named"
print(ls_2d_flat_named)

##      col1 col2 col3 col4
## row1  1    4    7    10
## row2  2    5    8    11
## row3  3    6    9    12
## attr(,"names")
## [1] "e1" "e2" "e3" "e4" "e5" "e6" "e7" "e8" "e9" "e10" "e11" "e12"
print('tb_2d_flat_named')

## [1] "tb_2d_flat_named"
print(tb_2d_flat_named)
print('mt_2d_flat_named')

## [1] "mt_2d_flat_named"
print(mt_2d_flat_named)
```

```
##      col1 col2 col3 col4
## [1,]    1    4    7   10
## [2,]    2    5    8   11
## [3,]    3    6    9   12
```

Select elements from list:

```
# Select elements with with dimnames
ffi_lst2str(ls_2d_flat_named[['row2','col2']])

## [1] "ls_2d_flat_named[["row2", "col2"]]:=5"

# Select elements with element names
ffi_lst2str(ls_2d_flat_named[['e5']])

## [1] "ls_2d_flat_named[["e5"]]:=5"

# Select elements with index
ffi_lst2str(ls_2d_flat_named[[5]])

## [1] "ls_2d_flat_named[[5]]:=5"
```

## 1.2 Array

### 1.2.1 Array Basics

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 1.2.1.1 Multidimensional Arrays

```
ar_a <- c(1,2,3)
ar_b <- c(1,2,3/1,2,3)
rep(0, length(ar_a))
```

##### 1.2.1.1.1 Repeat one Number by the Size of an Array

```
## [1] 0 0 0
```

```
# Multidimensional Array
# 1 is r1c1t1, 1.5 in r2c1t1, 0 in r1c2t1, etc.
# Three dimensions, row first, column second, and tensor third
x <- array(c(1, 1.5, 0, 2, 0, 4, 0, 3), dim=c(2, 2, 2))
dim(x)
```

##### 1.2.1.1.2 Generate 2 Dimensional Array

```
## [1] 2 2 2
```

```
print(x)
```

```
## , , 1
##
##      [,1] [,2]
## [1,]  1.0   0
## [2,]  1.5   2
##
## , , 2
##
##      [,1] [,2]
## [1,]    0   0
## [2,]    4   3
```

### 1.2.1.2 Array Slicing

**1.2.1.2.1 Remove Elements of Array** Select elements with direct indexing, or with head and tail functions. Get the first two elements of three elements array.

```
# Remove last element of array
vars.group.bydf <- c('23','dfa', 'wer')
vars.group.bydf[-length(vars.group.bydf)]
```

```
## [1] "23" "dfa"
```

```
# Use the head function to remove last element
head(vars.group.bydf, -1)
```

```
## [1] "23" "dfa"
```

```
head(vars.group.bydf, 2)
```

```
## [1] "23" "dfa"
```

Get last two elements of array.

```
# Remove first element of array
vars.group.bydf <- c('23','dfa', 'wer')
vars.group.bydf[2:length(vars.group.bydf)]
```

```
## [1] "dfa" "wer"
```

```
# Use Tail function
tail(vars.group.bydf, -1)
```

```
## [1] "dfa" "wer"
```

```
tail(vars.group.bydf, 2)
```

```
## [1] "dfa" "wer"
```

Select all except for the first and the last element of an array.

```
# define array
ar_amin <- c(0, 0.25, 0.50, 0.75, 1)
# select without head and tail
tail(head(ar_amin, -1), -1)
```

```
## [1] 0.25 0.50 0.75
```

Select the first and the last element of an array. The extreme values.

```
# define array
ar_amin <- c(0, 0.25, 0.50, 0.75, 1)
# select head and tail
c(head(ar_amin, 1), tail(ar_amin, 1))
```

```
## [1] 0 1
```

### 1.2.1.3 NA in Array

```
# Convert Inf and -Inf to NA
x <- c(1, -1, Inf, 10, -Inf)
na_if(na_if(x, -Inf), Inf)
```

#### 1.2.1.3.1 Check if NA is in Array

```
## [1] 1 -1 NA 10 NA
```

### 1.2.1.4 Notations

#### 1.2.1.4.1 e notation

1. Case one:  $1.149946e+00$ 
  - this is approximately: 1.14995
2. Case two:  $9.048038e-01$ 
  - this is approximately: 0.90480
3. Case three:  $9.048038e-01$ 
  - this is approximately: 0.90480

## 1.2.2 Generate Arrays

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 1.2.2.1 Generate Special Arrays

**1.2.2.1.1 Log Space Arrays** Often need to generate arrays on log rather than linear scale, below is log 10 scaled grid.

```
# Parameters
it.lower.bd.inc.cnt <- 3
fl.log.lower <- -10
fl.log.higher <- -9
fl.min.rescale <- 0.01
it.log.count <- 4
# Generate
ar.fl.log.rescaled <- exp(log(10)*seq(log10(fl.min.rescale),
                                     log10(fl.min.rescale +
                                             (fl.log.higher-fl.log.lower)),
                                     length.out=it.log.count))
ar.fl.log <- ar.fl.log.rescaled + fl.log.lower - fl.min.rescale
# Print
ar.fl.log

## [1] -10.000000 -9.963430 -9.793123 -9.000000
```

## 1.2.3 String Arrays

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 1.2.3.1 String Replace

- r string wildcard replace between regex
- [R - replace part of a string using wildcards](#)

```
# String replacement
gsub(x = paste0(unique(df.slds.stats.perc$it.inner.counter), ':',
                  unique(df.slds.stats.perc$z_n_a_n), collapse = ';'),
     pattern = "\\n",
     replacement = "")
gsub(x = var, pattern = "\\n", replacement = "")
gsub(x = var.input, pattern = "\\.", replacement = "_")
```

String replaces a segment, search by wildcard. Given the string below, delete all text between carriage return and pound sign:

```
st_tex_text <- "\\n% Lat2ex Comments\\n\\newcommand{\\exa}{\\text{from external file: } \\alpha + \\be
st_clean_a1 <- gsub("\\%.*?\\n", "", st_tex_text)
```

```

st_clean_a2 <- gsub("L.*?x", "[LATEX]", st_tex_text)
print(paste0('st_tex_text:', st_tex_text))

## [1] "st_tex_text:\n% Lat2ex Comments\n\\newcommand{\exa}{\\text{from external file: } \\alpha +
print(paste0('st_clean_a1:', st_clean_a1))

## [1] "st_clean_a1:\n\\newcommand{\exa}{\\text{from external file: } \\alpha + \\beta}\n"
print(paste0('st_clean_a2:', st_clean_a2))

## [1] "st_clean_a2:\n% [LATEX] Comments\n\\newcommand{\exa}{\\text{from external file: } \\alpha +
String delete after a particular string:
st_tex_text <- "\\end{equation}\n\n% Even more comments from Latex preamble"
st_clean_a1 <- gsub("\\n%.*", "", st_tex_text)
print(paste0('st_tex_text:', st_tex_text))

## [1] "st_tex_text:\\end{equation}\n\n% Even more comments from Latex preamble"
print(paste0('st_clean_a1:', st_clean_a1))

## [1] "st_clean_a1:\\end{equation}\n\n"

```

#### 1.2.3.1.1 Search If and Which String Contains

- r if string contains
- r if string contains either or grepl
- [Use grepl to search either of multiple substrings in a text](#)

Search for a single substring in a single string:

```

st_example_a <- 'C:/Users/fan/R4Econ/amto/tibble/fs_tib_basics.Rmd'
st_example_b <- 'C:/Users/fan/R4Econ/amto/tibble/_main.html'
grepl('_main', st_example_a)

## [1] FALSE
grepl('_main', st_example_b)

```

```
## [1] TRUE
```

Search for if one of a set of substring exists in a set of strings. In particular which one of the elements of *ls\_spn* contains at least one of the elements of *ls\_str\_if\_contains*. In the example below, only the first path does not contain either the word *aggregate* or *index* in the path. This can be used after all paths have been found recursively in some folder to select only desired paths from the full set of possibilities:

```

ls_spn <- c("C:/Users/fan/R4Econ//panel/basic/fs_genpanel.Rmd",
           "C:/Users/fan/R4Econ//summarize/aggregate/main.Rmd",
           "C:/Users/fan/R4Econ//summarize/index/fs_index_populate.Rmd")
ls_str_if_contains <- c("aggregate", "index")
str_if_contains <- paste(ls_str_if_contains, collapse = "|")
grepl(str_if_contains, ls_spn)

```

```
## [1] FALSE TRUE TRUE
```

#### 1.2.3.2 String Split

Given some string, generated for example by cut, get the lower cut starting points, and also the higher end point

```

# Extract 0.216 and 0.500 as lower and upper bounds
st_cut_cate <- '(0.216,0.500]'
# Extract Lower Part
substring(strsplit(st_cut_cate, ",")[[1]][1], 2)

```

```
## [1] "0.216"
# Extract second part except final bracket Option 1
intToUtf8(rev(utf8ToInt(substring(intToUtf8(rev(utf8ToInt(strsplit(st_cut_cate, ",")[[1]][2]))), 2))

## [1] "0.500"
# Extract second part except final bracket Option 2
gsub(strsplit(st_cut_cate, ",")[[1]][2], pattern = "]", replacement = "")

## [1] "0.500"
```

### 1.2.3.3 String Concatenate

```
# Simple Collapse
vars.group.by <- c('abc', 'efg')
paste0(vars.group.by, collapse='|')

## [1] "abc|efg"
```

### 1.2.3.4 String Add Leading Zero

```
# Add Leading zero for integer values to allow for sorting when
# integers are combined into strings
it_z_n <- 1
it_a_n <- 192
print(sprintf("%02d", it_z_n))

## [1] "01"
print(sprintf("%04d", it_a_n))

## [1] "0192"
```

### 1.2.3.5 Substring Components

Given a string, with certain structure, get components.

- r time string get month and year and day

```
snm_full <- "20100701"
snm_year <- substr(snm_full, 0, 4)
snm_month <- substr(snm_full, 5, 6)
snm_day <- substr(snm_full, 7, 8)
print(paste0('full:', snm_full,
             ', year:', snm_year,
             ', month:', snm_month,
             ', day:', snm_day))

## [1] "full:20100701, year:2010, month:07, day:01"
```

### 1.2.3.6 Substring and File Name

From path, get file name without suffix.

- r string split
- r list last element
- r get file name from path
- r get file path no name



```

st_example <- 'C:/Users/fan/R4Econ/amto/tibble/fs_tib_basics.Rmd'
st_file_wth_suffix_s <- tail(strsplit(st_example, "/")[[1]],n=1)
st_file_wno_suffix_s <- tools::file_path_sans_ext(basename(st_example))
st_fullpath_nosufx_s <- sub('\\.Rmd$', '', st_example)
st_fullpath_noname_s <- dirname(st_example)

print(strsplit(st_example, "/"))

## [[1]]
## [1] "C:"          "Users"       "fan"         "R4Econ"      "amto"
## [6] "tibble"     "fs_tib_basics.Rmd"

print(paste0('st_file_wth_suffix_s:', st_file_wth_suffix_s))

## [1] "st_file_wth_suffix_s:fs_tib_basics.Rmd"

print(paste0('st_file_wno_suffix_s:', st_file_wno_suffix_s))

## [1] "st_file_wno_suffix_s:fs_tib_basics"

print(paste0('st_fullpath_nosufx_s:', st_fullpath_nosufx_s))

## [1] "st_fullpath_nosufx_s:C:/Users/fan/R4Econ/amto/tibble/fs_tib_basics"

print(paste0('st_fullpath_noname_s:', st_fullpath_noname_s))

## [1] "st_fullpath_noname_s:C:/Users/fan/R4Econ/amto/tibble"

```

## 1.2.4 Mesh Matrices, Arrays and Scalars

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

- `r.expand.grid` meshed array to matrix
- `r.meshgrid`
- `r.array` to matrix
- `r.reshape` array to matrix
- `dplyr` permutations rows of matrix and element of array
- `tidyr.expand_grid` mesh matrix and vector

### 1.2.4.1 Mesh Two or More Vectors with `expand_grid`

In the example below, we have a matrix that is 2 by 2 (endogenous states), a vector that is 3 by 1 (choices), and another matrix that is 4 by 3 (exogenous states shocks).

We want to generate a tibble dataset that meshes the matrix and the vector, so that all combinations show up. Additionally, we want to add some additional values that are common across all rows to the meshed dataframe.

Note `expand_grid` is from `tidyr` 1.0.0.

```

# A. Generate the 5 by 2 Matrix (ENDO STATES)
# it_child_count = N, the number of children
it_N_child_cnt = 2
# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = it_N_child_cnt)
ar_nN_alpha = seq(0.1, 0.9, length.out = it_N_child_cnt)
fl_rho = 0.1
fl_lambda = 1.1
mt_nP_A_alpha = cbind(ar_nN_A, ar_nN_alpha, fl_rho, fl_lambda)
ar_st_varnames <- c('s_A', 's_alpha', 'p_rho', 'p_lambda')
tb_states_endo <- as_tibble(mt_nP_A_alpha) %>%
  rename_all(~c(ar_st_varnames)) %>%

```

```

rowid_to_column(var = "state_id")

# B. Choice Grid
it_N_choice_cnt = 3
fl_max = 10
fl_min = 0
ar_nN_d = seq(fl_min, fl_max, length.out = it_N_choice_cnt)
ar_st_varnames <- c('c_food')
tb_choices <- as_tibble(ar_nN_d) %>%
  rename_all(~c(ar_st_varnames)) %>%
  rowid_to_column(var = "choice_id")

# C. Shock Grid
set.seed(123)
it_N_shock_cnt = 4
ar_nQ_shocks = exp(rnorm(it_N_shock_cnt, mean=0, sd=1))
ar_st_varnames <- c('s_eps')
tb_states_exo <- as_tibble(ar_nQ_shocks) %>%
  rename_all(~c(ar_st_varnames)) %>%
  rowid_to_column(var = "shock_id")

# dataframe expand with other non expanded variables
ar_st_varnames <-
tb_states_shk_choices <- tb_states_endo %>%
  expand_grid(tb_choices) %>%
  expand_grid(tb_states_exo) %>%
  select(state_id, choice_id, shock_id,
         s_A, s_alpha, s_eps, c_food,
         p_rho, p_lambda)

# display
kable(tb_states_shk_choices) %>% kable_styling_fc()

```

Using `expand_grid` directly over arrays

```

# expand grid with dplyr
expand_grid(x = 1:3, y = 1:2, z = -3:-1)

```

#### 1.2.4.2 Mesh Arrays with `expand.grid`

Given two arrays, mesh the two arrays together.

```

# use expand.grid to generate all combinations of two arrays

it_ar_A = 5
it_ar_alpha = 10

ar_A = seq(-2, 2, length.out=it_ar_A)
ar_alpha = seq(0.1, 0.9, length.out=it_ar_alpha)

mt_A_alpha = expand.grid(A = ar_A, alpha = ar_alpha)

mt_A_meshed = mt_A_alpha[,1]
dim(mt_A_meshed) = c(it_ar_A, it_ar_alpha)

mt_alpha_meshed = mt_A_alpha[,2]
dim(mt_alpha_meshed) = c(it_ar_A, it_ar_alpha)

# display

```

state_id	choice_id	shock_id	s_A	s_alpha	s_eps	c_food	p_rho	p_lambda
1	1	1	-2	0.1	0.5709374	0	0.1	1.1
1	1	2	-2	0.1	0.7943926	0	0.1	1.1
1	1	3	-2	0.1	4.7526783	0	0.1	1.1
1	1	4	-2	0.1	1.0730536	0	0.1	1.1
1	2	1	-2	0.1	0.5709374	5	0.1	1.1
1	2	2	-2	0.1	0.7943926	5	0.1	1.1
1	2	3	-2	0.1	4.7526783	5	0.1	1.1
1	2	4	-2	0.1	1.0730536	5	0.1	1.1
1	3	1	-2	0.1	0.5709374	10	0.1	1.1
1	3	2	-2	0.1	0.7943926	10	0.1	1.1
1	3	3	-2	0.1	4.7526783	10	0.1	1.1
1	3	4	-2	0.1	1.0730536	10	0.1	1.1
2	1	1	2	0.9	0.5709374	0	0.1	1.1
2	1	2	2	0.9	0.7943926	0	0.1	1.1
2	1	3	2	0.9	4.7526783	0	0.1	1.1
2	1	4	2	0.9	1.0730536	0	0.1	1.1
2	2	1	2	0.9	0.5709374	5	0.1	1.1
2	2	2	2	0.9	0.7943926	5	0.1	1.1
2	2	3	2	0.9	4.7526783	5	0.1	1.1
2	2	4	2	0.9	1.0730536	5	0.1	1.1
2	3	1	2	0.9	0.5709374	10	0.1	1.1
2	3	2	2	0.9	0.7943926	10	0.1	1.1
2	3	3	2	0.9	4.7526783	10	0.1	1.1
2	3	4	2	0.9	1.0730536	10	0.1	1.1

```
kable(mt_A_meshed) %>%
  kable_styling_fc()
```

-2	-2	-2	-2	-2	-2	-2	-2	-2	-2
-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
0	0	0	0	0	0	0	0	0	0
1	1	1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2	2	2

```
kable(mt_alpha_meshed) %>%
  kable_styling_fc_wide()
```

0.1	0.1888889	0.2777778	0.3666667	0.4555556	0.5444444	0.6333333	0.7222222	0.8111111	0.9
0.1	0.1888889	0.2777778	0.3666667	0.4555556	0.5444444	0.6333333	0.7222222	0.8111111	0.9
0.1	0.1888889	0.2777778	0.3666667	0.4555556	0.5444444	0.6333333	0.7222222	0.8111111	0.9
0.1	0.1888889	0.2777778	0.3666667	0.4555556	0.5444444	0.6333333	0.7222222	0.8111111	0.9
0.1	0.1888889	0.2777778	0.3666667	0.4555556	0.5444444	0.6333333	0.7222222	0.8111111	0.9

Two Identical Arrays, individual attributes, each column is an individual for a matrix, and each row is also an individual.

*# use expand.grid to generate all combinations of two arrays*

```
it_ar_A = 5

ar_A = seq(-2, 2, length.out=it_ar_A)
mt_A_A = expand.grid(Arow = ar_A, Arow = ar_A)
mt_Arow = mt_A_A[,1]
dim(mt_Arow) = c(it_ar_A, it_ar_A)
mt_Acol = mt_A_A[,2]
dim(mt_Acol) = c(it_ar_A, it_ar_A)
```

```
# display
kable(mt_Arow) %>%
  kable_styling_fc()
```

-2	-2	-2	-2	-2
-1	-1	-1	-1	-1
0	0	0	0	0
1	1	1	1	1
2	2	2	2	2

```
kable(mt_Acol) %>%
  kable_styling_fc()
```

-2	-1	0	1	2
-2	-1	0	1	2
-2	-1	0	1	2
-2	-1	0	1	2
-2	-1	0	1	2

## 1.3 Matrix

### 1.3.1 Generate Matrixes

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 1.3.1.1 Create a N by 2 Matrix from 3 arrays

Names of each array become row names automatically.

```
ar_row_one <- c(-1,+1)
ar_row_two <- c(-3,-2)
ar_row_three <- c(0.35,0.75)

mt_n_by_2 <- rbind(ar_row_one, ar_row_two, ar_row_three)
kable(mt_n_by_2) %>%
  kable_styling_fc()
```

ar_row_one	-1.00	1.00
ar_row_two	-3.00	-2.00
ar_row_three	0.35	0.75

#### 1.3.1.2 Name Matrix Columns and Rows

```
# An empty matrix with Logical NA
mt_named <- matrix(data=NA, nrow=2, ncol=2)
colnames(mt_named) <- paste0('c', seq(1,2))
rownames(mt_named) <- paste0('r', seq(1,2))
mt_named
```

```
##      c1 c2
## r1 NA NA
## r2 NA NA
```

#### 1.3.1.3 Generate NA Matrix

- [Best way to allocate matrix in R, NULL vs NA?](#)

Allocate with NA or NA\_real\_ or NA\_int\_. Clarity in type definition is preferred.

```
# An empty matrix with Logical NA
mt_na <- matrix(data=NA, nrow=2, ncol=2)
str(mt_na)

## logi [1:2, 1:2] NA NA NA NA

# An empty matrix with numerica NA
mt_fl_na <- matrix(data=NA_real_, nrow=2, ncol=2)
mt_it_na <- matrix(data=NA_integer_, nrow=2, ncol=2)

str(mt_fl_na)

## num [1:2, 1:2] NA NA NA NA

str(mt_fl_na)

## num [1:2, 1:2] NA NA NA NA
```

#### 1.3.1.4 Generate Random Matrixes

Random draw from the normal distribution, random draw from the uniform distribution, and combine resulting matrixes.

```
# Generate 15 random normal, put in 5 rows, and 3 columns
mt_rnorm <- matrix(rnorm(15,mean=0,sd=1), nrow=5, ncol=3)

# Generate 15 random normal, put in 5 rows, and 3 columns
mt_runif <- matrix(runif(15,min=0,max=1), nrow=5, ncol=5)

# Combine
mt_rnorm_runif <- cbind(mt_rnorm, mt_runif)

# Display
kable(mt_rnorm_runif) %>% kable_styling_fc_wide()
```

0.1292877	-0.4456620	-0.5558411	0.3181810	0.3688455	0.2659726	0.3181810	0.3688455
1.7150650	1.2240818	1.7869131	0.2316258	0.1524447	0.8578277	0.2316258	0.1524447
0.4609162	0.3598138	0.4978505	0.1428000	0.1388061	0.0458312	0.1428000	0.1388061
-1.2650612	0.4007715	-1.9666172	0.4145463	0.2330341	0.4422001	0.4145463	0.2330341
-0.6868529	0.1106827	0.7013559	0.4137243	0.4659625	0.7989248	0.4137243	0.4659625

#### 1.3.1.5 Add Column to Matrix with Common Scalar Value

Given some matrix of information, add a column, where all rows of the column have the same numerical value. Use the matrix created prior. - R add column to matrix - r append column to matrix constant value

```
fl_new_first_col_val <- 111
fl_new_last_col_val <- 999
mt_with_more_columns <- cbind(rep(fl_new_first_col_val, dim(mt_rnorm_runif)[1]),
                              mt_rnorm_runif,
                              rep(fl_new_last_col_val, dim(mt_rnorm_runif)[1]))

# Display
kable(mt_with_more_columns) %>% kable_styling_fc_wide()
```

### 1.3.2 Linear Algebra

Go back to [fan's REconTools](#) Package, [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

111	0.1292877	-0.4456620	-0.5558411	0.3181810	0.3688455	0.2659726	0.3181810	0.3688455	999
111	1.7150650	1.2240818	1.7869131	0.2316258	0.1524447	0.8578277	0.2316258	0.1524447	999
111	0.4609162	0.3598138	0.4978505	0.1428000	0.1388061	0.0458312	0.1428000	0.1388061	999
111	-1.2650612	0.4007715	-1.9666172	0.4145463	0.2330341	0.4422001	0.4145463	0.2330341	999
111	-0.6868529	0.1106827	0.7013559	0.4137243	0.4659625	0.7989248	0.4137243	0.4659625	999

### 1.3.2.1 Matrix Multiplication

Multiply Together a 3 by 2 matrix and a 2 by 1 vector

```
ar_row_one <- c(-1,+1)
ar_row_two <- c(-3,-2)
ar_row_three <- c(0.35,0.75)
mt_n_by_2 <- rbind(ar_row_one, ar_row_two, ar_row_three)
```

```
ar_row_four <- c(3,4)
```

```
# Matrix Multiplication
```

```
mt_out <- mt_n_by_2 %*% ar_row_four
print(mt_n_by_2)
```

```
##           [,1] [,2]
## ar_row_one  -1.00  1.00
## ar_row_two  -3.00 -2.00
## ar_row_three  0.35  0.75
```

```
print(ar_row_four)
```

```
## [1] 3 4
```

```
print(mt_out)
```

```
##           [,1]
## ar_row_one    1.00
## ar_row_two   -17.00
## ar_row_three    4.05
```

## 1.4 Variables in Dataframes

### 1.4.1 Generate Dataframe

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 1.4.1.1 Simple Meshed Dataframe Name Columns

```
# 5 by 3 matrix
mt_rnorm_a <- matrix(rnorm(4,mean=0,sd=1), nrow=5, ncol=3)
```

```
# Column Names
```

```
ar_st_varnames <- c('id','var1','varb','vartheta')
```

```
# Combine to tibble, add name col1, col2, etc.
```

```
tb_combine <- as_tibble(mt_rnorm_a) %>%
  rowid_to_column(var = "id") %>%
  rename_all(~c(ar_st_varnames))
```

```
# Display
```

```
kable(tb_combine) %>% kable_styling_fc()
```

id	var1	varb	vartheta
1	-1.1655448	-0.8185157	0.6849361
2	-0.8185157	0.6849361	-0.3200564
3	0.6849361	-0.3200564	-1.1655448
4	-0.3200564	-1.1655448	-0.8185157
5	-1.1655448	-0.8185157	0.6849361

### 1.4.1.2 Generate Tibble given Matrixes and Arrays

Given Arrays and Matrixes, Generate Tibble and Name Variables/Columns

- naming tibble columns
- tibble variable names
- dplyr rename tibble
- dplyr rename tibble all variables
- dplyr rename all columns by index
- dplyr tibble add index column
- see also: [SO-51205520](#)

```
# Base Inputs
ar_col <- c(-1,+1)
mt_rnorm_a <- matrix(rnorm(4,mean=0,sd=1), nrow=2, ncol=2)
mt_rnorm_b <- matrix(rnorm(4,mean=0,sd=1), nrow=2, ncol=4)

# Combine Matrix
mt_combine <- cbind(ar_col, mt_rnorm_a, mt_rnorm_b)
colnames(mt_combine) <- c('ar_col',
  paste0('matcolvar_grpa_', seq(1,dim(mt_rnorm_a)[2])),
  paste0('matcolvar_grpb_', seq(1,dim(mt_rnorm_b)[2])))

# Variable Names
ar_st_varnames <- c('var_one',
  paste0('tibcolvar_ga_', c(1,2)),
  paste0('tibcolvar_gb_', c(1,2,3,4)))

# Combine to tibble, add name col1, col2, etc.
tb_combine <- as_tibble(mt_combine) %>% rename_all(~c(ar_st_varnames))

# Add an index column to the dataframe, ID column
tb_combine <- tb_combine %>% rowid_to_column(var = "ID")

# Change all gb variable names
tb_combine <- tb_combine %>%
  rename_at(vars(starts_with("tibcolvar_gb")),
    funs(str_replace(., "_gb_", "_gbrenamed_")))

# Tibble back to matrix
mt_tb_combine_back <- data.matrix(tb_combine)

# Display
kable(mt_combine) %>% kable_styling_fc_wide()
```

ar_col	matcolvar_grpa_1	matcolvar_grpa_2	matcolvar_grpb_1	matcolvar_grpb_2	matcolvar_grpb_3	matcolvar_grpb_4
-1	-1.3115224	-0.1294107	-0.1513960	-3.2273228	-0.1513960	-3.2273228
1	-0.5996083	0.8867361	0.3297912	-0.7717918	0.3297912	-0.7717918

```
kable(tb_combine) %>% kable_styling_fc_wide()
```

ID	var_one	tibcolvar_ga_1	tibcolvar_ga_2	tibcolvar_gbrenamed_1	tibcolvar_gbrenamed_2	tibcolvar_gbrenamed_3	tibcolvar_gbrenamed_4
1	-1	-1.3115224	-0.1294107	-0.1513960	-3.2273228	-0.1513960	-3.2273228
2	1	-0.5996083	0.8867361	0.3297912	-0.7717918	0.3297912	-0.7717918

```
kable(mt_tb_combine_back) %>% kable_styling_fc_wide()
```

ID	var_one	tibcolvar_ga_1	tibcolvar_ga_2	tibcolvar_gbrenamed_1	tibcolvar_gbrenamed_2	tibcolvar_gbrenamed_3	tibcolvar_gbrenamed_4
1	-1	-1.3115224	-0.1294107	-0.1513960	-3.2273228	-0.1513960	-3.2273228
2	1	-0.5996083	0.8867361	0.3297912	-0.7717918	0.3297912	-0.7717918

### 1.4.1.3 Rename Tibble with Numeric Column Names

After reshaping, often could end up with variable names that are all numeric, integers for example, how to rename these variables to add a common prefix for example.

```
# Base Inputs
ar_col <- c(-1,+1)
mt_rnorm_c <- matrix(rnorm(4,mean=0,sd=1), nrow=5, ncol=10)
mt_combine <- cbind(ar_col, mt_rnorm_c)

# Variable Names
ar_it_cols_ctr <- seq(1, dim(mt_rnorm_c)[2])
ar_st_varnames <- c('var_one', ar_it_cols_ctr)

# Combine to tibble, add name col1, col2, etc.
tb_combine <- as_tibble(mt_combine) %>% rename_all(~c(ar_st_varnames))

# Add an index column to the dataframe, ID column
tb_combine_ori <- tb_combine %>% rowid_to_column(var = "ID")

# Change all gb variable names
tb_combine <- tb_combine_ori %>%
  rename_at(
    vars(num_range('1', ar_it_cols_ctr)),
    funs(paste0("rho", ., 'var'))
  )

# Display
kable(tb_combine_ori) %>% kable_styling_fc_wide()
```

ID	var_one	1	2	3	4	5	6	7	8	9	10
1	-1	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120
2	1	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504
3	-1	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769
4	1	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486
5	-1	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120

```
kable(tb_combine) %>% kable_styling_fc_wide()
```

ID	var_one	rho1var	rho2var	rho3var	rho4var	rho5var	rho6var	rho7var	rho8var	rho9var	rho10var
1	-1	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120
2	1	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504
3	-1	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769
4	1	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486
5	-1	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120	0.4345504	0.8001769	0.2865486	-1.2205120

### 1.4.1.4 Tibble Row and Column and Summarize

Show what is in the table: 1, column and row names; 2, contents inside table.

```
tb_iris <- as_tibble(iris)
print(rownames(tb_iris))
```



```
## [1] "1" "2" "3" "4" "5" "6" "7" "8" "9" "10" "11" "12" "13" "14" "15" "
## [20] "20" "21" "22" "23" "24" "25" "26" "27" "28" "29" "30" "31" "32" "33" "34" "
## [39] "39" "40" "41" "42" "43" "44" "45" "46" "47" "48" "49" "50" "51" "52" "53" "
## [58] "58" "59" "60" "61" "62" "63" "64" "65" "66" "67" "68" "69" "70" "71" "72" "
## [77] "77" "78" "79" "80" "81" "82" "83" "84" "85" "86" "87" "88" "89" "90" "91" "
## [96] "96" "97" "98" "99" "100" "101" "102" "103" "104" "105" "106" "107" "108" "109" "110" "
## [115] "115" "116" "117" "118" "119" "120" "121" "122" "123" "124" "125" "126" "127" "128" "129" "
## [134] "134" "135" "136" "137" "138" "139" "140" "141" "142" "143" "144" "145" "146" "147" "148" "
```

```
colnames(tb_iris)
```

```
## [1] "Sepal.Length" "Sepal.Width" "Petal.Length" "Petal.Width" "Species"
```

```
colnames(tb_iris)
```

```
## [1] "Sepal.Length" "Sepal.Width" "Petal.Length" "Petal.Width" "Species"
```

```
summary(tb_iris)
```

```
## Sepal.Length Sepal.Width Petal.Length Petal.Width Species
## Min. :4.300 Min. :2.000 Min. :1.000 Min. :0.100 setosa :50
## 1st Qu.:5.100 1st Qu.:2.800 1st Qu.:1.600 1st Qu.:0.300 versicolor:50
## Median :5.800 Median :3.000 Median :4.350 Median :1.300 virginica :50
## Mean :5.843 Mean :3.057 Mean :3.758 Mean :1.199
## 3rd Qu.:6.400 3rd Qu.:3.300 3rd Qu.:5.100 3rd Qu.:1.800
## Max. :7.900 Max. :4.400 Max. :6.900 Max. :2.500
```

#### 1.4.1.5 Tibble Sorting

- dplyr arrange desc reverse
- dplyr sort

```
# Sort in Ascending Order
```

```
tb_iris %>% select(Species, Sepal.Length, everything()) %>%
  arrange(Species, Sepal.Length) %>% head(10) %>%
  kable() %>% kable_styling_fc()
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
setosa	4.3	3.0	1.1	0.1
setosa	4.4	2.9	1.4	0.2
setosa	4.4	3.0	1.3	0.2
setosa	4.4	3.2	1.3	0.2
setosa	4.5	2.3	1.3	0.3
setosa	4.6	3.1	1.5	0.2
setosa	4.6	3.4	1.4	0.3
setosa	4.6	3.6	1.0	0.2
setosa	4.6	3.2	1.4	0.2
setosa	4.7	3.2	1.3	0.2

```
# Sort in Descending Order
```

```
tb_iris %>% select(Species, Sepal.Length, everything()) %>%
  arrange(desc(Species), desc(Sepal.Length)) %>% head(10) %>%
  kable() %>% kable_styling_fc()
```

#### 1.4.1.6 REconTools Summarize over Tibble

Use R4Econ's summary tool.

```
df_summ_stats <- ff_summ_percentiles(tb_iris)
kable(t(df_summ_stats)) %>% kable_styling_fc_wide()
```

Species	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width
virginica	7.9	3.8	6.4	2.0
virginica	7.7	3.8	6.7	2.2
virginica	7.7	2.6	6.9	2.3
virginica	7.7	2.8	6.7	2.0
virginica	7.7	3.0	6.1	2.3
virginica	7.6	3.0	6.6	2.1
virginica	7.4	2.8	6.1	1.9
virginica	7.3	2.9	6.3	1.8
virginica	7.2	3.6	6.1	2.5
virginica	7.2	3.2	6.0	1.8

stats	n	unique	NAobs	ZEROobs	mean	sd	cv	min	p01	p05	p10	p25	p50	p75	p90	p95	p99	max
Petal.Length	150	43	0	0	3.758000	1.7652982	0.4697441	1.0	1.149	1.300	1.4	1.6	4.35	5.1	5.80	6.100	6.700	6.9
Petal.Width	150	22	0	0	1.199333	0.7622377	0.6355511	0.1	0.100	0.200	0.2	0.3	1.30	1.8	2.20	2.300	2.500	2.5
Sepal.Length	150	35	0	0	5.843333	0.8280661	0.1417113	4.3	4.400	4.600	4.8	5.1	5.80	6.4	6.90	7.255	7.700	7.9
Sepal.Width	150	23	0	0	3.057333	0.4358663	0.1425642	2.0	2.200	2.345	2.5	2.8	3.00	3.3	3.61	3.800	4.151	4.4

## 1.4.2 Factor Label and Combine

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 1.4.2.1 Factor, Label, Cross and Graph

Generate a Scatter plot with different colors representing different categories. There are multiple underlying factor/categorical variables, for example two binary variables. Generate scatter plot with colors for the combinations of these two binary variables.

We combine here the *vs* and *am* variables from the *mtcars* dataset. *vs* is engine shape, *am* is auto or manual shift. We will generate a scatter plot of *mpg* and *qsec* over four categories with different colors.

- *am*: Transmission (0 = automatic, 1 = manual)
- *vs*: Engine (0 = V-shaped, 1 = straight)
- *mpg*: miles per gallon
- *qsec*: 1/4 mile time

```
# First make sure these are factors
tb_mtcars <- as_tibble(mtcars) %>%
  mutate(vs = as_factor(vs), am = as_factor(am))

# Second Label the Factors
am_levels <- c(auto_shift = "0", manual_shift = "1")
vs_levels <- c(vshaped_engine = "0", straight_engine = "1")
tb_mtcars <- tb_mtcars %>%
  mutate(vs = fct_recode(vs, !!!vs_levels),
         am = fct_recode(am, !!!am_levels))

# Third Combine Factors
tb_mtcars_selected <- tb_mtcars %>%
  mutate(vs_am = fct_cross(vs, am, sep='_', keep_empty = FALSE)) %>%
  select(mpg, qsec, vs_am)
print(tb_mtcars_selected)
```

Now we generate scatter plot based on the combined factors

```
# Labeling
st_title <- paste0('Distribution of MPG and QSEC from mtcars')
st_subtitle <- paste0('https://fanwangecon.github.io/',
                     'R4Econ/amto/tibble/htmlpdf/fs_tib_factors.html')
st_caption <- paste0('mtcars dataset, ',
                    'https://fanwangecon.github.io/R4Econ/')

```

```

st_x_label <- 'MPG = Miles per Gallon'
st_y_label <- 'QSEC = time for 1/4 Miles'


# Graphing
plt_mtcars_scatter <-
  ggplot(tb_mtcars_selected,
    aes(x=mpg, y=qsec, colour=vs_am, shape=vs_am)) +
  geom_jitter(size=3, width = 0.15) +
  labs(title = st_title, subtitle = st_subtitle,
    x = st_x_label, y = st_y_label, caption = st_caption) +
  theme_bw()

# show
print(plt_mtcars_scatter)

```

### Distribution of MPG and QSEC from mtcars

[https://fanwangecon.github.io/R4Econ/amto/tibble/htmlpdf/fs\\_tib\\_factors.html](https://fanwangecon.github.io/R4Econ/amto/tibble/htmlpdf/fs_tib_factors.html)

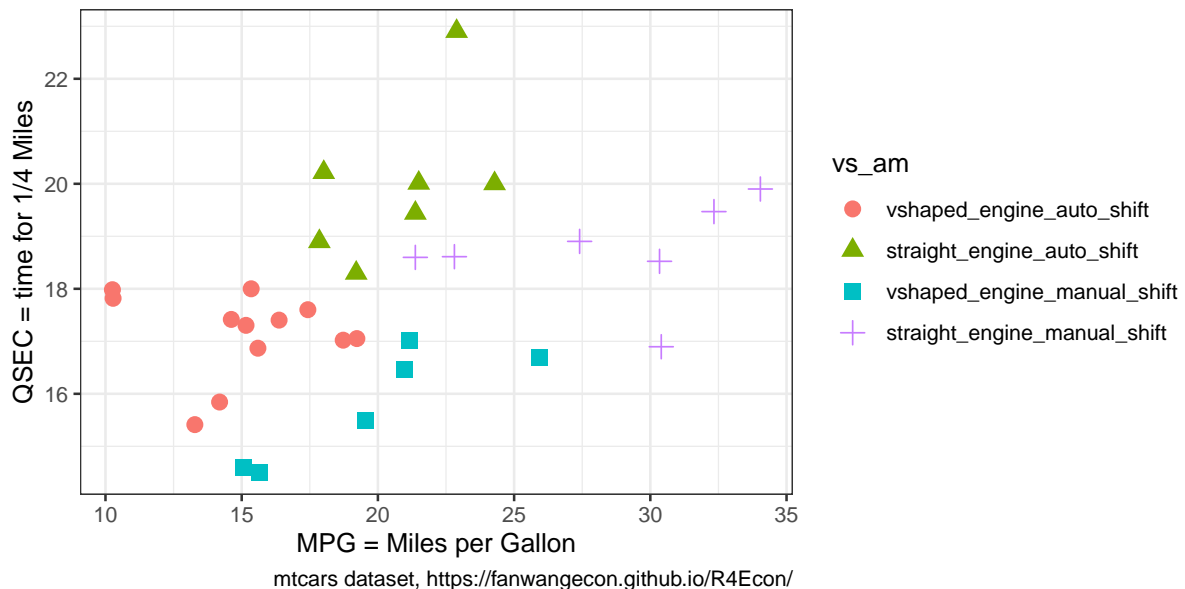

## 1.4.3 Drawly Random Rows

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

### 1.4.3.1 Draw Random Subset of Sample

- $r$  random discrete

We have a sample of  $N$  individuals in some dataframe. Draw without replacement a subset  $M < N$  of rows.

```

# parameters, it_M < it_N
it_N <- 10
it_M <- 5

# Draw it_m from indexed list of it_N
set.seed(123)
ar_it_rand_idx <- sample(it_N, it_M, replace=FALSE)

# dataframe

```

```
df_full <- as_tibble(matrix(rnorm(4,mean=0,sd=1), nrow=it_N, ncol=4)) %>% rowid_to_column(var = "ID")

# random Subset
df_rand_sub_a <- df_full[ar_it_rand_idx,]

# Random subset also
df_rand_sub_b <- df_full[sample(dim(df_full)[1], it_M, replace=FALSE),]

# Print
# Display
kable(df_full) %>% kable_styling_fc()
```

ID	V1	V2	V3	V4
1	0.1292877	0.4609162	0.1292877	0.4609162
2	1.7150650	-1.2650612	1.7150650	-1.2650612
3	0.4609162	0.1292877	0.4609162	0.1292877
4	-1.2650612	1.7150650	-1.2650612	1.7150650
5	0.1292877	0.4609162	0.1292877	0.4609162
6	1.7150650	-1.2650612	1.7150650	-1.2650612
7	0.4609162	0.1292877	0.4609162	0.1292877
8	-1.2650612	1.7150650	-1.2650612	1.7150650
9	0.1292877	0.4609162	0.1292877	0.4609162
10	1.7150650	-1.2650612	1.7150650	-1.2650612

```
kable(df_rand_sub_a) %>% kable_styling_fc()
```

ID	V1	V2	V3	V4
3	0.4609162	0.1292877	0.4609162	0.1292877
10	1.7150650	-1.2650612	1.7150650	-1.2650612
2	1.7150650	-1.2650612	1.7150650	-1.2650612
8	-1.2650612	1.7150650	-1.2650612	1.7150650
6	1.7150650	-1.2650612	1.7150650	-1.2650612

```
kable(df_rand_sub_b) %>% kable_styling_fc()
```

ID	V1	V2	V3	V4
5	0.1292877	0.4609162	0.1292877	0.4609162
3	0.4609162	0.1292877	0.4609162	0.1292877
9	0.1292877	0.4609162	0.1292877	0.4609162
1	0.1292877	0.4609162	0.1292877	0.4609162
4	-1.2650612	1.7150650	-1.2650612	1.7150650

#### 1.4.3.2 Random Subset of Panel

There are  $N$  individuals, each could be observed  $M$  times, but then select a subset of rows only, so each person is randomly observed only a subset of times. Specifically, there are 3 unique students with student ids, and the second variable shows the random dates in which the student showed up in class, out of the 10 classes available.

```
# Define
it_N <- 3
it_M <- 10
svr_id <- 'student_id'

# dataframe
set.seed(123)
df_panel_rand <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
```

```

rowid_to_column(var = svr_id) %>%
uncount(V1) %>%
group_by(!sym(svr_id)) %>% mutate(date = row_number()) %>%
ungroup() %>% mutate(in_class = case_when(rnorm(n(),mean=0,sd=1) < 0 ~ 1, TRUE ~ 0)) %>%
filter(in_class == 1) %>% select(!sym(svr_id), date) %>%
rename(date_in_class = date)

# Print
kable(df_panel_rand) %>% kable_styling_fc()

```

student_id	date_in_class
1	1
1	2
1	8
1	9
1	10
2	5
2	8
2	10
3	1
3	2
3	3
3	4
3	5
3	6
3	9

#### 1.4.4 Generate Variables Conditional On Others

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

##### 1.4.4.1 case\_when Basic Example

Given several other variables, and generate a new variable when these variables satisfy conditions. Note that case\_when are ifelse type statements. So below

1. group one is below 16 MPG
2. when do qsec >= 20 second line that is elseif, only those that are >=16 are considered here
3. then think about two dimensional mpg and qsec grid, the lower-right area, give another category to manual cars in that group

```

# Get mtcars
df_mtcars <- mtcars

# case_when with mtcars
df_mtcars <- df_mtcars %>%
  mutate(mpg_qsec_am_grp =
    case_when(mpg < 16 ~ "< 16 MPG",
              qsec >= 20 ~ "> 16 MPG & qsec >= 20",
              am == 1 ~ "> 16 MPG & asec < 20 & manual",
              TRUE ~ "Others"))

# # For dataframe
# df.reg <- df.reg %>% na_if(-Inf) %>% na_if(Inf)
# # For a specific variable in dataframe
# df.reg.use %>% mutate(!sym(var.input) := na_if(!sym(var.input), 0))
#

```


```
# # Setting to NA
# df.reg.use <- df.reg.guat %>% filter(!sym(var.mth) != 0)
# df.reg.use.log <- df.reg.use
# df.reg.use.log[which(is.nan(df.reg.use$prot.imputed.log)),] = NA
# df.reg.use.log[which(df.reg.use$prot.imputed.log==Inf),] = NA
# df.reg.use.log[which(df.reg.use$prot.imputed.log==-Inf),] = NA
# df.reg.use.log <- df.reg.use.log %>% drop_na(prot.imputed.log)
# # df.reg.use.log$prot.imputed.log
```

Now we generate scatter plot based on the combined factors

```
# Labeling
st_title <- paste0('Use case_when To Generate ifelse Groupings')
st_subtitle <- paste0('https://fanwangecon.github.io/',
                      'R4Econ/amto/tibble/htmlpdf/fr/fs_tib_na.html')
st_caption <- paste0('mtcars dataset, ',
                     'https://fanwangecon.github.io/R4Econ/')
st_x_label <- 'MPG = Miles per Gallon'
st_y_label <- 'QSEC = time for 1/4 Miles'

# Graphing
plt_mtcars_casewhen_scatter <-
  ggplot(df_mtcars,
    aes(x=mpg, y=qsec,
        colour=mpg_qsec_am_grp,
        shape=mpg_qsec_am_grp)) +
  geom_jitter(size=3, width = 0.15) +
  labs(title = st_title, subtitle = st_subtitle,
       x = st_x_label, y = st_y_label, caption = st_caption) +
  theme_bw()

# show
print(plt_mtcars_casewhen_scatter)
```

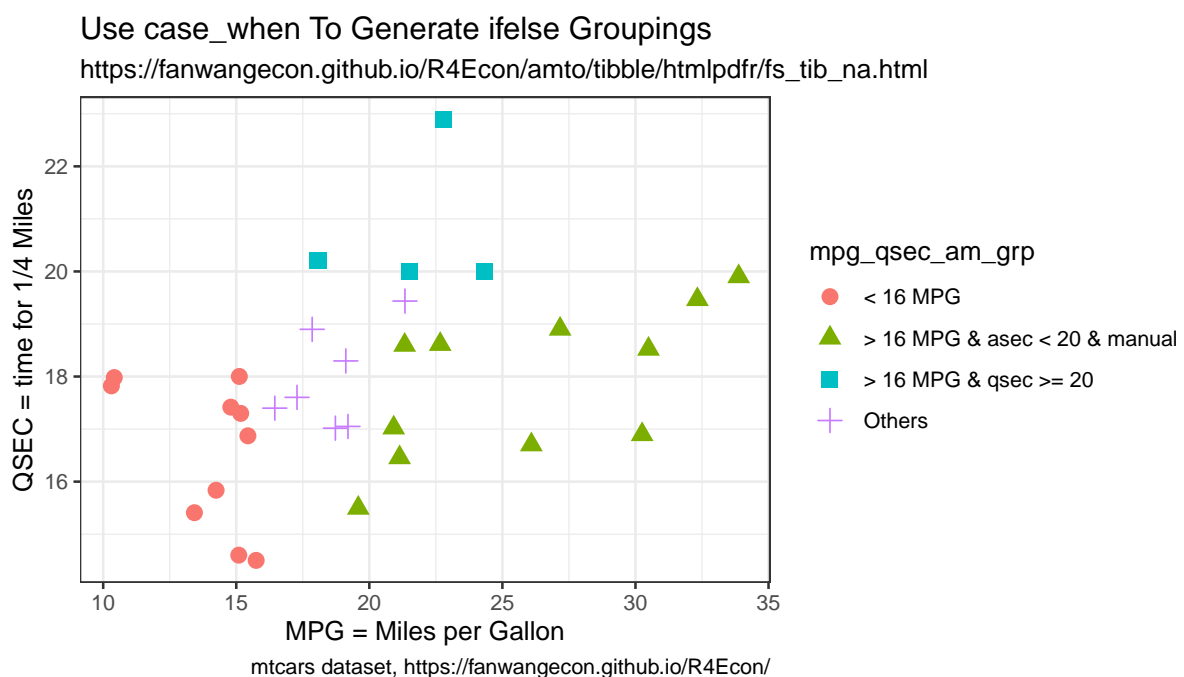

### 1.4.4.2 Generate NA values if Variables have Certain Value

In the example below, in one line:

1. generate a random standard normal vector
2. two set na methods:
  - if the value of the standard normal is negative, set value to -999, otherwise MPG, replace the value -999 with NA
  - case\_when only with type specific NA values
  - [Assigning NA yields error in case\\_when](#)
  - note we need to conform NA to type
3. generate new categorical variable based on NA condition using is.na with both string and numeric NAs jointly considered.
  - fake NA string to be printed on chart

```
# Get mtcars
df_mtcars <- mtcars

# Make some values of mpg randomly NA
# the NA has to conform to the type of the remaining values for the new variable
# NA_real_, NA_character_, NA_integer_, NA_complex_
set.seed(2341)
df_mtcars <- df_mtcars %>%
  mutate(mpg_wth_NA1 = na_if(
    case_when(
      rnorm(n(),mean=0,sd=1) < 0 ~ -999,
      TRUE ~ mpg),
    -999)) %>%
  mutate(mpg_wth_NA2 = case_when(
    rnorm(n(),mean=0,sd=1) < 0 ~ NA_real_,
    TRUE ~ mpg)) %>%
  mutate(mpg_wth_NA3 = case_when(
    rnorm(n(),mean=0,sd=1) < 0 ~ NA_character_,
    TRUE ~ "shock > 0 string"))

# Generate New Variables based on if mpg_wth_NA is NA or not
# same variable as above, but now first a category based on if NA
# And we generate a fake string "NA" variable, this is not NA
# the String NA allows for it to be printed on figure
df_mtcars <- df_mtcars %>%
  mutate(group_with_na =
    case_when(is.na(mpg_wth_NA2) & is.na(mpg_wth_NA3) ~
      "Rand String and Rand Numeric both NA",
    mpg < 16 ~ "< 16 MPG",
    qsec >= 20 ~ "> 16 MPG & qsec >= 20",
    am == 1 ~ "> 16 MPG & asec < 20 & manual",
    TRUE ~ "Fake String NA"))

# show
kable(head(df_mtcars %>% select(starts_with('mpg')),13)) %>%
  kable_styling_fc()
```

```
# # Setting to NA
# df.reg.use <- df.reg.guat %>% filter(!sym(var.mth) != 0)
# df.reg.use.log <- df.reg.use
# df.reg.use.log[which(is.nan(df.reg.use$prot.imputed.log)),] = NA
# df.reg.use.log[which(df.reg.use$prot.imputed.log==Inf),] = NA
# df.reg.use.log[which(df.reg.use$prot.imputed.log==Inf),] = NA
# df.reg.use.log <- df.reg.use.log %>% drop_na(prot.imputed.log)
# # df.reg.use.log$prot.imputed.log
```

mpg	mpg_wth_NA1	mpg_wth_NA2	mpg_wth_NA3
21.0	NA	NA	shock > 0 string
21.0	21.0	21.0	NA
22.8	NA	NA	NA
21.4	NA	21.4	NA
18.7	NA	18.7	NA
18.1	18.1	NA	shock > 0 string
14.3	14.3	NA	shock > 0 string
24.4	NA	24.4	NA
22.8	22.8	22.8	NA
19.2	19.2	NA	NA
17.8	NA	NA	NA
16.4	16.4	16.4	NA
17.3	NA	NA	shock > 0 string

Now we generate scatter plot based on the combined factors, but now with the NA category

```
# Labeling
st_title <- paste0('Use na_if and is.na to Generate and Distinguish NA Values\n',
                  'NA_real_, NA_character_, NA_integer_, NA_complex_')
st_subtitle <- paste0('https://fanwangecon.github.io/',
                    'R4Econ/amto/tibble/htmlpdf/fs_tib_na.html')
st_caption <- paste0('mtcars dataset, ',
                    'https://fanwangecon.github.io/R4Econ/')
st_x_label <- 'MPG = Miles per Gallon'
st_y_label <- 'QSEC = time for 1/4 Miles'

# Graphing
plt_mtcars_ifisna_scatter <-
  ggplot(df_mtcars,
        aes(x=mpg, y=qsec,
            colour=group_with_na,
            shape=group_with_na)) +
  geom_jitter(size=3, width = 0.15) +
  labs(title = st_title, subtitle = st_subtitle,
       x = st_x_label, y = st_y_label, caption = st_caption) +
  theme_bw()


# show
print(plt_mtcars_ifisna_scatter)
```



Use `na_if` and `is.na` to Generate and Distinguish NA Values

NA\_real\_, NA\_character\_, NA\_integer\_, NA\_complex\_

[https://fanwangecon.github.io/R4Econ/amto/tibble/htmlpdf/fr/fs\\_tib\\_na.html](https://fanwangecon.github.io/R4Econ/amto/tibble/htmlpdf/fr/fs_tib_na.html)

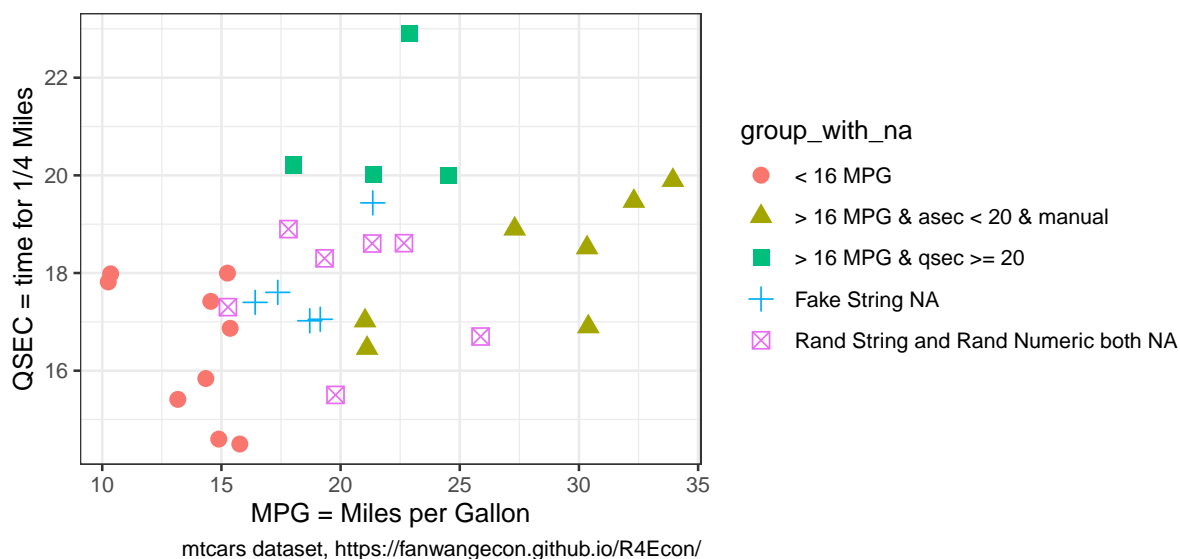

#### 1.4.4.3 Approximate Values Comparison

- r values almost the same
- `all.equal`

From numeric approximation, often values are very close, and should be set to equal. Use `isTRUE(all.equal)`. In the example below, we randomly generates four arrays. Two of the arrays have slightly higher variance, two arrays have slightly lower variance. They sd are to be 10 times below or 10 times above the tolerance comparison level. The values are not the same in any of the columns, but by allowing for almost true given some tolerance level, in the low standard deviation case, the values differences are within tolerance, so they are equal.

This is an essential issue when dealing with optimization results.

```
# Set tolerance
tol_lvl = 1.5e-3
sd_lower_than_tol = tol_lvl/10
sd_higher_than_tol = tol_lvl*10

# larger SD
set.seed(123)
mt_runif_standard <- matrix(rnorm(10,mean=0,sd=sd_higher_than_tol), nrow=5, ncol=2)

# small SD
set.seed(123)
mt_rnorm_small_sd <- matrix(rnorm(10,mean=0,sd=sd_lower_than_tol), nrow=5, ncol=2)

# Generates Random Matirx
tb_rnorm_runif <- as_tibble(cbind(mt_rnorm_small_sd, mt_runif_standard))

# Are Variables the same, not for strict comparison
tb_rnorm_runif_approxi_same <- tb_rnorm_runif %>%
  mutate(V1_V2_ALMOST_SAME =
    case_when(isTRUE(all.equal(V1, V2, tolerance=tol_lvl)) ~
      paste0('TOL=',sd_lower_than_tol,', SAME ALMOST'),
      TRUE ~
      paste0('TOL=',sd_lower_than_tol,', NOT SAME ALMOST')))) %>%
```

```
mutate(V3_V4_ALMOST_SAME =
  case_when(isTRUE(all.equal(V3, V4, tolerance=tol_lvl)) ~
    paste0('TOL=',sd_higher_than_tol,', SAME ALMOST'),
    TRUE ~
    paste0('TOL=',sd_higher_than_tol,', NOT SAME ALMOST'))))

# Print
kable(tb_rnorm_runif_approxi_same) %>% kable_styling_fc_wide()
```

V1	V2	V3	V4	V1_V2_ALMOST_SAME	V3_V4_ALMOST_SAME
-0.0000841	0.0002573	-0.0084071	0.0257260	TOL=0.00015, SAME ALMOST	TOL=0.015, NOT SAME ALMOST
-0.0000345	0.0000691	-0.0034527	0.0069137	TOL=0.00015, SAME ALMOST	TOL=0.015, NOT SAME ALMOST
0.0002338	-0.0001898	0.0233806	-0.0189759	TOL=0.00015, SAME ALMOST	TOL=0.015, NOT SAME ALMOST
0.0000106	-0.0001030	0.0010576	-0.0103028	TOL=0.00015, SAME ALMOST	TOL=0.015, NOT SAME ALMOST
0.0000194	-0.0000668	0.0019393	-0.0066849	TOL=0.00015, SAME ALMOST	TOL=0.015, NOT SAME ALMOST

### 1.4.5 String Values

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

#### 1.4.5.1 Find and Replace

Find and Replace in Dataframe.

```
# if string value is contained in variable
("bridex.B" %in% (df.reg.out.all$vars_var.y))
# if string value is not contained in variable:
# 1. type is variable name
# 2. Toyota/Mazda are strings to be excluded
filter(mtcars, !grepl('Toyota|Mazda', type))

# filter does not contain string
rs_hgt_prot_log_tidy %>% filter(!str_detect(term, 'prot'))
```

## Chapter 2

# Summarize Data

## 2.1 Counting Observation

### 2.1.1 Uncount

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

In some panel, there are  $N$  individuals, each observed for  $Y_i$  years. Given a dataset with two variables, the individual index, and the  $Y_i$  variable, expand the dataframe so that there is a row for each individual index's each unique year in the survey.

*Search:*

- [r duplicate row by variable](#)

*Links:*

- see: [Create duplicate rows based on a variable](#)

*Algorithm:*

1. generate testing frame, the individual attribute dataset with invariant information over panel
2. uncount, duplicate rows by years in survey
3. group and generate sorted index
4. add individual specific stat year to index

```
# 1. Array of Years in the Survey
ar_years_in_survey <- c(2,3,1,10,2,5)
ar_start_yaer <- c(1,2,3,1,1,1)
ar_end_year <- c(2,4,3,10,2,5)
mt_combine <- cbind(ar_years_in_survey, ar_start_yaer, ar_end_year)

# This is the individual attribute dataset, attributes that are invariant acrosss years
tb_indi_attributes <- as_tibble(mt_combine) %>% rowid_to_column(var = "ID")

# 2. Sort and generate variable equal to sorted index
tb_indi_panel <- tb_indi_attributes %>% uncount(ar_years_in_survey)

# 3. Panel now construct exactly which year in survey, note that all needed is sort index
# Note sorting not needed, all rows identical now
tb_indi_panel <- tb_indi_panel %>%
  group_by(ID) %>%
  mutate(yr_in_survey = row_number())

tb_indi_panel <- tb_indi_panel %>%
  mutate(calendar_year = yr_in_survey + ar_start_yaer - 1)
```

```
# Show results Head 10
tb_indi_panel %>% head(10) %>%
  kable() %>%
  kable_styling_fc()
```

ID	ar_start_yaer	ar_end_year	yr_in_survey	calendar_year
1	1	2	1	1
1	1	2	2	2
2	2	4	1	2
2	2	4	2	3
2	2	4	3	4
3	3	3	1	3
4	1	10	1	1
4	1	10	2	2
4	1	10	3	3
4	1	10	4	4

## 2.2 Sorting, Indexing, Slicing

### 2.2.1 Sorting

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 2.2.1.1 Generate Sorted Index within Group with Repeating Values

There is a variable, sort by this variable, then generate index from 1 to N representing sorted values of this index. If there are repeating values, still assign index, different index each value.

- r generate index sort
- dplyr mutate equals index

```
# Sort and generate variable equal to sorted index
df_iris <- iris %>% arrange(Sepal.Length) %>%
  mutate(Sepal.Len.Index = row_number()) %>%
  select(Sepal.Length, Sepal.Len.Index, everything())

# Show results Head 10
df_iris %>% head(10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

Sepal.Length	Sepal.Len.Index	Sepal.Width	Petal.Length	Petal.Width	Species
4.3	1	3.0	1.1	0.1	setosa
4.4	2	2.9	1.4	0.2	setosa
4.4	3	3.0	1.3	0.2	setosa
4.4	4	3.2	1.3	0.2	setosa
4.5	5	2.3	1.3	0.3	setosa
4.6	6	3.1	1.5	0.2	setosa
4.6	7	3.4	1.4	0.3	setosa
4.6	8	3.6	1.0	0.2	setosa
4.6	9	3.2	1.4	0.2	setosa
4.7	10	3.2	1.3	0.2	setosa

### 2.2.1.2 Populate Value from Lowest Index to All other Rows

We would like to calculate for example the ratio of each individual's highest to the the person with the lowest height in a dataset. We first need to generated sorted index from lowest to highest, and then populate the lowest height to all rows, and then divide.

*Search Terms:*

- r spread value to all rows from one row
- r other rows equal to the value of one row
- Conditional assignment of one variable to the value of one of two other variables
- dplyr mutate conditional
- dplyr value from one row to all rows
- dplyr mutate equal to value in another cell

*Links:*

- see: dplyr [rank](#)
- see: dplyr [case\\_when](#)

**2.2.1.2.1 Short Method: mutate and min** We just want the lowest value to be in its own column, so that we can compute various statistics using the lowest value variable and the original variable.

```
# 1. Sort
df_iris_m1 <- iris %>% mutate(Sepal.Len.Lowest.all = min(Sepal.Length)) %>%
  select(Sepal.Length, Sepal.Len.Lowest.all, everything())

# Show results Head 10
df_iris_m1 %>% head(10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

Sepal.Length	Sepal.Len.Lowest.all	Sepal.Width	Petal.Length	Petal.Width	Species
5.1	4.3	3.5	1.4	0.2	setosa
4.9	4.3	3.0	1.4	0.2	setosa
4.7	4.3	3.2	1.3	0.2	setosa
4.6	4.3	3.1	1.5	0.2	setosa
5.0	4.3	3.6	1.4	0.2	setosa
5.4	4.3	3.9	1.7	0.4	setosa
4.6	4.3	3.4	1.4	0.3	setosa
5.0	4.3	3.4	1.5	0.2	setosa
4.4	4.3	2.9	1.4	0.2	setosa
4.9	4.3	3.1	1.5	0.1	setosa

**2.2.1.2.2 Long Method: row\_number and case\_when** This is the long method, using row\_number, and case\_when. The benefit of this method is that it generates several intermediate variables that might be useful. And the key final step is to set a new variable (A=Sepal.Len.Lowest.all) equal to another variable's (B=Sepal.Length's) value at the index that satisfies condition based a third variable (C=Sepal.Len.Index).

```
# 1. Sort
# 2. generate index
# 3. value at lowest index (case_when)
# 4. spread value from lowest index to other rows
# Note step 4 does not require step 3
df_iris_m2 <- iris %>% arrange(Sepal.Length) %>%
  mutate(Sepal.Len.Index = row_number()) %>%
  mutate(Sepal.Len.Lowest.one =
```

```

      case_when(row_number()==1 ~ Sepal.Length)) %>%
mutate(Sepal.Len.Lowest.all =
      Sepal.Length[Sepal.Len.Index==1]) %>%
select(Sepal.Length, Sepal.Len.Index,
      Sepal.Len.Lowest.one, Sepal.Len.Lowest.all)

# Show results Head 10
df_iris_m2 %>% head(10) %>%
  kable() %>%
  kable_styling_fc_wide()

```

Sepal.Length	Sepal.Len.Index	Sepal.Len.Lowest.one	Sepal.Len.Lowest.all
4.3	1	4.3	4.3
4.4	2	NA	4.3
4.4	3	NA	4.3
4.4	4	NA	4.3
4.5	5	NA	4.3
4.6	6	NA	4.3
4.6	7	NA	4.3
4.6	8	NA	4.3
4.6	9	NA	4.3
4.7	10	NA	4.3

### 2.2.1.3 Generate Sorted Index based on Deviations

Generate Positive and Negative Index based on Ordered Deviation from some Number.

There is a variable that is continuous, subtract a number from this variable, and generate index based on deviations. Think of the index as generating intervals indicating where the value lies. 0th index indicates the largest value in sequence that is smaller than or equal to number  $x$ , 1st index indicates the smallest value in sequence that is larger than number  $x$ .

The solution below is a little bit convoluted and long, there is likely a much quicker way. The process below shows various intermediary outputs that help arrive at deviation index *Sepal.Len.Devi.Index* from initial sorted index *Sepal.Len.Index*.

search:

- dplyr arrange ignore na
- dplyr index deviation from order number sequence
- dplyr index below above
- dplyr index order below above value

```

# 1. Sort and generate variable equal to sorted index
# 2. Plus or minus deviations from some value
# 3. Find the zero, which means, the number closests to zero including zero from the negative side
# 4. Find the index at the highest zero and below deviation point
# 5. Difference of zero index and original sorted index
sc_val_x <- 4.65
df_iris_deviate <- iris %>% arrange(Sepal.Length) %>%
  mutate(Sepal.Len.Index = row_number()) %>%
  mutate(Sepal.Len.Devi = (Sepal.Length - sc_val_x)) %>%
  mutate(Sepal.Len.Devi.Neg =
    case_when(Sepal.Len.Devi <= 0 ~ (-1)*(Sepal.Len.Devi))) %>%
  arrange((Sepal.Len.Devi.Neg), desc(Sepal.Len.Index)) %>%

```

```

mutate(Sepal.Len.Index.Zero =
  case_when(row_number() == 1 ~ Sepal.Len.Index)) %>%
mutate(Sepal.Len.Devi.Index =
  Sepal.Len.Index - Sepal.Len.Index.Zero[row_number() == 1]) %>%
arrange(Sepal.Len.Index) %>%
select(Sepal.Length, Sepal.Len.Index, Sepal.Len.Devi,
  Sepal.Len.Devi.Neg, Sepal.Len.Index.Zero, Sepal.Len.Devi.Index)

# Show results Head 10
df_iris_deviat %>% head(20) %>%
  kable() %>%
  kable_styling_fc_wide()

```

Sepal.Length	Sepal.Len.Index	Sepal.Len.Devi	Sepal.Len.Devi.Neg	Sepal.Len.Index.Zero	Sepal.Len.Devi.Index
4.3	1	-0.35	0.35	NA	-8
4.4	2	-0.25	0.25	NA	-7
4.4	3	-0.25	0.25	NA	-6
4.4	4	-0.25	0.25	NA	-5
4.5	5	-0.15	0.15	NA	-4
4.6	6	-0.05	0.05	NA	-3
4.6	7	-0.05	0.05	NA	-2
4.6	8	-0.05	0.05	NA	-1
4.6	9	-0.05	0.05	9	0
4.7	10	0.05	NA	NA	1
4.7	11	0.05	NA	NA	2
4.8	12	0.15	NA	NA	3
4.8	13	0.15	NA	NA	4
4.8	14	0.15	NA	NA	5
4.8	15	0.15	NA	NA	6
4.8	16	0.15	NA	NA	7
4.9	17	0.25	NA	NA	8
4.9	18	0.25	NA	NA	9
4.9	19	0.25	NA	NA	10
4.9	20	0.25	NA	NA	11

## 2.2.2 Group, Sort and Slice

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 2.2.2.1 Get Highest Values from Groups

There is a dataframe with a grouping variable. Get N rows that have the highest sorted value for another numeric variable. In the example below, group by *cyl* and get the cars with the highest *mpg* in each *cyl* group.

```

# use mtcars
df_groupby_top_mpg <- mtcars %>%
  arrange(cyl, mpg) %>%
  group_by(cyl) %>%
  slice_head(n=1)
# display
kable(df_groupby_top_mpg) %>% kable_styling_fc()

```

mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
21.4	4	121.0	109	4.11	2.78	18.60	1	1	4	2
17.8	6	167.6	123	3.92	3.44	18.90	1	0	4	4
10.4	8	472.0	205	2.93	5.25	17.98	0	0	3	4

## 2.3 Group Statistics

### 2.3.1 Cumulative Statistics within Group

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 2.3.1.1 Cumulative Mean

There is a dataset where there are different types of individuals, perhaps household size, that is the grouping variable. Within each group, we compute the incremental marginal propensity to consume for each additional check. We now also want to know the average propensity to consume up to each check considering all allocated checks. We needed to calculate this for [Nygaard, Sørensen and Wang \(2021\)](#). This can be dealt with by using the `cumall` function.

Use the `df_hgt_wgt` as the testing dataset. In the example below, group by individual id, sort by survey month, and cumulative mean over the protein variable.

In the protein example

First select the testing dataset and variables.

```
# Load the REconTools Dataset df_hgt_wgt
data("df_hgt_wgt")
# str(df_hgt_wgt)

# Select several rows
df_hgt_wgt_sel <- df_hgt_wgt %>%
  filter(S.country == "Cebu") %>%
  select(indi.id, svymthRound, prot)
```

Second, arrange, groupby, and cumulative mean. The protein variable is protein for each survey month, from month 2 to higher as babies grow. The protein intake observed is increasing quickly, hence, the cumulative mean is lower than the observed value for the survey month of the baby.

```
# Group by indi.id and sort by protein
df_hgt_wgt_sel_cummean <- df_hgt_wgt_sel %>%
  arrange(indi.id, svymthRound) %>%
  group_by(indi.id) %>%
  mutate(prot_cummean = cummean(prot))

# display results
REconTools::ff_summ_percentiles(df_hgt_wgt_sel_cummean)
# display results
df_hgt_wgt_sel_cummean %>% filter(indi.id %in% c(17, 18)) %>%
  kable() %>% kable_styling_fc()
```

Third, in the basic implementation above, if an incremental month has NA, no values computed at that point or after. This is the case for individual 18 above. To ignore NA, we have, from [this](#). Note how results for individual 18 changes.

```
# https://stackoverflow.com/a/49906718/8280804
# Group by indi.id and sort by protein
df_hgt_wgt_sel_cummean_noNA <- df_hgt_wgt_sel %>%
  arrange(indi.id, svymthRound) %>%
  group_by(indi.id, isna = is.na(prot)) %>%
  mutate(prot_cummean = ifelse(isna, NA, cummean(prot)))

# display results
df_hgt_wgt_sel_cummean_noNA %>% filter(indi.id %in% c(17, 18)) %>%
  kable() %>% kable_styling_fc()
```



indi.id	svymthRound	prot	prot_cummean
17	0	0.5	0.5000000
17	2	0.7	0.6000000
17	4	0.5	0.5666667
17	6	0.5	0.5500000
17	8	6.1	1.6600000
17	10	5.0	2.2166667
17	12	6.4	2.8142857
17	14	20.1	4.9750000
17	16	20.1	6.6555556
17	18	23.0	8.2900000
17	20	24.9	9.8000000
17	22	20.1	10.6583333
17	24	10.1	10.6153846
17	102	NA	NA
17	138	NA	NA
17	187	NA	NA
17	224	NA	NA
17	258	NA	NA
18	0	1.2	1.2000000
18	2	4.7	2.9500000
18	4	17.2	7.7000000
18	6	18.6	10.4250000
18	8	NA	NA
18	10	16.8	NA
18	12	NA	NA
18	14	NA	NA
18	16	NA	NA
18	18	NA	NA
18	20	NA	NA
18	22	15.7	NA
18	24	22.5	NA
18	102	NA	NA
18	138	NA	NA
18	187	NA	NA
18	224	NA	NA
18	258	NA	NA

## 2.3.2 Groups Statistics

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

### 2.3.2.1 Aggrgate Groups only Unique Group and Count

There are two variables that are numeric, we want to find all the unique groups of these two variables in a dataset and count how many times each unique group occurs

- r unique occurrence of numeric groups
- How to add count of unique values by group to R data.frame

```
# Numeric value combinations unique Groups
vars.group <- c('hgt0', 'wgt0')

# dataset subsetting
df_use <- df_hgt_wgt %>% select(!!!syms(c(vars.group))) %>%
  mutate(hgt0 = round(hgt0/5)*5, wgt0 = round(wgt0/2000)*2000) %>%
  drop_na()
```

indi.id	svymthRound	prot	isna	prot_cummean
17	0	0.5	FALSE	0.5000000
17	2	0.7	FALSE	0.6000000
17	4	0.5	FALSE	0.5666667
17	6	0.5	FALSE	0.5500000
17	8	6.1	FALSE	1.6600000
17	10	5.0	FALSE	2.2166667
17	12	6.4	FALSE	2.8142857
17	14	20.1	FALSE	4.9750000
17	16	20.1	FALSE	6.6555556
17	18	23.0	FALSE	8.2900000
17	20	24.9	FALSE	9.8000000
17	22	20.1	FALSE	10.6583333
17	24	10.1	FALSE	10.6153846
17	102	NA	TRUE	NA
17	138	NA	TRUE	NA
17	187	NA	TRUE	NA
17	224	NA	TRUE	NA
17	258	NA	TRUE	NA
18	0	1.2	FALSE	1.2000000
18	2	4.7	FALSE	2.9500000
18	4	17.2	FALSE	7.7000000
18	6	18.6	FALSE	10.4250000
18	8	NA	TRUE	NA
18	10	16.8	FALSE	11.7000000
18	12	NA	TRUE	NA
18	14	NA	TRUE	NA
18	16	NA	TRUE	NA
18	18	NA	TRUE	NA
18	20	NA	TRUE	NA
18	22	15.7	FALSE	12.3666667
18	24	22.5	FALSE	13.8142857
18	102	NA	TRUE	NA
18	138	NA	TRUE	NA
18	187	NA	TRUE	NA
18	224	NA	TRUE	NA
18	258	NA	TRUE	NA

```

# Group, count and generate means for each numeric variables
# mutate_at(vars.group, funs(as.factor(.))) %>%
df.group.count <- df_use %>% group_by(!!!syms(vars.group)) %>%
  arrange(!!!syms(vars.group)) %>%
  summarise(n_obs_group=n())

# Show results Head 10
df.group.count %>% kable() %>% kable_styling_fc()

```

### 2.3.2.2 Aggrgate Groups only Unique Group Show up With Means

Several variables that are grouping identifiers. Several variables that are values which mean be unique for each group members. For example, a Panel of income for N households over T years with also household education information that is invariant over time. Want to generate a dataset where the unit of observation are households, rather than household years. Take average of all numeric variables that are household and year specific.

A complicating factor potentially is that the number of observations differ within group, for example,

hgt0	wgt0	n_obs_group
40	2000	122
45	2000	4586
45	4000	470
50	2000	9691
50	4000	13106
55	2000	126
55	4000	1900
60	6000	18

income might be observed for all years for some households but not for other households.

- r dplyr aggregate group average
- Aggregating and analyzing data with dplyr
- column can't be modified because it is a grouping variable
- see also: [Aggregating and analyzing data with dplyr](#)

```
# In the df_hgt_wgt from R4Econ, there is a country id, village id,
# and individual id, and various other statistics
vars.group <- c('S.country', 'vil.id', 'indi.id')
vars.values <- c('hgt', 'momEdu')

# dataset subsetting
df_use <- df_hgt_wgt %>% select(!!!syms(c(vars.group, vars.values)))

# Group, count and generate means for each numeric variables
df.group <- df_use %>% group_by(!!!syms(vars.group)) %>%
  arrange(!!!syms(vars.group)) %>%
  summarise_if(is.numeric,
               funs(mean = mean(., na.rm = TRUE),
                    sd = sd(., na.rm = TRUE),
                    n = sum(is.na(.)==0)))

# Show results Head 10
df.group %>% head(10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

S.country	vil.id	indi.id	hgt_mean	momEdu_mean	hgt_sd	momEdu_sd	hgt_n	momEdu_n
Cebu	1	1	61.80000	5.3	9.520504	0	7	18
Cebu	1	2	68.86154	7.1	9.058931	0	13	18
Cebu	1	3	80.45882	9.4	29.894231	0	17	18
Cebu	1	4	88.10000	13.9	35.533166	0	18	18
Cebu	1	5	97.70556	11.3	41.090366	0	18	18
Cebu	1	6	87.49444	7.3	35.586439	0	18	18
Cebu	1	7	90.79412	10.4	38.722385	0	17	18
Cebu	1	8	68.45385	13.5	10.011961	0	13	18
Cebu	1	9	86.21111	10.4	35.126057	0	18	18
Cebu	1	10	87.67222	10.5	36.508127	0	18	18

```
# Show results Head 10
df.group %>% tail(10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

### 2.3.3 One Variable Group Summary

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

S.country	vil.id	indi.id	hgt_mean	momEdu_mean	hgt_sd	momEdu_sd	hgt_n	momEdu_n
Guatemala	14	2014	66.97000	NaN	8.967974	NA	10	0
Guatemala	14	2015	71.71818	NaN	11.399984	NA	11	0
Guatemala	14	2016	66.33000	NaN	9.490352	NA	10	0
Guatemala	14	2017	76.40769	NaN	14.827871	NA	13	0
Guatemala	14	2018	74.55385	NaN	12.707846	NA	13	0
Guatemala	14	2019	70.47500	NaN	11.797390	NA	12	0
Guatemala	14	2020	60.28750	NaN	7.060036	NA	8	0
Guatemala	14	2021	84.96000	NaN	15.446193	NA	10	0
Guatemala	14	2022	79.38667	NaN	15.824749	NA	15	0
Guatemala	14	2023	66.50000	NaN	8.613113	NA	8	0

There is a categorical variable (based on one or the interaction of multiple variables), there is a continuous variable, obtain statistics for the continuous variable conditional on the categorical variable, but also unconditionally.

Store results in a matrix, but also flatten results wide to row with appropriate keys/variable-names for all group statistics.

Pick which statistics to be included in final wide row

### 2.3.3.1 Build Program

```
# Single Variable Group Statistics (also generate overall statistics)
ff_summ_by_group_summ_one <- function(
  df, vars.group, var.numeric, str.stats.group = 'main',
  str.stats.specify = NULL, boo.overall.stats = TRUE){

  # List of statistics
  # https://rdr.io/cran/dplyr/man/summarise.html
  str.center <- c('mean', 'median')
  str.spread <- c('sd', 'IQR', 'mad')
  str.range <- c('min', 'max')
  str.pos <- c('first', 'last')
  str.count <- c('n_distinct')

  # Grouping of Statistics
  if (missing(str.stats.specify)) {
    if (str.stats.group == 'main') {
      str.all <- c('mean', 'min', 'max', 'sd')
    }
    if (str.stats.group == 'all') {
      str.all <- c(str.center, str.spread, str.range, str.pos, str.count)
    }
  } else {
    str.all <- str.stats.specify
  }

  # Start Transform
  df <- df %>% drop_na() %>%
    mutate(!!(var.numeric) := as.numeric(!!sym(var.numeric)))

  # Overall Statistics
  if (boo.overall.stats) {
    df.overall.stats <- df %>%
      summarize_at(vars(var.numeric), funs(!!!str.all))
    if (length(str.all) == 1) {
      # give it a name, otherwise if only one stat, name of stat not saved
      df.overall.stats <- df.overall.stats %>%

```

```

    rename(!!strs.all := !!sym(var.numeric))
  }
  names(df.overall.stats) <-
    paste0(var.numeric, '.', names(df.overall.stats))
}

# Group Sort
df.select <- df %>%
  group_by(!!!syms(vars.group)) %>%
  arrange(!!!syms(c(vars.group, var.numeric)))

# Table of Statistics
df.table.grp.stats <- df.select %>%
  summarize_at(vars(var.numeric), funs(!!!strs.all))

# Add Stat Name
if (length(strs.all) == 1) {
  # give it a name, otherwise if only one stat, name of stat not saved
  df.table.grp.stats <- df.table.grp.stats %>%
    rename(!!strs.all := !!sym(var.numeric))
}

# Row of Statistics
str.vars.group.combine <- paste0(vars.group, collapse='_')
if (length(vars.group) == 1) {
  df.row.grp.stats <- df.table.grp.stats %>%
    mutate(!!(str.vars.group.combine) :=
      paste0(var.numeric, '.',
              vars.group, '.g',
              (!!!syms(vars.group)))) %>%
    gather(variable, value, -one_of(vars.group)) %>%
    unite(str.vars.group.combine, c(str.vars.group.combine, 'variable')) %>%
    spread(str.vars.group.combine, value)
} else {
  df.row.grp.stats <- df.table.grp.stats %>%
    mutate(vars.groups.combine :=
      paste0(paste0(vars.group, collapse='.')),
      !(str.vars.group.combine) :=
      paste0(interaction(!!!syms(vars.group)))) %>%
    mutate(!!(str.vars.group.combine) :=
      paste0(var.numeric, '.', vars.groups.combine, '.',
              (!!sym(str.vars.group.combine)))) %>%
    ungroup() %>%
    select(-vars.groups.combine, -one_of(vars.group)) %>%
    gather(variable, value, -one_of(str.vars.group.combine)) %>%
    unite(str.vars.group.combine, c(str.vars.group.combine, 'variable')) %>%
    spread(str.vars.group.combine, value)
}

# Clean up name strings
names(df.table.grp.stats) <-
  gsub(x = names(df.table.grp.stats), pattern = "_", replacement = "\\.")
names(df.row.grp.stats) <-
  gsub(x = names(df.row.grp.stats), pattern = "_", replacement = "\\.")

# Return

```

```
list.return <-
  list(df_table_grp_stats = df.table.grp.stats,
        df_row_grp_stats = df.row.grp.stats)

# Overall Statistics, without grouping
if (boo.overall.stats) {
  df.row.stats.all <- c(df.row.grp.stats, df.overall.stats)
  list.return <- append(list.return,
                        list(df_overall_stats = df.overall.stats,
                              df_row_stats_all = df.row.stats.all))
}

# Return
return(list.return)
}
```

### 2.3.3.2 Test

Load data and test

```
# Library
library(tidyverse)

# Load Sample Data
setwd('C:/Users/fan/R4Econ/_data/')
df <- read_csv('height_weight.csv')
```

**2.3.3.2.1 Function Testing By Gender Groups** Need two variables, a group variable that is a factor, and a numeric

```
vars.group <- 'sex'
var.numeric <- 'hgt'

df.select <- df %>% select(one_of(vars.group, var.numeric)) %>% drop_na()
```

Main Statistics:

```
# Single Variable Group Statistics
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.group = 'main')$df_table_grp_stats
```

Specify Two Specific Statistics:

```
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.specify = c('mean', 'sd'))$df_table_grp_stats
```

Specify One Specific Statistics:

```
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.specify = c('mean'))$df_table_grp_stats
```

**2.3.3.2.2 Function Testing By Country and Gender Groups** Need two variables, a group variable that is a factor, and a numeric. Now joint grouping variables.

```
vars.group <- c('S.country', 'sex')
var.numeric <- 'hgt'
```

```
df.select <- df %>% select(one_of(vars.group, var.numeric)) %>% drop_na()
```

Main Statistics:

```
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.group = 'main')$df_table_grp_stats
```

Specify Two Specific Statistics:

```
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.specify = c('mean', 'sd'))$df_table_grp_stats
```

Specify One Specific Statistics:

```
ff_summ_by_group_summ_one(
  df.select, vars.group = vars.group, var.numeric = var.numeric,
  str.stats.specify = c('mean'))$df_table_grp_stats
```

### 2.3.4 Nested within Group Stats

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

By Multiple within Individual Groups Variables, Averages for All Numeric Variables within All Groups of All Group Variables (Long to very Wide). Suppose you have an individual level final outcome. The individual is observed for N periods, where each period the inputs differ. What inputs impacted the final outcome?

Suppose we can divide N periods in which the individual is in the data into a number of years, a number of semi-years, a number of quarters, or uneven-staggered lengths. We might want to generate averages across individuals and within each of these different possible groups averages of inputs.

Then we want to version of the data where each row is an individual, one of the variables is the final outcome, and the other variables are these different averages: averages for the 1st, 2nd, 3rd year in which individual is in data, averages for 1st, ..., final quarter in which individual is in data.

#### 2.3.4.1 Build Function

This function takes as inputs:

1. **vars.not.groups2avg**: a list of variables that are not the within-individual or across-individual grouping variables, but the variables we want to average over. Within individual grouping averages will be calculated for these variables using the not-listed variables as within individual groups (excluding vars.indi.grp groups).
2. **vars.indi.grp**: a list of individual variables, and also perhaps villages, province, etc id variables that are higher than individual ID. Note the groups are across individual higher level group variables.
3. the remaining variables are all within individual grouping variables.

the function output is a dataframe:

1. each row is an individual
2. initial variables individual ID and across individual groups from *vars.indi.grp*.
3. other variables are all averages for the variables in *vars.not.groups2avg*
  - if there are 2 within individual group variables, and the first has 3 groups (years), the second has 6 groups (semi-years), then there would be 9 average variables.
  - each average variables has the original variable name from vars.not.groups2avg plus the name of the within individual grouping variable, and at the end 'c\_x', where x is a integer representing the category within the group (if 3 years, x=1, 2, 3)

```

# Data Function
# https://fanwangecon.github.io/R4Econ/summarize/summ/ByGroupsSummWide.html
f.by.groups.summ.wide <- function(df.groups.to.average,
                                  vars.not.groups2avg,
                                  vars.indi.grp = c('S.country', 'ID'),
                                  display=TRUE) {

  # 1. generate categoricals for full year (m.12), half year (m.6), quarter year (m.4)
  # 2. generate categoricals also for uneven years (m12t14) using
  # stagger (+2 rather than -1)
  # 3. reshape wide to long, so that all categorical date groups appear in var=value,
  # and categories in var=variable
  # 4. calculate mean for all numeric variables for all date groups
  # 5. combine date categorical variable and value, single var:
  # m.12.c1= first year average from m.12 averaging

  #####
  # Step 1
  #####
  # 1. generate categoricals for full year (m.12), half year (m.6), quarter year (m.4)
  # 2. generate categoricals also for uneven years (m12t14) using stagger
  # (+2 rather than -1)

  #####
  # S2: reshape wide to long, so that all categorical date groups appear in var=value,
  # and categories in var=variable; calculate mean for all
  # numeric variables for all date groups
  #####
  df.avg.long <- df.groups.to.average %>%
    gather(variable, value, -one_of(c(vars.indi.grp,
                                      vars.not.groups2avg))) %>%
    group_by(!!!syms(vars.indi.grp), variable, value) %>%
    summarise_if(is.numeric, funs(mean(., na.rm = TRUE)))

  if (display){
    dim(df.avg.long)
    options(repr.matrix.max.rows=10, repr.matrix.max.cols=20)
    print(df.avg.long)
  }

  #####
  # S3 combine date categorical variable and value, single var:
  # m.12.c1= first year average from m.12 averaging; to do this make
  # data even longer first
  #####

  # We already have the averages, but we want them to show up as variables,
  # mean for each group of each variable.
  df.avg.allvars.wide <- df.avg.long %>%
    ungroup() %>%
    mutate(all_m_cate = paste0(variable, '_c', value)) %>%
    select(all_m_cate, everything(), -variable, -value) %>%
    gather(variable, value, -one_of(vars.indi.grp), -all_m_cate) %>%
    unite('var_mcate', variable, all_m_cate) %>%
    spread(var_mcate, value)

  if (display){
    dim(df.avg.allvars.wide)
  }
}

```



```

options(repr.matrix.max.rows=10, repr.matrix.max.cols=10)
print(df.avg.allvars.wide)
}

return(df.avg.allvars.wide)
}

```

### 2.3.4.2 Test Program

In our sample dataset, the number of nutrition/height/income etc information observed within each country and month of age group are different. We have a panel dataset for children observed over different months of age.

We have two key grouping variables: 1. country: data are observed for guatemala and cebu 2. month-age (survey month round=svymthRound): different months of age at which each individual child is observed

A child could be observed for many months, or just a few months. A child's height information could be observed for more months-of-age than nutritional intake information. We eventually want to run regressions where the outcome is height/weight and the input is nutrition. The regressions will be at the month-of-age level. We need to know how many times different variables are observed at the month-of-age level.

```

# Library
library(tidyverse)

# Load Sample Data
setwd('C:/Users/fan/R4Econ/_data/')
df <- read_csv('height_weight.csv')

```

**2.3.4.2.1 Generate Within Individual Groups** In the data, children are observed for different number of months since birth. We want to calculate quarterly, semi-year, annual, etc average nutritional intakes. First generate these within-individual grouping variables. We can also generate uneven-staggered calendar groups as shown below.

```

mth.var <- 'svymthRound'
df.groups.to.average <- df %>%
  filter(!sym(mth.var) >= 0 & !sym(mth.var) <= 24) %>%
  mutate(m12t24=(floor((!sym(mth.var) - 12) %/% 14) + 1),
         m8t24=(floor((!sym(mth.var) - 8) %/% 18) + 1),
         m12 = pmax((floor((!sym(mth.var)-1) %/% 12) + 1), 1),
         m6 = pmax((floor((!sym(mth.var)-1) %/% 6) + 1), 1),
         m3 = pmax((floor((!sym(mth.var)-1) %/% 3) + 1), 1))

# Show Results
options(repr.matrix.max.rows=30, repr.matrix.max.cols=20)
vars.arrange <- c('S.country', 'indi.id', 'svymthRound')
vars.groups.within.indi <- c('m12t24', 'm8t24', 'm12', 'm6', 'm3')
as.tibble(df.groups.to.average %>%
  group_by(!!!syms(vars.arrange)) %>%
  arrange(!!!syms(vars.arrange)) %>%
  select(!!!syms(vars.arrange), !!!syms(vars.groups.within.indi)))

```

**2.3.4.2.2 Within Group Averages** With the within-group averages created, we can generate averages for all variables within these groups.

```

vars.not.groups2avg <- c('prot', 'cal')
vars.indi.grp <- c('S.country', 'indi.id')
vars.groups.within.indi <- c('m12t24', 'm8t24', 'm12', 'm6', 'm3')

df.groups.to.average.select <- df.groups.to.average %>%

```



```
## Mean    : 83.88    Mean    : 87.90
## 3rd Qu.: 95.89    3rd Qu.:100.75
## Max.    :104.27    Max.    :112.22
```

```
ff_summ_percentiles(df = tb_final_twovar, bl_statsasrows = TRUE, col2varname = FALSE)
```

```
ar_final_scores <- c(94.28442509,95.68817475,97.25219512,77.89268293,95.08795497,93.27380863,92.3,84.
mt_test_scores <- cbind(seq(1,length(ar_final_scores)), ar_final_scores)
ar_st_varnames <- c('index', 'course_final')
tb_onevar <- as_tibble(mt_test_scores) %>% rename_all(~c(ar_st_varnames))
summary(tb_onevar)
```

#### 2.4.1.1.2 A Dataset with one Continuous Variable and Histogram

```
##      index      course_final
## Min.   : 1.0    Min.   : 2.293
## 1st Qu.:12.5    1st Qu.: 76.372
## Median :24.0    Median : 86.959
## Mean   :24.0    Mean   : 82.415
## 3rd Qu.:35.5    3rd Qu.: 94.686
## Max.   :47.0    Max.   :100.898
```

```
ff_summ_percentiles(df = tb_onevar, bl_statsasrows = TRUE, col2varname = FALSE)
```

```
#load in data empirically by hand
txt_test_data <- "init_prof, later_prof, class_id, exam_score
'SW', 'SW', 1, 102
'SW', 'SW', 1, 102
'SW', 'SW', 1, 101
'SW', 'SW', 1, 100
'SW', 'SW', 1, 100
'SW', 'SW', 1, 99
'SW', 'SW', 1, 98.5
'SW', 'SW', 1, 98.5
'SW', 'SW', 1, 97
'SW', 'SW', 1, 95
'SW', 'SW', 1, 94
'SW', 'SW', 1, 91
'SW', 'SW', 1, 91
'SW', 'SW', 1, 90
'SW', 'SW', 1, 89
'SW', 'SW', 1, 88.5
'SW', 'SW', 1, 88
'SW', 'SW', 1, 87
'SW', 'SW', 1, 87
'SW', 'SW', 1, 87
'SW', 'SW', 1, 86
'SW', 'SW', 1, 86
'SW', 'SW', 1, 84
'SW', 'SW', 1, 82
'SW', 'SW', 1, 78.5
'SW', 'SW', 1, 76
'SW', 'SW', 1, 72
'SW', 'SW', 1, 70.5
'SW', 'SW', 1, 67.5
'SW', 'SW', 1, 67.5
'SW', 'SW', 1, 67
```

```
'SW', 'SW', 1, 63.5
'SW', 'SW', 1, 60
'SW', 'SW', 1, 59
'SW', 'SW', 1, 44.5
'SW', 'SW', 1, 44
'SW', 'SW', 1, 42.5
'SW', 'SW', 1, 40.5
'SW', 'SW', 1, 40.5
'SW', 'SW', 1, 36.5
'SW', 'SW', 1, 35.5
'SW', 'SW', 1, 21.5
'SW', 'SW', 1, 4
'MP', 'MP', 2, 105
'MP', 'MP', 2, 103
'MP', 'MP', 2, 102
'MP', 'MP', 2, 101
'MP', 'MP', 2, 101
'MP', 'MP', 2, 100.5
'MP', 'MP', 2, 100
'MP', 'MP', 2, 99
'MP', 'MP', 2, 97
'MP', 'MP', 2, 97
'MP', 'MP', 2, 97
'MP', 'MP', 2, 97
'MP', 'MP', 2, 96
'MP', 'MP', 2, 95
'MP', 'MP', 2, 91
'MP', 'MP', 2, 89
'MP', 'MP', 2, 85
'MP', 'MP', 2, 84
'MP', 'MP', 2, 84
'MP', 'MP', 2, 84
'MP', 'MP', 2, 83.5
'MP', 'MP', 2, 82.5
'MP', 'MP', 2, 81.5
'MP', 'MP', 2, 80.5
'MP', 'MP', 2, 80
'MP', 'MP', 2, 77
'MP', 'MP', 2, 77
'MP', 'MP', 2, 75
'MP', 'MP', 2, 75
'MP', 'MP', 2, 71
'MP', 'MP', 2, 70
'MP', 'MP', 2, 68
'MP', 'MP', 2, 63
'MP', 'MP', 2, 56
'MP', 'MP', 2, 56
'MP', 'MP', 2, 55.5
'MP', 'MP', 2, 49.5
'MP', 'MP', 2, 48.5
'MP', 'MP', 2, 47.5
'MP', 'MP', 2, 44.5
'MP', 'MP', 2, 34.5
'MP', 'MP', 2, 29.5
'CA', 'MP', 3, 103
'CA', 'MP', 3, 103
'CA', 'MP', 3, 101
'CA', 'MP', 3, 96.5
```

```
'CA', 'MP', 3, 93.5
'CA', 'MP', 3, 93
'CA', 'MP', 3, 93
'CA', 'MP', 3, 92
'CA', 'MP', 3, 90
'CA', 'MP', 3, 90
'CA', 'MP', 3, 89
'CA', 'MP', 3, 86.5
'CA', 'MP', 3, 84.5
'CA', 'MP', 3, 83
'CA', 'MP', 3, 83
'CA', 'MP', 3, 82
'CA', 'MP', 3, 78
'CA', 'MP', 3, 75
'CA', 'MP', 3, 74.5
'CA', 'MP', 3, 70
'CA', 'MP', 3, 54.5
'CA', 'MP', 3, 52
'CA', 'MP', 3, 50
'CA', 'MP', 3, 42
'CA', 'MP', 3, 36.5
'CA', 'MP', 3, 28
'CA', 'MP', 3, 26
'CA', 'MP', 3, 11
'CA', 'SN', 4, 103
'CA', 'SN', 4, 103
'CA', 'SN', 4, 102
'CA', 'SN', 4, 102
'CA', 'SN', 4, 101
'CA', 'SN', 4, 100
'CA', 'SN', 4, 98
'CA', 'SN', 4, 98
'CA', 'SN', 4, 98
'CA', 'SN', 4, 95
'CA', 'SN', 4, 95
'CA', 'SN', 4, 92.5
'CA', 'SN', 4, 92
'CA', 'SN', 4, 91
'CA', 'SN', 4, 90
'CA', 'SN', 4, 85.5
'CA', 'SN', 4, 84
'CA', 'SN', 4, 82.5
'CA', 'SN', 4, 81
'CA', 'SN', 4, 77.5
'CA', 'SN', 4, 77
'CA', 'SN', 4, 72
'CA', 'SN', 4, 71.5
'CA', 'SN', 4, 69
'CA', 'SN', 4, 68.5
'CA', 'SN', 4, 68
'CA', 'SN', 4, 67
'CA', 'SN', 4, 65.5
'CA', 'SN', 4, 62.5
'CA', 'SN', 4, 62
'CA', 'SN', 4, 61.5
'CA', 'SN', 4, 61
'CA', 'SN', 4, 57.5
'CA', 'SN', 4, 54
```

```

'CA', 'SN', 4, 52.5
'CA', 'SN', 4, 51
'CA', 'SN', 4, 50.5
'CA', 'SN', 4, 50
'CA', 'SN', 4, 49
'CA', 'SN', 4, 43
'CA', 'SN', 4, 39.5
'CA', 'SN', 4, 32.5
'CA', 'SN', 4, 25.5
'CA', 'SN', 4, 18"

csv_test_data = read.csv(text=txt_test_data, header=TRUE)
ar_st_varnames <- c('first_half_professor',
                    'second_half_professor',
                    'course_id', 'exam_score')
tb_test_data <- as_tibble(csv_test_data) %>%
  rename_all(~c(ar_st_varnames))
summary(tb_test_data)

```

#### 2.4.1.1.3 A Dataset with Multiple Variables

```

## first_half_professor second_half_professor course_id exam_score
## Length:157          Length:157          Min. :1.000 Min. : 4.00
## Class :character    Class :character    1st Qu.:1.000 1st Qu.: 60.00
## Mode :character     Mode :character     Median :2.000 Median : 82.00
##                               Mean :2.465 Mean : 75.08
##                               3rd Qu.:4.000 3rd Qu.: 94.00
##                               Max. :4.000 Max. :105.00

```


```

ggplot(tb_final_twovar, aes(x=ar_test_scores_ec3)) +
  geom_histogram(bins=25) +
  labs(title = paste0('Sandbox: Final Distribution (Econ 2370, FW)'),
       caption = paste0('FW Section, formula:',
                        '0.3*exam1Perc + 0.3*exam2Perc + ',
                        '0.42*HWtotalPerc + 0.03*AttendancePerc \n',
                        '+ perfect attendance + 0.03 per Extra Credit')) +
  theme_bw()

```

#### 2.4.1.2.1 Histogram


Sandbox: Final Distribution (Econ 2370, FW)

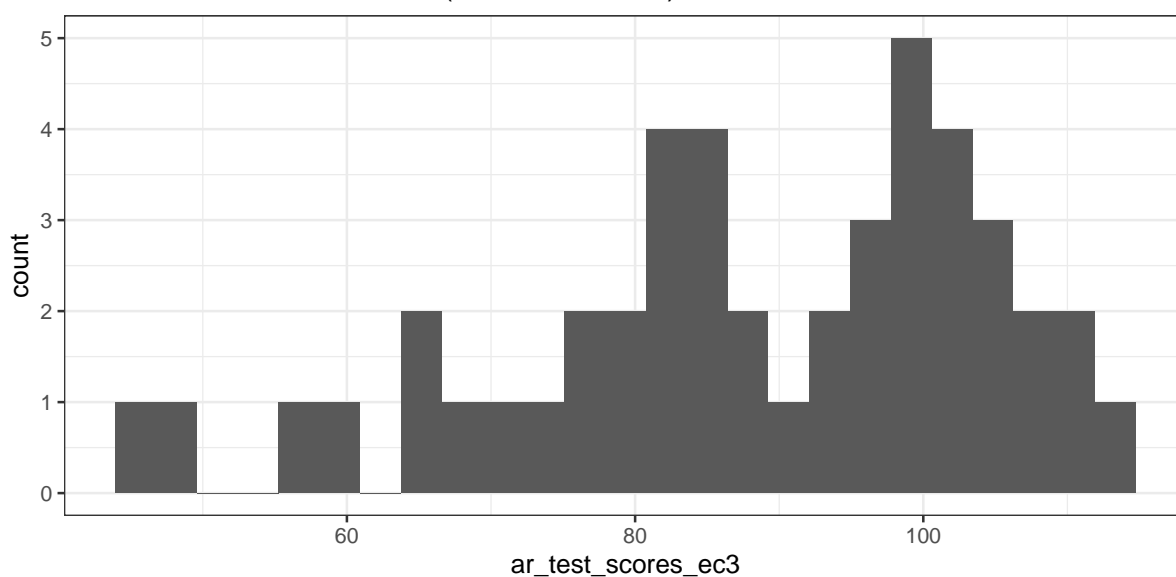

FW Section, formula:  $0.3 \times \text{exam1Perc} + 0.3 \times \text{exam2Perc} + 0.42 \times \text{HWtotalPerc} + 0.03 \times \text{AttendancePerc}$   
 + perfect attendance + 0.03 per Extra Credit

```
ggplot(tb_test_data, aes(x=exam_score)) +
  geom_histogram(bins=16) +
  labs(title = paste0('Exam Distribution'),
       caption = 'All Sections') +
  theme_bw()
```

Exam Distribution

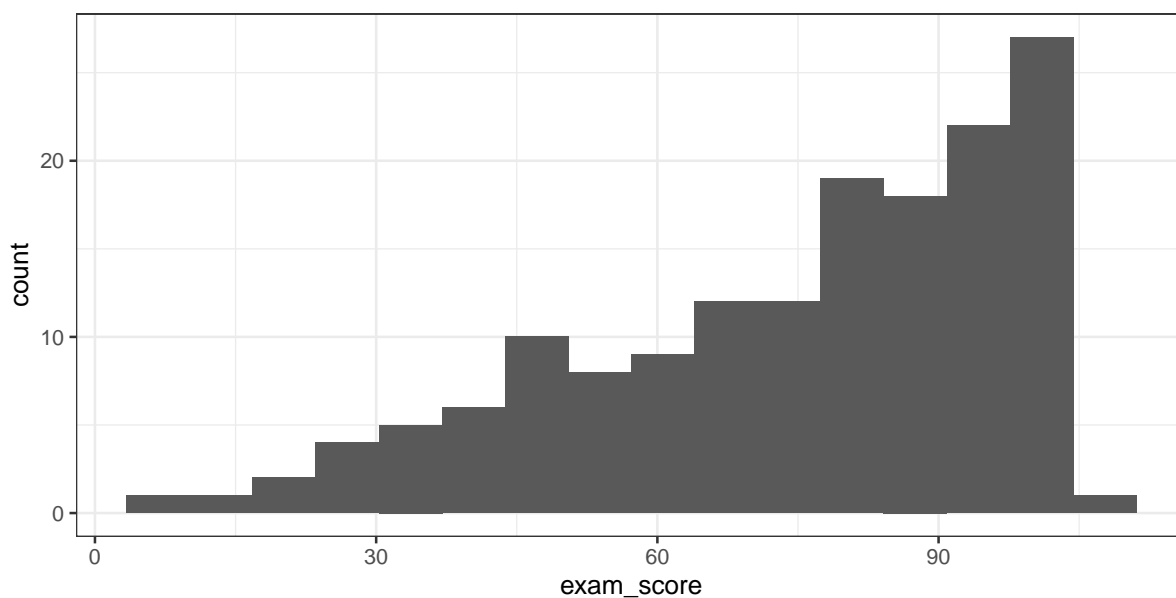

All Sections

## 2.5 Summarize Multiple Variables

### 2.5.1 Generate Replace Variables

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 2.5.1.1 Replace NA for Multiple Variables

Replace some variables NA by some values, and other variables' NAs by other values.

```
# Define
it_N <- 3
it_M <- 5
svr_id <- 'date'

# NA dataframe
df_NA <- as_tibble(matrix(NA, nrow=it_N, ncol=it_M)) %>%
  rowid_to_column(var = svr_id) %>%
  rename_at(vars(starts_with("V")),
            funs(str_replace(., "V", "var")))
kable(df_NA) %>%
  kable_styling_fc()
```

date	var1	var2	var3	var4	var5
1	NA	NA	NA	NA	NA
2	NA	NA	NA	NA	NA
3	NA	NA	NA	NA	NA

```
# Replace NA
df_NA_replace <- df_NA %>%
  mutate_at(vars(one_of(c('var1', 'var2'))), list(~replace_na(., 0))) %>%
  mutate_at(vars(one_of(c('var3', 'var5'))), list(~replace_na(., 99)))
kable(df_NA_replace) %>%
  kable_styling_fc()
```

date	var1	var2	var3	var4	var5
1	0	0	99	NA	99
2	0	0	99	NA	99
3	0	0	99	NA	99

### 2.5.1.2 Cumulative Sum Multiple Variables

Each row is a different date, each column is the profit a firms earns on a date, we want to compute cumulatively how much a person is earning. Also renames variable names below jointly.

```
# Define
it_N <- 3
it_M <- 5
svr_id <- 'date'

# random dataframe, daily profit of firms
# dp_fx: daily profit firm ID something
set.seed(123)
df_daily_profit <- as_tibble(matrix(rnorm(it_N*it_M), nrow=it_N, ncol=it_M)) %>%
  rowid_to_column(var = svr_id) %>%
  rename_at(vars(starts_with("V")),
            funs(str_replace(., "V", "dp_f")))
kable(df_daily_profit) %>%
  kable_styling_fc()
```

date	dp_f1	dp_f2	dp_f3	dp_f4	dp_f5
1	-0.5604756	0.0705084	0.4609162	-0.4456620	0.4007715
2	-0.2301775	0.1292877	-1.2650612	1.2240818	0.1106827
3	1.5587083	1.7150650	-0.6868529	0.3598138	-0.5558411



```
# cumulative sum with suffix
```

```
df_cumu_profit_suffix <- df_daily_profit %>%
  mutate_at(vars(contains('dp_f')), .funs = list(cumu = ~cumsum(.)))
kable(df_cumu_profit_suffix) %>%
  kable_styling_fc_wide()
```

date	dp_f1	dp_f2	dp_f3	dp_f4	dp_f5	dp_f1_cumu	dp_f2_cumu	dp_f3_cumu	dp_f4_cumu	dp_f5_cumu
1	-0.5604756	0.0705084	0.4609162	-0.4456620	0.4007715	-0.5604756	0.0705084	0.4609162	-0.4456620	0.4007715
2	-0.2301775	0.1292877	-1.2650612	1.2240818	0.1106827	-0.7906531	0.1997961	-0.8041450	0.7784198	0.5114542
3	1.5587083	1.7150650	-0.6868529	0.3598138	-0.5558411	0.7680552	1.9148611	-1.4909979	1.1382337	-0.0443870

```
# cumulative sum variables naming to prefix
```

```
df_cumu_profit <- df_cumu_profit_suffix %>%
  rename_at(vars(contains( "_cumu" )), list(~paste("cp_f", gsub("_cumu", "", .), sep = ""))) %>%
  rename_at(vars(contains( "cp_f" )), list(~gsub("dp_f", "", .)))
kable(df_cumu_profit) %>%
  kable_styling_fc_wide()
```

date	dp_f1	dp_f2	dp_f3	dp_f4	dp_f5	cp_f1	cp_f2	cp_f3	cp_f4	cp_f5
1	-0.5604756	0.0705084	0.4609162	-0.4456620	0.4007715	-0.5604756	0.0705084	0.4609162	-0.4456620	0.4007715
2	-0.2301775	0.1292877	-1.2650612	1.2240818	0.1106827	-0.7906531	0.1997961	-0.8041450	0.7784198	0.5114542
3	1.5587083	1.7150650	-0.6868529	0.3598138	-0.5558411	0.7680552	1.9148611	-1.4909979	1.1382337	-0.0443870



## Chapter 3

# Functions

### 3.1 Dataframe Mutate

#### 3.1.1 Row Input Functions

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

We want evaluate nonlinear function  $f(Q\_i, y\_i, ar\_x, ar\_y, c, d)$ , where  $c$  and  $d$  are constants, and  $ar\_x$  and  $ar\_y$  are arrays, both fixed.  $x\_i$  and  $y\_i$  vary over each row of matrix. We would like to evaluate this nonlinear function concurrently across  $N$  individuals. The eventual goal is to find the  $i$  specific  $Q$  that solves the nonlinear equations.

This is a continuation of [R use Apply, Sapply and dplyr Mutate to Evaluate one Function Across Rows of a Matrix](#)

##### 3.1.1.1 Set up Input Arrays

There is a function that takes  $M = Q + P$  inputs, we want to evaluate this function  $N$  times. Each time, there are  $M$  inputs, where all but  $Q$  of the  $M$  inputs, meaning  $P$  of the  $M$  inputs, are the same. In particular,  $P = Q * N$ .

$$M = Q + P = Q + Q * N$$

```
# it_child_count = N, the number of children
it_N_child_cnt = 5
# it_heter_param = Q, number of parameters that are heterogeneous across children
it_Q_hetpa_cnt = 2

# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = it_N_child_cnt)
ar_nN_alpha = seq(0.1, 0.9, length.out = it_N_child_cnt)
ar_nP_A_alpha = c(ar_nN_A, ar_nN_alpha)
ar_nN_N_choice = seq(1, it_N_child_cnt) / sum(seq(1, it_N_child_cnt))

# N by Q varying parameters
mt_nN_by_nQ_A_alpha = cbind(ar_nN_A, ar_nN_alpha, ar_nN_N_choice)

# Convert Matrix to Tibble
ar_st_col_names = c('fl_A', 'fl_alpha', 'fl_N')
tb_nN_by_nQ_A_alpha <- as_tibble(mt_nN_by_nQ_A_alpha) %>% rename_all(~c(ar_st_col_names))

# Show
```

```
kable(tb_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()
```

fl_A	fl_alpha	fl_N
-2	0.1	0.0666667
-1	0.3	0.1333333
0	0.5	0.2000000
1	0.7	0.2666667
2	0.9	0.3333333

### 3.1.1.2 Mutate over Simple Function

For this example, use a very simple function with only one type of input, all inputs are scalars.

```
# Define Implicit Function
ffi_nonlinear <- function(fl_A, fl_alpha){

  fl_out <- (fl_A + fl_alpha*fl_A)/(fl_A)^2

  return(fl_out)
}
```

Apply the function over the dataframe, note five different ways below, the third way allows for parameters to be strings.

```
# variable names
svr_fl_A <- 'fl_A'
svr_fl_alpha <- 'fl_alpha'

# Evaluate
tb_nN_by_nQ_A_alpha_mutate_rows <- tb_nN_by_nQ_A_alpha %>%
  mutate(fl_out_m1 = ffi_nonlinear(fl_A=.$fl_A, fl_alpha=.$fl_alpha),
         fl_out_m2 = ffi_nonlinear(fl_A=`.$`(`.$`, 'fl_A'), fl_alpha=`.$`(`.$`, 'fl_alpha')),
         fl_out_m3 = ffi_nonlinear(fl_A=.$[[svr_fl_A]], fl_alpha=.$[[svr_fl_alpha]]),
         fl_out_m4 = ffi_nonlinear(fl_A=fl_A, fl_alpha=fl_alpha),
         fl_out_m5 = ffi_nonlinear(fl_A, fl_alpha))

# print
kable(tb_nN_by_nQ_A_alpha_mutate_rows) %>% kable_styling_fc()
```

fl_A	fl_alpha	fl_N	fl_out_m1	fl_out_m2	fl_out_m3	fl_out_m4	fl_out_m5
-2	0.1	0.0666667	-0.55	-0.55	-0.55	-0.55	-0.55
-1	0.3	0.1333333	-1.30	-1.30	-1.30	-1.30	-1.30
0	0.5	0.2000000	NaN	NaN	NaN	NaN	NaN
1	0.7	0.2666667	1.70	1.70	1.70	1.70	1.70
2	0.9	0.3333333	0.95	0.95	0.95	0.95	0.95

### 3.1.1.3 Testing Function with Scalar and Arrays

Test non-linear Equation.

```
# Test Parameters
fl_N_agg = 100
fl_rho = -1
fl_N_q = ar_nN_N_choice[4]*fl_N_agg
ar_A_alpha = mt_nN_by_nQ_A_alpha[4,]
# Apply Function
ar_p1_s1 = exp((ar_A_alpha[1] - ar_nN_A)*fl_rho)
```

```

ar_p1_s2 = (ar_A_alpha[2]/ar_nN_alpha)
ar_p1_s3 = (1/(ar_nN_alpha*fl_rho - 1))
ar_p1 = (ar_p1_s1*ar_p1_s2)^ar_p1_s3
ar_p2 = fl_N_q^((ar_A_alpha[2]*fl_rho-1)/(ar_nN_alpha*fl_rho-1))
ar_overall = ar_p1*ar_p2
fl_overall = fl_N_agg - sum(ar_overall)
print(fl_overall)

```

```
## [1] -598.2559
```

Implement the non-linear problem's evaluation using apply over all  $N$  individuals.

```

# Define Implicit Function
ffi_nonlin_dplyrdo <- function(fl_A, fl_alpha, fl_N, ar_A, ar_alpha, fl_N_agg, fl_rho){
  # ar_A_alpha[1] is A
  # ar_A_alpha[2] is alpha

  # # Test Parameters
  # fl_N = 100
  # fl_rho = -1
  # fl_N_q = 10

  # Apply Function
  ar_p1_s1 = exp((fl_A - ar_A)*fl_rho)
  ar_p1_s2 = (fl_alpha/ar_alpha)
  ar_p1_s3 = (1/(ar_alpha*fl_rho - 1))
  ar_p1 = (ar_p1_s1*ar_p1_s2)^ar_p1_s3
  ar_p2 = fl_N^((fl_alpha*fl_rho-1)/(ar_alpha*fl_rho-1))
  ar_overall = ar_p1*ar_p2
  fl_overall = fl_N_agg - sum(ar_overall)

  return(fl_overall)
}

# Parameters
fl_rho = -1

# Evaluate Function
print(ffi_nonlin_dplyrdo(mt_nN_by_nQ_A_alpha[1,1],
                        mt_nN_by_nQ_A_alpha[1,2],
                        mt_nN_by_nQ_A_alpha[1,3]*fl_N_agg,
                        ar_nN_A, ar_nN_alpha, fl_N_agg, fl_rho))

```

```
## [1] 81.86645
```

```

for (i in seq(1,dim(mt_nN_by_nQ_A_alpha)[1])){
  fl_eval = ffi_nonlin_dplyrdo(mt_nN_by_nQ_A_alpha[i,1],
                              mt_nN_by_nQ_A_alpha[i,2],
                              mt_nN_by_nQ_A_alpha[i,3]*fl_N_agg,
                              ar_nN_A, ar_nN_alpha, fl_N_agg, fl_rho)

  print(fl_eval)
}

```

```

## [1] 81.86645
## [1] 54.48885
## [1] -65.5619
## [1] -598.2559
## [1] -3154.072

```

### 3.1.1.4 Evaluate Nonlinear Function using dplyr mutate

```
# Define Implicit Function
ffi_nonlin_dplyrdo <- function(fl_A, fl_alpha, fl_N, ar_A, ar_alpha, fl_N_agg, fl_rho){

  # Test Parameters
  # ar_A = ar_nN_A
  # ar_alpha = ar_nN_alpha
  # fl_N = 100
  # fl_rho = -1
  # fl_N_q = 10

  # Apply Function
  ar_p1_s1 = exp((fl_A - ar_A)*fl_rho)
  ar_p1_s2 = (fl_alpha/ar_alpha)
  ar_p1_s3 = (1/(ar_alpha*fl_rho - 1))
  ar_p1 = (ar_p1_s1*ar_p1_s2)^ar_p1_s3
  ar_p2 = (fl_N*fl_N_agg)^((fl_alpha*fl_rho-1)/(ar_alpha*fl_rho-1))
  ar_overall = ar_p1*ar_p2
  fl_overall = fl_N_agg - sum(ar_overall)

  return(fl_overall)
}

# fl_A, fl_alpha are from columns of tb_nN_by_nQ_A_alpha
tb_nN_by_nQ_A_alpha = tb_nN_by_nQ_A_alpha %>% rowwise() %>%
  mutate(dplyr_eval = ffi_nonlin_dplyrdo(fl_A, fl_alpha, fl_N,
                                          ar_nN_A, ar_nN_alpha,
                                          fl_N_agg, fl_rho))

# Show
kable(tb_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()
```

fl_A	fl_alpha	fl_N	dplyr_eval
-2	0.1	0.0666667	81.86645
-1	0.3	0.1333333	54.48885
0	0.5	0.2000000	-65.56190
1	0.7	0.2666667	-598.25595
2	0.9	0.3333333	-3154.07226

### 3.1.2 Evaluate Choices Across States

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

See the `ff_opti_bisect_pmap_multi` function from [Fan's REconTools Package](#), which provides a reusable function based on the algorithm worked out here.

We want evaluate linear function  $0 = f(z_{ij}, x_i, y_i, \mathbf{X}, \mathbf{Y}, c, d)$ . There are  $i$  functions that have  $i$  specific  $x$  and  $y$ . For each  $i$  function, we evaluate along a grid of feasible values for  $z$ , over  $j \in J$  grid points, potentially looking for the  $j$  that is closest to the root.  $\mathbf{X}$  and  $\mathbf{Y}$  are arrays common across the  $i$  equations, and  $c$  and  $d$  are constants.

The evaluation strategy is the following, given min and max for  $z$  that are specific for each  $j$ , and given common number of grid points, generate a matrix of  $z_{ij}$ . Suppose there the number of  $i$  is  $I$ , and the number of grid points for  $j$  is  $J$ .

1. Generate a  $J \cdot I$  by 3 matrix where the columns are  $z, x, y$  as tibble
2. Follow [this](#) Mutate to evaluate the  $f(\cdot)$  function.

3. Add two categorical columns for grid levels and with  $i$ ,  $i$  and  $j$  index. Plot Mutate output evaluated column categorized by  $i$  as color and  $j$  as x-axis.

### 3.1.2.1 Set up Input Arrays

There is a function that takes  $M = Q + P$  inputs, we want to evaluate this function  $N$  times. Each time, there are  $M$  inputs, where all but  $Q$  of the  $M$  inputs, meaning  $P$  of the  $M$  inputs, are the same. In particular,  $P = Q * N$ .

$$M = Q + P = Q + Q * N$$

Now we need to expand this by the number of choice grid. Each row, representing one equation, is expanded by the number of choice grids. We are graphically searching, or rather brute force searching, which means if we have 100 individuals, we want to plot out the nonlinear equation for each of these lines, and show graphically where each line crosses zero. We achieve this, by evaluating the equation for each of the 100 individuals along a grid of feasible choices.

In this problem here, the feasible choices are shared across individuals.

```
# Parameters
fl_rho = 0.20
svr_id_var = 'INDI_ID'

# it_child_count = N, the number of children
it_N_child_cnt = 4
# it_heter_param = Q, number of parameters that are heterogeneous across children
it_Q_hetpa_cnt = 2

# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = it_N_child_cnt)
ar_nN_alpha = seq(0.1, 0.9, length.out = it_N_child_cnt)
ar_nP_A_alpha = c(ar_nN_A, ar_nN_alpha)

# N by Q varying parameters
mt_nN_by_nQ_A_alpha = cbind(ar_nN_A, ar_nN_alpha)

# Choice Grid for nutritional feasible choices for each
fl_N_agg = 100
fl_N_min = 0
it_N_choice_cnt_ttest = 3
it_N_choice_cnt_dense = 100
ar_N_choices_ttest = seq(fl_N_min, fl_N_agg, length.out = it_N_choice_cnt_ttest)
ar_N_choices_dense = seq(fl_N_min, fl_N_agg, length.out = it_N_choice_cnt_dense)

# Mesh Expand
tb_states_choices <- as_tibble(mt_nN_by_nQ_A_alpha) %>% rowid_to_column(var=svr_id_var)
tb_states_choices_ttest <- tb_states_choices %>% expand_grid(choices = ar_N_choices_ttest)
tb_states_choices_dense <- tb_states_choices %>% expand_grid(choices = ar_N_choices_dense)

# display
summary(tb_states_choices_dense)
```

```
##      INDI_ID      ar_nN_A      ar_nN_alpha      choices
## Min.   :1.00   Min.   :-2      Min.   :0.1      Min.   : 0
## 1st Qu.:1.75   1st Qu.: -1      1st Qu.:0.3      1st Qu.: 25
## Median :2.50   Median : 0      Median :0.5      Median : 50
## Mean   :2.50   Mean    : 0      Mean    :0.5      Mean    : 50
## 3rd Qu.:3.25   3rd Qu.: 1      3rd Qu.:0.7      3rd Qu.: 75
## Max.   :4.00   Max.    : 2      Max.    :0.9      Max.    :100
```

```
kable(tb_states_choices_ttest) %>%
  kable_styling_fc()
```

INDI_ID	ar_nN_A	ar_nN_alpha	choices
1	-2.0000000	0.1000000	0
1	-2.0000000	0.1000000	50
1	-2.0000000	0.1000000	100
2	-0.6666667	0.3666667	0
2	-0.6666667	0.3666667	50
2	-0.6666667	0.3666667	100
3	0.6666667	0.6333333	0
3	0.6666667	0.6333333	50
3	0.6666667	0.6333333	100
4	2.0000000	0.9000000	0
4	2.0000000	0.9000000	50
4	2.0000000	0.9000000	100

### 3.1.2.2 Apply Same Function all Rows, Some Inputs Row-specific, other Shared

There are two types of inputs, row-specific inputs, and inputs that should be applied for each row. The Function just requires all of these inputs, it does not know what is row-specific and what is common for all row. Dplyr recognizes which parameter inputs already existing in the piped dataframe/tibble, given rowwise, those will be row-specific inputs. Additional function parameters that do not exist in dataframe as variable names, but that are pre-defined scalars or arrays will be applied to all rows.

- ? string variable name of input where functions are evaluated, these are already contained in the dataframe, existing variable names, row specific, rowwise computation over these, each rowwise calculation using different rows: *fl\_A*, *fl\_alpha*, *fl\_N*
- ? scalar and array values that are applied to every rowwise calculation, all rowwise calculations using the same scalars and arrays: *ar\_A*, *ar\_alpha*, *fl\_N\_agg*, *fl\_rho*
- ? string output variable name

The function looks within group, finds min/max etc that are relevant.

```
# Convert Matrix to Tibble
ar_st_col_names = c(svr_id_var, 'fl_A', 'fl_alpha')
tb_states_choices <- tb_states_choices %>% rename_all(~c(ar_st_col_names))
ar_st_col_names = c(svr_id_var, 'fl_A', 'fl_alpha', 'fl_N')
tb_states_choices_ttest <- tb_states_choices_ttest %>% rename_all(~c(ar_st_col_names))
tb_states_choices_dense <- tb_states_choices_dense %>% rename_all(~c(ar_st_col_names))

# Define Implicit Function
ffi_nonlin_dplyrdo <- function(fl_A, fl_alpha, fl_N, ar_A, ar_alpha, fl_N_agg, fl_rho){
  # scalar value that are row-specific, in dataframe already: *fl_A*, *fl_alpha*, *fl_N*
  # array and scalars not in dataframe, common all rows: *ar_A*, *ar_alpha*, *fl_N_agg*, *fl_rho*

  # Test Parameters
  # ar_A = ar_nN_A
  # ar_alpha = ar_nN_alpha
  # fl_N = 100
  # fl_rho = -1
  # fl_N_q = 10

  # Apply Function
  ar_p1_s1 = exp((fl_A - ar_A)*fl_rho)
  ar_p1_s2 = (fl_alpha/ar_alpha)
  ar_p1_s3 = (1/(ar_alpha*fl_rho - 1))
```



```

ar_p1 = (ar_p1_s1*ar_p1_s2)^ar_p1_s3
ar_p2 = fl_N^((fl_alpha*fl_rho-1)/(ar_alpha*fl_rho-1))
ar_overall = ar_p1*ar_p2
fl_overall = fl_N_agg - sum(ar_overall)

return(fl_overall)
}

```

### 3.1.2.2.1 3 Points and Denser Dataframes and Define Function

**3.1.2.2.2 Evaluate at Three Choice Points and Show Table** In the example below, just show results evaluating over three choice points and show table.

```

# fl_A, fl_alpha are from columns of tb_nN_by_nQ_A_alpha
tb_states_choices_ttest_eval = tb_states_choices_ttest %>% rowwise() %>%
  mutate(dplyr_eval = ffi_nonlin_dplyrdo(fl_A, fl_alpha, fl_N,
                                          ar_nN_A, ar_nN_alpha,
                                          fl_N_agg, fl_rho))

# Show
kable(tb_states_choices_ttest_eval) %>%
  kable_styling_fc()

```

INDI_ID	fl_A	fl_alpha	fl_N	dplyr_eval
1	-2.0000000	0.1000000	0	100.00000
1	-2.0000000	0.1000000	50	-5666.95576
1	-2.0000000	0.1000000	100	-12880.28392
2	-0.6666667	0.3666667	0	100.00000
2	-0.6666667	0.3666667	50	-595.73454
2	-0.6666667	0.3666667	100	-1394.70698
3	0.6666667	0.6333333	0	100.00000
3	0.6666667	0.6333333	50	-106.51058
3	0.6666667	0.6333333	100	-323.94216
4	2.0000000	0.9000000	0	100.00000
4	2.0000000	0.9000000	50	22.55577
4	2.0000000	0.9000000	100	-51.97161

**3.1.2.2.3 Evaluate at Many Choice Points and Show Graphically** Same as above, but now we evaluate the function over the individuals at many choice points so that we can graph things out.

```

# fl_A, fl_alpha are from columns of tb_nN_by_nQ_A_alpha
tb_states_choices_dense_eval = tb_states_choices_dense %>% rowwise() %>%
  mutate(dplyr_eval = ffi_nonlin_dplyrdo(fl_A, fl_alpha, fl_N,
                                          ar_nN_A, ar_nN_alpha,
                                          fl_N_agg, fl_rho))

# Labeling
st_title <- paste0('Evaluate Non-Linear Functions to Search for Roots')
st_subtitle <- paste0('https://fanwangecon.github.io/',
                      'R4Econ/function/mutatef/htmlpdf/fs_func_choice_states.html')
st_caption <- paste0('Evaluating the function, ',
                      'https://fanwangecon.github.io/R4Econ/')
st_x_label <- 'x values'
st_y_label <- 'f(x)'

# Show
dim(tb_states_choices_dense_eval)

```

```
## [1] 400 5
```


```
summary(tb_states_choices_dense_eval)
```

```
##      INDI_ID      fl_A      fl_alpha      fl_N      dplyr_eval
## Min.   :1.00   Min.   : -2   Min.   :0.1   Min.   : 0   Min.   : -12880.28
## 1st Qu.:1.75   1st Qu.: -1   1st Qu.:0.3   1st Qu.: 25   1st Qu.: -1167.29
## Median :2.50   Median : 0   Median :0.5   Median : 50   Median : -202.42
## Mean   :2.50   Mean    : 0   Mean   :0.5   Mean   : 50   Mean   : -1645.65
## 3rd Qu.:3.25   3rd Qu.: 1   3rd Qu.:0.7   3rd Qu.: 75   3rd Qu.: 0.96
## Max.   :4.00   Max.    : 2   Max.   :0.9   Max.   :100   Max.   : 100.00
```

```
lineplot <- tb_states_choices_dense_eval %>%
  ggplot(aes(x=fl_N, y=dplyr_eval)) +
    geom_line() +
    facet_wrap(. ~ INDI_ID, scales = "free") +
    geom_hline(yintercept=0, linetype="dashed",
              color = "red", size=1) +
    labs(title = st_title,
         subtitle = st_subtitle,
         x = st_x_label,
         y = st_y_label,
         caption = st_caption)
print(lineplot)
```

### Evaluate Non-Linear Functions to Search for Roots

[https://fanwangecon.github.io/R4Econ/function/mutatef/htmlpdf/fs\\_func\\_choice\\_states.html](https://fanwangecon.github.io/R4Econ/function/mutatef/htmlpdf/fs_func_choice_states.html)

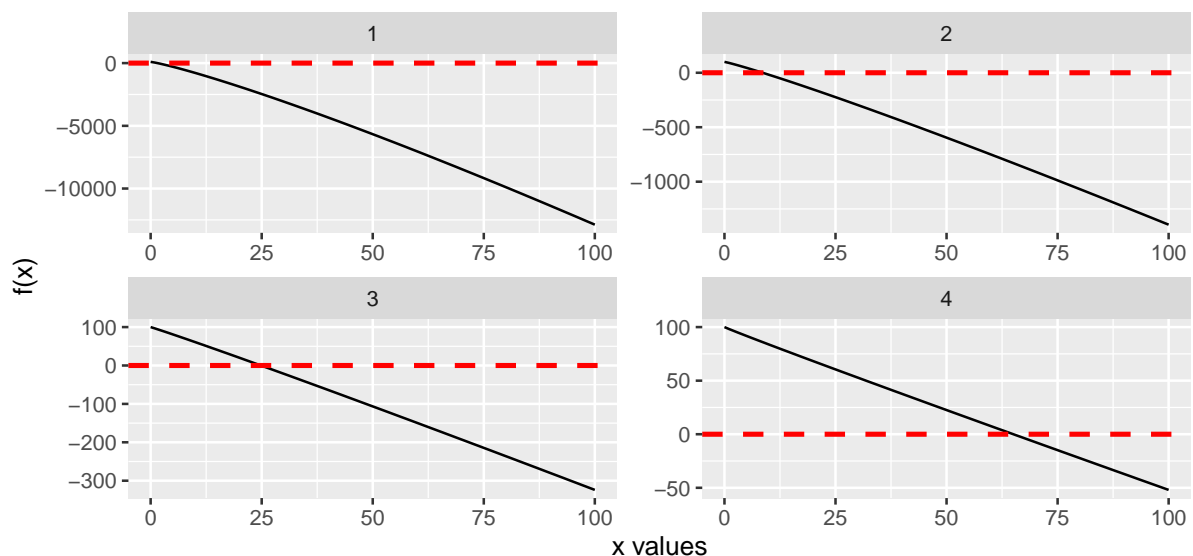

Evaluating the function, <https://fanwangecon.github.io/R4Econ/>

## 3.2 Dataframe Do Anything

### 3.2.1 (Mx1 by N) to (MxQ by N+1)

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

**Case One:** There is a dataframe with  $M$  rows, based on these  $m$  specific information, generate dataframes for each  $m$ . Stack these individual dataframes together and merge original  $m$  specific information in as well. The number of rows for each  $m$  is  $Q_m$ , each  $m$  could have different number of expansion rows.

Generate a panel with  $M$  individuals, each individual is observed for different spans of times (*uncount*).

Before expanding, generate individual specific normal distribution standard deviation. All individuals share the same mean, but have increasing standard deviations.

### 3.2.1.1 Generate Dataframe with M Rows.

This is the first step, generate  $M$  rows of data, to be expanded. Each row contains the number of normal draws to make and the mean and the standard deviation for normal daraws that are  $m$  specific.

```
# Parameter Setups
it_M <- 3
it_Q_max <- 5
fl_rnorm_mu <- 1000
ar_rnorm_sd <- seq(0.01, 200, length.out=it_M)
ar_it_q <- sample.int(it_Q_max, it_M, replace=TRUE)

# N by Q varying parameters
mt_data = cbind(ar_it_q, ar_rnorm_sd)
tb_M <- as_tibble(mt_data) %>% rowid_to_column(var = "ID") %>%
  rename(sd = ar_rnorm_sd, Q = ar_it_q) %>%
  mutate(mean = fl_rnorm_mu)

# display
kable(tb_M) %>%
  kable_styling_fc()
```

ID	Q	sd	mean
1	1	0.010	1000
2	3	100.005	1000
3	4	200.000	1000

### 3.2.1.2 Random Normal Draw Expansion

The steps are:

1. `do anything`
2. use “.\$” sign to refer to variable names, or `[[‘name’]]`
3. `unnest`
4. `left_join` expanded and original

Note these all give the same results

Use dot dollar to get variables

```
# Generate $Q_m$ individual specific incomes, expanded different number of times for each m
tb_income <- tb_M %>% group_by(ID) %>%
  do(income = rnorm(.$Q, mean=.$mean, sd=.$sd)) %>%
  unnest(c(income))

# Merge back with tb_M
tb_income_full_dd <- tb_income %>%
  left_join(tb_M)

# display
kable(tb_income) %>%
  kable_styling_fc()

kable(tb_income_full_dd) %>%
  kable_styling_fc()
```

ID	income
1	999.9803
2	1070.1391
2	952.7185
2	893.2123
3	956.4050
3	794.7991
3	854.2218
3	874.9921

ID	income	Q	sd	mean
1	999.9803	1	0.010	1000
2	1070.1391	3	100.005	1000
2	952.7185	3	100.005	1000
2	893.2123	3	100.005	1000
3	956.4050	4	200.000	1000
3	794.7991	4	200.000	1000
3	854.2218	4	200.000	1000
3	874.9921	4	200.000	1000

### 3.2.2 (MxP by N) to (Mx1 by 1)

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

There is a Panel with  $M$  individuals and each individual has  $Q$  records/rows. A function generate an individual specific outcome given the  $Q$  individual specific inputs, along with shared parameters and arrays across the  $M$  individuals.

For example, suppose we have a dataframe of individual wage information from different countries, each row is an individual from one country. We want to generate country specific gini based on the individual data for each country in the dataframe. But additionally, perhaps the gini formula requires not just individual income but some additional parameters or shared dataframes as inputs.

Given the within  $m$  income observations, we can compute gini statistics that are individual specific based on the observed distribution of incomes. For this, we will use the [ff\\_dist\\_gini\\_vector\\_pos.html](#) function from [REconTools](#).

To make this more interesting, we will generate large dataframe with more  $M$  and more  $Q$  each  $m$ .

#### 3.2.2.1 Income Rows for Individuals in Many Groups

There are up to ten thousand income observation per person. And there are ten people.

```
# Parameter Setups
it_M <- 10
it_Q_max <- 10000
fl_rnorm_mu <- 1
ar_rnorm_sd <- seq(0.01, 0.2, length.out=it_M)
ar_it_q <- sample.int(it_Q_max, it_M, replace=TRUE)

# N by Q varying parameters
mt_data = cbind(ar_it_q, ar_rnorm_sd)
tb_M <- as_tibble(mt_data) %>% rowid_to_column(var = "ID") %>%
  rename(sd = ar_rnorm_sd, Q = ar_it_q) %>%
  mutate(mean = fl_rnorm_mu)
```

### 3.2.2.2 Compute Group Specific Gini

There is only one input for the gini function `ar_pos`. Note that the gini are not very large even with large SD, because these are normal distributions. By Construction, most people are in the middle. So with almost zero standard deviation, we have perfect equality, as standard deviation increases, inequality increases, but still pretty equal overall, there is no fat upper tail.

Note that there are three ways of referring to variable names with dot, which are all shown below:

1. We can explicitly refer to names
2. We can use the [dollar dot structure](#) to use string variable names in do anything.
3. We can use dot bracket, this is the only option that works with string variable names

First: Generate individual group all incomes:

```
# A. Normal Draw Expansion, Explicitly Name
set.seed('123')
tb_income_norm_dot_dollar <- tb_M %>% group_by(ID) %>%
  do(income = rnorm(. $Q,
                    mean=.$mean,
                    sd=.$sd)) %>%
  unnest(c(income)) %>%
  left_join(tb_M, by="ID")

# Normal Draw Expansion again, dot dollar differently with string variable name
set.seed('123')
tb_income_norm_dollar_dot <- tb_M %>% group_by(ID) %>%
  do(income = rnorm(`.$`(. , 'Q'),
                    mean = `.$`(. , 'mean'),
                    sd = `.$`(. , 'sd')) %>%
  unnest(c(income)) %>%
  left_join(tb_M, by="ID")

# Normal Draw Expansion again, dot double bracket
set.seed('123')
svr_mean <- 'mean'
svr_sd <- 'sd'
svr_Q <- 'Q'
tb_income_norm_dot_bracket_db <- tb_M %>% group_by(ID) %>%
  do(income = rnorm(. [[svr_Q]],
                    mean = . [[svr_mean]],
                    sd = . [[svr_sd]])) %>%
  unnest(c(income)) %>%
  left_join(tb_M, by="ID")

# display
print(dim(tb_income_norm_dot_bracket_db))

## [1] 59429      5

kable(head(tb_income_norm_dot_bracket_db, 20)) %>% kable_styling_fc()
```

Second, compute gini:

```
# Gini by Group
tb_gini_norm <- tb_income_norm_dot_bracket_db %>% group_by(ID) %>%
  do(inc_gini_norm = ff_dist_gini_vector_pos(.$income)) %>%
  unnest(c(inc_gini_norm)) %>%
  left_join(tb_M, by="ID")

# display
kable(tb_gini_norm) %>% kable_styling_fc()
```

ID	income	Q	sd	mean
1	0.9943952	3004	0.01	1
1	0.9976982	3004	0.01	1
1	1.0155871	3004	0.01	1
1	1.0007051	3004	0.01	1
1	1.0012929	3004	0.01	1
1	1.0171506	3004	0.01	1
1	1.0046092	3004	0.01	1
1	0.9873494	3004	0.01	1
1	0.9931315	3004	0.01	1
1	0.9955434	3004	0.01	1
1	1.0122408	3004	0.01	1
1	1.0035981	3004	0.01	1
1	1.0040077	3004	0.01	1
1	1.0011068	3004	0.01	1
1	0.9944416	3004	0.01	1
1	1.0178691	3004	0.01	1
1	1.0049785	3004	0.01	1
1	0.9803338	3004	0.01	1
1	1.0070136	3004	0.01	1
1	0.9952721	3004	0.01	1

ID	inc_gini_norm	Q	sd	mean
1	0.0056006	3004	0.0100000	1
2	0.0174893	3207	0.0311111	1
3	0.0295527	7989	0.0522222	1
4	0.0412807	3995	0.0733333	1
5	0.0537107	8358	0.0944444	1
6	0.0650354	217	0.1155556	1
7	0.0766718	9506	0.1366667	1
8	0.0891009	8157	0.1577778	1
9	0.1014251	6216	0.1788889	1
10	0.1135054	8780	0.2000000	1

### 3.2.3 (MxP by N) to (MxQ by N+Z)

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

There is a dataframe composed of  $M$  mini-dataframes. Group by a variable that identifies each unique sub-dataframe, and use the sub-dataframes with  $P$  rows as inputs to a function.

The function outputs  $Q$  by  $Z$  rows and columns of results, stack the results. The output file has  $MxQ$  rows and the  $Z$  columns of additional results should be appended.

#### 3.2.3.1 Generate the MxP by N Dataframe

$M$  Grouping characteristics,  $P$  rows for each group, and  $N$  Variables.

1.  $M$  are individuals
2.  $P$  are dates
3. A wage variable for individual wage at each date. And a savings variable as well.

```
# Define
it_M <- 3
it_P <- 5
svr_m <- 'group_m'
svr_mp <- 'info_mp'
```

```
# dataframe
set.seed(123)
df_panel_skeleton <- as_tibble(matrix(it_P, nrow=it_M, ncol=1)) %>%
  rowid_to_column(var = svr_m) %>%
  uncount(V1) %>%
  group_by(!sym(svr_m)) %>% mutate(!sym(svr_mp) := row_number()) %>%
  ungroup() %>%
  rowwise() %>% mutate(wage = rnorm(1, 100, 10),
                      savings = rnorm(1, 200, 30)) %>%
  ungroup() %>%
  rowid_to_column(var = "id_ji")

# Print
kable(df_panel_skeleton) %>% kable_styling_fc()
```

id_ji	group_m	info_mp	wage	savings
1	1	1	94.39524	253.6074
2	1	2	97.69823	214.9355
3	1	3	115.58708	141.0015
4	1	4	100.70508	221.0407
5	1	5	101.29288	185.8163
6	2	1	117.15065	167.9653
7	2	2	104.60916	193.4608
8	2	3	87.34939	169.2199
9	2	4	93.13147	178.1333
10	2	5	95.54338	181.2488
11	3	1	112.24082	149.3992
12	3	2	103.59814	225.1336
13	3	3	104.00771	204.6012
14	3	4	101.10683	165.8559
15	3	5	94.44159	237.6144

### 3.2.3.2 Subgroup Compute and Expand

Use the  $M$  sub-dataframes, generate  $Q$  by  $Z$  result for each of the  $M$  groups. Stack all results together.

Base on all the wages for each individual, generate individual specific mean and standard deviations. Do this for three things, the wage variable, the savings variable, and the sum of wage and savings:

1.  $Z=2$ : 2 columns, mean and standard deviation
2.  $Q=3$ : 3 rows, statistics based on wage, savings, and the sum of both

First, here is the processing function that takes the dataframe as input, with a parameter for rounding:

```
# define function
ffi_subset_mean_sd <- function(df_sub, it_round=1) {
  #' A function that generates mean and sd for several variables
  #'
  #' @description
  #' Assume there are two variables in df_sub wage and savings
  #'
  #' @param df_sub dataframe where each individual row is a different
  #' data point, over which we compute mean and sd, Assum there are two
  #' variables, savings and wage
  #' @param it_round integer rounding for resulting dataframe
  #' @return a dataframe where each row is aggregate for a different type
  #' of variable and each column is a different statistics

  fl_wage_mn = mean(df_sub$wage)
```

```

fl_wage_sd = sd(df_sub$wage)

fl_save_mn = mean(df_sub$savings)
fl_save_sd = sd(df_sub$savings)

fl_wgsv_mn = mean(df_sub$wage + df_sub$savings)
fl_wgsv_sd = sd(df_sub$wage + df_sub$savings)

ar_mn <- c(fl_wage_mn, fl_save_mn, fl_wgsv_mn)
ar_sd <- c(fl_wage_sd, fl_save_sd, fl_wgsv_sd)
ar_st_row_lab <- c('wage', 'savings', 'wage_and_savings')

mt_stats <- cbind(ar_mn, ar_sd)
mt_stats <- round(mt_stats, it_round)

ar_st_varnames <- c('mean', 'sd', 'variables')
df_combine <- as_tibble(mt_stats) %>%
  add_column(ar_st_row_lab) %>%
  rename_all(~c(ar_st_varnames)) %>%
  select(variables, 'mean', 'sd') %>%
  rowid_to_column(var = "id_q")

return(df_combine)
}
# testing function
ffi_subset_mean_sd(df_panel_skeleton %>% filter(!sym(svr_m)==1))

```

Second, call `ffi_subset_mean_sd` function for each of the groups indexed by  $j$  and stack results together with  $j$  index:

1. group by
2. call function
3. unnest

```

# run group stats and stack dataframes
df_outputs <- df_panel_skeleton %>% group_by(!sym(svr_m)) %>%
  do(df_stats = ffi_subset_mean_sd(., it_round=2)) %>%
  unnest() %>%
  rowid_to_column(var = "id_mq")
# print
kable(df_outputs) %>% kable_styling_fc()

```

id_mq	group_m	id_q	variables	mean	sd
1	1	1	wage	101.94	8.11
2	1	2	savings	203.28	42.33
3	1	3	wage_and_savings	305.22	34.83
4	2	1	wage	99.56	11.63
5	2	2	savings	178.01	10.34
6	2	3	wage_and_savings	277.56	15.48
7	3	1	wage	103.08	6.39
8	3	2	savings	196.52	37.86
9	3	3	wage_and_savings	299.60	33.50

In the resulting file, we went from a matrix with  $M \times P$  rows to a matrix with  $M \times Q$  Rows.



## 3.3 Apply and pmap

### 3.3.1 Apply and Sapply

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

- `r` apply matrix to function row by row
- `r` evaluate function on grid
- [Apply a function to every row of a matrix or a data frame](#)
- `r` apply
- `r` sapply
- sapply over matrix row by row
- function as parameters using formulas
- `do`

We want evaluate linear function  $f(x_i, y_i, ar\_x, ar\_y, c, d)$ , where  $c$  and  $d$  are constants, and  $ar\_x$  and  $ar\_y$  are arrays, both fixed.  $x_i$  and  $y_i$  vary over each row of matrix. More specifically, we have a functions, this function takes inputs that are individual specific. We would like to evaluate this function concurrently across  $N$  individuals.

The function is such that across the  $N$  individuals, some of the function parameter inputs are the same, but others are different. If we are looking at demand for a particular product, the prices of all products enter the demand equation for each product, but the product's own price enters also in a different way.

The objective is either to just evaluate this function across  $N$  individuals, or this is a part of a nonlinear solution system.

What is the relationship between `apply`, `lapply` and vectorization? see [Is the “\\*apply” family really not vectorized?](#).

#### 3.3.1.1 Set up Input Arrays

There is a function that takes  $M = Q + P$  inputs, we want to evaluate this function  $N$  times. Each time, there are  $M$  inputs, where all but  $Q$  of the  $M$  inputs, meaning  $P$  of the  $M$  inputs, are the same. In particular,  $P = Q * N$ .

$$M = Q + P = Q + Q * N$$

```
# it_child_count = N, the number of children
it_N_child_cnt = 5
# it_heter_param = Q, number of parameters that are
# heterogeneous across children
it_Q_hetpa_cnt = 2

# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = it_N_child_cnt)
ar_nN_alpha = seq(0.1, 0.9, length.out = it_N_child_cnt)
ar_nP_A_alpha = c(ar_nN_A, ar_nN_alpha)

# N by Q varying parameters
mt_nN_by_nQ_A_alpha = cbind(ar_nN_A, ar_nN_alpha)

# display
kable(mt_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()
```

#### 3.3.1.2 Using apply

**3.3.1.2.1 Named Function** First we use the `apply` function, we have to hard-code the arrays that are fixed for each of the  $N$  individuals. Then `apply` allows us to loop over the matrix that is  $N$  by  $Q$ ,

ar_nN_A	ar_nN_alpha
-2	0.1
-1	0.3
0	0.5
1	0.7
2	0.9

each row one at a time, from 1 to  $N$ .

```
# Define Implicit Function
ffi_linear_hardcode <- function(ar_A_alpha){
  # ar_A_alpha[1] is A
  # ar_A_alpha[2] is alpha

  fl_out = sum(ar_A_alpha[1]*ar_nN_A +
               1/(ar_A_alpha[2] + 1/ar_nN_alpha))

  return(fl_out)
}

# Evaluate function row by row
ar_func_apply = apply(mt_nN_by_nQ_A_alpha, 1, ffi_linear_hardcode)
```

### 3.3.1.2.2 Anonymous Function

- apply over matrix

Apply with anonymous function generating a list of arrays of different lengths. In the example below, we want to draw  $N$  sets of random uniform numbers, but for each set the number of draws we want to have is  $Q_i$ . Furthermore, we want to rescale the random uniform draws so that they all become proportions that sum up to one for each  $i$ , but then we multiply each row's values by the row specific aggregates.

The anonymous function has hard coded parameters. Using an anonymous function here allows for parameters to be provided inside the function that are shared across each looped evaluation. This is perhaps more convenient than supply with additional parameters.

```
set.seed(1039)

# Define the number of draws each row and total amount
it_N <- 4
fl_unif_min <- 1
fl_unif_max <- 2
mt_draw_define <- cbind(sample(it_N, it_N, replace=TRUE),
                        runif(it_N, min=1, max=10))
tb_draw_define <- as_tibble(mt_draw_define) %>%
  rowid_to_column(var = "draw_group")
print(tb_draw_define)

# apply row by row, anonymous function has hard
# coded min and max
ls_ar_draws_shares_lvls =
  apply(tb_draw_define,
        1,
        function(row) {
          it_draw <- row[2]
          fl_sum <- row[3]
          ar_unif <- runif(it_draw,
                           min=fl_unif_min,
                           max=fl_unif_max)
```

```

    ar_share <- ar_unif/sum(ar_unif)
    ar_levels <- ar_share*fl_sum
    return(list(ar_share=ar_share,
               ar_levels=ar_levels))
  })

# Show Results
print(ls_ar_draws_shares_lvls)

## [[1]]
## [[1]]$ar_share
## [1] 0.2783638 0.2224140 0.2797840 0.2194381
##
## [[1]]$ar_levels
## [1] 1.492414 1.192446 1.500028 1.176491
##
##
## [[2]]
## [[2]]$ar_share
## [1] 0.5052919 0.4947081
##
## [[2]]$ar_levels
## [1] 3.866528 3.785541
##
##
## [[3]]
## [[3]]$ar_share
## [1] 1
##
## [[3]]$ar_levels
##      V2
## 9.572211
##
##
## [[4]]
## [[4]]$ar_share
## [1] 0.4211426 0.2909812 0.2878762
##
## [[4]]$ar_levels
## [1] 4.051971 2.799640 2.769765

```

We will try to do the same thing as above, but now the output will be a stacked dataframe. Note that within each element of the apply row by row loop, we are generating two variables *ar\_share* and *ar\_levels*. We will not generate a dataframe with multiple columns, storing *ar\_share*, *ar\_levels* as well as information on *min*, *max*, number of draws and rescale total sum.

```

set.seed(1039)
# apply row by row, anonymous function has hard coded min and max
ls_mt_draws_shares_lvls =
  apply(tb_draw_define, 1, function(row) {

    it_draw_group <- row[1]
    it_draw <- row[2]
    fl_sum <- row[3]

    ar_unif <- runif(it_draw,
                    min=fl_unif_min,
                    max=fl_unif_max)
    ar_share <- ar_unif/sum(ar_unif)

```

```

ar_levels <- ar_share*fl_sum

mt_all_res <- cbind(it_draw_group, it_draw, fl_sum,
                   ar_unif, ar_share, ar_levels)
colnames(mt_all_res) <-
  c('draw_group', 'draw_count', 'sum',
    'unif_draw', 'share', 'rescale')
rownames(mt_all_res) <- NULL

  return(mt_all_res)
})
mt_draws_shares_lvls_all <- do.call(rbind, ls_mt_draws_shares_lvls)
# Show Results
kable(mt_draws_shares_lvls_all) %>% kable_styling_fc()

```

draw_group	draw_count	sum	unif_draw	share	rescale
1	4	5.361378	1.125668	0.1988606	1.066167
1	4	5.361378	1.668536	0.2947638	1.580340
1	4	5.361378	1.419382	0.2507483	1.344356
1	4	5.361378	1.447001	0.2556274	1.370515
2	2	7.652069	1.484598	0.4605236	3.523959
2	2	7.652069	1.739119	0.5394764	4.128110
3	1	9.572211	1.952468	1.0000000	9.572211
4	3	9.621375	1.957931	0.3609352	3.472693
4	3	9.621375	1.926995	0.3552324	3.417824
4	3	9.621375	1.539678	0.2838324	2.730858

### 3.3.1.3 Using supply

#### 3.3.1.3.1 Named Function

- r convert matrix to list
- Convert a matrix to a list of vectors in R

Supply allows us to not have to hard code in the A and alpha arrays. But Supply works over List or Vector, not Matrix. So we have to convert the  $N$  by  $Q$  matrix to a  $N$  element list. Now update the function with supply.

```

ls_ar_nN_by_nQ_A_alpha = as.list(data.frame(t(mt_nN_by_nQ_A_alpha)))

# Define Implicit Function
ffi_linear_supply <- function(ar_A_alpha, ar_A, ar_alpha){
  # ar_A_alpha[1] is A
  # ar_A_alpha[2] is alpha

  fl_out = sum(ar_A_alpha[1]*ar_nN_A +
              1/(ar_A_alpha[2] + 1/ar_nN_alpha))

  return(fl_out)
}

# Evaluate function row by row
ar_func_supply = sapply(ls_ar_nN_by_nQ_A_alpha, ffi_linear_supply,
                        ar_A=ar_nN_A, ar_alpha=ar_nN_alpha)

```

#### 3.3.1.3.2 Anonymous Function

- supply anonymous function
- r anonymous function multiple lines

Supply with anonymous function generating a list of arrays of different lengths. In the example below, we want to draw  $N$  sets of random uniform numbers, but for each set the number of draws we want to have is  $Q_i$ . Furthermore, we want to rescale the random uniform draws so that they all become proportions that sum up to one for each  $i$ .

```
it_N <- 4
fl_unif_min <- 1
fl_unif_max <- 2

# Generate using runif without anonymous function
set.seed(1039)
ls_ar_draws = sapply(seq(it_N),
                     runif,
                     min=fl_unif_min, max=fl_unif_max)
print(ls_ar_draws)

## [[1]]
## [1] 1.125668
##
## [[2]]
## [1] 1.668536 1.419382
##
## [[3]]
## [1] 1.447001 1.484598 1.739119
##
## [[4]]
## [1] 1.952468 1.957931 1.926995 1.539678

# Generate Using Anonymous Function
set.seed(1039)
ls_ar_draws_shares = sapply(seq(it_N),
                           function(n, min, max) {
                             ar_unif <- runif(n,min,max)
                             ar_share <- ar_unif/sum(ar_unif)
                             return(ar_share)
                           },
                           min=fl_unif_min, max=fl_unif_max)

# Print Share
print(ls_ar_draws_shares)

## [[1]]
## [1] 1
##
## [[2]]
## [1] 0.5403432 0.4596568
##
## [[3]]
## [1] 0.3098027 0.3178522 0.3723451
##
## [[4]]
## [1] 0.2646671 0.2654076 0.2612141 0.2087113

# Supply with anonymous function to check sums
sapply(seq(it_N), function(x) {sum(ls_ar_draws[[x]])})

## [1] 1.125668 3.087918 4.670717 7.377071

sapply(seq(it_N), function(x) {sum(ls_ar_draws_shares[[x]])})

## [1] 1 1 1 1
```

### 3.3.1.4 Compare Results

```
# Show overall Results
mt_results <- cbind(ar_func_apply, ar_func_sapply)
colnames(mt_results) <- c('eval_lin_apply', 'eval_lin_sapply')
kable(mt_results) %>% kable_styling_fc()
```

	eval_lin_apply	eval_lin_sapply
X1	2.346356	2.346356
X2	2.094273	2.094273
X3	1.895316	1.895316
X4	1.733708	1.733708
X5	1.599477	1.599477

## 3.3.2 Mutate Evaluate Functions

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

Apply a function over rows of a matrix using mutate, rowwise, etc.

### 3.3.2.1 Set up Input Arrays

There is a function that takes  $M = Q + P$  inputs, we want to evaluate this function  $N$  times. Each time, there are  $M$  inputs, where all but  $Q$  of the  $M$  inputs, meaning  $P$  of the  $M$  inputs, are the same. In particular,  $P = Q * N$ .

$$M = Q + P = Q + Q * N$$

```
# it_child_count = N, the number of children
it_N_child_cnt = 5
# it_heter_param = Q, number of parameters that are
# heterogeneous across children
it_Q_hetpa_cnt = 2

# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = it_N_child_cnt)
ar_nN_alpha = seq(0.1, 0.9, length.out = it_N_child_cnt)
ar_nP_A_alpha = c(ar_nN_A, ar_nN_alpha)

# N by Q varying parameters
mt_nN_by_nQ_A_alpha = cbind(ar_nN_A, ar_nN_alpha)

# display
kable(mt_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()
```

ar_nN_A	ar_nN_alpha
-2	0.1
-1	0.3
0	0.5
1	0.7
2	0.9

```
# Convert Matrix to Tibble
ar_st_col_names = c('fl_A', 'fl_alpha')
tb_nN_by_nQ_A_alpha <- as_tibble(mt_nN_by_nQ_A_alpha) %>%
```

```

  rename_all(~c(ar_st_col_names))
# Show
kable(tb_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()

```

fl_A	fl_alpha
-2	0.1
-1	0.3
0	0.5
1	0.7
2	0.9

### 3.3.2.2 mutate rowwise

- dplyr mutate own function
- dplyr all row function
- dplyr do function
- apply function each row dplyr
- applying a function to every row of a table using dplyr
- dplyr rowwise

```

# Define Implicit Function
ffi_linear_dplyrdo <- function(fl_A, fl_alpha, ar_nN_A, ar_nN_alpha){
  # ar_A_alpha[1] is A
  # ar_A_alpha[2] is alpha

  print(paste0('cur row, fl_A=', fl_A, ', fl_alpha=', fl_alpha))
  fl_out = sum(fl_A*ar_nN_A + 1/(fl_alpha + 1/ar_nN_alpha))

  return(fl_out)
}

# Evaluate function row by row of tibble
# fl_A, fl_alpha are from columns of tb_nN_by_nQ_A_alpha
tb_nN_by_nQ_A_alpha_show <- tb_nN_by_nQ_A_alpha %>%
  rowwise() %>%
  mutate(dplyr_eval =
    ffi_linear_dplyrdo(fl_A, fl_alpha, ar_nN_A, ar_nN_alpha))

## [1] "cur row, fl_A=-2, fl_alpha=0.1"
## [1] "cur row, fl_A=-1, fl_alpha=0.3"
## [1] "cur row, fl_A=0, fl_alpha=0.5"
## [1] "cur row, fl_A=1, fl_alpha=0.7"
## [1] "cur row, fl_A=2, fl_alpha=0.9"

# Show
kable(tb_nN_by_nQ_A_alpha_show) %>%
  kable_styling_fc()

```

fl_A	fl_alpha	dplyr_eval
-2	0.1	2.346356
-1	0.3	2.094273
0	0.5	1.895316
1	0.7	1.733708
2	0.9	1.599477

same as before, still rowwise, but hard code some inputs:

```

# Define function, fixed inputs are not parameters, but
# defined earlier as a part of the function
# ar_nN_A, ar_nN_alpha are fixed, not parameters
ffi_linear_dplyrdo_func <- function(fl_A, fl_alpha){
  fl_out <- sum(fl_A*ar_nN_A + 1/(fl_alpha + 1/ar_nN_alpha))
  return(fl_out)
}

# Evaluate function row by row of tibble
tbfunc_A_nN_by_nQ_A_alpha_rowwise = tb_nN_by_nQ_A_alpha %>% rowwise() %>%
  mutate(dplyr_eval = ffi_linear_dplyrdo_func(fl_A, fl_alpha))
# Show
kable(tbfunc_A_nN_by_nQ_A_alpha_rowwise) %>%
  kable_styling_fc()

```

fl_A	fl_alpha	dplyr_eval
-2	0.1	2.346356
-1	0.3	2.094273
0	0.5	1.895316
1	0.7	1.733708
2	0.9	1.599477

### 3.3.2.3 mutate with pmap

Apparently *rowwise()* is not a good idea, and *pmap* should be used, below is the *pmap* solution to the problem. Which does seem nicer. Crucially, don't have to define input parameter names, automatically I think they are matching up to the names in the function

- dplyr mutate pass function
- r function quosure string multiple
- r function multiple parameters as one string
- dplyr mutate anonymous function
- quosure style lambda
- pmap tibble rows
- dplyr pwalk

```

# Define function, fixed inputs are not parameters, but defined
# earlier as a part of the function Rorate fl_alpha and fl_A name
# compared to before to make sure pmap tracks by names
ffi_linear_dplyrdo_func <- function(fl_alpha, fl_A){
  fl_out <- sum(fl_A*ar_nN_A + 1/(fl_alpha + 1/ar_nN_alpha))
  return(fl_out)
}

# Evaluate a function row by row of dataframe, generate list,
# then to vector
tb_nN_by_nQ_A_alpha %>% pmap(ffi_linear_dplyrdo_func) %>% unlist()

## [1] 2.346356 2.094273 1.895316 1.733708 1.599477

# Same as above, but in line line and save output as new column
# in dataframe note this ONLY works if the tibble only has variables
# that are inputs for the function if tibble contains additional
# variables, those should be droppd, or only the ones needed selected,
# inside the pmap call below.
tbfunc_A_nN_by_nQ_A_alpha_pmap <- tb_nN_by_nQ_A_alpha %>%
  mutate(dplyr_eval_pmap =
    unlist(
      pmap(tb_nN_by_nQ_A_alpha, ffi_linear_dplyrdo_func)
    )
  )

```



```

    )
  )

# Show
kable(tbfunc_A_nN_by_nQ_A_alpha_pmap) %>%
  kable_styling_fc()

```

fl_A	fl_alpha	dplyr_eval_pmap
-2	0.1	2.346356
-1	0.3	2.094273
0	0.5	1.895316
1	0.7	1.733708
2	0.9	1.599477

### 3.3.2.4 rowwise and do

Now, we have three types of parameters, for something like a bisection type calculation. We will supply the program with a function with some hard-coded value inside, and as parameters, we will have one parameter which is a row in the current matrix, and another parameter which is a scalar values. The three types of parameters are dealt with separately:

1. parameters that are fixed for all bisection iterations, but differ for each row
  - these are hard-coded into the function
2. parameters that are fixed for all bisection iterations, but are shared across rows
  - these are the first parameter of the function, a list
3. parameters that differ for each iteration, but differ across iterations
  - second scalar value parameter for the function
  - dplyr mutate function apply to each row dot notation
  - note [rowwise might be bad](#) according to Hadley, should use pmap?

```

ffi_linear_dplyrdo_fdot <- function(ls_row, fl_param){
  # Type 1 Param = ar_nN_A, ar_nN_alpha
  # Type 2 Param = ls_row$fl_A, ls_row$fl_alpha
  # Type 3 Param = fl_param

  fl_out <- (sum(ls_row$fl_A*ar_nN_A +
                1/(ls_row$fl_alpha + 1/ar_nN_alpha))) + fl_param
  return(fl_out)
}

cur_func <- ffi_linear_dplyrdo_fdot
fl_param <- 0
dplyr_eval_flex <- tb_nN_by_nQ_A_alpha %>% rowwise() %>%
  do(dplyr_eval_flex = cur_func(., fl_param)) %>%
  unnest(dplyr_eval_flex)
tbfunc_B_nN_by_nQ_A_alpha <- tb_nN_by_nQ_A_alpha %>% add_column(dplyr_eval_flex)
# Show
kable(tbfunc_B_nN_by_nQ_A_alpha) %>%
  kable_styling_fc()

```

### 3.3.2.5 Compare Apply and Mutate Results

```

# Show overall Results
mt_results <- cbind(tb_nN_by_nQ_A_alpha_show['dplyr_eval'],

```

fl_A	fl_alpha	dplyr_eval_flex
-2	0.1	2.346356
-1	0.3	2.094273
0	0.5	1.895316
1	0.7	1.733708
2	0.9	1.599477

```

      tbfunc_A_nN_by_nQ_A_alpha_rowwise['dplyr_eval'],
      tbfunc_A_nN_by_nQ_A_alpha_pmap['dplyr_eval_pmap'],
      tbfunc_B_nN_by_nQ_A_alpha['dplyr_eval_flex'],
      mt_nN_by_nQ_A_alpha)
colnames(mt_results) <- c('eval_dplyr_mutate',
                          'eval_dplyr_mutate_hcode',
                          'eval_dplyr_mutate_pmap',
                          'eval_dplyr_mutate_flex',
                          'A_child', 'alpha_child')
kable(mt_results) %>%
  kable_styling_fc_wide()

```

eval_dplyr_mutate	eval_dplyr_mutate_hcode	eval_dplyr_mutate_pmap	eval_dplyr_mutate_flex	A_child	alpha_child
2.346356	2.346356	2.346356	2.346356	-2	0.1
2.094273	2.094273	2.094273	2.094273	-1	0.3
1.895316	1.895316	1.895316	1.895316	0	0.5
1.733708	1.733708	1.733708	1.733708	1	0.7
1.599477	1.599477	1.599477	1.599477	2	0.9

# Chapter 4

## Panel

### 4.1 Generate and Join

#### 4.1.1 Generate Panel Structure

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

##### 4.1.1.1 Balanced Panel Skeleton

There are  $N$  individuals, each could be observed  $M$  times. In the example below, there are 3 students, each observed over 4 dates. This just uses the [uncount](#) function from *tidyr*.

```
# Define
it_N <- 3
it_M <- 5
svr_id <- 'student_id'
svr_date <- 'class_day'

# dataframe
df_panel_skeleton <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_id)) %>% mutate(!!sym(svr_date) := row_number()) %>%
  ungroup()

# Print
kable(df_panel_skeleton) %>%
  kable_styling_fc()
```

##### 4.1.1.2 Panel of Children with Height Growth

Given  $N$  individuals, each with  $G$  observations. There is an initial height variable and height grows every year. There are growth variables, variables for cumulative growth and variables for height at each age for each child.

Individuals are defined by gender (1 = female), race (1=asian), and birth height. Within individual yearly information includes height at each year of age.

```
# Define
it_N <- 5
it_M <- 3
svr_id <- 'indi_id'
svr_gender <- 'female'
svr_asian <- 'asian'
```

student_id	class_day
1	1
1	2
1	3
1	4
1	5
2	1
2	2
2	3
2	4
2	5
3	1
3	2
3	3
3	4
3	5

```

svr_age <- 'year_of_age'
# Define Height Related Variables
svr_brthgt <- 'birth_height'
svr_hgtgrow <- 'hgt_growth'
svr_hgtgrow_cumu <- 'hgt_growcumu'
svr_height <- 'height'

# panel dataframe following
set.seed(123)
df_panel_indiage <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  mutate(!!sym(svr_gender) := rbinom(n(), 1, 0.5),
         !!sym(svr_asian) := rbinom(n(), 1, 0.5),
         !!sym(svr_brthgt) := rnorm(n(), mean=60, sd=3)) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_gender), !!sym(svr_asian), !!sym(svr_brthgt)) %>%
  mutate(!!sym(svr_age) := row_number(),
         !!sym(svr_hgtgrow) := runif(n(), min=5, max=15),
         !!sym(svr_hgtgrow_cumu) := cumsum(!!sym(svr_hgtgrow)),
         !!sym(svr_height) := !!sym(svr_brthgt) + !!sym(svr_hgtgrow_cumu)) %>%
  ungroup()

# Add Height Index
kable(df_panel_indiage) %>% kable_styling_fc()

```

#### 4.1.1.3 Create Group IDs

Given the dataframe just created, generate group IDs for each Gender and Race Groups. Given that both are binary, there can only be 4 unique groups.

```

# group id
svr_group_id <- 'female_asian_id'
# Define
ls_svr_group_vars <- c('female', 'asian')

# panel dataframe following
df_panel_indiage_id <- df_panel_indiage %>%
  arrange(!!!syms(ls_svr_group_vars)) %>%
  group_by(!!!syms(ls_svr_group_vars)) %>%
  mutate(!!sym(svr_group_id) := (row_number()==1)*1) %>%
  ungroup() %>%

```

female	asian	birth_height	year_of_age	hgt_growth	hgt_growcumu	height
0	0	65.14520	1	13.895393	13.895393	79.04059
0	0	65.14520	2	11.928034	25.823427	90.96862
0	0	65.14520	3	11.405068	37.228495	102.37369
1	1	61.38275	1	11.907053	11.907053	73.28980
1	1	61.38275	2	12.954674	24.861727	86.24448
1	1	61.38275	3	5.246137	30.107864	91.49061
0	1	56.20482	1	14.942698	14.942698	71.14751
0	1	56.20482	2	11.557058	26.499756	82.70457
0	1	56.20482	3	12.085305	38.585060	94.78988
1	1	57.93944	1	6.471137	6.471137	64.41058
1	1	57.93944	2	14.630242	21.101379	79.04082
1	1	57.93944	3	14.022991	35.124369	93.06381
1	0	58.66301	1	10.440660	10.440660	69.10367
1	0	58.66301	2	10.941420	21.382081	80.04509
1	0	58.66301	3	7.891597	29.273678	87.93669

```
mutate(!sym(svr_group_id) := cumsum(!sym(svr_group_id))) %>%
select(one_of(svr_group_id, ls_svr_group_vars), everything())

# Add Height Index
kable(df_panel_indiage_id) %>%
  kable_styling_fc_wide()
```

female_asian_id	female	asian	birth_height	year_of_age	hgt_growth	hgt_growcumu	height
1	0	0	65.14520	1	13.895393	13.895393	79.04059
1	0	0	65.14520	2	11.928034	25.823427	90.96862
1	0	0	65.14520	3	11.405068	37.228495	102.37369
2	0	1	56.20482	1	14.942698	14.942698	71.14751
2	0	1	56.20482	2	11.557058	26.499756	82.70457
2	0	1	56.20482	3	12.085305	38.585060	94.78988
3	1	0	58.66301	1	10.440660	10.440660	69.10367
3	1	0	58.66301	2	10.941420	21.382081	80.04509
3	1	0	58.66301	3	7.891597	29.273678	87.93669
4	1	1	61.38275	1	11.907053	11.907053	73.28980
4	1	1	61.38275	2	12.954674	24.861727	86.24448
4	1	1	61.38275	3	5.246137	30.107864	91.49061
4	1	1	57.93944	1	6.471137	6.471137	64.41058
4	1	1	57.93944	2	14.630242	21.101379	79.04082
4	1	1	57.93944	3	14.022991	35.124369	93.06381

## 4.1.2 Join Datasets

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

### 4.1.2.1 Join Panel with Multiple Keys

We have two datasets, one for student enrollment, panel over time, but some students do not show up on some dates. The other is a skeleton panel with all student ID and all dates. Often we need to join dataframes together, and we need to join by the student ID and the panel time Key at the same time. When students show up, there is a quiz score for that day, so the joined panel should have as data column quiz score

Student count is  $N$ , total dates are  $M$ . First we generate two panels below, then we join by both keys using `left_join`. First, define dataframes:

```
# Define
it_N <- 4
it_M <- 3
svr_id <- 'sid'
svr_date <- 'classday'
svr_attend <- 'date_in_class'

# Panel Skeleton
df_panel_balanced_skeleton <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_id)) %>% mutate(!!sym(svr_date) := row_number()) %>%
  ungroup()
# Print
kable(df_panel_balanced_skeleton) %>%
  kable_styling_fc()
```

sid	classday
1	1
1	2
1	3
2	1
2	2
2	3
3	1
3	2
3	3
4	1
4	2
4	3

```
# Smaller Panel of Random Days in School
set.seed(456)
df_panel_attend <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_id)) %>% mutate(!!sym(svr_date) := row_number()) %>%
  ungroup() %>% mutate(in_class = case_when(rnorm(n(),mean=0,sd=1) < 0 ~ 1, TRUE ~ 0)) %>%
  filter(in_class == 1) %>% select(!!sym(svr_id), !!sym(svr_date)) %>%
  rename(!!sym(svr_attend) := !!sym(svr_date)) %>%
  mutate(dayquizscore = rnorm(n(),mean=80,sd=10))
# Print
kable(df_panel_attend) %>%
  kable_styling_fc()
```

sid	date_in_class	dayquizscore
1	1	89.88726
2	1	96.53929
2	2	65.59195
2	3	99.47356
4	2	97.36936

Second, now join dataframes:

```
# Join with explicit names
df_quiz_joined_multikey <- df_panel_balanced_skeleton %>%
  left_join(df_panel_attend,
```

```

by=(c('sid'='sid', 'classday'='date_in_class'))

# Join with setname strings
df_quiz_joined_multikey_setnames <- df_panel_balanced_skeleton %>%
  left_join(df_panel_attend, by=setNames(c('sid', 'date_in_class'), c('sid', 'classday')))

# Print
kable(df_quiz_joined_multikey) %>%
  kable_styling_fc()

```

sid	classday	dayquizscore
1	1	89.88726
1	2	NA
1	3	NA
2	1	96.53929
2	2	65.59195
2	3	99.47356
3	1	NA
3	2	NA
3	3	NA
4	1	NA
4	2	97.36936
4	3	NA

```

kable(df_quiz_joined_multikey_setnames) %>%
  kable_styling_fc()

```

sid	classday	dayquizscore
1	1	89.88726
1	2	NA
1	3	NA
2	1	96.53929
2	2	65.59195
2	3	99.47356
3	1	NA
3	2	NA
3	3	NA
4	1	NA
4	2	97.36936
4	3	NA

#### 4.1.2.2 Stack Panel Frames Together

There are multiple panel dataframe, each for different subsets of dates. All variable names and units of observations are identical. Use DPLYR `bind_rows`.

```

# Define
it_N <- 2 # Number of individuals
it_M <- 3 # Number of Months
svr_id <- 'sid'
svr_date <- 'date'

# Panel First Half of Year
df_panel_m1tom3 <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_id)) %>% mutate(!!sym(svr_date) := row_number()) %>%

```

```

ungroup()

# Panel Second Half of Year
df_panel_m4tom6 <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!sym(svr_id)) %>% mutate(!sym(svr_date) := row_number() + 3) %>%
  ungroup()

# Bind Rows
df_panel_m1tm6 <- bind_rows(df_panel_m1tom3, df_panel_m4tom6) %>% arrange(!sym(svr_id), svr_date)

# Print
kable(df_panel_m1tom3) %>%
  kable_styling_fc()

```

sid	date
1	1
1	2
1	3
2	1
2	2
2	3

```

kable(df_panel_m4tom6) %>%
  kable_styling_fc()

```

sid	date
1	4
1	5
1	6
2	4
2	5
2	6

```

kable(df_panel_m1tm6) %>%
  kable_styling_fc()

```

sid	date
1	1
1	2
1	3
1	4
1	5
1	6
2	1
2	2
2	3
2	4
2	5
2	6



## 4.2 Wide and Long

### 4.2.1 Long to Wide

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

Using the `pivot_wider` function in `tidyr` to reshape panel or other data structures

#### 4.2.1.1 Panel Long Attendance Roster to Wide

There are  $N$  students in class, but only a subset of them attend class each day. If student  $id_i$  is in class on day  $Q$ , the teacher records on a sheet the date and the student ID. So if the student has been in class 10 times, the teacher has ten rows of recorded data for the student with two columns: column one is the student ID, and column two is the date on which the student was in class. Suppose there were 50 students, who on average attended exactly 10 classes each during the semester, this means we have  $10 \cdot 50$  rows of data, with differing numbers of rows for each student. This is shown as `df_panel_attend_date` generated below.

Now we want to generate a new dataframe, where each row is a date, and each column is a student. The values in the new dataframe shows, at the  $Q^{th}$  day, how many classes student  $i$  has attended so far. The following results is also in a REconTools Function. This is shown as `df_attend_cumu_by_day` generated below.

**First**, generate the raw data structure, `df_panel_attend_date`:

```
# Define
it_N <- 3
it_M <- 5
svr_id <- 'student_id'

# from : support/rand/fs_rand_draws.Rmd
set.seed(222)
df_panel_attend_date <- as_tibble(matrix(it_M, nrow=it_N, ncol=1)) %>%
  rowid_to_column(var = svr_id) %>%
  uncount(V1) %>%
  group_by(!!sym(svr_id)) %>% mutate(date = row_number()) %>%
  ungroup() %>% mutate(in_class = case_when(rnorm(n(), mean=0, sd=1) < 0 ~ 1, TRUE ~ 0)) %>%
  filter(in_class == 1) %>% select(!!sym(svr_id), date) %>%
  rename(date_in_class = date)

# Print
kable(df_panel_attend_date) %>%
  kable_styling_fc()
```

student_id	date_in_class
1	2
1	4
2	1
2	2
2	5
3	2
3	3
3	5

**Second**, generate wider data structure, `df_attend_cumu_by_day`:

```
# Define
svr_id <- 'student_id'
svr_date <- 'date_in_class'
st_idcol_prefix <- 'sid_'
```

```
# Generate cumulative enrollment counts by date
df_panel_attend_date_addone <- df_panel_attend_date %>% mutate(attended = 1)
kable(df_panel_attend_date_addone) %>%
  kable_styling_fc()
```

student_id	date_in_class	attended
1	2	1
1	4	1
2	1	1
2	2	1
2	5	1
3	2	1
3	3	1
3	5	1

```
# Pivot Wide
df_panel_attend_date_wider <- df_panel_attend_date_addone %>%
  pivot_wider(names_from = svr_id,
              values_from = attended)
kable(df_panel_attend_date_wider) %>%
  kable_styling_fc()
```

date_in_class	1	2	3
2	1	1	1
4	1	NA	NA
1	NA	1	NA
5	NA	1	1
3	NA	NA	1

```
# Sort and rename
# rename see: https://fanwangecon.github.io/R4Econ/amto/tibble/fs_tib_basics.html
ar_unique_ids <- sort(unique(df_panel_attend_date %>% pull(!sym(svr_id))))
df_panel_attend_date_wider_sort <- df_panel_attend_date_wider %>%
  arrange(!sym(svr_date)) %>%
  rename_at(vars(num_range('1', ar_unique_ids)),
            list(~paste0(st_idcol_prefix, . , '1')))
kable(df_panel_attend_date_wider_sort) %>%
  kable_styling_fc()
```

date_in_class	sid_1	sid_2	sid_3
1	NA	1	NA
2	1	1	1
3	NA	NA	1
4	1	NA	NA
5	NA	1	1

```
# replace NA and cumusum again
# see: R4Econ/support/function/fs_func_multivar for renaming and replacing
df_attend_cumu_by_day <- df_panel_attend_date_wider_sort %>%
  mutate_at(vars(contains(st_idcol_prefix)), list(~replace_na(., 0))) %>%
  mutate_at(vars(contains(st_idcol_prefix)), list(~cumsum(.)))

kable(df_attend_cumu_by_day) %>%
  kable_styling_fc()
```

The structure above is also a function in Fan's [REconTools](#) Package, here the function is tested:

date_in_class	sid_1	sid_2	sid_3
1	0	1	0
2	1	2	1
3	1	2	2
4	2	2	2
5	2	3	3

```
# Parameters
df <- df_panel_attend_date
svr_id_i <- 'student_id'
svr_id_t <- 'date_in_class'
st_idcol_prefix <- 'sid_'

# Invoke Function
ls_df_rosterwide <- ff_panel_expand_longrosterwide(df, svr_id_t, svr_id_i, st_idcol_prefix)
df_roster_wide_func <- ls_df_rosterwide$df_roster_wide
df_roster_wide_cumu_func <- ls_df_rosterwide$df_roster_wide_cumu

# Print
print(df_roster_wide_func)
print(df_roster_wide_cumu_func)
```

### 4.2.2 Wide to Long

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

Using the `pivot_wider` function in `tidyr` to reshape panel or other data structures

#### 4.2.2.1 Generated Matrix by States to Long Table

A matrix of ev given states, rows are states and cols are shocks. Convert to Long table with shock and state values and ev.

Generated Matrix by States to Long Table where state values are stored as variables, with correct value labels for states:

1. Generate a matrix
2. Convert matrix to tibble
3. Tibble make longer, and store column and row id var names

```
# Generate A Matrix
set.seed(123)
ar_a <- c(1.1, 5.1)
ar_z <- seq(-2.5, 2.53, length.out=11)
mt_ev = matrix(rnorm(ar_a*ar_z), nrow=length(ar_a), ncol=length(ar_z))

# Name Matrix
rownames(mt_ev) <- paste0('ai', seq(1:length(ar_a)))
colnames(mt_ev) <- paste0('zi', seq(1:length(ar_z)))

# to tibble
tb_ev <- as_tibble(mt_ev) %>% rowid_to_column(var = "ai")

# longer
tb_ev_long <- tb_ev %>%
  pivot_longer(cols = starts_with('zi'),
               names_to = c('zi'),
               names_pattern = paste0("zi(.*)"),
```

```

      values_to = "ev") %>%
mutate(zi = as.numeric(zi))

# Merge with a and z values
tb_ev_long <- tb_ev_long %>%
  left_join(as_tibble(ar_a) %>%
    rowid_to_column(var = "ai") %>%
    rename(a = value)
    , by = 'ai') %>%
  left_join(as_tibble(ar_z) %>%
    rowid_to_column(var = "zi") %>%
    rename(z = value),
    by = 'zi') %>%
  select(a,ai,z,zi,ev)

# Display
kable(tb_ev) %>% kable_styling_fc_wide()

```

ai	zi1	zi2	zi3	zi4	zi5	zi6	zi7	zi8	zi9	zi10	zi11
1	-0.5604756	1.5587083	0.1292877	0.4609162	-0.6868529	1.2240818	-0.2301775	0.0705084	1.7150650	-1.2650612	-0.445662
2	-0.2301775	0.0705084	1.7150650	-1.2650612	-0.4456620	-0.5604756	1.5587083	0.1292877	0.4609162	-0.6868529	1.224082

```
kable(tb_ev_long) %>% kable_styling_fc()
```

a	ai	z	zi	ev
1.1	1	-2.500	1	-0.5604756
1.1	1	-1.997	2	1.5587083
1.1	1	-1.494	3	0.1292877
1.1	1	-0.991	4	0.4609162
1.1	1	-0.488	5	-0.6868529
1.1	1	0.015	6	1.2240818
1.1	1	0.518	7	-0.2301775
1.1	1	1.021	8	0.0705084
1.1	1	1.524	9	1.7150650
1.1	1	2.027	10	-1.2650612
1.1	1	2.530	11	-0.4456620
5.1	2	-2.500	1	-0.2301775
5.1	2	-1.997	2	0.0705084
5.1	2	-1.494	3	1.7150650
5.1	2	-0.991	4	-1.2650612
5.1	2	-0.488	5	-0.4456620
5.1	2	0.015	6	-0.5604756
5.1	2	0.518	7	1.5587083
5.1	2	1.021	8	0.1292877
5.1	2	1.524	9	0.4609162
5.1	2	2.027	10	-0.6868529
5.1	2	2.530	11	1.2240818

## Chapter 5

# Linear Regression

### 5.1 OLS and IV

Back to [Fan's R4Econ Homepage](#) [Table of Content](#)

#### 5.1.1 OLS and IV Regression

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

IV regression using AER package. Option to store all results in dataframe row for combining results from other estimations together. Produce Row Statistics.

##### 5.1.1.1 Construct Program

```
# IV regression function
# The code below uses the AER library's regresison function
# All results are stored in a single row as data_frame
# This functoin could work with dplyr do
# var.y is single outcome, vars.x, vars.c and vars.z are vectors of endogenous variables, controls a
regf.iv <- function(var.y, vars.x,
                    vars.c, vars.z, df, transpose=TRUE) {

  # A. Set-Up Equation
  str.vars.x <- paste(vars.x, collapse='+')
  str.vars.c <- paste(vars.c, collapse='+')

  df <- df %>%
    select(one_of(var.y, vars.x, vars.c, vars.z)) %>%
    drop_na() %>% filter_all(all_vars(!is.infinite(.)))

  if (length(vars.z) >= 1) {
    # library(AER)
    str.vars.z <- paste(vars.z, collapse='+')
    equa.iv <- paste(var.y,
                     paste(paste(str.vars.x, str.vars.c, sep='+'),
                           paste(str.vars.z, str.vars.c, sep='+'),
                           sep='| '),
                     sep='~')
    # print(equa.iv)

    # B. IV Regression
    ivreg.summ <- summary(ivreg(as.formula(equa.iv), data=df),
```

```

vcov = sandwich, df = Inf, diagnostics = TRUE)

# C. Statistics from IV Regression
#   ivreg.summ$coef
#   ivreg.summ$diagnostics

# D. Combine Regression Results into a Matrix
df.results <- suppressWarnings(suppressMessages(
  as_tibble(ivreg.summ$coef, rownames='rownames') %>%
    full_join(as_tibble(ivreg.summ$diagnostics, rownames='rownames')) %>%
    full_join(tibble(rownames=c('vars'),
                      var.y=var.y,
                      vars.x=str.vars.x,
                      vars.z=str.vars.z,
                      vars.c=str.vars.c))))
} else {

  # OLS regression
  equa.ols <- paste(var.y,
                    paste(paste(vars.x, collapse='+'),
                          paste(vars.c, collapse='+'), sep='+'),
                    sep='~')

  lmreg.summ <- summary(lm(as.formula(equa.ols), data=df))

  lm.diagnostics <- as_tibble(
    list(df1=lmreg.summ$df[[1]],
          df2=lmreg.summ$df[[2]],
          df3=lmreg.summ$df[[3]],
          sigma=lmreg.summ$sigma,
          r.squared=lmreg.summ$r.squared,
          adj.r.squared=lmreg.summ$adj.r.squared)) %>%
    gather(variable, value) %>%
    rename(rownames = variable) %>%
    rename(v = value)

  df.results <- suppressWarnings(suppressMessages(
    as_tibble(lmreg.summ$coef, rownames='rownames') %>%
      full_join(lm.diagnostics) %>%
      full_join(tibble(rownames=c('vars'),
                        var.y=var.y,
                        vars.x=str.vars.x,
                        vars.c=str.vars.c))))
}

# E. Flatten Matrix, All IV results as a single tibble
# row to be combined with other IV results
df.row.results <- df.results %>%
  gather(variable, value, -rownames) %>%
  drop_na() %>%
  unite(esti.val, rownames, variable) %>%
  mutate(esti.val = gsub(' ', '', esti.val))

if (transpose) {
  df.row.results <- df.row.results %>% spread(esti.val, value)
}

```

```
# F. Return
return(data.frame(df.row.results))
}
```

### 5.1.1.2 Program Testing

Load Data

```
# Library
library(tidyverse)
library(AER)

# Load Sample Data
setwd('C:/Users/fan/R4Econ/_data/')
df <- read_csv('height_weight.csv')

# One Instrucments
var.y <- c('hgt')
vars.x <- c('prot')
vars.z <- NULL
vars.c <- c('sex', 'hgt0', 'wgt0')
# Regression
regf.iv(var.y, vars.x, vars.c, vars.z, df, transpose=FALSE) %>%
  kable() %>%
  kable_styling_fc()
```

esti.val	value
(Intercept)_Estimate	52.1186286658651
prot_Estimate	0.374472386357917
sexMale_Estimate	0.611043720578292
hgt0_Estimate	0.148513781160842
wgt0_Estimate	0.00150560230505631
(Intercept)_Std.Error	1.57770483608693
prot_Std.Error	0.00418121191133815
sexMale_Std.Error	0.118396259120659
hgt0_Std.Error	0.0393807494783186
wgt0_Std.Error	0.000187123663624397
(Intercept)_tvalue	33.0344608660332
prot_tvalue	89.5607288744356
sexMale_tvalue	5.16100529794248
hgt0_tvalue	3.77122790013449
wgt0_tvalue	8.04602836377991
(Intercept)_Pr(> t )	9.92126150975783e-233
prot_Pr(> t )	0
sexMale_Pr(> t )	2.48105505495642e-07
hgt0_Pr(> t )	0.000162939618371183
wgt0_Pr(> t )	9.05257561534111e-16
df1_v	5
df2_v	18958
df3_v	5
sigma_v	8.06197784622979
r.squared_v	0.319078711001325
adj.r.squared_v	0.318935041565942
vars_var.y	hgt
vars_vars.x	prot
vars_vars.c	sex+hgt0+wgt0

## 5.1.1.2.1 Example No Instrument, OLS

```
# One Instrucments
var.y <- c('hgt')
vars.x <- c('prot')
vars.z <- c('momEdu')
vars.c <- c('sex', 'hgt0', 'wgt0')
# Regression
regf.iv(var.y, vars.x, vars.c, vars.z, df, transpose=FALSE) %>%
  kable() %>%
  kable_styling_fc()
```

esti.val	value
(Intercept)_Estimate	43.4301969117558
prot_Estimate	0.130833343849446
sexMale_Estimate	0.868121847262411
hgt0_Estimate	0.412093881817148
wgt0_Estimate	0.000858630042617921
(Intercept)_Std.Error	1.82489550971182
prot_Std.Error	0.0192036220809189
sexMale_Std.Error	0.13373016700542
hgt0_Std.Error	0.0459431912927002
wgt0_Std.Error	0.00022691057702563
(Intercept)_zvalue	23.798730766023
prot_zvalue	6.81295139521853
sexMale_zvalue	6.49159323361366
hgt0_zvalue	8.96963990141069
wgt0_zvalue	3.7840018472164
(Intercept)_Pr(> z )	3.4423766196876e-125
prot_Pr(> z )	9.56164541643828e-12
sexMale_Pr(> z )	8.49333228172763e-11
hgt0_Pr(> z )	2.97485394526792e-19
wgt0_Pr(> z )	0.000154326676608523
Weakstruments_df1	1
Wu-Hausman_df1	1
Sargan_df1	0
Weakstruments_df2	16394
Wu-Hausman_df2	16393
Weakstruments_statistic	935.817456612075
Wu-Hausman_statistic	123.595856606729
Weakstruments_p-value	6.39714929178024e-200
Wu-Hausman_p-value	1.30703637796748e-28
vars_var.y	hgt
vars_vars.x	prot
vars_vars.z	momEdu
vars_vars.c	sex+hgt0+wgt0

## 5.1.1.2.2 Example 1 Instrument

```
# Multiple Instrucments
var.y <- c('hgt')
vars.x <- c('prot')
vars.z <- c('momEdu', 'wealthIdx', 'p.A.prot', 'p.A.nProt')
vars.c <- c('sex', 'hgt0', 'wgt0')
# Regression
```



```
regf.iv(var.y, vars.x, vars.c, vars.z, df, transpose=FALSE) %>%
  kable() %>%
  kable_styling_fc()
```

esti.val	value
(Intercept)_Estimate	42.2437613555242
prot_Estimate	0.26699945194704
sexMale_Estimate	0.695548488812932
hgt0_Estimate	0.424954881263031
wgt0_Estimate	0.000486951420329484
(Intercept)_Std.Error	1.85356686789642
prot_Std.Error	0.0154939347964083
sexMale_Std.Error	0.133157977814374
hgt0_Std.Error	0.0463195803786233
wgt0_Std.Error	0.000224867994873235
(Intercept)_zvalue	22.7905246296649
prot_zvalue	17.2325142357597
sexMale_zvalue	5.22348341593581
hgt0_zvalue	9.17441129192849
wgt0_zvalue	2.16549901022595
(Intercept)_Pr(> z )	5.69294074735747e-115
prot_Pr(> z )	1.51424021931607e-66
sexMale_Pr(> z )	1.75588197502565e-07
hgt0_Pr(> z )	4.54048595587756e-20
wgt0_Pr(> z )	0.030349491114332
Weakinstruments_df1	4
Wu-Hausman_df1	1
Sargan_df1	3
Weakinstruments_df2	14914
Wu-Hausman_df2	14916
Weakinstruments_statistic	274.147084958343
Wu-Hausman_statistic	17.7562545747101
Sargan_statistic	463.729664547249
Weakinstruments_p-value	8.61731956233366e-228
Wu-Hausman_p-value	2.52567249124181e-05
Sargan_p-value	3.45452874915475e-100
vars_var.y	hgt
vars_vars.x	prot
vars_vars.z	momEdu+wealthIdx+p.A.prot+p.A.nProt
vars_vars.c	sex+hgt0+wgt0

#### 5.1.1.2.3 Example Multiple Instrucments

```
# Multiple Instrucments
var.y <- c('hgt')
vars.x <- c('prot', 'cal')
vars.z <- c('momEdu', 'wealthIdx', 'p.A.prot', 'p.A.nProt')
vars.c <- c('sex', 'hgt0', 'wgt0')
# Regression
regf.iv(var.y, vars.x, vars.c, vars.z, df, transpose=FALSE) %>%
  kable() %>%
  kable_styling_fc()
```

#### 5.1.1.2.4 Example Multiple Endogenous Variables

esti.val	value
(Intercept)_Estimate	44.0243196254297
prot_Estimate	-1.4025623247106
cal_Estimate	0.065104895750151
sexMale_Estimate	0.120832787571818
hgt0_Estimate	0.286525437984517
wgt0_Estimate	0.000850481389651033
(Intercept)_Std.Error	2.75354847244082
prot_Std.Error	0.198640060273635
cal_Std.Error	0.00758881298880996
sexMale_Std.Error	0.209984580636303
hgt0_Std.Error	0.0707828182888255
wgt0_Std.Error	0.00033711210444429
(Intercept)_zvalue	15.9882130516502
prot_zvalue	-7.06082309267581
cal_zvalue	8.57906181719737
sexMale_zvalue	0.575436478267434
hgt0_zvalue	4.04795181812859
wgt0_zvalue	2.52284441418383
(Intercept)_Pr(> z )	1.54396598126854e-57
prot_Pr(> z )	1.65519210848649e-12
cal_Pr(> z )	9.56500648203187e-18
sexMale_Pr(> z )	0.564996139463599
hgt0_Pr(> z )	5.16677787108928e-05
wgt0_Pr(> z )	0.0116409892837831
Weakinstruments(prot)_df1	4
Weakinstruments(cal)_df1	4
Wu-Hausman_df1	2
Sargan_df1	2
Weakinstruments(prot)_df2	14914
Weakinstruments(cal)_df2	14914
Wu-Hausman_df2	14914
Weakinstruments(prot)_statistic	274.147084958343
Weakinstruments(cal)_statistic	315.036848606231
Wu-Hausman_statistic	94.7020085425169
Sargan_statistic	122.081979628898
Weakinstruments(prot)_p-value	8.61731956233366e-228
Weakinstruments(cal)_p-value	1.18918641220866e-260
Wu-Hausman_p-value	1.35024050408262e-41
Sargan_p-value	3.09196773720398e-27
vars_var.y	hgt
vars_vars.x	prot+cal
vars_vars.z	momEdu+wealthIdx+p.A.prot+p.A.nProt
vars_vars.c	sex+hgt0+wgt0

**5.1.1.2.5 Examples Line by Line** The examples are just to test the code with different types of variables.

```
# Selecting Variables
var.y <- c('hgt')
vars.x <- c('prot', 'cal')
vars.z <- c('momEdu', 'wealthIdx', 'p.A.prot', 'p.A.nProt')
vars.c <- c('sex', 'hgt0', 'wgt0')
```

```
# A. create Equation
str.vars.x <- paste(vars.x, collapse='+')
str.vars.c <- paste(vars.c, collapse='+')
```

```

str.vars.z <- paste(vars.z, collapse='+')
print(str.vars.x)

## [1] "prot+cal"
print(str.vars.c)

## [1] "sex+hgt0+wgt0"
print(str.vars.z)

## [1] "momEdu+wealthIdx+p.A.prot+p.A.nProt"
equa.iv <- paste(var.y,
                 paste(paste(str.vars.x, str.vars.c, sep='+'),
                       paste(str.vars.z, str.vars.c, sep='+'),
                           sep='|'),
                 sep='~')
print(equa.iv)

## [1] "hgt~prot+cal+sex+hgt0+wgt0|momEdu+wealthIdx+p.A.prot+p.A.nProt+sex+hgt0+wgt0"
# B. regression
res.ivreg <- ivreg(as.formula(equa.iv), data=df)
coef(res.ivreg)

##      (Intercept)      prot      cal      sexMale      hgt0      wgt0
## 44.0243196254 -1.4025623247  0.0651048958  0.1208327876  0.2865254380  0.0008504814
# C. Regression Summary
ivreg.summ <- summary(res.ivreg, vcov = sandwich, df = Inf, diagnostics = TRUE)

ivreg.summ$coef

##              Estimate   Std. Error   z value   Pr(>|z|)
## (Intercept) 44.0243196254 2.7535484724 15.9882131 1.543966e-57
## prot        -1.4025623247 0.1986400603 -7.0608231 1.655192e-12
## cal          0.0651048958 0.0075888130  8.5790618 9.565006e-18
## sexMale      0.1208327876 0.2099845806  0.5754365 5.649961e-01
## hgt0         0.2865254380 0.0707828183  4.0479518 5.166778e-05
## wgt0         0.0008504814 0.0003371121  2.5228444 1.164099e-02
## attr(,"df")
## [1] 0
## attr(,"nobs")
## [1] 14922
ivreg.summ$diagnostics

##              df1   df2 statistic      p-value
## Weak instruments (prot)  4 14914 274.14708 8.617320e-228
## Weak instruments (cal)  4 14914 315.03685 1.189186e-260
## Wu-Hausman              2 14914  94.70201 1.350241e-41
## Sargan                  2    NA 122.08198 3.091968e-27
# D. Combine Regression Results into a Matrix
df.results <- suppressMessages(as_tibble(ivreg.summ$coef, rownames='rownames') %>%
  full_join(as_tibble(ivreg.summ$diagnostics, rownames='rownames')) %>%
  full_join(tibble(rownames=c('vars'),
                    var.y=var.y,
                    vars.x=str.vars.x,
                    vars.z=str.vars.z,
                    vars.c=str.vars.c)))
# E. Flatten Matrix, All IV results as a single tibble row to be combined with other IV results

```

```
df.row.results <- df.results %>%
  gather(variable, value, -rownames) %>%
  drop_na() %>%
  unite(esti.val, rownames, variable) %>%
  mutate(esti.val = gsub(' ', '', esti.val))

# F. Results as Single Column
# df.row.results

# G. Results as Single Row
# df.row.results

# t(df.row.results %>% spread(esti.val, value)) %>%
#   kable() %>%
#   kable_styling_fc_wide()
```

### 5.1.2 IV Loop over RHS

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

Regression with a Variety of Outcome Variables and Right Hand Side Variables. There are M outcome variables, and there are N alternative right hand side variables. Regress each M outcome variable and each N alternative right hand side variable, with some common sets of controls and perhaps shared instruments. The output file is a M by N matrix of coefficients, with proper variable names and row names. The matrix stores coefficients for this key endogenous variable.

- Dependency: *R4Econ/linreg/ivreg/ivregdfrow.R*

#### 5.1.2.1 Construct Program

The program relies on double lapply. lapply is used for convenience, not speed.

```
ff_reg_mbyn <- function(list.vars.y, list.vars.x,
                        vars.c, vars.z, df,
                        return_all = FALSE,
                        stats_ends = 'value', time = FALSE) {

  # regf.iv() function is from C:\Users\fan\R4Econ\linreg\ivreg\ivregdfrow.R
  if (time) {
    start_time <- Sys.time()
  }

  if (return_all) {
    df.reg.out.all <-
      bind_rows(lapply(list.vars.x,
                      function(x) {
                        bind_rows(
                          lapply(list.vars.y, regf.iv,
                                vars.x=x, vars.c=vars.c, vars.z=vars.z, df=df))
                        )))
  } else {
    df.reg.out.all <-
      (lapply(list.vars.x,
              function(x) {
                bind_rows(
                  lapply(list.vars.y, regf.iv,
                        vars.x=x, vars.c=vars.c, vars.z=vars.z, df=df)) %>%
                select(vars_var.y, starts_with(x)) %>%
```

```

        select(vars_var.y, ends_with(stats_ends))
      ))) %>% reduce(full_join)
    }

    if (time) {
      end_time <- Sys.time()
      print(paste0('Estimation for all ys and xs took (seconds):',
                    end_time - start_time))
    }

    return(df.reg.out.all)
  }

```

### 5.1.2.2 Prepare Data

```

# Library
library(tidyverse)
library(AER)

# Load Sample Data
setwd('C:/Users/fan/R4Econ/_data/')
df <- read_csv('height_weight.csv')

# Source Dependency
source('C:/Users/fan/R4Econ/linreg/ivreg/ivregdfrow.R')

# Setting
options(repr.matrix.max.rows=50, repr.matrix.max.cols=50)

```

Parameters.

```

var.y1 <- c('hgt')
var.y2 <- c('wgt')
var.y3 <- c('vil.id')
list.vars.y <- c(var.y1, var.y2, var.y3)

var.x1 <- c('prot')
var.x2 <- c('cal')
var.x3 <- c('wealthIdx')
var.x4 <- c('p.A.prot')
var.x5 <- c('p.A.nProt')
list.vars.x <- c(var.x1, var.x2, var.x3, var.x4, var.x5)

vars.z <- c('indi.id')
vars.c <- c('sex', 'wgt0', 'hgt0', 'svymthRound')

```

### 5.1.2.3 Program Testing

```

vars.z <- NULL
suppressWarnings(suppressMessages(
  ff_reg_mbyn(list.vars.y, list.vars.x,
              vars.c, vars.z, df,
              return_all = FALSE,
              stats_ends = 'value')) %>%
  kable() %>%
  kable_styling_fc_wide()

```

vars_var.y	prot_tvalue	cal_tvalue	wealthIdx_tvalue	p.A.prot_tvalue	p.A.nProt_tvalue
hgt	18.8756010031786	23.4421863484661	13.508899618216	3.83682180045518	32.5448257554855
wgt	16.3591125056062	17.3686031309332	14.1390521528113	1.36958319982295	12.0961557911467
vil.id	-14.9385580468907	-19.6150110809452	34.0972558327347	8.45943342783186	17.7801422421419

### 5.1.2.3.1 Test Program OLS Z-Stat

```
vars.z <- c('indi.id')
suppressWarnings(suppressMessages(
  ff_reg_mbyn(list.vars.y, list.vars.x,
    vars.c, vars.z, df,
    return_all = FALSE,
    stats_ends = 'value')))) %>%
kable() %>%
kable_styling_fc_wide()
```

vars_var.y	prot_zvalue	cal_zvalue	wealthIdx_zvalue	p.A.prot_zvalue	p.A.nProt_zvalue
hgt	8.87674929300964	12.0739764947235	4.62589553677969	26.6373587567312	32.1162192385744
wgt	5.60385871756365	6.1225187008946	5.17869536991717	11.9295584469998	12.3509307017263
vil.id	-9.22106223347162	-13.0586007975839	-51.5866689219593	-29.9627476577329	-38.3528894620707

### 5.1.2.3.2 Test Program IV T-stat

```
vars.z <- NULL
suppressWarnings(suppressMessages(
  ff_reg_mbyn(list.vars.y, list.vars.x,
    vars.c, vars.z, df,
    return_all = FALSE,
    stats_ends = 'Estimate')))) %>%
kable() %>%
kable_styling_fc_wide()
```

vars_var.y	prot_Estimate	cal_Estimate	wealthIdx_Estimate	p.A.prot_Estimate	p.A.nProt_Estimate
hgt	0.049431093806755	0.00243408846205622	0.21045655488185	3.86952250259526e-05	0.00542428867316449
wgt	16.5557424523585	0.699072500364623	106.678721085969	0.00521731297924587	0.779514232050632
vil.id	-0.0758835879205584	-0.00395676177098486	0.451733304543324	0.000149388430455142	0.00526237555581024

### 5.1.2.3.3 Test Program OLS Coefficient

```
vars.z <- c('indi.id')
suppressWarnings(suppressMessages(
  ff_reg_mbyn(list.vars.y, list.vars.x,
    vars.c, vars.z, df,
    return_all = FALSE,
    stats_ends = 'Estimate')))) %>%
kable() %>%
kable_styling_fc_wide()
```

vars_var.y	prot_Estimate	cal_Estimate	wealthIdx_Estimate	p.A.prot_Estimate	p.A.nProt_Estimate
hgt	0.859205733632614	0.0238724384575419	0.144503490136948	0.00148073028434642	0.0141317656200726
wgt	98.9428234201406	2.71948246216953	69.1816142883022	0.221916473012486	2.11856940494335
vil.id	-6.02451379136132	-0.168054407187466	-1.91414470908345	-0.00520794333267238	-0.0494468877742109

### 5.1.2.3.4 Test Program IV coefficient

Year	Country	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	24
------	---------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	----

[illegible]

```
df.reg.out <- as_tibble(
  bind_rows(lapply(list.vars.y, regf.iv,
                    vars.x=var.x1, vars.c=vars.c, vars.z=vars.z, df=df)))
```

## 5.1.2.4.1 Lapply

```
lapply(list.vars.y, function(y) (mean(df[[var.x1]], na.rm=TRUE) +
                                mean(df[[y]], na.rm=TRUE)))
```

## 5.1.2.4.2 Nested Lapply Test

```
## [[1]]
## [1] 98.3272
##
## [[2]]
## [1] 13626.51
##
## [[3]]
## [1] 26.11226
```

```
lapplytwice <- lapply(
  list.vars.x, function(x) (
    lapply(list.vars.y, function(y) (mean(df[[x]], na.rm=TRUE) +
                                    mean(df[[y]], na.rm=TRUE))))
# lapplytwice
```

```
df.reg.out.all <- bind_rows(
  lapply(list.vars.x,
    function(x) (
      bind_rows(
        lapply(list.vars.y, regf.iv,
              vars.x=x, vars.c=vars.c, vars.z=vars.z, df=df))
      )))
```

```
# df.reg.out.all %>%
# kable() %>%
# kable_styling_fc_wide()
```

## 5.1.2.4.3 Nested Lapply All

```
df.reg.out.all <-
  (lapply(list.vars.x,
    function(x) (
      bind_rows(lapply(list.vars.y, regf.iv,
        vars.x=x, vars.c=vars.c, vars.z=vars.z, df=df)) %>%
        select(vars_var.y, starts_with(x)) %>%
        select(vars_var.y, ends_with('value'))
      ))) %>% reduce(full_join)
```

```
df.reg.out.all %>%
  kable() %>%
  kable_styling_fc_wide()
```

vars_var.y	prot_tvalue	cal_tvalue	wealthIdx_tvalue	p.A.prot_tvalue	p.A.nProt_tvalue
hgt	18.8756010031786	23.4421863484661	13.508899618216	3.83682180045518	32.5448257554855
wgt	16.3591125056062	17.3686031309332	14.1390521528113	1.36958319982295	12.0961557911467
vil.id	-14.9385580468907	-19.6150110809452	34.0972558327347	8.45943342783186	17.7801422421419

## 5.1.2.4.4 Nested Lapply Select



## 5.2 Decomposition

### 5.2.1 Decompose RHS

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

One runs a number of regressions. With different outcomes, and various right hand side variables.

What is the remaining variation in the left hand side variable if right hand side variable one by one is set to the average of the observed values.

- Dependency: *R4Econ/linreg/ivreg/ivregdfrow.R*

The code below does not work with categorical variables (except for dummies). Dummy variable inputs need to be converted to zero/one first. The examples are just to test the code with different types of variables.

```
# Library
library(tidyverse)
library(AER)

# Load Sample Data
setwd('C:/Users/fan/R4Econ/_data/')
df <- read_csv('height_weight.csv')

# Source Dependency
source('C:/Users/fan/R4Econ/linreg/ivreg/ivregdfrow.R')
```

Data Cleaning.

```
# Convert Variable for Sex which is categorical to Numeric
df <- df
df$male <- (as.numeric(factor(df$sex)) - 1)
summary(factor(df$sex))
```

```
## Female    Male
##  16446    18619
```

```
summary(df$male)
```

```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##    0.000   0.000   1.000   0.531   1.000   1.000
```

```
df.use <- df %>% filter(S.country == 'Guatemala') %>%
  filter(svymthRound %in% c(12, 18, 24))
dim(df.use)
```

```
## [1] 2022    16
```

Setting Up Parameters.

```
# Define Left Hand Side Variables
var.y1 <- c('hgt')
var.y2 <- c('wgt')
vars.y <- c(var.y1, var.y2)
# Define Right Hand Side Variables
vars.x <- c('prot')
vars.c <- c('male', 'wgt0', 'hgt0', 'svymthRound')
# vars.z <- c('p.A.prot')
vars.z <- c('vil.id')
# vars.z <- NULL
vars.xc <- c(vars.x, vars.c)

# Other variables to keep
```

```

vars.other.keep <- c('S.country', 'vil.id', 'indi.id', 'svymthRound')

# Decompose sequence
vars.tomean.first <- c('male', 'hgt0')
var.tomean.first.name.suffix <- '_mh02m'
vars.tomean.second <- c(vars.tomean.first, 'hgt0', 'wgt0')
var.tomean.second.name.suffix <- '_mh0me2m'
vars.tomean.third <- c(vars.tomean.second, 'prot')
var.tomean.third.name.suffix <- '_mh0mep2m'
vars.tomean.fourth <- c(vars.tomean.third, 'svymthRound')
var.tomean.fourth.name.suffix <- '_mh0mepm2m'
list.vars.tomean = list(
#           vars.tomean.first,
           vars.tomean.second,
           vars.tomean.third,
           vars.tomean.fourth
)
list.vars.tomean.name.suffix <- list(
#           var.tomean.first.name.suffix,
           var.tomean.second.name.suffix,
           var.tomean.third.name.suffix,
           var.tomean.fourth.name.suffix
)

```

### 5.2.1.1 Obtain Regression Coefficients from somewhere

```

# Regressions
# regf.iv from C:\Users\fan\R4Econ\linreg\ivreg\ivregdfrow.R
df.reg.out <- as_tibble(
  bind_rows(lapply(vars.y, regf.iv,
    vars.x=vars.x, vars.c=vars.c, vars.z=vars.z, df=df)))

# Regressions
# reg1 <- regf.iv(var.y = var.y1, vars.x, vars.c, vars.z, df.use)
# reg2 <- regf.iv(var.y = var.y2, vars.x, vars.c, vars.z, df.use)
# df.reg.out <- as_tibble(bind_rows(reg1, reg2))

# df.reg.out

# Select Variables
str.esti.suffix <- '_Estimate'
arr.esti.name <- paste0(vars.xc, str.esti.suffix)
str.outcome.name <- 'vars_var.y'
arr.columns2select <- c(arr.esti.name, str.outcome.name)
arr.columns2select

## [1] "prot_Estimate"      "male_Estimate"      "wgt0_Estimate"      "hgt0_Estimate"
## [6] "vars_var.y"

# Generate dataframe for coefficients
df.coef <- df.reg.out[,c(arr.columns2select)] %>%
  mutate_at(vars(arr.esti.name), as.numeric) %>% column_to_rownames(str.outcome.name)
df.coef %>%
  kable() %>%
  kable_styling_fc()

```

	prot_Estimate	male_Estimate	wgt0_Estimate	hgt0_Estimate	svymthRound_Estimate
hgt	-0.2714772	1.244735	0.0004430	0.6834853	1.133919
wgt	-59.0727542	489.852902	0.7696158	75.4867897	250.778883

```
str(df.coef)
```

```
## 'data.frame':  2 obs. of  5 variables:
## $ prot_Estimate      : num  -0.271 -59.073
## $ male_Estimate      : num   1.24 489.85
## $ wgt0_Estimate      : num  0.000443 0.769616
## $ hgt0_Estimate      : num   0.683 75.487
## $ svymthRound_Estimate: num   1.13 250.78
```

### 5.2.1.2 Decomposition Step 1

```
# Decomposition Step 1: gather
df.decompose_step1 <- df.use %>%
  filter(svymthRound %in% c(12, 18, 24)) %>%
  select(one_of(c(vars.other.keep, vars.xc, vars.y))) %>%
  drop_na() %>%
  gather(variable, value, -one_of(c(vars.other.keep, vars.xc)))
options(repr.matrix.max.rows=20, repr.matrix.max.cols=20)
dim(df.decompose_step1)
```

```
## [1] 1382  10
```

```
head(df.decompose_step1, 10) %>%
  kable() %>%
  kable_styling_fc()
```

S.country	vil.id	indi.id	svymthRound	prot	male	wgt0	hgt0	variable	value
Guatemala	3	1352	18	13.3	1	2545.2	47.4	hgt	70.2
Guatemala	3	1352	24	46.3	1	2545.2	47.4	hgt	75.8
Guatemala	3	1354	12	1.0	1	3634.3	51.2	hgt	66.3
Guatemala	3	1354	18	9.8	1	3634.3	51.2	hgt	69.2
Guatemala	3	1354	24	15.4	1	3634.3	51.2	hgt	75.3
Guatemala	3	1356	12	8.6	1	3911.8	51.9	hgt	68.1
Guatemala	3	1356	18	17.8	1	3911.8	51.9	hgt	74.1
Guatemala	3	1356	24	30.5	1	3911.8	51.9	hgt	77.1
Guatemala	3	1357	12	1.0	1	3791.4	52.6	hgt	71.5
Guatemala	3	1357	18	12.7	1	3791.4	52.6	hgt	77.8

### 5.2.1.3 Decomposition Step 2

```
# Decomposition Step 2: mutate_at(vars, funs(mean = mean(.)))
# the xc averaging could have taken place earlier, no difference in mean across variables
df.decompose_step2 <- df.decompose_step1 %>%
  group_by(variable) %>%
  mutate_at(vars(c(vars.xc, 'value')), funs(mean = mean(.))) %>%
  ungroup()

options(repr.matrix.max.rows=20, repr.matrix.max.cols=20)
dim(df.decompose_step2)
```

```
## [1] 1382  16
```

```
head(df.decompose_step2, 10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

S.country	vil.id	indi.id	svymthRound	prot	male	wgt0	hgt0	variable	value	prot_mean	male_mean	wgt0_mean	hgt0_mean	svymthRound_mean	value_mean
Guatemala	3	1352	18	13.3	1	2545.2	47.4	hgt	70.2	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1352	24	46.3	1	2545.2	47.4	hgt	75.8	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1354	12	1.0	1	3634.3	51.2	hgt	66.3	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1354	18	9.8	1	3634.3	51.2	hgt	69.2	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1354	24	15.4	1	3634.3	51.2	hgt	75.3	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1356	12	8.6	1	3911.8	51.9	hgt	68.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1356	18	17.8	1	3911.8	51.9	hgt	74.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1356	24	30.5	1	3911.8	51.9	hgt	77.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1357	12	1.0	1	3791.4	52.6	hgt	71.5	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216
Guatemala	3	1357	18	12.7	1	3791.4	52.6	hgt	77.8	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216

### 5.2.1.4 Decomposition Step 3 Non-Loop

```
ff_lr_decompose_valadj <- function(df, df.coef, vars.tomean, str.esti.suffix) {
  new_value <- (df$value +
    rowSums((df[paste0(vars.tomean, '_mean')] - df[vars.tomean])
      *df.coef[df$variable, paste0(vars.tomean, str.esti.suffix)]))
  return(new_value)
}
```

### 5.2.1.5 Decomposition Step 3 With Loop

```
df.decompose_step3 <- df.decompose_step2
for (i in 1:length(list.vars.tomean)) {
  var.decomp.cur <- (paste0('value', list.vars.tomean.name.suffix[[i]]))
  vars.tomean <- list.vars.tomean[[i]]
  var.decomp.cur
  df.decompose_step3 <- df.decompose_step3 %>%
    mutate((!var.decomp.cur) :=
      ff_lr_decompose_valadj(., df.coef, vars.tomean, str.esti.suffix))
}

dim(df.decompose_step3)
```

```
## [1] 1382 19
```

```
head(df.decompose_step3, 10) %>%
  kable() %>%
  kable_styling_fc_wide()
```

S.country	vil.id	indi.id	svymthRound	prot	male	wgt0	hgt0	variable	value	prot_mean	male_mean	wgt0_mean	hgt0_mean	svymthRound_mean	value_mean	value_mh0mep2m	value_mh0mep2m	value_mh0mep2m
Guatemala	3	1352	18	13.3	1	2545.2	47.4	hgt	70.2	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	73.19390	71.19903	71.68148
Guatemala	3	1352	24	46.3	1	2545.2	47.4	hgt	75.8	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	78.79390	85.75778	79.43671
Guatemala	3	1354	12	1.0	1	3634.3	51.2	hgt	66.3	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	63.61689	58.28285	65.56882
Guatemala	3	1354	18	9.8	1	3634.3	51.2	hgt	69.2	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	66.51689	63.57185	64.05430
Guatemala	3	1354	24	15.4	1	3634.3	51.2	hgt	75.3	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	72.61689	71.19213	64.87106
Guatemala	3	1356	12	8.6	1	3911.8	51.9	hgt	68.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	64.33707	61.06626	68.35222
Guatemala	3	1356	18	17.8	1	3911.8	51.9	hgt	74.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	70.33707	69.56385	70.04630
Guatemala	3	1356	24	30.5	1	3911.8	51.9	hgt	77.1	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	73.33707	76.01161	69.69055
Guatemala	3	1357	12	1.0	1	3791.4	52.6	hgt	71.5	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	66.83353	61.49949	68.78545
Guatemala	3	1357	18	12.7	1	3791.4	52.6	hgt	77.8	20.64819	0.5499276	3312.297	49.75137	18.42547	73.41216	73.13353	70.97578	71.45823

### 5.2.1.6 Decomposition Step 4 Variance

```
df.decompose_step3 %>%
  select(variable, contains('value')) %>%
  group_by(variable) %>%
  summarize_all(funs(mean = mean, var = var)) %>%
  select(matches('value')) %>% select(ends_with("_var")) %>%
  mutate_if(is.numeric, funs(frac = (./value_var))) %>%
  mutate_if(is.numeric, round, 3) %>%
  kable() %>%
  kable_styling_fc_wide()
```

value_var	value_mean_var	value_mh0mep2m_var	value_mh0mep2m_var	value_mh0mep2m_var	value_var_frac	value_mean_var_frac	value_mh0mep2m_var_frac	value_mh0mep2m_var_frac	value_mh0mep2m_var_frac
21.864	NA	25.35	49.047	23.06	1	NA	1.159	2.243	1.055
2965693.245	NA	2949187.64	4192769.518	3147506.60	1	NA	0.994	1.414	1.061


### 5.2.1.7 Graphical Results

Graphically, difficult to pick up exact differences in variance, a 50 percent reduction in variance visually does not look like 50 percent. Intuitively, we are kind of seeing standard deviation, not variance on the graph if we think about the x-scale.

```
head(df.decompose_step3 %>%
  select(variable, contains('value'), -value_mean), 10) %>%
  kable() %>%
  kable_styling_fc()
```

variable	value	value_mh0me2m	value_mh0mep2m	value_mh0mepm2m
hgt	70.2	73.19390	71.19903	71.68148
hgt	75.8	78.79390	85.75778	79.43671
hgt	66.3	63.61689	58.28285	65.56882
hgt	69.2	66.51689	63.57185	64.05430
hgt	75.3	72.61689	71.19213	64.87106
hgt	68.1	64.33707	61.06626	68.35222
hgt	74.1	70.33707	69.56385	70.04630
hgt	77.1	73.33707	76.01161	69.69055
hgt	71.5	66.83353	61.49949	68.78545
hgt	77.8	73.13353	70.97578	71.45823

```
df.decompose_step3 %>%
  select(variable, contains('value'), -value_mean) %>%
  rename(outcome = variable) %>%
  gather(variable, value, -outcome) %>%
  ggplot(aes(x=value, color = variable, fill = variable)) +
    geom_line(stat = "density") +
    facet_wrap(~ outcome, scales='free', nrow=2)
```

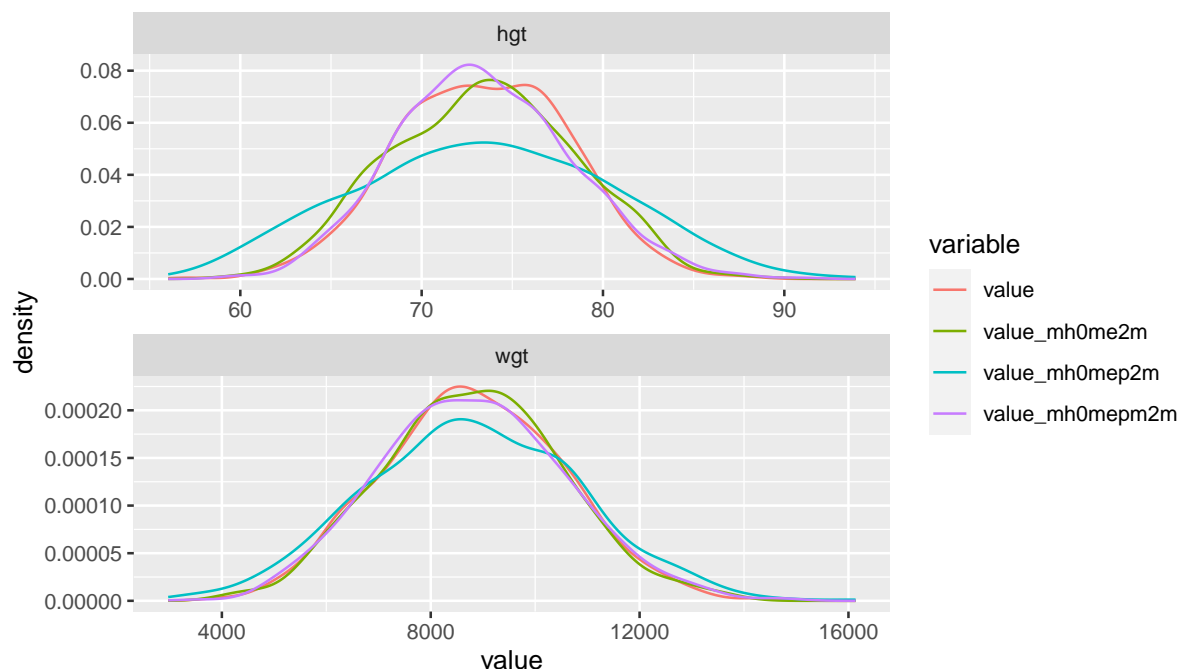

### 5.2.1.8 Additional Decomposition Testings

```
head(df.decompose_step2[vars.tomean.first], 3)
head(df.decompose_step2[paste0(vars.tomean.first, '_mean')], 3)
```

```

head(df.coef[df.decompose_step2$variable,
  paste0(vars.tomean.first, str.esti.suffix)], 3)
df.decompose.tomean.first <- df.decompose_step2 %>%
  mutate(pred_new = df.decompose_step2$value +
    rowSums((df.decompose_step2[paste0(vars.tomean.first, '_mean')]
      - df.decompose_step2[vars.tomean.first])
      *df.coef[df.decompose_step2$variable,
        paste0(vars.tomean.first, str.esti.suffix)])) %>%
  select(variable, value, pred_new)
head(df.decompose.tomean.first, 10)
df.decompose.tomean.first %>%
  group_by(variable) %>%
  summarize_all(funs(mean = mean, sd = sd)) %>%
  kable() %>%
  kable_styling_fc()

```

variable	value_mean	pred_new_mean	value_sd	pred_new_sd
hgt	73.41216	73.41216	4.675867	4.534947
wgt	8807.87656	8807.87656	1722.118824	1695.221845

Note the r-square from regression above matches up with the 1 - ratio below. This is the proper decomposition method that is equivalent to  $r^2$ .

```

df.decompose_step2 %>%
  mutate(pred_new = df.decompose_step2$value +
    rowSums((df.decompose_step2[paste0(vars.tomean.second, '_mean')]
      - df.decompose_step2[vars.tomean.second])
      *df.coef[df.decompose_step2$variable,
        paste0(vars.tomean.second, str.esti.suffix)])) %>%
  select(variable, value, pred_new) %>%
  group_by(variable) %>%
  summarize_all(funs(mean = mean, var = var)) %>%
  mutate(ratio = (pred_new_var/value_var)) %>%
  kable() %>%
  kable_styling_fc()

```

variable	value_mean	pred_new_mean	value_var	pred_new_var	ratio
hgt	73.41216	73.41216	2.186374e+01	25.3504	1.1594724
wgt	8807.87656	8807.87656	2.965693e+06	2949187.6357	0.9944345

## Chapter 6

# Nonlinear Regression

### 6.1 Logit Regression

#### 6.1.1 Binary Logit

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

*Data Preparation*

```
df_mtcars <- mtcars

# X-variables to use on RHS
ls_st_xs <- c('mpg', 'qsec')
ls_st_xs <- c('mpg')
ls_st_xs <- c('qsec')
ls_st_xs <- c('wt')
ls_st_xs <- c('mpg', 'wt', 'vs')

svr_binary <- 'hpLowHigh'
svr_binary_lb0 <- 'LowHP'
svr_binary_lb1 <- 'HighHP'
svr_outcome <- 'am'
sdt_name <- 'mtcars'

# Discretize hp
df_mtcars <- df_mtcars %>%
  mutate(!sym(svr_binary) := cut(hp,
                                breaks=c(-Inf, 210, Inf),
                                labels=c(svr_binary_lb0, svr_binary_lb1)))
```

##### 6.1.1.1 Logit Regression and Prediction

logit regression with glm, and predict using estimation data. Prediction and estimation with one variable.

- [LOGIT REGRESSION R DATA ANALYSIS EXAMPLES](#)
- [Generalized Linear Models](#)

```
# Regress
rs_logit <- glm(as.formula(paste(svr_outcome, "~", paste(ls_st_xs, collapse="+"))),
               ,data = df_mtcars, family = "binomial")
summary(rs_logit)
```

```
##
## Call:
```

```
## glm(formula = as.formula(paste(svr_outcome, "~", paste(ls_st_xs,
##   collapse = "+"))), family = "binomial", data = df_mtcars)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.73603  -0.25477  -0.04891   0.13402   1.90321
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)  22.69008   13.95112   1.626   0.1039
## mpg         -0.01786    0.33957  -0.053   0.9581
## wt          -6.73804    3.01400  -2.236   0.0254 *
## vs          -4.44046    2.84247  -1.562   0.1182
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##    Null deviance: 43.230  on 31  degrees of freedom
## Residual deviance: 13.092  on 28  degrees of freedom
## AIC: 21.092
##
## Number of Fisher Scoring iterations: 7
# Predict Using Regression Data
df_mtcars$p_mpg <- predict(rs_logit, newdata = df_mtcars, type = "response")
```

**6.1.1.1.1 Prediction with Observed Binary Input** Logit regression with a continuous variable and a binary variable. Predict outcome with observed continuous variable as well as observed binary input variable.


```
# Regress
rs_logit_bi <- glm(as.formula(paste(svr_outcome,
                                   "~ factor(", svr_binary,") + ",
                                   paste(ls_st_xs, collapse="+"))),
                  , data = df_mtcars, family = "binomial")
summary(rs_logit_bi)

##
## Call:
## glm(formula = as.formula(paste(svr_outcome, "~ factor(", svr_binary,
##   ") + ", paste(ls_st_xs, collapse = "+"))), family = "binomial",
##   data = df_mtcars)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.45771  -0.09563  -0.00875   0.00555   1.87612
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      3.8285   18.0390   0.212   0.8319
## factor(hpLowHigh)HighHP  6.9907   5.5176   1.267   0.2052
## mpg              0.8985    0.8906   1.009   0.3131
## wt              -6.7291    3.3166  -2.029   0.0425 *
## vs              -5.9206    4.1908  -1.413   0.1577
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
```



```
##
## Null deviance: 43.2297 on 31 degrees of freedom
## Residual deviance: 8.9777 on 27 degrees of freedom
## AIC: 18.978
##
## Number of Fisher Scoring iterations: 9
# Predict Using Regression Data
df_mtcars$p_mpg_hp <- predict(rs_logit_bi, newdata = df_mtcars, type = "response")

# Predicted Probabilities am on mpg with or without hp binary
scatter <- ggplot(df_mtcars, aes(x=p_mpg_hp, y=p_mpg)) +
  geom_point(size=1) +
  # geom_smooth(method=lm) + # Trend line
  geom_abline(intercept = 0, slope = 1) + # 45 degree line
  labs(title = paste0('Predicted Probabilities ', svr_outcome, ' on ', ls_st_xs, ' with or without ',
    x = paste0('prediction with ', ls_st_xs, ' and binary ', svr_binary, ' indicator, 1 is high'),
    y = paste0('prediction with only ', ls_st_xs),
    caption = 'mtcars; prediction based on observed data') +
  theme_bw()
print(scatter)
```

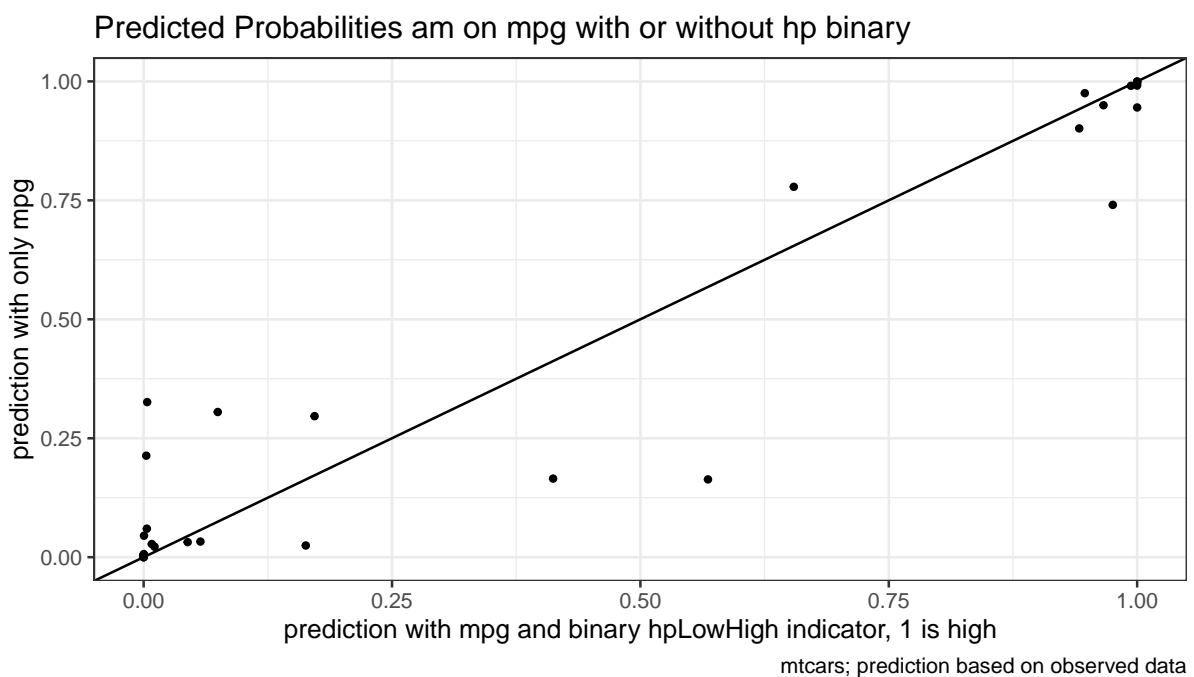

**6.1.1.1.2 Prediction with Binary set to 0 and 1** Now generate two predictions. One set where binary input is equal to 0, and another where the binary inputs are equal to 1. Ignore whether in data binary input is equal to 0 or 1. Use the same regression results as what was just derived.

Note that given the example here, the probability changes a lot when we

```
# Previous regression results
summary(rs_logit_bi)


##
## Call:
## glm(formula = as.formula(paste(svr_outcome, "~ factor(", svr_binary,
##   ") + ", paste(ls_st_xs, collapse = "+"))), family = "binomial",
##   data = df_mtcars)
```

```
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -1.45771  -0.09563  -0.00875   0.00555   1.87612
##
## Coefficients:
##              Estimate Std. Error z value Pr(>|z|)
## (Intercept)      3.8285     18.0390   0.212   0.8319
## factor(hpLowHigh)HighHP  6.9907     5.5176   1.267   0.2052
## mpg              0.8985     0.8906   1.009   0.3131
## wt              -6.7291     3.3166  -2.029   0.0425 *
## vs              -5.9206     4.1908  -1.413   0.1577
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##      Null deviance: 43.2297  on 31  degrees of freedom
## Residual deviance:  8.9777  on 27  degrees of freedom
## AIC: 18.978
##
## Number of Fisher Scoring iterations: 9

# Two different dataframes, mutate the binary regressor
df_mtcars_bi0 <- df_mtcars %>% mutate(!sym(svr_binary) := svr_binary_lb0)
df_mtcars_bi1 <- df_mtcars %>% mutate(!sym(svr_binary) := svr_binary_lb1)

# Predict Using Regression Data
df_mtcars$p_mpg_hp_bi0 <- predict(rs_logit_bi, newdata = df_mtcars_bi0, type = "response")
df_mtcars$p_mpg_hp_bi1 <- predict(rs_logit_bi, newdata = df_mtcars_bi1, type = "response")

# Predicted Probabilities and Binary Input
scatter <- ggplot(df_mtcars, aes(x=p_mpg_hp_bi0)) +
  geom_point(aes(y=p_mpg_hp), size=4, shape=4, color="red") +
  geom_point(aes(y=p_mpg_hp_bi1), size=2, shape=8) +
  # geom_smooth(method=lm) + # Trend line
  geom_abline(intercept = 0, slope = 1) + # 45 degree line
  labs(title = paste0('Predicted Probabilities and Binary Input',
    '\ncross(shape=4)/red is predict actual binary data',
    '\nstar(shape=8)/black is predict set binary = 1 for all'),
    x = paste0('prediction with ', ls_st_xs, ' and binary ', svr_binary, ' = 0 for all'),
    y = paste0('prediction with ', ls_st_xs, ' and binary ', svr_binary, ' = 1'),
    caption = paste0(sdt_name)) +
  theme_bw()
print(scatter)
```

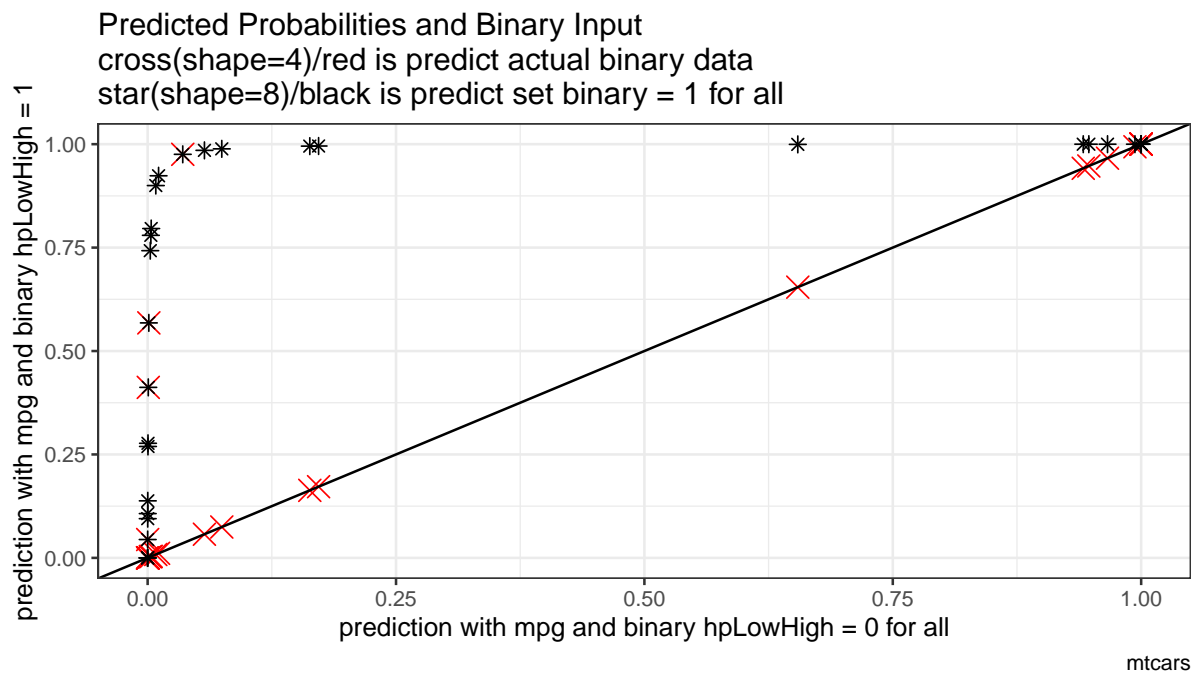


**6.1.1.1.3 Prediction with Binary set to 0 and 1 Difference** What is the difference in probability between binary = 0 vs binary = 1. How does that relate to the probability of outcome of interest when binary = 0 for all.

In the binary logit case, the relationship will be hump-shaped by construction between  $A_i$  and  $\alpha_i$ . In the exponential wage cases, the relationship is convex upwards.

```
# Generate Gap Variable
df_mtcars <- df_mtcars %>% mutate(alpha_i = p_mpg_hp_bi1 - p_mpg_hp_bi0) %>%
  mutate(A_i = p_mpg_hp_bi0)

# Binary Marginal Effects and Prediction without Binary
scatter <- ggplot(df_mtcars, aes(x=A_i)) +
  geom_point(aes(y=alpha_i), size=4, shape=4, color="red") +
  geom_abline(intercept = 0, slope = 1) + # 45 degree line
  labs(title = paste0('Binary Marginal Effects and Prediction without Binary'),
       x = 'P(binary=0) for all',
       y = 'P(binary=1) - P(binary=0) gap',
       caption = paste0(sdt_name)) +
  theme_bw()
print(scatter)
```

Binary Marginal Effects and Prediction without Binary

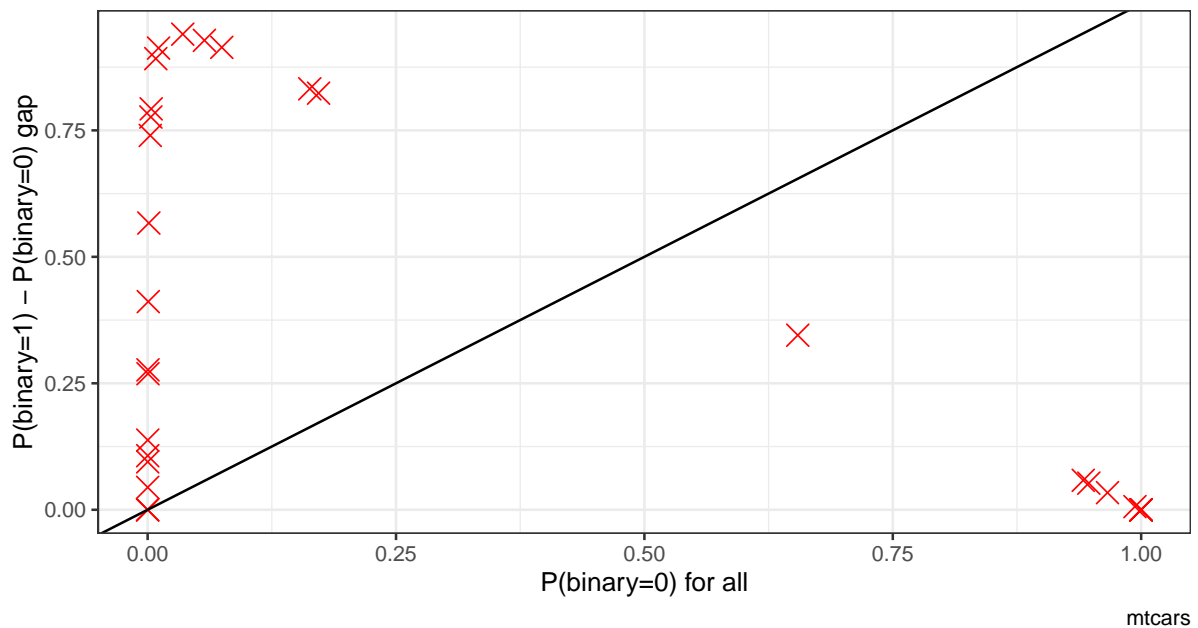

**6.1.1.1.4 X variables and A and alpha** Given the x-variables included in the logit regression, how do they relate to  $A_i$  and  $\alpha_i$

```
# Generate Gap Variable
df_mtcars <- df_mtcars %>% mutate(alpha_i = p_mpg_hp_bi1 - p_mpg_hp_bi0) %>%
  mutate(A_i = p_mpg_hp_bi0)


# Binary Marginal Effects and Prediction without Binary
ggplot.A.alpha.x <- function(svr_x, df,
                             svr_alpha = 'alpha_i', svr_A = "A_i"){

  scatter <- ggplot(df, aes(x=!!sym(svr_x))) +
    geom_point(aes(y=alpha_i), size=4, shape=4, color="red") +
    geom_point(aes(y=A_i), size=2, shape=8, color="blue") +
    geom_abline(intercept = 0, slope = 1) + # 45 degree line
    labs(title = paste0('A (blue) and alpha (red) vs x variables=', svr_x),
         x = svr_x,
         y = 'Probabilities',
         caption = paste0(sdt_name)) +
    theme_bw()


  return(scatter)
}

# Plot over multiple
lapply(ls_st_xs,
       ggplot.A.alpha.x,
       df = df_mtcars)
```


```
## [[1]]
```

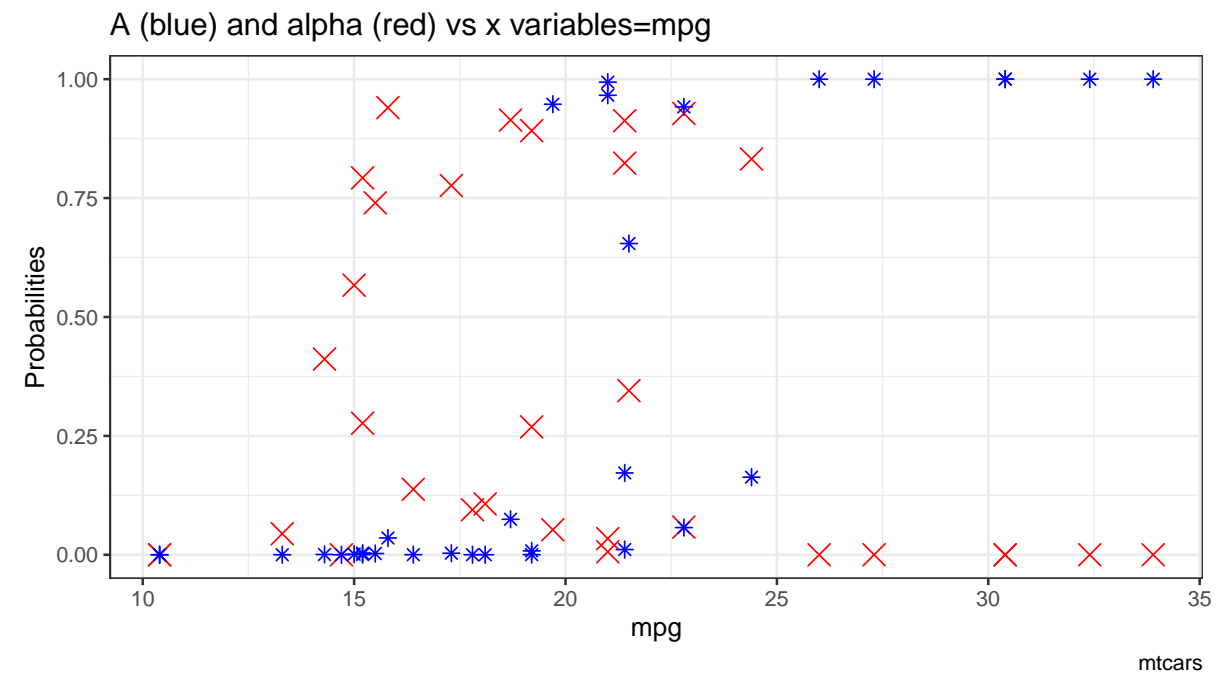

```
##
## [[2]]
```

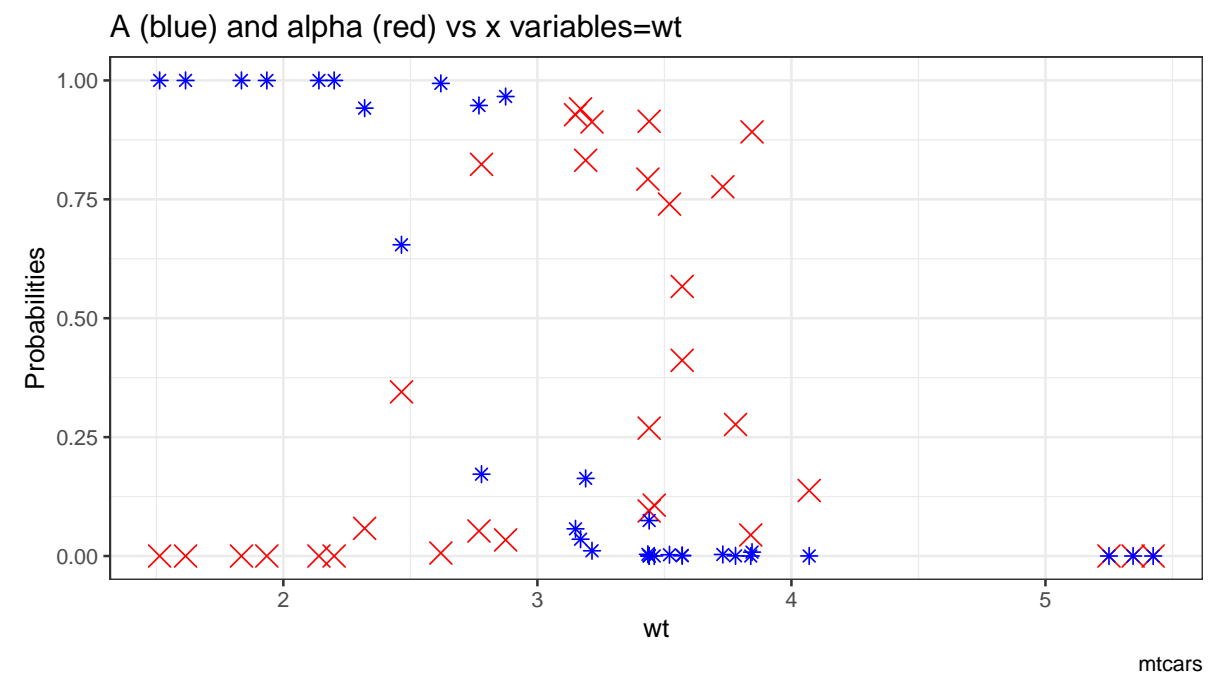

```
##
## [[3]]
```

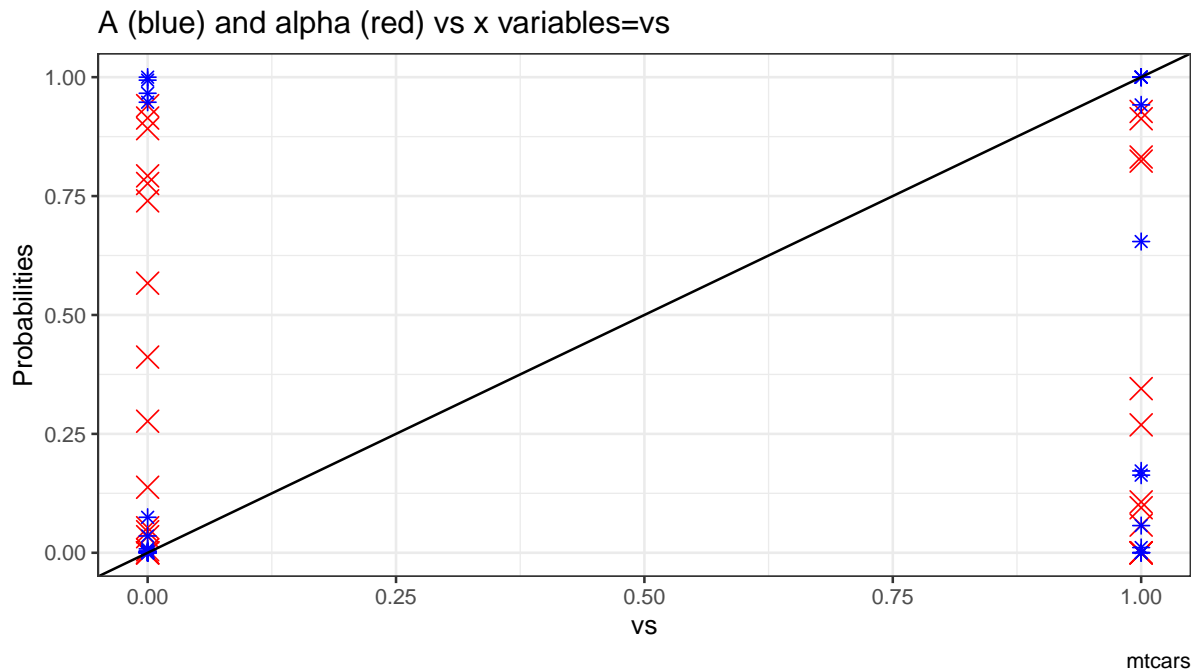

## 6.2 Quantile Regression

### 6.2.1 Quantile Regression Basics

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

#### 6.2.1.1 Estimate Mean and Quantile Coefficients using mtcars dataset

First, estimate the mean regression:

```
fit_mean <- lm(mpg ~ disp + hp + factor(am) + factor(vs), data = mtcars)
summary(fit_mean)
```

```
##
## Call:
## lm(formula = mpg ~ disp + hp + factor(am) + factor(vs), data = mtcars)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -4.7981 -1.9532  0.0111  1.5665  5.6321
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  24.832119   2.890418   8.591 3.32e-09 ***
## disp        -0.008304   0.010087  -0.823  0.41757
## hp          -0.037623   0.013846  -2.717  0.01135 *
## factor(am)1  4.419257   1.493243   2.960  0.00634 **
## factor(vs)1  2.052472   1.627096   1.261  0.21794
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 2.812 on 27 degrees of freedom
## Multiple R-squared:  0.8104, Adjusted R-squared:  0.7823
## F-statistic: 28.85 on 4 and 27 DF, p-value: 2.13e-09
```

Now estimate the quantile regressions at various quantiles, standard error obtained via bootstrap. Note

that there is a gradient in the quantile hp coefficients as well as disp. disp sign reverses, also the coefficient on factor am is different by quantiles:

```
ls_fl_quantiles <- c(0.25, 0.50, 0.75)
fit_quantiles <- rq(mpg ~ disp + hp + factor(am),
                    tau = ls_fl_quantiles,
                    data = mtcars)
summary(fit_quantiles, se = "boot")

##
## Call: rq(formula = mpg ~ disp + hp + factor(am), tau = ls_fl_quantiles,
##      data = mtcars)
##
## tau: [1] 0.25
##
## Coefficients:
##              Value      Std. Error t value Pr(>|t|)
## (Intercept) 25.34665    1.38870   18.25209  0.00000
## disp        -0.02441    0.00798   -3.06028  0.00484
## hp          -0.01672    0.01409   -1.18621  0.24551
## factor(am)1  1.39719    1.41689    0.98610  0.33253
##
## Call: rq(formula = mpg ~ disp + hp + factor(am), tau = ls_fl_quantiles,
##      data = mtcars)
##
## tau: [1] 0.5
##
## Coefficients:
##              Value      Std. Error t value Pr(>|t|)
## (Intercept) 27.49722    1.75659   15.65379  0.00000
## disp        -0.02253    0.01634   -1.37904  0.17880
## hp          -0.02713    0.02414   -1.12386  0.27062
## factor(am)1  3.37328    2.25738    1.49434  0.14627
##
## Call: rq(formula = mpg ~ disp + hp + factor(am), tau = ls_fl_quantiles,
##      data = mtcars)
##
## tau: [1] 0.75
##
## Coefficients:
##              Value      Std. Error t value Pr(>|t|)
## (Intercept) 28.06384    1.68640   16.64124  0.00000
## disp         0.00445    0.01457    0.30566  0.76212
## hp          -0.06662    0.01795   -3.71247  0.00090
## factor(am)1  7.91402    2.36999    3.33926  0.00239
```

### 6.2.1.2 Test Quantile Coefficients if Different

Use the `rq.anova` function from the quantile regression package to conduct WALD test. Remember WALD test says given unrestricted model's estimates, test where null is that the coefficients satisfy some linear restrictions.

To test, use the returned object from running `rq` with different numbers of quantiles, and set the option `joint` to true or false. When `joint` is true: "equality of slopes should be done as joint tests on all slope parameters", when `joint` is false: "separate tests on each of the slope parameters should be reported". A slope parameter refers to one of the RHS variables.

Note that quantile tests are "parallel line" tests. Meaning that we should expect to have different x-intercepts for each quantile, because they represent the levels of the conditional shocks distributions. However, if quantile coefficients for the slopes are all the same, then there are no quantile specific effects,

mean effects would be sufficient.

see: - [anova.rq\(\)](#) in [quantreg](#) package in R

**6.2.1.2.1 Test Statistical Difference between 0.25 and 0.50** Given the quantile estimates above, the difference between 0.25 and 0.50 quantiles exists, but are they sufficiently large to be statistically different? What is the p-value? Reviewing the results below, they are not statistically different.

First, `joint = TRUE`. This is not testing if the coefficient on `disp` is the same as the coefficient on `hp`. This is testing jointly if the coefficients for different quantiles of `disp`, and different quantiles of `hp` are the same for each RHS variable.

```
ls_fl_quantiles <- c(0.25, 0.50)
fit_quantiles <- rq(mpg ~ disp + hp + factor(am),
                    tau = ls_fl_quantiles,
                    data = mtcars)
anova(fit_quantiles, test = "Wald", joint=TRUE)

## Quantile Regression Analysis of Deviance Table
##
## Model: mpg ~ disp + hp + factor(am)
## Joint Test of Equality of Slopes: tau in { 0.25 0.5 }
##
##      Df Resid Df F value Pr(>F)
## 1    3      61  0.7986 0.4994
```

Second, `joint = False`:

```
anova(fit_quantiles, test = "Wald", joint=FALSE)

## Quantile Regression Analysis of Deviance Table
##
## Model: mpg ~ disp + hp + factor(am)
## Tests of Equality of Distinct Slopes: tau in { 0.25 0.5 }
##
##              Df Resid Df F value Pr(>F)
## disp              1      63  0.0304 0.8621
## hp                1      63  0.5397 0.4653
## factor(am)1      1      63  1.0957 0.2992
```

**6.2.1.2.2 Test Statistical Difference between 0.25, 0.50 and 0.75** The 1st quartile and median do not seem to be statistically different, now include the 3rd quartile. As seen earlier, the quantiles jointly show a gradient. Now, we can see that `idisp`, `hp` and `am` are separately have statistically different

First, `joint = TRUE`:

```
ls_fl_quantiles <- c(0.25, 0.50, 0.75)
fit_quantiles <- rq(mpg ~ disp + hp + factor(am),
                    tau = ls_fl_quantiles,
                    data = mtcars)
anova(fit_quantiles, test = "Wald", joint=TRUE)

## Quantile Regression Analysis of Deviance Table
##
## Model: mpg ~ disp + hp + factor(am)
## Joint Test of Equality of Slopes: tau in { 0.25 0.5 0.75 }
##
##      Df Resid Df F value   Pr(>F)
## 1    6      90   3.957 0.001475 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```



Second, joint = False:

```
anova(fit_quantiles, test = "Wald", joint=FALSE)
```

```
## Quantile Regression Analysis of Deviance Table
##
## Model: mpg ~ disp + hp + factor(am)
## Tests of Equality of Distinct Slopes: tau in { 0.25 0.5 0.75 }
##
##           Df Resid Df F value    Pr(>F)
## disp           2      94  9.2284 0.0002191 ***
## hp              2      94  6.5798 0.0021162 **
## factor(am)1    2      94  3.6669 0.0292803 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```



# Chapter 7

## Optimization

### 7.1 Bisection

#### 7.1.1 Bisection

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

See the `ff_opti_bisect_pmap_multi` function from [Fan's REconTools Package](#), which provides a reusable function based on the algorithm worked out here.

The bisection specific code does not need to do much.

- list variables in file for grouping, each group is an individual for whom we want to calculate optimal choice for using bisection.
- string variable name of input where functions are evaluated, these are already contained in the dataframe, existing variable names, row specific, rowwise computation over these, each rowwise calculation using different rows.
- scalar and array values that are applied to every rowwise calculation, all rowwise calculations using the same scalars and arrays.
- string output variable name

This is how I implement the bisection algorithm, when we know the bounding minimum and maximum to be below and above zero already.

1. Evaluate  $f_a^0 = f(a^0)$  and  $f_b^0 = f(b^0)$ , min and max points.
2. Evaluate at  $f_p^0 = f(p^0)$ , where  $p_0 = \frac{a^0 + b^0}{2}$ .
3. if  $f_a^i \cdot f_p^i < 0$ , then  $b_{i+1} = p_i$ , else,  $a_{i+1} = p_i$  and  $f_a^{i+1} = p_i$ .
4. iterate until convergence.

Generate New columns of a and b as we iterate, do not need to store p, p is temporary. Evaluate the function below which we have already tested, but now, in the dataframe before generating all permutations, `tb_states_choices`, now the `fl_N` element will be changing with each iteration, it will be row specific. `fl_N` are first min and max, then each subsequent ps.

##### 7.1.1.1 Initialize Matrix

Prepare Input Data:

```
# Parameters
fl_rho = 0.20
svr_id_var = 'INDI_ID'

# P fixed parameters, nN is N dimensional, nP is P dimensional
ar_nN_A = seq(-2, 2, length.out = 4)
ar_nN_alpha = seq(0.1, 0.9, length.out = 4)
```

```

# Choice Grid for nutritional feasible choices for each
fl_N_agg = 100
fl_N_min = 0

# Mesh Expand
tb_states_choices <- as_tibble(cbind(ar_nN_A, ar_nN_alpha)) %>%
  rowid_to_column(var=svr_id_var)

# Convert Matrix to Tibble
ar_st_col_names = c(svr_id_var, 'fl_A', 'fl_alpha')
tb_states_choices <- tb_states_choices %>% rename_all(~c(ar_st_col_names))

```

Prepare Function:

```

# Define Implicit Function
ffi_nonlin_dpdyrdo <- function(fl_A, fl_alpha, fl_N, ar_A, ar_alpha, fl_N_agg, fl_rho){

  ar_p1_s1 = exp((fl_A - ar_A)*fl_rho)
  ar_p1_s2 = (fl_alpha/ar_alpha)
  ar_p1_s3 = (1/(ar_alpha*fl_rho - 1))
  ar_p1 = (ar_p1_s1*ar_p1_s2)^ar_p1_s3
  ar_p2 = fl_N^((fl_alpha*fl_rho-1)/(ar_alpha*fl_rho-1))
  ar_overall = ar_p1*ar_p2
  fl_overall = fl_N_agg - sum(ar_overall)

  return(fl_overall)
}

```

Initialize the matrix with  $a_0$  and  $b_0$ , the initial min and max points:

```

# common prefix to make reshaping easier
st_bisec_prefix <- 'bisec_'
svr_a_lst <- paste0(st_bisec_prefix, 'a_0')
svr_b_lst <- paste0(st_bisec_prefix, 'b_0')
svr_fa_lst <- paste0(st_bisec_prefix, 'fa_0')
svr_fb_lst <- paste0(st_bisec_prefix, 'fb_0')

# Add initial a and b
tb_states_choices_bisec <- tb_states_choices %>%
  mutate(!!sym(svr_a_lst) := fl_N_min, !!sym(svr_b_lst) := fl_N_agg)

# Evaluate function f(a_0) and f(b_0)
tb_states_choices_bisec <- tb_states_choices_bisec %>%
  rowwise() %>%
  mutate(!!sym(svr_fa_lst) := ffi_nonlin_dpdyrdo(fl_A, fl_alpha, !!sym(svr_a_lst),
                                                  ar_nN_A, ar_nN_alpha,
                                                  fl_N_agg, fl_rho),
         !!sym(svr_fb_lst) := ffi_nonlin_dpdyrdo(fl_A, fl_alpha, !!sym(svr_b_lst),
                                                  ar_nN_A, ar_nN_alpha,
                                                  fl_N_agg, fl_rho))

# Summarize
dim(tb_states_choices_bisec)

## [1] 4 7

# summary(tb_states_choices_bisec)

```

### 7.1.1.2 Iterate and Solve for $f(p)$ , update $f(a)$ and $f(b)$

Implement the DPLYR based Concurrent bisection algorithm.

```

# fl_tol = float tolerance criteria
# it_tol = number of iterations to allow at most
fl_tol <- 10^-2
it_tol <- 100

# fl_p_dist2zr = distance to zero to initialize
fl_p_dist2zr <- 1000
it_cur <- 0
while (it_cur <= it_tol && fl_p_dist2zr >= fl_tol ) {

  it_cur <- it_cur + 1

  # New Variables
  svr_a_cur <- paste0(st_bisec_prefix, 'a_', it_cur)
  svr_b_cur <- paste0(st_bisec_prefix, 'b_', it_cur)
  svr_fa_cur <- paste0(st_bisec_prefix, 'fa_', it_cur)
  svr_fb_cur <- paste0(st_bisec_prefix, 'fb_', it_cur)

  # Evaluate function f(a_0) and f(b_0)
  # 1. generate p
  # 2. generate f_p
  # 3. generate f_p*f_a
  tb_states_choices_bisec <- tb_states_choices_bisec %>%
    rowwise() %>%
    mutate(p = (((sym(svr_a_lst) + sym(svr_b_lst))/2)) %>%
      mutate(f_p = ffi_nonlin_dplyrdo(fl_A, fl_alpha, p,
                                     ar_nN_A, ar_nN_alpha,
                                     fl_N_agg, fl_rho)) %>%
      mutate(f_p_t_f_a = f_p*sym(svr_fa_lst))
  # fl_p_dist2zr = sum(abs(p))
  fl_p_dist2zr <- mean(abs(tb_states_choices_bisec %>% pull(f_p)))

  # Update a and b
  tb_states_choices_bisec <- tb_states_choices_bisec %>%
    mutate(sym(svr_a_cur) :=
      case_when(f_p_t_f_a < 0 ~ sym(svr_a_lst),
                TRUE ~ p)) %>%
    mutate(sym(svr_b_cur) :=
      case_when(f_p_t_f_a < 0 ~ p,
                TRUE ~ sym(svr_b_lst)))
  # Update f(a) and f(b)
  tb_states_choices_bisec <- tb_states_choices_bisec %>%
    mutate(sym(svr_fa_cur) :=
      case_when(f_p_t_f_a < 0 ~ sym(svr_fa_lst),
                TRUE ~ f_p)) %>%
    mutate(sym(svr_fb_cur) :=
      case_when(f_p_t_f_a < 0 ~ f_p,
                TRUE ~ sym(svr_fb_lst)))

  # Save from last
  svr_a_lst <- svr_a_cur
  svr_b_lst <- svr_b_cur
  svr_fa_lst <- svr_fa_cur
  svr_fb_lst <- svr_fb_cur

  # Summar current round
  print(paste0('it_cur:', it_cur, ', fl_p_dist2zr:', fl_p_dist2zr))
  summary(tb_states_choices_bisec %>%
    select(one_of(svr_a_cur, svr_b_cur, svr_fa_cur, svr_fb_cur)))
}

```

```

}

## [1] "it_cur:1, fl_p_dist2zr:1597.93916362849"
## [1] "it_cur:2, fl_p_dist2zr:676.06602535902"
## [1] "it_cur:3, fl_p_dist2zr:286.850590132782"
## [1] "it_cur:4, fl_p_dist2zr:117.225493866655"
## [1] "it_cur:5, fl_p_dist2zr:37.570593471664"
## [1] "it_cur:6, fl_p_dist2zr:4.60826664896022"
## [1] "it_cur:7, fl_p_dist2zr:14.4217689135683"
## [1] "it_cur:8, fl_p_dist2zr:8.38950830086659"
## [1] "it_cur:9, fl_p_dist2zr:3.93347761455868"
## [1] "it_cur:10, fl_p_dist2zr:1.88261338941038"
## [1] "it_cur:11, fl_p_dist2zr:0.744478952222305"
## [1] "it_cur:12, fl_p_dist2zr:0.187061801237917"
## [1] "it_cur:13, fl_p_dist2zr:0.117844913432613"
## [1] "it_cur:14, fl_p_dist2zr:0.0275365951418891"
## [1] "it_cur:15, fl_p_dist2zr:0.0515488156908255"
## [1] "it_cur:16, fl_p_dist2zr:0.0191152349149135"
## [1] "it_cur:17, fl_p_dist2zr:0.00385372194545752"

```

### 7.1.1.3 Reshape Wide to long to Wide

To view results easily, how iterations improved to help us find the roots, convert table from wide to long. Pivot twice. This allows us to easily graph out how bisection is working out iteration by iteration.

Here, we will first show what the raw table looks like, the wide only table, and then show the long version, and finally the version that is medium wide.

#### 7.1.1.3.1 Table One—Very Wide Show what the *tb\_states\_choices\_bisec* looks like.

Variables are formatted like: *bisec\_xx\_yy*, where *yy* is the iteration indicator, and *xx* is either a, b, fa, fb, or fb.

```

kable(head(t(tb_states_choices_bisec), 25)) %>%
  kable_styling_fc()

```

```

# str(tb_states_choices_bisec)

```

**7.1.1.3.2 Table Two—Very Wide to Very Long** We want to treat the iteration count information that is the suffix of variable names as a variable by itself. Additionally, we want to treat the a,b,fa,fb as a variable. Structuring the data very long like this allows for easy graphing and other types of analysis. Rather than dealing with many many variables, we have only 3 core variables that store bisection iteration information.

Here we use the very nice *pivot\_longer* function. Note that to achieve this, we put a common prefix in front of the variables we wanted to convert to long. This is helpful, because we can easily identify which variables need to be reshaped.

```

# New variables
svr_bisect_iter <- 'biseciter'
svr_abfafb_long_name <- 'varname'
svr_number_col <- 'value'
svr_id_bisect_iter <- paste0(svr_id_var, '_bisect_ier')

# Pivot wide to very long
tb_states_choices_bisec_long <- tb_states_choices_bisec %>%
  pivot_longer(
    cols = starts_with(st_bisec_prefix),
    names_to = c(svr_abfafb_long_name, svr_bisect_iter),
    names_pattern = paste0(st_bisec_prefix, "(.*)_(.*)"),

```

INDI_ID	1.000000e+00	2.0000000	3.0000000	4.0000000
fl_A	-2.000000e+00	-0.6666667	0.6666667	2.0000000
fl_alpha	1.000000e-01	0.3666667	0.6333333	0.9000000
bisec_a_0	0.000000e+00	0.0000000	0.0000000	0.0000000
bisec_b_0	1.000000e+02	100.0000000	100.0000000	100.0000000
bisec_fa_0	1.000000e+02	100.0000000	100.0000000	100.0000000
bisec_fb_0	-1.288028e+04	-1394.7069782	-323.9421599	-51.9716069
p	1.544952e+00	8.5838318	24.8359680	65.0367737
f_p	-7.637200e-03	-0.0052211	-0.0016162	-0.0009405
f_p_t_f_a	-3.800000e-04	-0.0000237	-0.0000025	-0.0000002
bisec_a_1	0.000000e+00	0.0000000	0.0000000	50.0000000
bisec_b_1	5.000000e+01	50.0000000	50.0000000	100.0000000
bisec_fa_1	1.000000e+02	100.0000000	100.0000000	22.5557704
bisec_fb_1	-5.666956e+03	-595.7345364	-106.5105843	-51.9716069
bisec_a_2	0.000000e+00	0.0000000	0.0000000	50.0000000
bisec_b_2	2.500000e+01	25.0000000	25.0000000	75.0000000
bisec_fa_2	1.000000e+02	100.0000000	100.0000000	22.5557704
bisec_fb_2	-2.464562e+03	-224.1460032	-0.6857375	-14.8701831
bisec_a_3	0.000000e+00	0.0000000	12.5000000	62.5000000
bisec_b_3	1.250000e+01	12.5000000	25.0000000	75.0000000
bisec_fa_3	1.000000e+02	100.0000000	50.8640414	3.7940196
bisec_fb_3	-1.041574e+03	-51.1700464	-0.6857375	-14.8701831
bisec_a_4	0.000000e+00	6.2500000	18.7500000	62.5000000
bisec_b_4	6.250000e+00	12.5000000	25.0000000	68.7500000
bisec_fa_4	1.000000e+02	29.4271641	25.2510409	3.7940196

```

    values_to = svr_number_col
  )

# Print
# summary(tb_states_choices_bisec_long)
kable(head(tb_states_choices_bisec_long %>%
  select(-one_of('p', 'f_p', 'f_p_t_f_a')), 15)) %>%
  kable_styling_fc()

```

INDI_ID	fl_A	fl_alpha	varname	biseciter	value
1	-2	0.1	a	0	0.000
1	-2	0.1	b	0	100.000
1	-2	0.1	fa	0	100.000
1	-2	0.1	fb	0	-12880.284
1	-2	0.1	a	1	0.000
1	-2	0.1	b	1	50.000
1	-2	0.1	fa	1	100.000
1	-2	0.1	fb	1	-5666.956
1	-2	0.1	a	2	0.000
1	-2	0.1	b	2	25.000
1	-2	0.1	fa	2	100.000
1	-2	0.1	fb	2	-2464.562
1	-2	0.1	a	3	0.000
1	-2	0.1	b	3	12.500
1	-2	0.1	fa	3	100.000

```

kable(tail(tb_states_choices_bisec_long %>%
  select(-one_of('p', 'f_p', 'f_p_t_f_a')), 15)) %>%
  kable_styling_fc()

```

INDI_ID	fl_A	fl_alpha	varname	biseciter	value
4	2	0.9	b	14	65.0390625
4	2	0.9	fa	14	0.0047633
4	2	0.9	fb	14	-0.0043628
4	2	0.9	a	15	65.0360107
4	2	0.9	b	15	65.0390625
4	2	0.9	fa	15	0.0002003
4	2	0.9	fb	15	-0.0043628
4	2	0.9	a	16	65.0360107
4	2	0.9	b	16	65.0375366
4	2	0.9	fa	16	0.0002003
4	2	0.9	fb	16	-0.0020812
4	2	0.9	a	17	65.0360107
4	2	0.9	b	17	65.0367737
4	2	0.9	fa	17	0.0002003
4	2	0.9	fb	17	-0.0009405

**7.1.1.3.3 Table Two—Very Very Long to Wider Again** But the previous results are too long, with the a, b, fa, and fb all in one column as different categories, they are really not different categories, they are in fact different types of variables. So we want to spread those four categories of this variable into four columns, each one representing the a, b, fa, and fb values. The rows would then be uniquely identified by the iteration counter and individual ID.

```
# Pivot wide to very long to a little wide
tb_states_choices_bisec_wider <- tb_states_choices_bisec_long %>%
  pivot_wider(
    names_from = !!sym(svr_abfafb_long_name),
    values_from = svr_number_col
  )

# Print
# summary(tb_states_choices_bisec_wider)
kable(head(tb_states_choices_bisec_wider %>%
  select(-one_of('p', 'f_p', 'f_p_t_f_a')), 10)) %>%
  kable_styling_fc_wide()
```

INDI_ID	fl_A	fl_alpha	biseciter	a	b	fa	fb
1	-2	0.1	0	0.000000	100.0000	100.00000	-12880.283918
1	-2	0.1	1	0.000000	50.0000	100.00000	-5666.955763
1	-2	0.1	2	0.000000	25.0000	100.00000	-2464.562178
1	-2	0.1	3	0.000000	12.5000	100.00000	-1041.574253
1	-2	0.1	4	0.000000	6.2500	100.00000	-408.674764
1	-2	0.1	5	0.000000	3.1250	100.00000	-126.904283
1	-2	0.1	6	0.000000	1.5625	100.00000	-1.328965
1	-2	0.1	7	0.781250	1.5625	54.69612	-1.328965
1	-2	0.1	8	1.171875	1.5625	27.46061	-1.328965
1	-2	0.1	9	1.367188	1.5625	13.23495	-1.328965

```
kable(head(tb_states_choices_bisec_wider %>%
  select(-one_of('p', 'f_p', 'f_p_t_f_a')), 10)) %>%
  kable_styling_fc_wide()
```

#### 7.1.1.4 Graph Bisection Iteration Results

Actually we want to graph based on the long results, not the wider. Wider easier to view in table.




INDI_ID	fl_A	fl_alpha	biseciter	a	b	fa	fb
1	-2	0.1	0	0.000000	100.0000	100.00000	-12880.283918
1	-2	0.1	1	0.000000	50.0000	100.00000	-5666.955763
1	-2	0.1	2	0.000000	25.0000	100.00000	-2464.562178
1	-2	0.1	3	0.000000	12.5000	100.00000	-1041.574253
1	-2	0.1	4	0.000000	6.2500	100.00000	-408.674764
1	-2	0.1	5	0.000000	3.1250	100.00000	-126.904283
1	-2	0.1	6	0.000000	1.5625	100.00000	-1.328965
1	-2	0.1	7	0.781250	1.5625	54.69612	-1.328965
1	-2	0.1	8	1.171875	1.5625	27.46061	-1.328965
1	-2	0.1	9	1.367188	1.5625	13.23495	-1.328965

### # Graph results

```

lineplot <- tb_states_choices_bisec_long %>%
  mutate(!sym(svr_bisect_iter) := as.numeric(!sym(svr_bisect_iter))) %>%
  filter(!sym(svr_abfafb_long_name) %in% c('a', 'b')) %>%
  ggplot(aes(x=!sym(svr_bisect_iter), y=!sym(svr_number_col),
             colour=!sym(svr_abfafb_long_name),
             linetype=!sym(svr_abfafb_long_name),
             shape=!sym(svr_abfafb_long_name))) +
  facet_wrap( ~ INDI_ID) +
  geom_line() +
  geom_point() +
  labs(title = 'Bisection Iteration over individuals Until Convergence',
       x = 'Bisection Iteration',
       y = 'a (left side point) and b (right side point) values',
       caption = 'DPLYR concurrent bisection nonlinear multiple individuals') +
  theme(axis.text.x = element_text(angle = 90, hjust = 1))
print(lineplot)

```

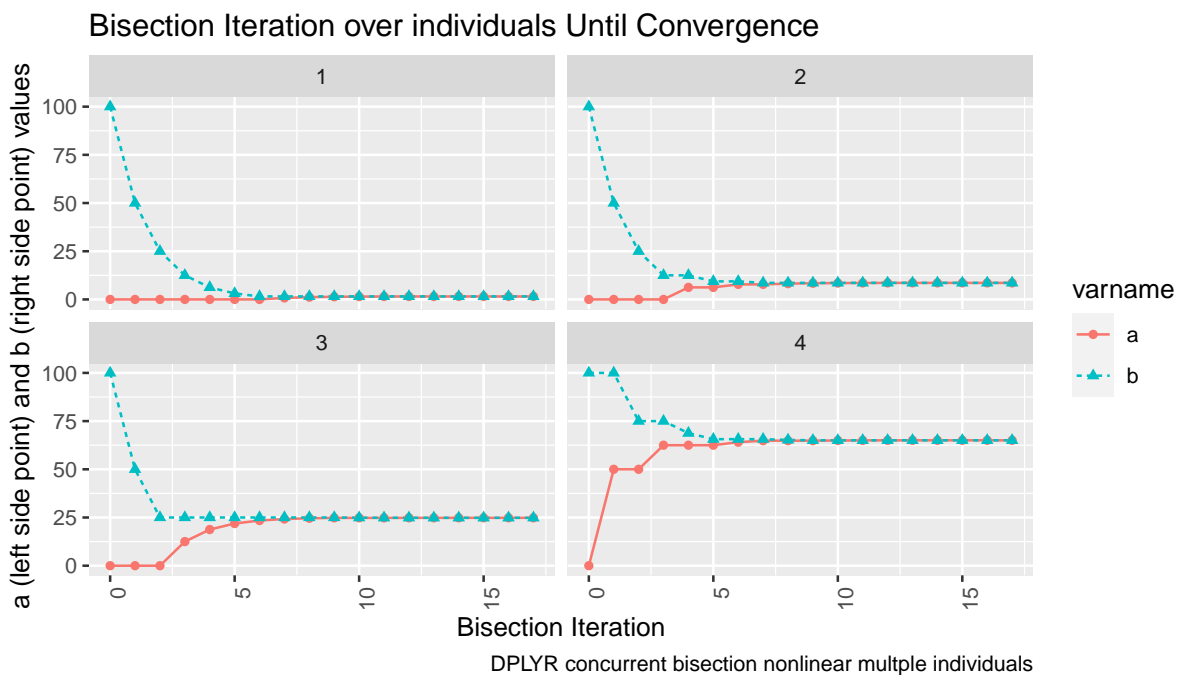



## Chapter 8

# Mathematics and Statistics

### 8.1 Distributions

#### 8.1.1 Integrate Over Normal Guassian Process Shock

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

Some Common parameters

```
fl_eps_mean = 10
fl_eps_sd = 50
fl_cdf_min = 0.000001
fl_cdf_max = 0.999999
ar_it_draws <- seq(1, 1000)
```

##### 8.1.1.1 Randomly Sample and Integrate (Monte Carlo Integration)

Compare randomly drawn normal shock mean and known mean. How does simulated mean change with draws. Actual integral equals to 10, as sample size increases, the sample mean approaches the integration results, but this is expensive, even with ten thousand draws, not very exact.

```
# Simulate Draws
set.seed(123)
ar_fl_means <-
  sapply(ar_it_draws, function(x)
    return(mean(rnorm(x[1], mean=fl_eps_mean, sd=fl_eps_sd))))
ar_fl_sd <-
  sapply(ar_it_draws, function(x)
    return(sd(rnorm(x[1], mean=fl_eps_mean, sd=fl_eps_sd))))


mt_sample_means <- cbind(ar_it_draws, ar_fl_means, ar_fl_sd)
colnames(mt_sample_means) <- c('draw_count', 'mean', 'sd')
tb_sample_means <- as_tibble(mt_sample_means)

# Graph
# x-labels
x.labels <- c('n=1', 'n=10', 'n=100', 'n=1000')
x.breaks <- c(1, 10, 100, 1000)

# Shared Subtitle
st_subtitle <- paste0('https://fanwangecon.github.io/',
  'R4Econ/math/integration/htmlpdf/fs_integrate_normal.html')
```

```
# Shared Labels
slb_title_shr = paste0('as Sample Size Increases\n',
                       'True Mean=', fl_eps_mean, ', sd=', fl_eps_sd)
slb_xtitle = paste0('Sample Size')

# Graph Results--Draw
plt_mean <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=mean)) +
  geom_line(size=0.75) +
  labs(title = paste0('Sample Mean ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Sample Mean',
       caption = 'Mean of Sample Integrates to True Mean') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_mean)
```

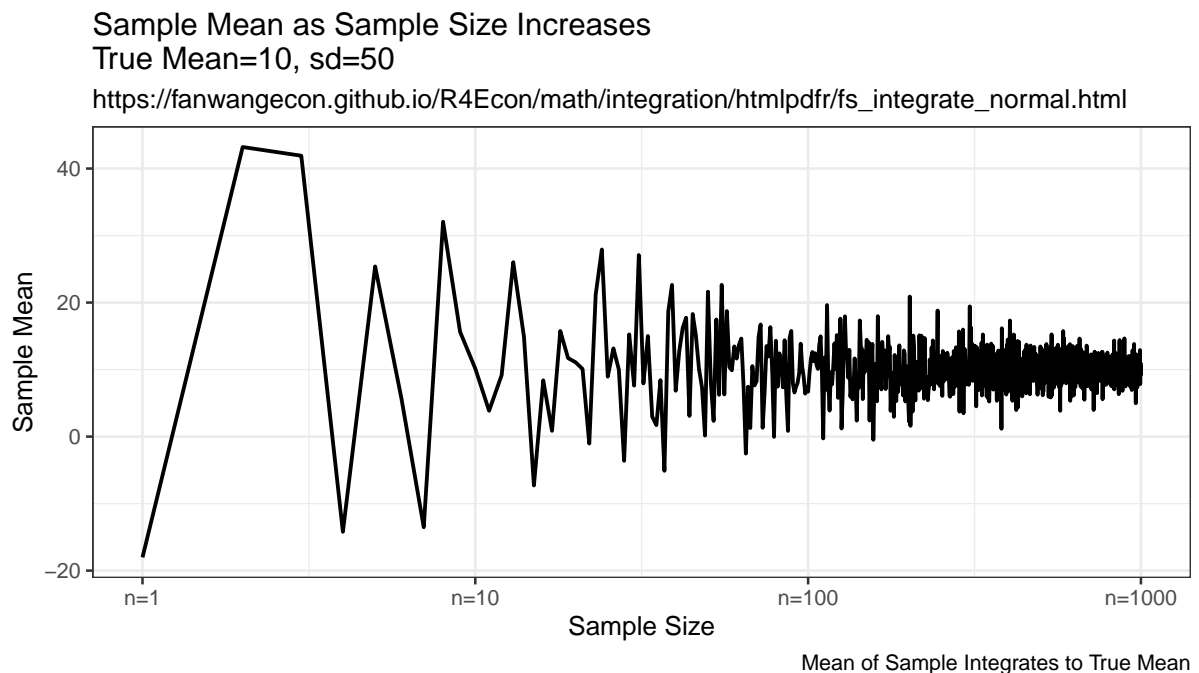


```
plt_sd <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=sd)) +
  geom_line(size=0.75) +
  labs(title = paste0('Sample Standard Deviation ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Sample Standard Deviation',
       caption = 'Standard Deviation of Sample Integrates to True SD') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_sd)
```

### Sample Standard Deviation as Sample Size Increases

True Mean=10, sd=50

[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

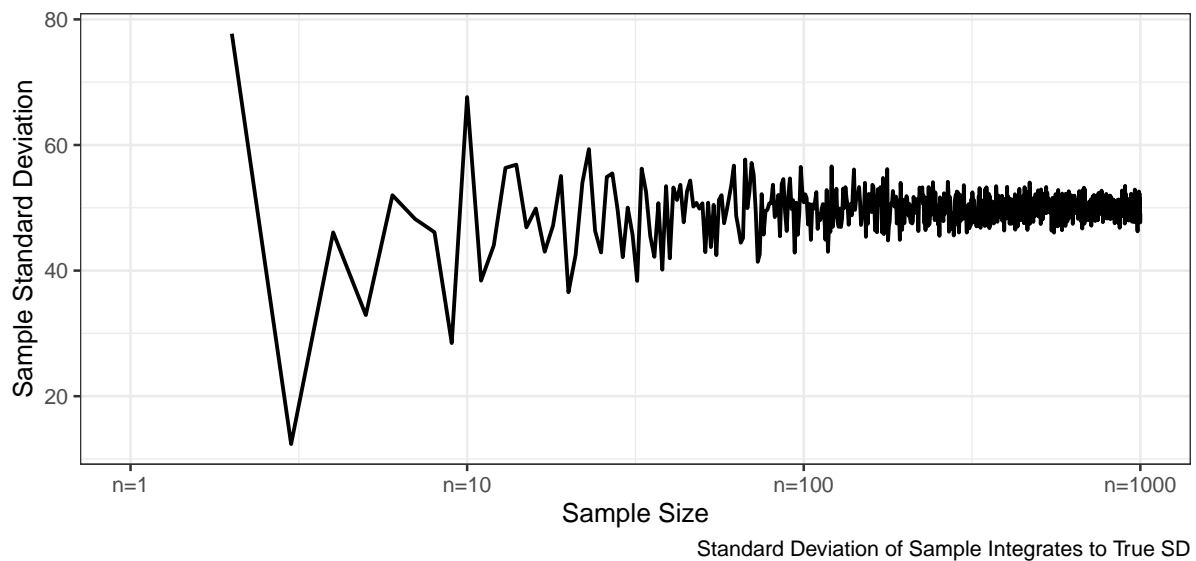

#### 8.1.1.2 Integration By Symmetric Uneven Rectangle

Draw on even grid from close to 0 to close to 1. Get the corresponding x points to these quantile levels. Distance between x points are not equi-distance but increasing and symmetric away from the mean. Under this approach, each rectangle aims to approximate the same area.

Resulting integration is rectangle based, but rectangle width differ. The rectangles have wider width as they move away from the mean, and thinner width close to the mean. This is much more stable than the random draw method, but note that it converges somewhat slowly to true values as well.

```
mt_fl_means <-
  supply(ar_it_draws, function(x) {

    fl_prob_break = (fl_cdf_max - fl_cdf_min)/(x[1])
    ar_eps_bounds <- qnorm(seq(fl_cdf_min, fl_cdf_max,
                              by=(fl_cdf_max - fl_cdf_min)/(x[1])),
                          mean = fl_eps_mean, sd = fl_eps_sd)
    ar_eps_val <- (tail(ar_eps_bounds, -1) + head(ar_eps_bounds, -1))/2
    ar_eps_prb <- rep(fl_prob_break/(fl_cdf_max - fl_cdf_min), x[1])
    ar_eps_fev <- dnorm(ar_eps_val,
                       mean = fl_eps_mean, sd = fl_eps_sd)

    fl_cdf_total_approx <- sum(ar_eps_fev*diff(ar_eps_bounds))
    fl_mean_approx <- sum(ar_eps_val*(ar_eps_fev*diff(ar_eps_bounds)))
    fl_sd_approx <- sqrt(sum((ar_eps_val-fl_mean_approx)^2*(ar_eps_fev*diff(ar_eps_bounds))))

    return(list(cdf=fl_cdf_total_approx, mean=fl_mean_approx, sd=fl_sd_approx))
  })

mt_sample_means <- cbind(ar_it_draws, as_tibble(t(mt_fl_means))) %>% unnest()
colnames(mt_sample_means) <- c('draw_count', 'cdf', 'mean', 'sd')
tb_sample_means <- as_tibble(mt_sample_means)


# Graph
# x-labels
x.labels <- c('n=1', 'n=10', 'n=100', 'n=1000')
x.breaks <- c(1, 10, 100, 1000)
```

```
# Shared Labels
slb_title_shr = paste0('as Uneven Rectangle Count Increases\n',
                      'True Mean=', fl_eps_mean, ', sd=', fl_eps_sd)
slb_xtitle = paste0('Number of Quantile Bins for Uneven Rectangles Approximation')

# Graph Results--Draw
plt_mean <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=mean)) +
  geom_line(size=0.75) +
  labs(title = paste0('Average ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Approximated Mean',
       caption = 'Integral Approximation as Uneven Rectangle Count Increases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_mean)
```

Average as Uneven Rectangle Count Increases  
True Mean=10, sd=50

[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

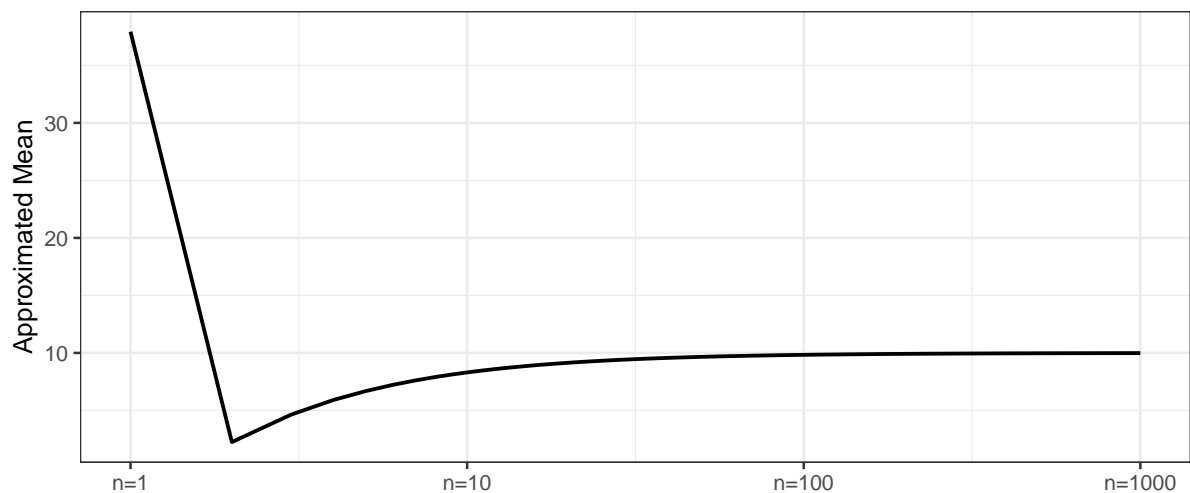


Integral Approximation as Uneven Rectangle Count Increases

```
plt_sd <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=sd)) +
  geom_line(size=0.75) +
  labs(title = paste0('Standard Deviation ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Approximated Standard Deviation',
       caption = 'Integral Approximation as Uneven Rectangle Count Increases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_sd)
```

## Standard Deviation as Uneven Rectangle Count Increases

True Mean=10, sd=50

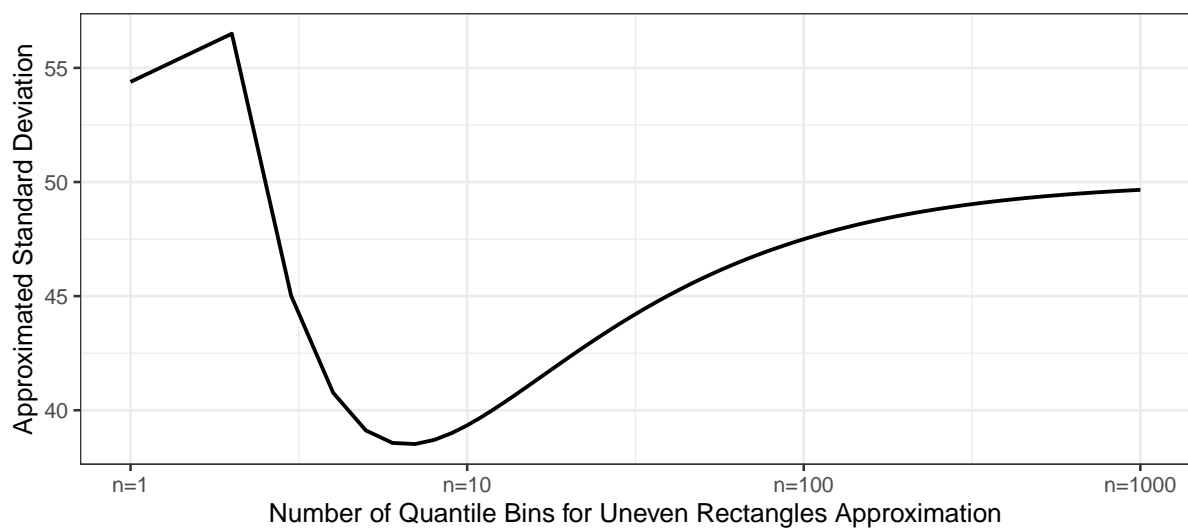
[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

Integral Approximation as Uneven Rectangle Count Increases

```
plt_cdf <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=cdf)) +
  geom_line(size=0.75) +
  labs(title = paste0('Aggregate Probability ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Sum of Uneven Rectangles',
       caption = 'Sum of Approx. Probability as Uneven Rectangle Count Increases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_cdf)
```

## Aggregate Probability as Uneven Rectangle Count Increases

True Mean=10, sd=50

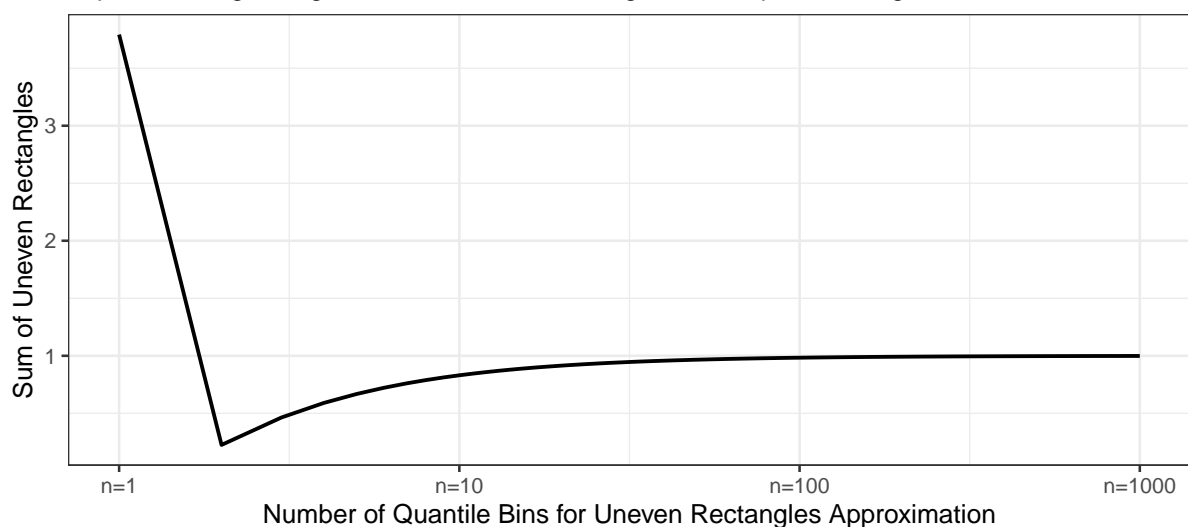[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

Sum of Approx. Probability as Uneven Rectangle Count Increases

### 8.1.1.3 Integration By Constant Width Rectangle (Trapezoidal rule)

This is implementing even width rectangle, even along x-axis. Rectangle width are the same, height is  $f(x)$ . This is even width, but uneven area. Note that this method approximates the true answer much better and more quickly than the prior methods.

```
mt_fl_means <-
  sapply(ar_it_draws, function(x) {

    fl_eps_min <- qnorm(fl_cdf_min, mean = fl_eps_mean, sd = fl_eps_sd)
    fl_eps_max <- qnorm(fl_cdf_max, mean = fl_eps_mean, sd = fl_eps_sd)
    fl_gap <- (fl_eps_max-fl_eps_min)/(x[1])
    ar_eps_bounds <- seq(fl_eps_min, fl_eps_max, by=fl_gap)
    ar_eps_val <- (tail(ar_eps_bounds, -1) + head(ar_eps_bounds, -1))/2
    ar_eps_prb <- dnorm(ar_eps_val, mean = fl_eps_mean, sd = fl_eps_sd)*fl_gap

    fl_cdf_total_approx <- sum(ar_eps_prb)
    fl_mean_approx <- sum(ar_eps_val*ar_eps_prb)
    fl_sd_approx <- sqrt(sum((ar_eps_val-fl_mean_approx)^2*ar_eps_prb))

    return(list(cdf=fl_cdf_total_approx, mean=fl_mean_approx, sd=fl_sd_approx))
  })

mt_sample_means <- cbind(ar_it_draws, as_tibble(t(mt_fl_means))) %>% unnest()
colnames(mt_sample_means) <- c('draw_count', 'cdf', 'mean', 'sd')
tb_sample_means <- as_tibble(mt_sample_means)

# Graph
# x-labels
x.labels <- c('n=1', 'n=10', 'n=100', 'n=1000')
x.breaks <- c(1, 10, 100, 1000)


# Shared Labels
slb_title_shr = paste0('as Even Rectangle Count Increases\n',
                      'True Mean=', fl_eps_mean, ', sd=', fl_eps_sd)
slb_xtitle = paste0('Number Equi-distance Rectangles Bins')

# Graph Results--Draw
plt_mean <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=mean)) +
  geom_line(size=0.75) +
  labs(title = paste0('Average ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Integrated Mean',
       caption = 'Integral Approximation as Even Rectangle width decreases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_mean)
```



## Average as Even Rectangle Count Increases

True Mean=10, sd=50

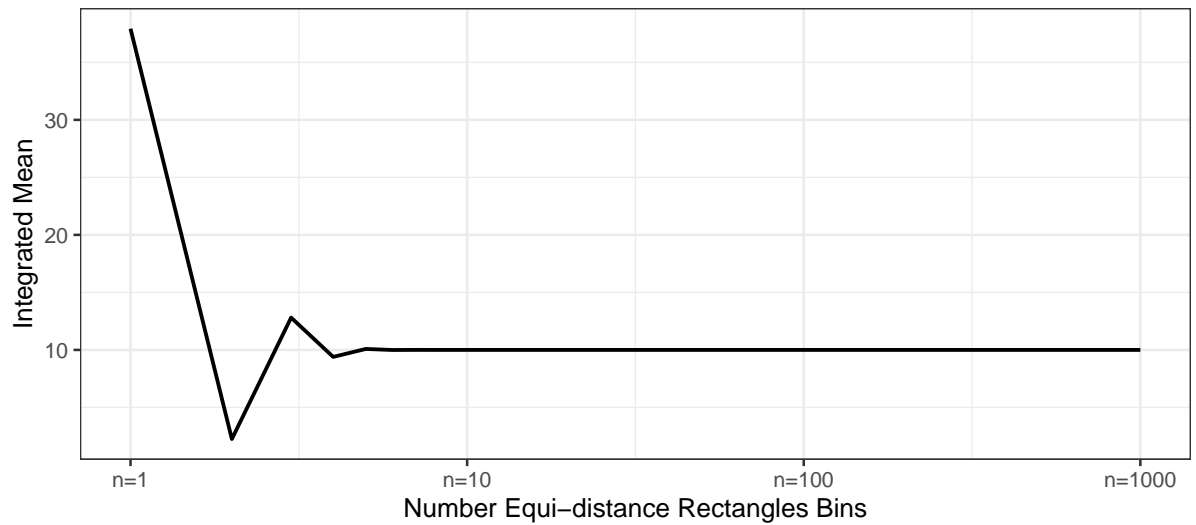
[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

Integral Approximation as Even Rectangle width decreases

```
plt_sd <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=sd)) +
  geom_line(size=0.75) +
  labs(title = paste0('Standard Deviation ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Standard Deviation',
       caption = 'Integral Approximation as Even Rectangle width decreases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_sd)
```

## Standard Deviation as Even Rectangle Count Increases

True Mean=10, sd=50

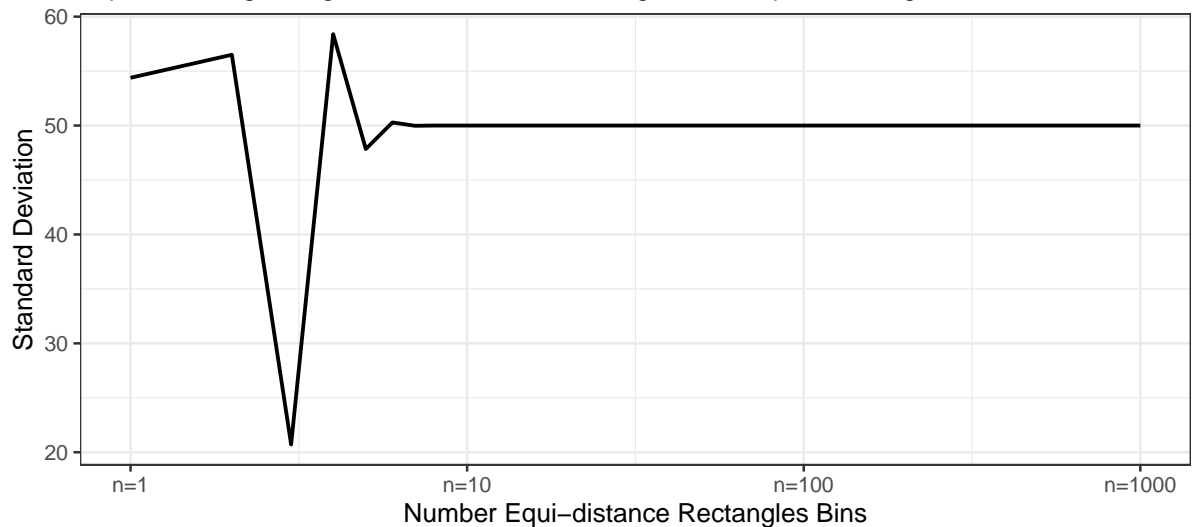[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)


Integral Approximation as Even Rectangle width decreases

```
plt_cdf <- tb_sample_means %>%
  ggplot(aes(x=draw_count, y=cdf)) +
  geom_line(size=0.75) +
  labs(title = paste0('Aggregate Probability ', slb_title_shr),
       subtitle = st_subtitle,
       x = slb_xtitle,
       y = 'Sum of Equi-Dist Rectangles',
       caption = 'Sum of Approx. Probability as Equi-Dist Rectangle width decreases') +
  scale_x_continuous(trans='log10', labels = x.labels, breaks = x.breaks) +
  theme_bw()
print(plt_cdf)
```

## Aggregate Probability as Even Rectangle Count Increases

True Mean=10, sd=50

[https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs\\_integrate\\_normal.html](https://fanwangecon.github.io/R4Econ/math/integration/htmlpdf/fs_integrate_normal.html)

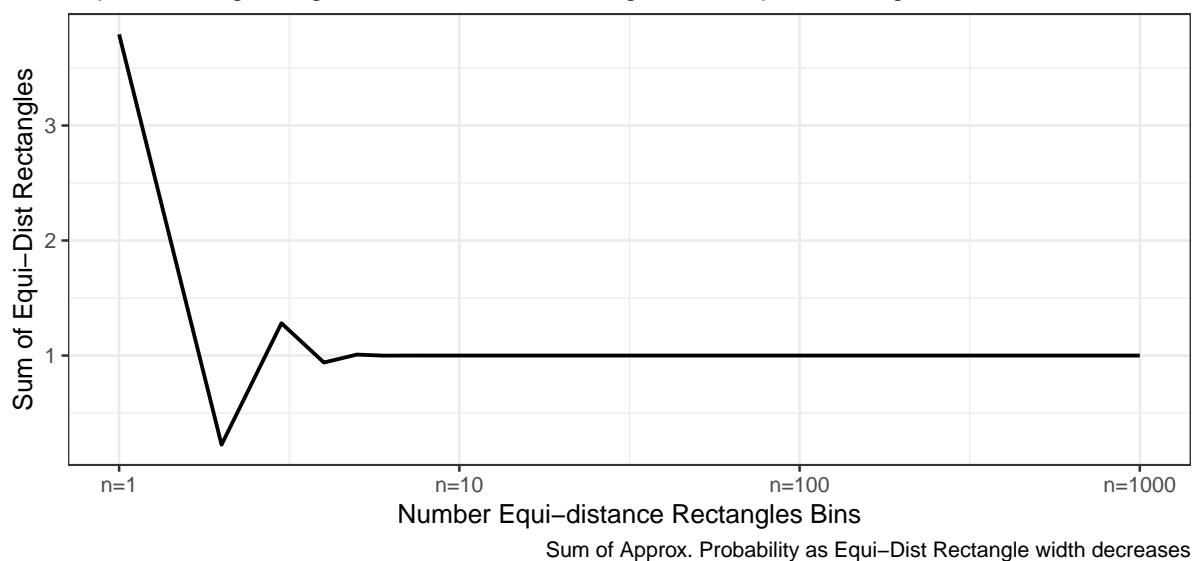

## 8.2 Analytical Solutions

### 8.2.1 Linear Scalar $f(x)=0$ Solutions

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

#### 8.2.1.1 Ratio

Here are some common ratios.

**8.2.1.1.1 Unif Draw Min and Max Ratio** We want to draw numbers such that we have some mean  $b$ , and that the possible maximum and minimum value drawn are at most  $a$  times apart. Given  $b$  and  $a$ , solve for  $x$ .

$$f(x) = \frac{b+x}{b-x} - a = 0$$

$$b \cdot a - x \cdot a = b + x \quad b \cdot a - b = x + x \cdot a \quad b(a-1) = x(a+1) \quad x = \frac{b(a-1)}{a+1}$$

Uniformly draw

```

b <- 100
a <- 2
x <- (b*(a-1))/(a+1)
ar_unif_draws <- runif(100, min=b-x, max=b+x)
fl_max_min_ratio <- max(ar_unif_draws)/min(ar_unif_draws)
cat('fl_max_min_ratio =', fl_max_min_ratio, 'is close to a =', a, '\n')

```

```
## fl_max_min_ratio = 1.965882 is close to a = 2
```

## 8.3 Inequality Models

### 8.3.1 Gini Discrete Sample

Go back to [fan's REconTools Package](#), [R Code Examples Repository \(bookdown site\)](#), or [Intro Stats with R Repository \(bookdown site\)](#).

This works out how the `ff_dist_gini_vector_pos` function works from [Fan's REconTools Package](#).

#### 8.3.1.1 Gini Formula for Discrete Sample

There is an vector values (all positive). This could be height information for  $N$  individuals. It could also be income information for  $N$  individuals. Calculate the **GINI** coefficient treating the given vector as population. This is not an estimation exercise where we want to estimate population gini based on a sample. The given array is the population. The population is discrete, and only has these  $N$  individuals in the length  $n$  vector.

Note that when the sample size is small, there is a limit to inequality using the formula defined below given each  $N$ . So for small  $N$ , can not really compare inequality across arrays with different  $N$ , can only compare arrays with the same  $N$ .

The GINI formula used here is:

$$GINI = 1 - \frac{2}{N+1} \cdot \left( \sum_{i=1}^N \sum_{j=1}^i x_j \right) \cdot \left( \sum_{i=1}^N x_i \right)^{-1}$$

Derive the formula in the steps below.

*Step 1 Area Formula*

$$\Gamma = \sum_{i=1}^N \frac{1}{N} \cdot \left( \sum_{j=1}^i \left( \frac{x_j}{\sum_{\hat{j}=1}^N x_{\hat{j}}} \right) \right)$$

*Step 2 Total Area Given Perfect equality*

With perfect equality  $x_i = a$  for all  $i$ , so need to divide by that.

$$\Gamma^{\text{equal}} = \sum_{i=1}^N \frac{1}{N} \cdot \left( \sum_{j=1}^i \left( \frac{a}{\sum_{\hat{j}=1}^N a} \right) \right) = \frac{N+1}{N} \cdot \frac{1}{2}$$

As the number of elements of the vecotr increases:

$$\lim_{N \rightarrow \infty} \Gamma^{\text{equal}} = \lim_{N \rightarrow \infty} \frac{N+1}{N} \cdot \frac{1}{2} = \frac{1}{2}$$

*Step 3 Arriving at Finite Vector Gini Formula*

Given what we have from above, we obtain the gini formula, divide by total area below 45 degree line.

$$GINI = 1 - \left( \sum_{i=1}^N \sum_{j=1}^i x_j \right) \cdot \left( N \cdot \sum_{i=1}^N x_i \right)^{-1} \cdot \left( \frac{N+1}{N} \cdot \frac{1}{2} \right)^{-1} = 1 - \frac{2}{N+1} \cdot \left( \sum_{i=1}^N \sum_{j=1}^i x_j \right) \cdot \left( \sum_{i=1}^N x_i \right)^{-1}$$

*Step 4 Maximum Inequality given N*

Suppose  $x_i = 0$  for all  $i < N$ , then:

$$GINI_{x_i=0 \text{ except } i=N} = 1 - \frac{2}{N+1} \cdot X_N \cdot (X_N)^{-1} = 1 - \frac{2}{N+1}$$

$$\lim_{N \rightarrow \infty} GINI_{x_i=0 \text{ except } i=N} = 1 - \lim_{N \rightarrow \infty} \frac{2}{N+1} = 1$$

Note that for small N, for example if  $N = 10$ , even when one person holds all income, all others have 0 income, the formula will not produce gini is zero, but that gini is equal to  $\frac{2}{11} \approx 0.1818$ . If  $N = 2$ , inequality is at most,  $\frac{2}{3} \approx 0.667$ .

$$MostUnequalGINI(N) = 1 - \frac{2}{N+1} = \frac{N-1}{N+1}$$

### 8.3.1.2 Implement GINI Formula

The **GINI** formula just derived is trivial to compute.

1. scalar:  $\frac{2}{N+1}$
2. cumsum:  $\sum_{j=1}^i x_j$
3. sum of cumsum:  $\left( \sum_{i=1}^N \sum_{j=1}^i x_j \right)$
4. sum:  $\sum_{i=1}^N X_i$

There are no package dependencies. Define the formula here:

```
# Formula, directly implement the GINI formula Following Step 4 above
fv_dist_gini_vector_pos_test <- function(ar_pos) {
  # Check length and given warning
  it_n <- length(ar_pos)
  if (it_n <= 100) warning('Data vector has n=', it_n, ', max-inequality/max-gini=', (it_n-1)/(it_n +
  # Sort
  ar_pos <- sort(ar_pos)
  # formula implement
  fl_gini <- 1 - ((2/(it_n+1)) * sum(cumsum(ar_pos))*(sum(ar_pos))^(1))
  return(fl_gini)
}
```

Generate a number of examples Arrays for testing

```
# Example Arrays of data
ar_equal_n1 = c(1)
ar_ineql_n1 = c(100)

ar_equal_n2 = c(1,1)
ar_ineql_alittle_n2 = c(1,2)
ar_ineql_somewht_n2 = c(1,2^3)
ar_ineql_alotine_n2 = c(1,2^5)
ar_ineql_veryvry_n2 = c(1,2^8)
ar_ineql_mostmst_n2 = c(1,2^13)

ar_equal_n10 = c(2,2,2,2,2,2, 2, 2, 2, 2)
```

```

ar_ineql_some_n10 = c(1,2,3,5,8,13,21,34,55,89)
ar_ineql_very_n10 = c(1,2^2,3^2,5^2,8^2,13^2,21^2,34^2,55^2,89^2)
ar_ineql_extr_n10 = c(1,2^2,3^3,5^4,8^5,13^6,21^7,34^8,55^9,89^10)

```

Now test the example arrays above using the function based on our formula:

```

##
## Small N=1 Hard-Code
## ar_equal_n1: 0
## ar_ineql_n1: 0
##
## Small N=2 Hard-Code, converge to 1/3, see formula above
## ar_ineql_alittle_n2: 0.1111111
## ar_ineql_somewht_n2: 0.2592593
## ar_ineql_alotine_n2: 0.3131313
## ar_ineql_veryvry_n2: 0.3307393
##
## Small N=10 Hard-Code, converge to 9/11=0.8181, see formula above
## ar_equal_n10: 0
## ar_ineql_some_n10: 0.5395514
## ar_ineql_very_n10: 0.7059554
## ar_ineql_extr_n10: 0.8181549

```

### 8.3.2 Atkinson Inequality Index

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

#### 8.3.2.1 Atkinson Inequality Measures

[Atkinson \(JET, 1970\)](#) studies five standard inequality measures. Atkinson finds that given the same income data across countries, different inequality measures lead to different rankings of which country is more unequal. Atkinson develops a measure of inequality that changes depending on an inequality aversion parameter.

$$\text{Atkinson Inequality} = A\left(\{Y_i\}_{i=1}^N, \lambda\right) = 1 - \left(\sum_{i=1}^N \frac{1}{N} \left(\frac{Y_i}{\sum_{j=1}^N \left(\frac{Y_j}{N}\right)}\right)^\lambda\right)^{\frac{1}{\lambda}} \in [0, 1]$$

$A\left(\{Y_i\}_{i=1}^N, \lambda\right)$  equals to zero is perfect equality. 1 is Perfect inequality. If  $\lambda = 1$ , the inequality measure is always equal to 0 because the planner does not care about inequality anymore.

#### 8.3.2.2 Atkinson Inequality Function

Programming up the equation above, we have:

```

# Formula
ffi_atkinson_ineq <- function(ar_data, fl_rho) {
  ar_data_demean <- ar_data/mean(ar_data)
  it_len <- length(ar_data_demean)
  fl_atkinson <- 1 - sum(ar_data_demean^{fl_rho}*(1/it_len))^(1/fl_rho)
  return(fl_atkinson)
}

```

### 8.3.2.3 Atkinson Inequality Examples

Given a vectr of observables, compute the atkinson inequality measure given different inequality aversion.

Preference vector and data vector:

```
# Preference Vector
ar_rho <- c(1, 1 - (10^(c(seq(-2.2,2.2, length.out=60)))))
ar_rho <- unique(ar_rho)
mt_rho <- matrix(ar_rho, nrow=length(ar_rho), ncol=1)

# Random Data Vector (not equal outcomes)
set.seed(123)
ar_data_rand <- rnorm(15, mean=0, sd=1)
ar_data_rand <- ar_data_rand - min(ar_data_rand) + 1

# Uniform Data Vector (Equal)
ar_data_unif <- rep(1, length(ar_data_rand))

# One Rich (last person has income equal to the sum of all others*100)
ar_data_onerich <- rep(0.1, length(ar_data_rand))
ar_data_onerich[length(ar_data_onerich)] = sum(head(ar_data_onerich,-1))*10
```

Testing Atkinson with different data arrays:

```
# ATK = 0.1180513
ffi_atkinson_ineq(ar_data_rand, -1)
```

```
## [1] 0.1180513
```

```
# ATK = 0
ffi_atkinson_ineq(ar_data_unif, -1)
```

```
## [1] 0
```

```
# ATK = 0.89
ffi_atkinson_ineq(ar_data_onerich, -1)
```

```
## [1] 0.8956933
```

**8.3.2.3.1 Atkinson Inequality as Inequality Aversion Changes** This is the vector of inequality aversion parameters:

```
ar_rho
```

```
## [1] 1.00000000 0.99369043 0.99250837 0.99110487 0.98943842 0.98745978 0.985
## [9] 0.97900896 0.97507643 0.97040717 0.96486316 0.95828051 0.95046465 0.941
## [17] 0.91708291 0.90154895 0.88310482 0.86120530 0.83520306 0.80432947 0.767
## [25] 0.67246762 0.61110666 0.53825013 0.45174443 0.34903248 0.22707813 0.082
## [33] -0.29379184 -0.53617495 -0.82396688 -1.16567469 -1.57139912 -2.05313328 -2.625
## [41] -4.11063160 -5.06807371 -6.20488608 -7.55467254 -9.15733231 -11.06023949 -13.319
## [49] -19.18760255 -22.96961271 -27.46015678 -32.79197376 -39.12267043 -46.63938010 -55.564
## [57] -78.74343059 -93.68282046 -111.42100351 -132.48231461 -157.48931925
```

How does Atkinson Inequality measure change with respect to a vector of random data as inequality aversion shifts:


```
par(new=T)
st_x_label <- 'Lambda, left Rawlsian, right (1) is Utilitarian'
st_y_label <- 'Atkinson Inequality, 0 = perfect equal'
ar_ylim = c(0,1)
ffi_atkinson_ineq(ar_data_rand, -1)
```

```
## [1] 0.1180513
```

```

ar_atkinson <- apply(mt_rho, 1, function(row){ffi_atkinson_ineq(ar_data_rand, row[1])})
plot(ar_rho, ar_atkinson, ylim = ar_ylim)
title(main = 'A vector of Random data', xlab = st_x_label, ylab = st_y_label)
grid()

```

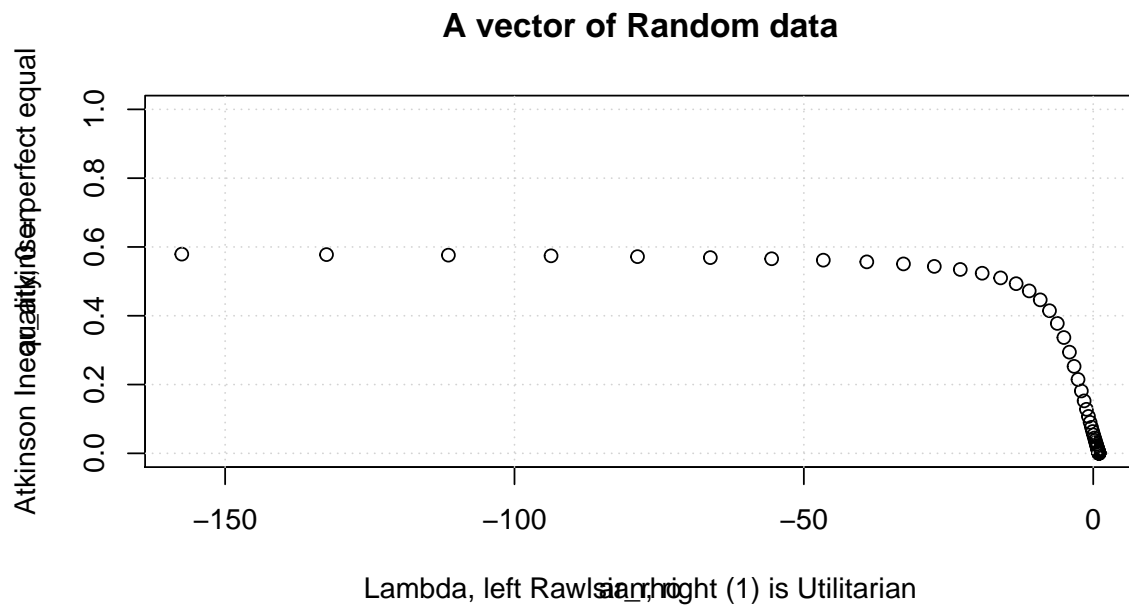

Now with the one person has the wealth of all others in the vector times 10:

```

par(new=T)
ffi_atkinson_ineq(ar_data_onerich, -1)


```

```
## [1] 0.8956933
```

```

ar_atkinson <- apply(mt_rho, 1, function(row){ffi_atkinson_ineq(ar_data_onerich, row[1])})
plot(ar_rho, ar_atkinson, ylim = ar_ylim)
title(main = '1 person has the (income of all others summed up)*10', xlab = st_x_label, ylab = st_y_label)
grid()

```

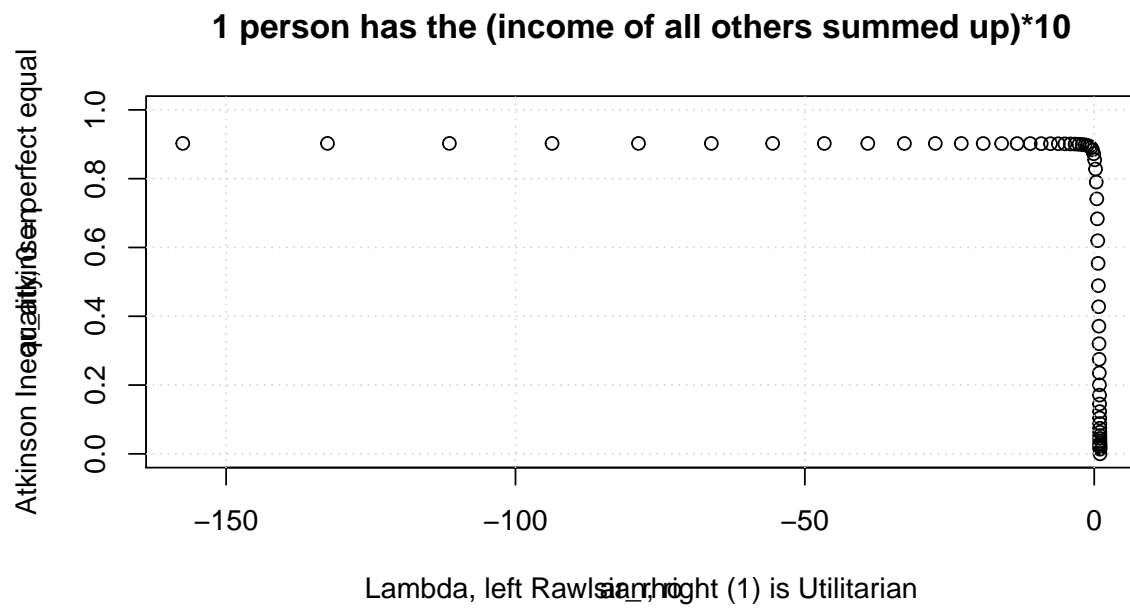


The Uniform Results, since allocations are uniform, zero for all:

```
par(new=T)
ffi_atkinson_ineq(ar_data_unif, -1)
```

```
## [1] 0
```

```
ar_atkinson <- apply(mt_rho, 1, function(row){ffi_atkinson_ineq(ar_data_unif, row[1])})
plot(ar_rho, ar_atkinson, ylim = ar_ylim)
title(main = 'uniform distribution', xlab = st_x_label, ylab = st_y_label)
grid()
```

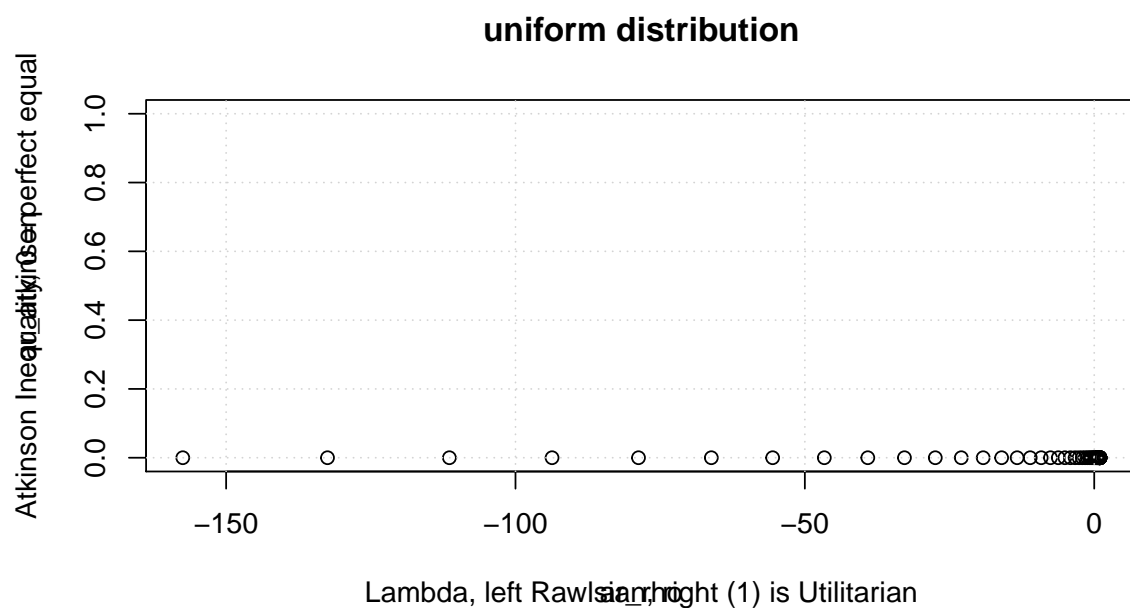



### 8.3.2.4 Analyzing Equation Mechanics

How does the Atkinson Family utility function work? The Atkinson Family Utility has the following functional form.

$$V^{\text{social}} = (\alpha \cdot A^\lambda + \beta \cdot B^\lambda)^{\frac{1}{\lambda}}$$

Several key issues here:

1.  $V^{\text{social}}$  is the utility of some social planner
2.  $A$  and  $B$  are allocations for Alex and Ben.
3.  $\alpha$  and  $\beta$  are biases that a social planner has for Alex and Ben:  $\alpha + \beta = 1$ ,  $\alpha > 0$ , and  $\beta > 0$
4.  $-\infty < \lambda \leq 1$  is a measure of inequality aversion
  - $\lambda = 1$  is when the planner cares about weighted total allocations (efficient, Utilitarian)
  - $\lambda = -\infty$  is when the planner cares about only the minimum between  $A$  and  $B$  allocations (equality, Rawlsian)

What if only care about Alex? Clearly, if the planner only cares about Ben,  $\beta = 1$ , then:

$$V^{\text{social}} = (B^\lambda)^{\frac{1}{\lambda}} = B$$

Clearly, regardless of the value of  $\lambda$ , as  $B$  increases  $V$  increases. What Happens to  $V$  when  $A$  or  $B$  increases? What is the derivative of  $V$  with respect to  $A$  or  $B$ ?

$$\frac{\partial V}{\partial A} = \frac{1}{\lambda} (\alpha A^\lambda + \beta B^\lambda)^{\frac{1}{\lambda}-1} \cdot \lambda \alpha A^{\lambda-1}$$

$$\frac{\partial V}{\partial A} = (\alpha A^\lambda + \beta B^\lambda)^{\frac{1-\lambda}{\lambda}} \cdot \alpha A^{\lambda-1} > 0$$

Note that  $\frac{\partial V}{\partial A} > 0$ . When  $\lambda < 0$ ,  $A^\lambda > 0$ . For example  $10^{-2} = \frac{1}{100}$ . And For example  $0.1^{\frac{3}{-2}} = \frac{1}{0.1^{1.5}}$ . Still Positive.

While the overall  $V$  increases with increasing  $A$ , but if we did not have the outer power term, the situation is different. In particular, when  $\lambda < 0$ :

$$\text{if } \lambda < 0 \text{ then } \frac{d(\alpha A^\lambda + \beta B^\lambda)}{dA} = \alpha \lambda A^{\lambda-1} < 0$$

Without the outer  $\frac{1}{\lambda}$  power, negative  $\lambda$  would lead to decreasing weighted sum. But:

$$\text{if } \lambda < 0 \text{ then } \frac{dG^{\frac{1}{\lambda}}}{dG} = \frac{1}{\lambda} \cdot G^{\frac{1-\lambda}{\lambda}} < 0$$

so when  $G$  is increasing and  $\lambda < 0$ ,  $V$  would decrease. But when  $G(A, B)$  is decreasing, as is the case with increasing  $A$  when  $\lambda < 0$ ,  $V$  will actually increase. This confirms that  $\frac{\partial V}{\partial A} > 0$  for  $\lambda < 0$ . The result is symmetric for  $\lambda > 0$ .

### 8.3.2.5 Indifference Curve Graph

Given  $V^*$ , we can show the combinations of  $A$  and  $B$  points that provide the same utility. We want to be able to potentially draw multiple indifference curves at the same time. Note that indifference curves are defined by  $\alpha$ ,  $\lambda$  only. Each indifference curve is a set of  $A$  and  $B$  coordinates. So to generate multiple indifference curves means to generate many sets of  $A$ ,  $B$  associated with different planner preferences, and then these could be graphed out.

```
# A as x-axis, need bounds on A
fl_A_min = 0.01
fl_A_max = 3
it_A_grid = 10000
```

```

# Define parameters
# ar_lambda <- 1 - (10^(c(seq(-2,2, length.out=3))))
ar_lambda <- c(1, 0.6, 0.06, -6)
ar_beta <- seq(0.25, 0.75, length.out = 3)
ar_beta <- c(0.3, 0.5, 0.7)
ar_v_star <- seq(1, 2, length.out = 1)
tb_pref <- as_tibble(cbind(ar_lambda)) %>%
  expand_grid(ar_beta) %>% expand_grid(ar_v_star) %>%
  rename_all(~c('lambda', 'beta', 'vstar')) %>%
  rowid_to_column(var = "indiff_id")

# Generate indifference points with apply and anonymous function
# tb_pref, whatever is selected from it, must be all numeric
# if there are strings, would cause conversion error.
ls_df_indiff <- apply(tb_pref, 1, function(x){
  indiff_id <- x[1]
  lambda <- x[2]
  beta <- x[3]
  vstar <- x[4]
  ar_fl_A_indiff <- seq(fl_A_min, fl_A_max, length.out=it_A_grid)
  ar_fl_B_indiff <- (((vstar^lambda) -
    (beta*ar_fl_A_indiff^(lambda)))/(1-beta))^(1/lambda)
  mt_A_B_indiff <- cbind(indiff_id, lambda, beta, vstar,
    ar_fl_A_indiff, ar_fl_B_indiff)
  colnames(mt_A_B_indiff) <- c('indiff_id', 'lambda', 'beta', 'vstar',
    'indiff_A', 'indiff_B')
  tb_A_B_indiff <- as_tibble(mt_A_B_indiff) %>%
    rowid_to_column(var = "A_grid_id") %>%
    filter(indiff_B >= 0 & indiff_B <= max(ar_fl_A_indiff))
  return(tb_A_B_indiff)
})
df_indiff <- do.call(rbind, ls_df_indiff) %>% drop_na()

```

Note that many more A grid points are needed to fully plot out the leontief line.

```

# Labeling
st_title <- paste0('Indifference Curves Aktinson Atkinson Utility (CES)')
st_subtitle <- paste0('Each Panel Different beta=A\'s Weight lambda=inequality aversion\n',
  'https://fanwangecon.github.io/',
  'R4Econ/math/func_ineq/htmlpdf/fs_atkinson_ces.html')
st_caption <- paste0('Indifference Curve 2 Individuals, ',
  'https://fanwangecon.github.io/R4Econ/')

st_x_label <- 'A'
st_y_label <- 'B'

# Graphing
plt_indiff <-
  df_indiff %>% mutate(lambda = as_factor(lambda),
    beta = as_factor(beta),
    vstar = as_factor(vstar)) %>%
  ggplot(aes(x=indiff_A, y=indiff_B,
    colour=lambda)) +
  facet_wrap( ~ beta) +
  geom_line(size=1) +
  labs(title = st_title, subtitle = st_subtitle,
    x = st_x_label, y = st_y_label, caption = st_caption) +
  theme_bw()


```

```
# show
print(plt_indiff)
```

### Indifference Curves Aktinson Atkinson Utility (CES)

Each Panel Different beta=A's Weight lambda=inequality aversion

[https://fanwangecon.github.io/R4Econ/math/func\\_ineq/htmlpdf/fs\\_atkinson\\_ces.html](https://fanwangecon.github.io/R4Econ/math/func_ineq/htmlpdf/fs_atkinson_ces.html)

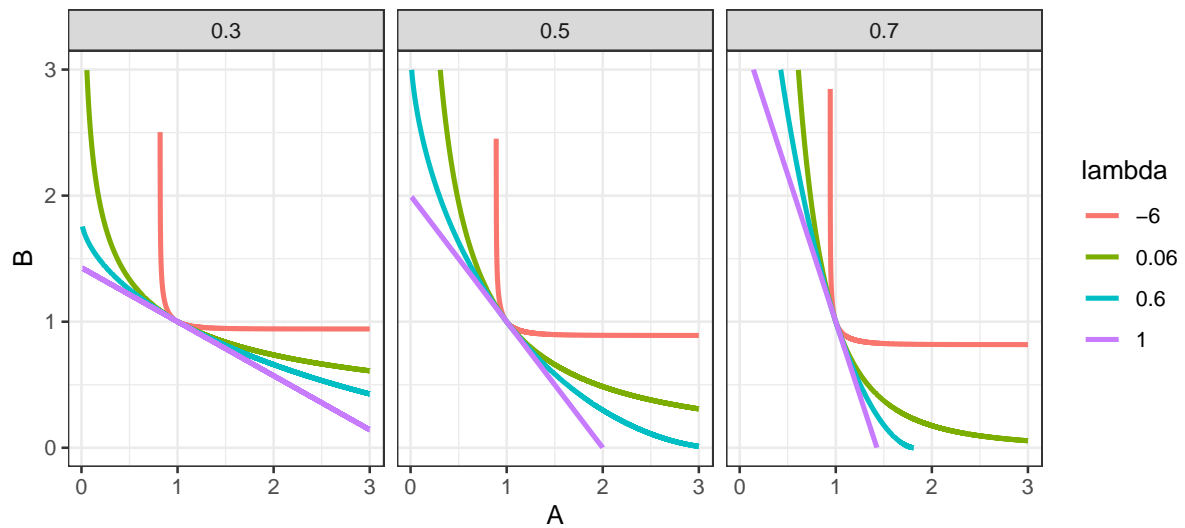

Indifference Curve 2 Individuals, <https://fanwangecon.github.io/R4Econ/>



## Chapter 9

# Tables and Graphs

### 9.1 R Base Plots

#### 9.1.1 Plot Curve, Line and Points

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

Work with the R plot function.

##### 9.1.1.1 One Point, One Line and Two Curves

- r curve on top of plot
- r plot specify pch lty both scatter and line
- r legend outside

Jointly plot:

- 1 scatter plot
- 1 line plot
- 2 function curve plots

```
#####  
# First, Some common Labels:  
#####  
# Labeling  
st_title <- paste0('Scatter, Line and Curve Joint Plotting Example Using Base R\n',  
                  'plot() + curve(): x*sin(x), cos(x), sin(x)*cos(x), sin(x)+tan(x)+cos(x)')  
st_subtitle <- paste0('https://fanwangecon.github.io/',  
                    'R4Econ/tabgraph/inout/htmlpdf/fs_base_curve.html')  
st_x_label <- 'x'  
st_y_label <- 'f(x)'  
  
#####  
# Second, Generate the Graphs Functions and data points:  
#####  
# x only used for Point 1 and Line 1  
x <- seq(-1*pi, 1*pi, length.out=25)  
# Line (Point) 1: Generate X and Y  
y1 <- x*sin(x)  
st_point_1_y_legend <- 'x*sin(x)'  
# Line 2: Line Plot  
y2 <- cos(x)  
st_line_2_y_legend <- 'cos(x)'  
# Line 3: Function
```

```

fc_sin_cos_diff <- function(x) sin(x)*cos(x)
st_line_3_y_legend <- 'sin(x)*cos(x)'
# Line 4: Function
fc_sin_cos_tan <- function(x) sin(x) + cos(x) + tan(x)
st_line_4_y_legend <- 'sin(x) + tan(x) + cos(x)'

#####
# Third, set:
# - point shape and size: *pch* and *cex*
# - line type and width: *lty* and *lwd*
#####
# http://www.sthda.com/english/wiki/r-plot-pch-symbols-the-different-point-shapes-available-in-r
# http://www.sthda.com/english/wiki/line-types-in-r-lty
# for colors, see: https://fanwangecon.github.io/M4Econ/graph/tools/fs\_color.html
st_point_1_blue <- rgb(57/255,106/255,177/255)
st_line_2_red <- rgb(204/255, 37/255, 41/255,)
st_line_3_black <- 'black'
st_line_4_purple <- 'orange'

# point type
st_point_1_pch <- 10
# point size
st_point_1_cex <- 2

# line type
st_line_2_lty <- 'dashed'
st_line_3_lty <- 'dotted'
st_line_4_lty <- 'dotdash'
# line width
st_line_2_lwd <- 3
st_line_3_lwd <- 2.5
st_line_4_lwd <- 3.5

#####
# Fourth: Share xlim and ylim
#####
ar_xlim = c(min(x), max(x))
ar_ylim = c(-3.5, 3.5)

#####
# Fifth: the legend will be long, will place it to the right of figure,
#####
par(new=FALSE, mar=c(5, 4, 4, 10))

#####
# Sixth, the four objects and do not print yet:
#####
# pdf(NULL)
# Graph Scatter 1
plot(x, y1, type="p",
     col = st_point_1_blue,
     pch = st_point_1_pch, cex = st_point_1_cex,
     xlim = ar_xlim, ylim = ar_ylim,
     panel.first = grid(),
     ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)
pl_scatter_1 <- recordPlot()

```

```

# Graph Line 2
par(new=T)
plot(x, y2, type="l",
     col = st_line_2_red,
     lwd = st_line_2_lwd, lty = st_line_2_lty,
     xlim = ar_xlim, ylim = ar_ylim,
     ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)
pl_12 <- recordPlot()

# Graph Curve 3
par(new=T)
curve(fc_sin_cos_diff,
     col = st_line_3_black,
     lwd = st_line_3_lwd, lty = st_line_3_lty,
     from = ar_xlim[1], to = ar_xlim[2], ylim = ar_ylim,
     ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)
pl_123 <- recordPlot()

# Graph Curve 4
par(new=T)
curve(fc_sin_cos_tan,
     col = st_line_4_purple,
     lwd = st_line_4_lwd, lty = st_line_4_lty,
     from = ar_xlim[1], to = ar_xlim[2], ylim = ar_ylim,
     ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)
pl_1234 <- recordPlot()
# invisible(dev.off())


#####
# Seventh, Set Title and Legend and Plot Jointly
#####
# CEX sizing Contorl Titling and Legend Sizes
fl_ces_fig_reg = 1
fl_ces_fig_small = 0.75

# R Legend
title(main = st_title, sub = st_subtitle, xlab = st_x_label, ylab = st_y_label,
     cex.lab=fl_ces_fig_reg,
     cex.main=fl_ces_fig_reg,
     cex.sub=fl_ces_fig_small)
axis(1, cex.axis=fl_ces_fig_reg)
axis(2, cex.axis=fl_ces_fig_reg)
grid()

# Legend sizing CEX
legend("topright",
     inset=c(-0.4,0),
     xpd=TRUE,
     c(st_point_1_y_legend, st_line_2_y_legend, st_line_3_y_legend, st_line_4_y_legend),
     col = c(st_point_1_blue, st_line_2_red, st_line_3_black, st_line_4_purple),
     pch = c(st_point_1_pch, NA, NA, NA),
     cex = fl_ces_fig_small,
     lty = c(NA, st_line_2_lty, st_line_3_lty, st_line_4_lty),
     lwd = c(NA, st_line_2_lwd, st_line_3_lwd, st_line_4_lwd),
     title = 'Legends',
     y.intersp=2)

```

**Scatter, Line and Curve Joint Plotting Example Using Base R**  
**plot() + curve():  $x \cdot \sin(x)$ ,  $\cos(x)$ ,  $\sin(x) \cdot \cos(x)$ ,  $\sin(x) + \tan(x) + \cos(x)$**

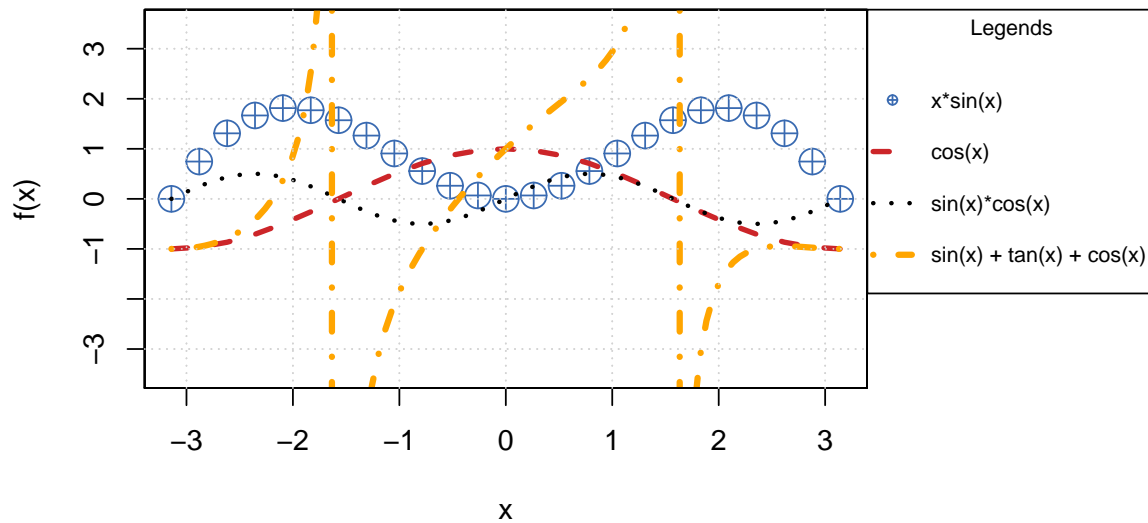

[https://fanwangecon.github.io/R4Econ/tabgraph/inout/htmlpdf/fs\\_base\\_curve.html](https://fanwangecon.github.io/R4Econ/tabgraph/inout/htmlpdf/fs_base_curve.html)

```
# record final plot
pl_1234_final <- recordPlot()
```


We used `recordplot()` earlier. So now we can print just the first two constructed plots.

```
#####
# Eighth, Plot just the first two saved lines
#####
# mar: margin, bottom, left, top, right
pl_12
# R Legend
par(new=T)
title(main = st_title, sub = st_subtitle, xlab = st_x_label, ylab = st_y_label,
      cex.lab = fl_ces_fig_reg,
      cex.main = fl_ces_fig_reg,
      cex.sub = fl_ces_fig_small)

# Legend sizing CEX
par(new=T)
legend("topright",
      inset=c(-0.4,0),
      xpd=TRUE,
      c(st_point_1_y_legend, st_line_2_y_legend),
      col = c(st_point_1_blue, st_line_2_red),
      pch = c(st_point_1_pch, NA),
      cex = fl_ces_fig_small,
      lty = c(NA, st_line_2_lty),
      lwd = c(NA, st_line_2_lwd),
      title = 'Legends',
      y.intersp=2)
```



### Scatter, Line and Curve Joint Ploting Example Using Base R plot() + curve(): $x*\sin(x)$ , $\cos(x)$ , $\sin(x)*\cos(x)$ , $\sin(x)+\tan(x)+\cos(x)$

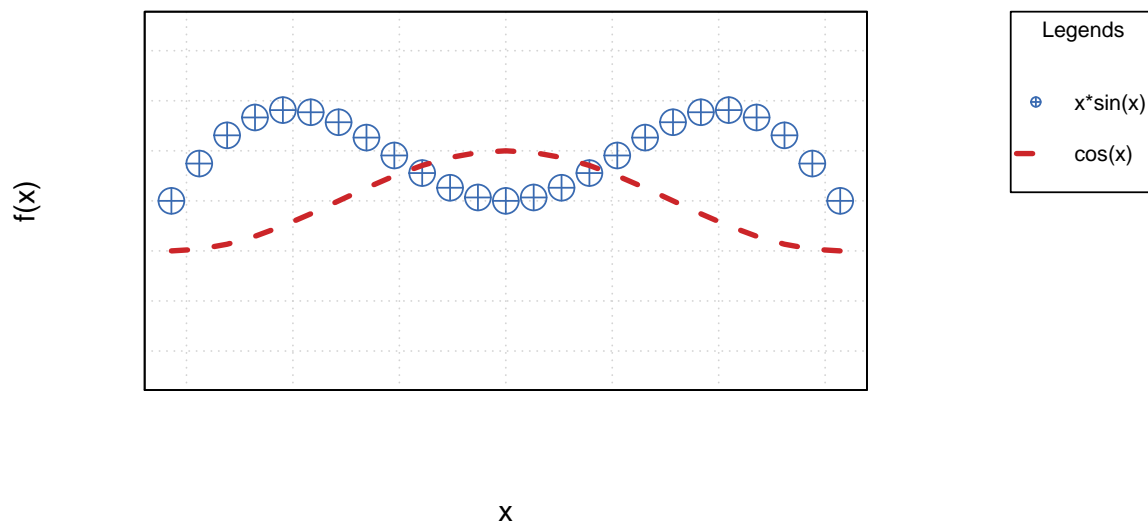

[https://fanwangecon.github.io/R4Econ/tabgraph/inout/htmlpdf/fr/fs\\_base\\_curve.html](https://fanwangecon.github.io/R4Econ/tabgraph/inout/htmlpdf/fr/fs_base_curve.html)

## 9.2 Write and Read Plots

### 9.2.1 Import and Export Images

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

Work with the R plot function.

#### 9.2.1.1 Export Images Different Formats with Plot()

**9.2.1.1.1 Generate and Record A Plot** Generate a graph and recordPlot() it. The generated graph does not have legends Yet. Crucially, there are no titles, legends, axis, labels in the figures. As we stack the figures together, do not add those. Only add at the end jointly for all figure elements together to control at one spot things.

```
#####
# First, Strings
#####
# Labeling
st_title <- paste0('Scatter, Line and Curve Joint Ploting Example Using Base R\n',
                   'plot() + curve():sin(x)*cos(x), sin(x)+tan(x)+cos(x)')
st_subtitle <- paste0('https://fanwangecon.github.io/',
                      'R4Econ/tabgraph/inout/htmlpdf/fr/fs_base_curve.html')
st_x_label <- 'x'
st_y_label <- 'f(x)'

#####
# Second, functions
#####
fc_sin_cos_diff <- function(x) sin(x)*cos(x)
st_line_3_y_legend <- 'sin(x)*cos(x)'
fc_sin_cos_tan <- function(x) sin(x) + cos(x) + tan(x)
st_line_4_y_legend <- 'sin(x) + tan(x) + cos(x)'

#####
```

```

# Third, patterns
#####
st_line_3_black <- 'black'
st_line_4_purple <- 'orange'
# line type
st_line_3_lty <- 'dotted'
st_line_4_lty <- 'dotdash'
# line width
st_line_3_lwd <- 2.5
st_line_4_lwd <- 3.5

#####
# Fourth: Share xlim and ylim
#####
ar_xlim = c(-3, 3)
ar_ylim = c(-3.5, 3.5)

#####
# Fifth: Even margins
#####
par(new=FALSE)

#####
# Sixth, the four objects and do not print yet:
#####
# Graph Curve 3
par(new=T)
curve(fc_sin_cos_diff,
      col = st_line_3_black,
      lwd = st_line_3_lwd, lty = st_line_3_lty,
      from = ar_xlim[1], to = ar_xlim[2], ylim = ar_ylim,
      ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)
# Graph Curve 4
par(new=T)
curve(fc_sin_cos_tan,
      col = st_line_4_purple,
      lwd = st_line_4_lwd, lty = st_line_4_lty,
      from = ar_xlim[1], to = ar_xlim[2], ylim = ar_ylim,
      ylab = '', xlab = '', yaxt='n', xaxt='n', ann=FALSE)

pl_curves_save <- recordPlot()

```

#### 9.2.1.1.2 Generate Large Font and Small Font Versions of PLOT Generate larger font version:

```

# Replay
pl_curves_save

#####
# Seventh, Set Title and Legend and Plot Jointly
#####
# CEX sizing Contorl Titling and Legend Sizes
fl_ces_fig_reg = 0.75
fl_ces_fig_leg = 0.75
fl_ces_fig_small = 0.65

# R Legend
title(main = st_title, sub = st_subtitle, xlab = st_x_label, ylab = st_y_label,
      cex.lab=fl_ces_fig_reg,

```

```

    cex.main=fl_ces_fig_reg,
    cex.sub=fl_ces_fig_small)
axis(1, cex.axis=fl_ces_fig_reg)
axis(2, cex.axis=fl_ces_fig_reg)
grid()

# Legend sizing CEX
legend("topleft",
      bg="transparent",
      bty = "n",
      c(st_line_3_y_legend, st_line_4_y_legend),
      col = c(st_line_3_black, st_line_4_purple),
      pch = c(NA, NA),
      cex = fl_ces_fig_leg,
      lty = c(st_line_3_lty, st_line_4_lty),
      lwd = c(st_line_3_lwd, st_line_4_lwd),
      y.intersp=2)

# record final plot
pl_curves_large <- recordPlot()
dev.off()

```

Generate smaller font version:

```

# Replay
pl_curves_save

#####
# Seventh, Set Title and Legend and Plot Jointly
#####
# CEX sizing Contorl Titling and Legend Sizes
fl_ces_fig_reg = 0.45
fl_ces_fig_leg = 0.45
fl_ces_fig_small = 0.25

# R Legend
title(main = st_title, sub = st_subtitle, xlab = st_x_label, ylab = st_y_label,
      cex.lab=fl_ces_fig_reg,
      cex.main=fl_ces_fig_reg,
      cex.sub=fl_ces_fig_small)
axis(1, cex.axis=fl_ces_fig_reg)
axis(2, cex.axis=fl_ces_fig_reg)
grid()

# Legend sizing CEX
legend("topleft",
      bg="transparent",
      bty = "n",
      c(st_line_3_y_legend, st_line_4_y_legend),
      col = c(st_line_3_black, st_line_4_purple),
      pch = c(NA, NA),
      cex = fl_ces_fig_leg,
      lty = c(st_line_3_lty, st_line_4_lty),
      lwd = c(st_line_3_lwd, st_line_4_lwd),
      y.intersp=2)

# record final plot
pl_curves_small <- recordPlot()
dev.off()

```

### 9.2.1.1.3 Save Plot with Varying Resolutions and Heights Export recorded plot.

A4 paper is 8.3 x 11.7, with 1 inch margins, the remaining area is 6.3 x 9.7. For figures that should take half of the page, the height should be 4.8 inch. One third of a page should be 3.2 inch. 6.3 inch is 160mm and 3 inch is 76 mm. In the example below, use

```
# Store both in within folder directory and root image directory:
# C:\Users\fan\R4Econ\tabgraph\inout\_img
# C:\Users\fan\R4Econ\_img
# need to store in both because bookdown and indi pdf path differ.
# Wrap in try because will not work underbookdown, but images already created

ls_spt_root <- c('..//..//', '')
spt_prefix <- '_img/fs_img_io_2curve'



for (spt_root in ls_spt_root) {
  # Changing pointsize will not change font sizes inside, just rescale
  # PNG 72
  try(png(paste0(spt_root, spt_prefix, "_w135h76_res72.png"),
    width = 135, height = 76, units='mm', res = 72, pointsize=7))
  print(pl_curves_large)
  dev.off()
  # PNG 300
  try(png(paste0(spt_root, spt_prefix, "_w135h76_res300.png"),
    width = 135, height = 76, units='mm', res = 300, pointsize=7))
  print(pl_curves_large)
  dev.off()
  # PNG 300, SMALL, POINT SIZE LOWER
  try(png(paste0(spt_root, spt_prefix, "_w80h48_res300.png"),
    width = 80, height = 48, units='mm', res = 300, pointsize=7))
  print(pl_curves_small)
  dev.off()
  # PNG 300
  try(png(paste0(spt_root, spt_prefix, "_w160h100_res300.png"),
    width = 160, height = 100, units='mm', res = 300))
  print(pl_curves_large)
  dev.off()

  # EPS
  setEPS()
  try(postscript(paste0(spt_root, spt_prefix, "_fs_2curve.eps")))
  print(pl_curves_large)
  dev.off()
}
```

```
## Error in png(paste0(spt_root, spt_prefix, "_w135h76_res72.png"), width = 135, :
##   unable to start png() device
## Error in png(paste0(spt_root, spt_prefix, "_w135h76_res300.png"), width = 135, :
##   unable to start png() device
## Error in png(paste0(spt_root, spt_prefix, "_w80h48_res300.png"), width = 80, :
##   unable to start png() device
## Error in png(paste0(spt_root, spt_prefix, "_w160h100_res300.png"), width = 160, :
##   unable to start png() device
## Error in postscript(paste0(spt_root, spt_prefix, "_fs_2curve.eps")) :
##   cannot open file '..//..//_img/fs_img_io_2curve_fs_2curve.eps'
```



**9.2.1.1.4 Low and High Resolution Figure** The standard resolution often produces very low quality images. Resolution should be increased. See figure comparison.

RES=72 (DEFAULT R) TOP, RES=300 Bottom, (Width=160, Height=81, PNG)

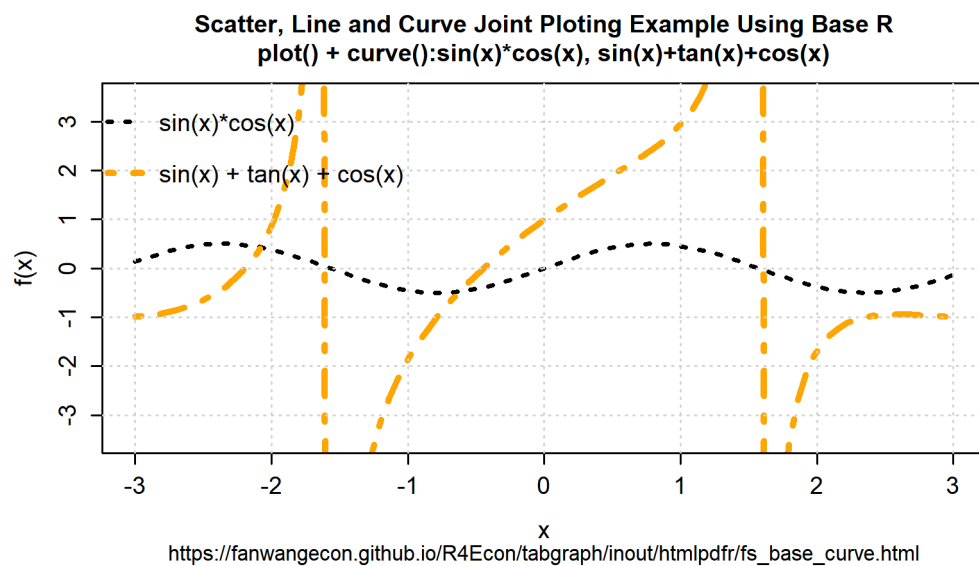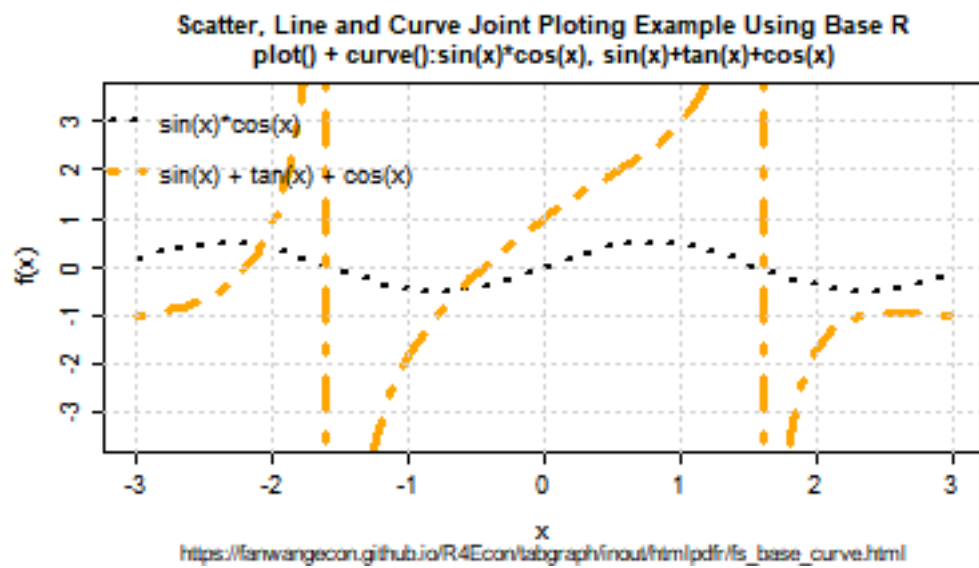

**9.2.1.1.5 Smaller and Larger Figures** Smaller and larger figures with different font size comparison. Note that earlier, we generated the figure without legends, labels, etc first, recorded the figure. Then we associated the same underlying figure with differently sized titles, legends, axis, labels.

Top Small (small font saved), Bottom Large, PNG

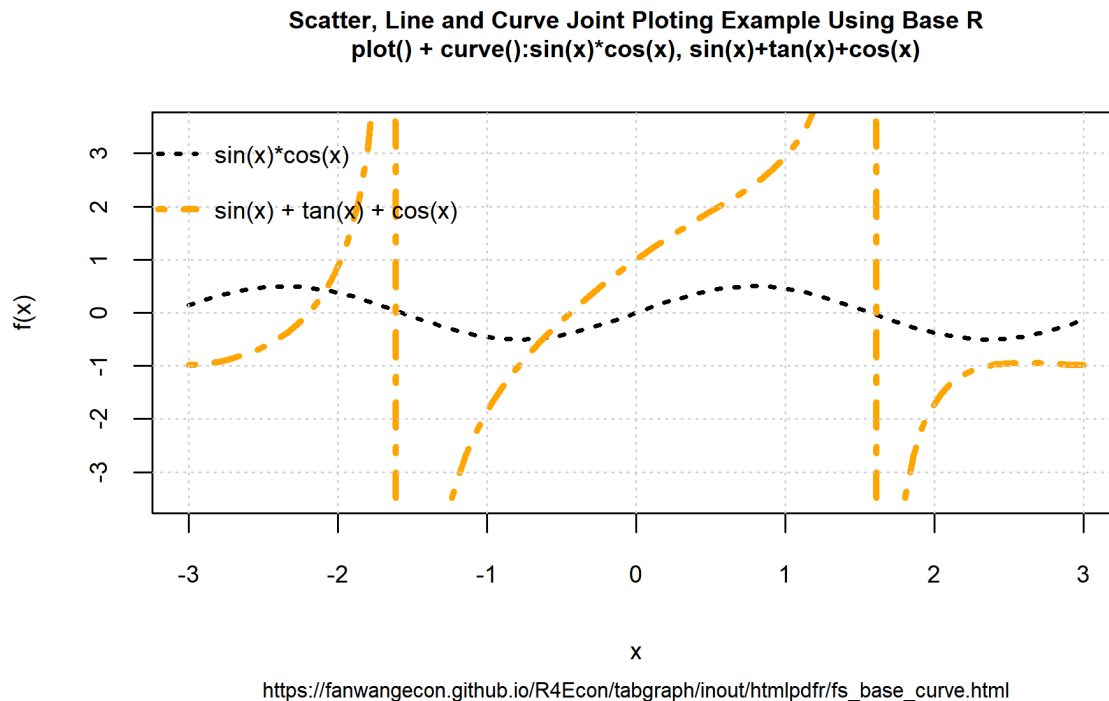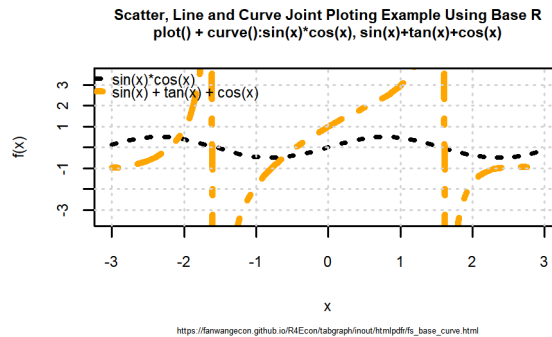

# Chapter 10

## Get Data

### 10.1 Environmental Data

#### 10.1.1 ECMWF ERA5 Data

Go back to [fan's REconTools Package](#), [R Code Examples](#) Repository ([bookdown site](#)), or [Intro Stats with R](#) Repository ([bookdown site](#)).

This files uses R with the reticulate package to download ECMWF ERA5 data. See [this file](#) for instructions and tutorials for downloading the data.

##### 10.1.1.1 Program to Download, Unzip, Convert to combined CSV, derived-utci-historical data

The data downloaded from CDS climate could become very large in size. We want to process parts of the data one part at a time, summarize and aggregate over each part, and generate a file output file with aggregate statistics over the entire time period of interest.

This code below accompalishes the following tasks:

1. download data from derived-utci-historical as ZIP
2. unzip
3. convert *nc* files to *csv* files
4. individual csv files are half year groups

Parameter Control for the code below:

1. *spt\_root*: root folder where everything will be at
2. *spth\_conda\_env*: the conda virtual environment python path, eccodes and cdsapi packages are installed in the conda virtual environment. In the example below, the first env is: wk\_ecmwf
3. *st\_nc\_prefix*: the downloaded individual nc files have dates and prefix before and after the date string in the nc file names. This is the string before that.
4. *st\_nc\_suffix*: see (3), this is the suffix
5. *ar\_years*: array of years to download and aggregate over
6. *ar\_months\_g1*: months to download in first half year
7. *ar\_months\_g2*: months to download in second half year

Note: *area* below corresponds to *North*, *West*, *South*, *East*.

```
#####  
# ----- Parameters  
#####  
  
# Where to store everything  
spt_root <- "C:/Users/fan/Downloads/_data/"  
spth_conda_env <- "C:/ProgramData/Anaconda3/envs/wk_ecmwf/python.exe"
```

```

# nc name prefix
st_nc_prefix <- "ECMWF_utci_"
st_nc_suffix <- "_v1.0_con.nc"

# Years list
# ar_years <- 2001:2019
ar_years <- c(2005, 2015)
# ar_months_g1 <- c('01','02','03','04','05','06')
ar_months_g1 <- c('01', '03')
# ar_months_g2 <- c('07','08','09','10','11','12')
ar_months_g2 <- c('07', '09')

# Area
# # China
# fl_area_north <- 53.31
# fl_area_west <- 73
# fl_area_south <- 4.15
# fl_area_east <- 135
fl_area_north <- 53
fl_area_west <- 73
fl_area_south <- 52
fl_area_east <- 74

# folder to download any nc zips to
nczippath <- spt_root
# we are changing the python api file with different requests stirngs and storing it here
pyapipath <- spt_root
# output directory for AGGREGATE CSV with all DATES from this search
csvpath <- spt_root

#####
# ----- Packages
#####

library("ncdf4")
library("chron")
library("lattice")
library("RColorBrewer")
library("stringr")
library("tibble")
library("dplyr")
Sys.setenv(RETICULATE_PYTHON = spth_conda_env)
library("reticulate")

#####
# ----- Define Loops
#####
for (it_yr in ar_years) {
  for (it_mth_group in c(1,2)) {
    if(it_mth_group == 1) {
      ar_months = ar_months_g1
    }
    if(it_mth_group == 2) {
      ar_months = ar_months_g2
    }
  }
}

#####
# ----- Define Python API Call

```



```
#####

# name of zip file
nczipname <- "derived_utci_2010_2.zip"
unzipfolder <- "derived_utci_2010_2"

st_file <- paste0("import cdsapi
import urllib.request
# download folder
spt_root = '', nczippath, ''
spn_dl_test_grib = spt_root + '', nczipname, ''
# request
c = cdsapi.Client()
res = c.retrieve(
  'derived-utci-historical',
  {
    'format': 'zip',
    'variable': 'Universal thermal climate index',
    'product_type': 'Consolidated dataset',
    'year': '', it_yr, '',
    'month': [
      "", paste("", ar_months, "", sep = "", collapse = ", "), ""
    ],
    'day': [
      '01','03'
    ],
    'area' : ["", fl_area_north, "", "", fl_area_west, "", "", fl_area_south, "", "", fl_area_east, ""],
    'grid' : [0.25, 0.25],
  },
  spn_dl_test_grib)
# show results
print('print results')
print(res)
print(type(res))

# st_file = "print(1+1)"

# Store Python Api File
fl_test_tex <- paste0(pyapipath, "api.py")
fileConn <- file(fl_test_tex)
writeLines(st_file, fileConn)
close(fileConn)

#####
# ----- Run Python File
#####
# Set Path
setwd(pyapipath)
# Run py file, api.py name just defined
use_python(spth_conda_env)
source_python('api.py')

#####
# ----- uNZIP
#####
spn_zip <- paste0(nczippath, nczipname)
spn_unzip_folder <- paste0(nczippath, unzipfolder)
unzip(spn_zip, exdir=spn_unzip_folder)
```

```
#####
# ----- Find All files
#####
# Get all files with nc suffix in folder
ncpath <- paste0(nczippath, unzipfolder)
ls_sfls <- list.files(path=ncpath, recursive=TRUE, pattern=".nc", full.names=T)

#####
# ----- Combine individual NC files to JOINT Dataframe
#####
# List to gather dataframes
ls_df <- vector(mode = "list", length = length(ls_sfls))
# Loop over files and convert nc to csv
it_df_ctr <- 0
for (spt_file in ls_sfls) {
  it_df_ctr <- it_df_ctr + 1

  # Get file name without Path
  snm_file_date <- sub(paste0('\\', st_nc_suffix, '$'), '', basename(spt_file))
  snm_file_date <- sub(st_nc_prefix, '', basename(snm_file_date))

  # Dates Start and End: list.files is auto sorted in ascending order
  if (it_df_ctr == 1) {
    snm_start_date <- snm_file_date
  }
  else {
    # this will give the final date
    snm_end_date <- snm_file_date
  }

  # Given this structure: ECMWF_utci_20100702_v1.0_con, sub out prefix and suffix
  print(spt_file)
  ncin <- nc_open(spt_file)

  nchist <- ncatt_get(ncin, 0, "history")

  # not using this missing value flag at the moment
  missingval <- str_match(nchist$value, "setmisstoc,\\s*(.*?)\\s* ")[,2]
  missingval <- as.numeric(missingval)

  lon <- ncvar_get(ncin, "lon")
  lat <- ncvar_get(ncin, "lat")
  tim <- ncvar_get(ncin, "time")
  tunits <- ncatt_get(ncin, "time", "units")

  nlon <- dim(lon)
  nlat <- dim(lat)
  ntim <- dim(tim)

  # convert time -- split the time units string into fields
  # tustr <- strsplit(tunits$value, " ")
  # tdstr <- strsplit(unlist(tustr)[3], "-")
  # tmonth <- as.integer(unlist(tdstr)[2])
  # tday <- as.integer(unlist(tdstr)[3])
  # tyear <- as.integer(unlist(tdstr)[1])
  # mytim <- chron(tim, origin = c(tmonth, tday, tyear))
}
```

```

tmp_array <- ncvar_get(ncin, "utci")
tmp_array <- tmp_array - 273.15

lonlat <- as.matrix(expand.grid(lon = lon, lat = lat, hours = tim))
temperature <- as.vector(tmp_array)
tmp_df <- data.frame(cbind(lonlat, temperature))

# extract a rectangle
eps <- 1e-8
minlat <- 22.25 - eps
maxlat <- 23.50 + eps
minlon <- 113.00 - eps
maxlon <- 114.50 + eps
# subset data
subset_df <- tmp_df[tmp_df$lat >= minlat & tmp_df$lat <= maxlat &
                    tmp_df$lon >= minlon & tmp_df$lon <= maxlon, ]

# add Date
subset_df_date <- as_tibble(subset_df) %>% mutate(date = snm_file_date)

# Add to list
ls_df[[it_df_ctr]] <- subset_df_date

# Close NC
nc_close(ncin)
}

# List of DF to one DF
df_all_nc <- do.call(rbind, ls_df)

# Save File
fname <- paste0(paste0(st_nc_prefix,
                      snm_start_date, "_to_", snm_end_date,
                      ".csv"))
csvfile <- paste0(csvpath, fname)
write.table(na.omit(df_all_nc), csvfile, row.names = FALSE, sep = ",")

# Delete folders
unlink(spn_zip, recursive=TRUE, force=TRUE)
unlink(spn_unzip_folder, recursive=TRUE, force=TRUE)

# end loop months groups
}
# end loop year
}

```



# Chapter 11

## Code and Development

### 11.1 File in and Out

#### 11.1.1 Text to File

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

##### 11.1.1.1 Latex Table to File

Tabular outputs, text outputs, etc are saved as variables, which could be printed in console. They can also be saved to file for future re-used. For example, latex outputs need to be saved to file.

```
# Load Data
dt <- mtcars[1:4, 1:6]
# Generate latex string variable
st_out_tex <- kable(dt, "latex")
print(st_out_tex)
# File out
# fileConn <- file("../_file/tex/tex_sample_a_tab.tex")
fileConn <- file("_file/tex/tex_sample_a_tab.tex")
writeLines(st_out_tex, fileConn)
close(fileConn)
```

##### 11.1.1.2 Create a Text File from Strings

```
st_file <- "\\documentclass[12pt,english]{article}
\\usepackage[bottom]{footmisc}
\\usepackage[urlcolor=blue]{hyperref}
\\begin{document}
\\title{A Latex Testing File}
\\author{\\href{http://fanwangecon.github.io/}{Fan Wang} \\thanks{See information \\href{https://fan
\\maketitle
Ipsum information dolor sit amet, consectetur adipiscing elit. Integer Latex placerat nunc orci.
\\paragraph{\\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}
Village closure information is taken from a village head survey.\\footnote{Generally students went t
output:
pdf_document:
  pandoc_args: '../_output_kniti_pdf.yaml'
  includes:
    in_header: '../_output_kniti_preamble.tex'
html_document:
  pandoc_args: '../_output_kniti_html.yaml'
```

```

    includes:
      in_header: '../.../hdga.html'
  \\end{document}"

print(st_file)

## [1] "\\documentclass[12pt,english]{article}\\n\\usepackage[bottom]{footmisc}\\n\\usepackage[urlcolor=blue]{hyperref}\\n\\begin{document}\\n\\title{A Latex Testing File}\\n\\author{\\href{http://fanwangecon.github.io/}{Fan Wang} \\thanks{See information \\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}\\n\\maketitle\\n\\section{Village closure information is taken from a village head survey.}\\n\\footnote{Generally students are not allowed to leave the village without the permission of the village head.}\\n\\end{document}"

fl_test_tex <- "_file/tex/test_fan.tex"
fileConn <- file(fl_test_tex)
writeLines(st_file, fileConn)
close(fileConn)

```

### 11.1.1.3 Open A File and Read Lines

Open and Replace Text in File:

```

fileConn <- file(fl_test_tex, "r")
st_file_read <- readLines(fileConn)
print(st_file_read)

## [1] "\\documentclass[12pt,english]{article}"
## [2] "\\usepackage[bottom]{footmisc}"
## [3] "\\usepackage[urlcolor=blue]{hyperref}"
## [4] "\\begin{document}"
## [5] "\\title{A Latex Testing File}"
## [6] "\\author{\\href{http://fanwangecon.github.io/}{Fan Wang} \\thanks{See information \\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}}"
## [7] "\\maketitle"
## [8] "Ipsum information dolor sit amet, consectetur adipiscing elit. Integer Latex placerat nunc."
## [9] "\\paragraph{\\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}{"
## [10] "Village closure information is taken from a village head survey.\\n\\footnote{Generally students are not allowed to leave the village without the permission of the village head.}\\n\\end{document}"
## [11] "output:"
## [12] "  pdf_document:"
## [13] "    pandoc_args: '../.../_output_kniti_pdf.yaml'"
## [14] "    includes:"
## [15] "      in_header: '../.../preamble.tex'"
## [16] "  html_document:"
## [17] "    pandoc_args: '../.../_output_kniti_html.yaml'"
## [18] "    includes:"
## [19] "      in_header: '../.../hdga.html'"
## [20] "\\end{document}"

close(fileConn)

```

### 11.1.1.4 Open a File and Replace Some Lines

Append additional strings into the file after *html\_document* with proper spacings:

```

# Read in Lines from existing file
fileConn <- file(fl_test_tex, "r")
st_file_read <- readLines(fileConn)
close(fileConn)

# Search and Replace String
st_search <- "html_document:"
st_replace <- paste0("html_document:\\r\\n",
  "  toc: true\\r\\n",
  "  number_sections: true\\r\\n",
  "  toc_float: true\\r\\n",
  "  collapsed: false\\r\\n",

```

```

        "      smooth_scroll: false\r\n",
        "      toc_depth: 3")

# Search and Replace
st_file_updated <- gsub(x = st_file_read,
                        pattern = st_search,
                        replacement = st_replace)

# Print
print(st_file_updated)

## [1] "\\documentclass[12pt,english]{article}"
## [2] "\\usepackage[bottom]{footmisc}"
## [3] "\\usepackage[urlcolor=blue]{hyperref}"
## [4] "\\begin{document}"
## [5] "\\title{A Latex Testing File}"
## [6] "\\author{\\href{http://fanwangecon.github.io/}{Fan Wang} \\thanks{See information \\href{ht
## [7] "\\maketitle"
## [8] "Ipsum information dolor sit amet, consectetur adipiscing elit. Integer Latex placerat nunc
## [9] "\\paragraph{\\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}"
## [10] "Village closure information is taken from a village head survey.\\footnote{Generally studen
## [11] "output:"
## [12] "  pdf_document:"
## [13] "    pandoc_args: '..//..//_output_kniti_pdf.yaml'"
## [14] "    includes:"
## [15] "      in_header: '..//..//preamble.tex'"
## [16] "  html_document:\r\n    toc: true\r\n    number_sections: true\r\n    toc_float:\r\n    c
## [17] "    pandoc_args: '..//..//_output_kniti_html.yaml'"
## [18] "    includes:"
## [19] "      in_header: '..//..//hdga.html'"
## [20] "\\end{document}"

# Save Updated File
fl_srcrep_tex <- "_file/tex/test_fan_search_replace.tex"
fileConn_sr <- file(fl_srcrep_tex)
writeLines(st_file_updated, fileConn_sr)
close(fileConn_sr)

```

### 11.1.2 Rmd to HTML

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

#### 11.1.2.1 Search and Find all Files in Repository

Search inside directories, for all files in a repository that have a particular suffix and that don't contain skip pattern list string items.

```

# Serch Folder and skip list
spt_roots <- c('C:/Users/fan/R4Econ/amt0', 'C:/Users/fan/R4Econ/summarize')
spn_skip <- c('summarize', 'panel', 'support')

# Search and get all Path
ls_sfls <- list.files(path=spt_roots, recursive=T, pattern=".Rmd", full.names=T)

# Skip path if contains words in skip list
if(!missing(spn_skip)) {
  ls_sfls <- ls_sfls[!grepl(paste(spn_skip, collapse = "|"), ls_sfls)]
}

```

```
# Loop and print
for (spt_file in ls_sfls) {
  st_fullpath_nosufx <- tail(strsplit(spt_file, "/")[[1]],n=1)
  print(paste0(spt_file, '----', st_fullpath_nosufx))
}

## [1] "C:/Users/fan/R4Econ/amto/array/fs_ary_basics.Rmd---fs_ary_basics.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/array/fs_ary_generate.Rmd---fs_ary_generate.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/array/fs_ary_mesh.Rmd---fs_ary_mesh.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/array/fs_ary_string.Rmd---fs_ary_string.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/array/main.Rmd---main.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/list/fs_lst_basics.Rmd---fs_lst_basics.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/list/main.Rmd---main.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/main.Rmd---main.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/matrix/fs_mat_generate.Rmd---fs_mat_generate.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/matrix/fs_mat_linear_algebra.Rmd---fs_mat_linear_algebra.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/matrix/main.Rmd---main.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/fs_tib_basics.Rmd---fs_tib_basics.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/fs_tib_factors.Rmd---fs_tib_factors.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/fs_tib_na.Rmd---fs_tib_na.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/fs_tib_random_draws.Rmd---fs_tib_random_draws.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/fs_tib_string.Rmd---fs_tib_string.Rmd"
## [1] "C:/Users/fan/R4Econ/amto/tibble/main.Rmd---main.Rmd"
```

### 11.1.2.2 Search and Find all Git Modified or New Rmd

Search inside directories, for all files in a git repo folder that are new or have been modified. Ignore possible subset of file based on string search.

```
# Serch Folder and skip list
spt_roots <- c('C:/Users/fan/R4Econ/amto', 'C:/Users/fan/R4Econ/development')
spn_skip <- c('summarize', 'panel', 'support')
ls_sfls <- list.files(path=spt_roots, recursive=T, pattern=".Rmd", full.names=T)
if(!missing(spn_skip)) {
  ls_sfls <- ls_sfls[!grepl(paste(spn_skip, collapse = "|"), ls_sfls)]
}

# Loop and print
for (spt_file in ls_sfls) {
  spg_check_git_status <- paste0('git status -s ', spt_file)
  st_git_status <- toString(system(spg_check_git_status, intern=TRUE))
  bl_modified <- grepl(' M ', st_git_status, fixed=TRUE)
  bl_anewfile <- grepl('?? ', st_git_status, fixed=TRUE)
  bl_nochange <- (st_git_status == "")

  if (bl_modified == 1) {
    print(paste0('MODIFIED: ', spt_file))
  } else if (bl_anewfile == 1) {
    print(paste0('A NEW FL: ', spt_file))
  } else {
    print(paste0('NO CHNGE: ', spt_file))
  }
}

## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/array/fs_ary_basics.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/array/fs_ary_generate.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/array/fs_ary_mesh.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/array/fs_ary_string.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/array/main.Rmd"
```



```
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/list/fs_lst_basics.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/list/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/matrix/fs_mat_generate.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/matrix/fs_mat_linear_algebra.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/matrix/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/fs_tib_basics.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/fs_tib_factors.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/fs_tib_na.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/fs_tib_random_draws.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/fs_tib_string.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/amto/tibble/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/_file/rmd/fs_rmd_pdf_html_mod.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/_file/rmd/fs_rmd_pdf_html_mod_mod.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/_file/rmd/fs_text_save_mod.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/_file/rmd/main_mod.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/fs_rmd_pdf_html.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/fs_text_save.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/inout/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/python/fs_python_reticulate.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/python/main.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/system/fs_system_shell.Rmd"
## [1] "NO CHNGE: C:/Users/fan/R4Econ/development/system/main.Rmd"
```

### 11.1.2.3 Resave an Existing File with Different Name Different Folder

Given an existing Rmd File, Resave it with a different name (add to name suffix), and then save in a different folder:

- old file: `/R4Econ/development/fs_rmd_pdf_html.Rmd`
- new file: `*R4Econ/development/inout/_file/rmd/fs_rmd_pdf_html_mod.Rmd*`

```
# Serch Folder and skip list
spt_roots <- c('C:/Users/fan/R4Econ/development/inout/')
spn_skip <- c('_main', '_file')
ls_sfls <- list.files(path=spt_roots, recursive=T, pattern=".Rmd", full.names=T)
if(!missing(spn_skip)) {
  ls_sfls <- ls_sfls[!grepl(paste(spn_skip, collapse = "|"), ls_sfls)]
}

# Loop and print
for (spt_file in ls_sfls) {
  spt_new <- paste0('_file/rmd/')
  spn_new <- paste0(spt_new, sub('\\.Rmd$', '', basename(spt_file)), '_mod.Rmd')
  print(spt_new)
  print(spn_new)

  fileConn_rd <- file(spt_file, "r")
  st_file_read <- readLines(fileConn_rd)

  fileConn_sr <- file(spn_new)
  writeLines(st_file_read, fileConn_sr)

  close(fileConn_rd)
  close(fileConn_sr)
}
```

**11.1.2.3.1 Replacment Function Change Markdown Hierarchy and Add to YAML** Given an existing Rmd File, Resave it with a different name, and replace (add in) additional yaml contents.

```
spn_file = '_file/rmd/fs_rmd_pdf_html_mod.Rmd'
fileConn_sr <- file(spn_file)
st_file <- readLines(fileConn_sr)
# print(st_file)

st_search <- "html_document:
  toc: true
  number_sections: true
  toc_float:
    collapsed: false
    smooth_scroll: false
    toc_depth: 3"
st_replace <- paste0("html_document:
  toc: true
  number_sections: true
  toc_float:
    collapsed: false
    smooth_scroll: false
    toc_depth: 3\n",
  "    toc: true\n",
  "    number_sections: true\n",
  "    toc_float:\n",
  "      collapsed: false\n",
  "      smooth_scroll: false\n",
  "      toc_depth: 3")
st_file_updated <- gsub(x = st_file,
  pattern = st_search,
  replacement = st_replace)

st_search <- "../../"
st_replace <- paste0("../..../..../")
st_file_updated <- gsub(x = st_file_updated,
  pattern = st_search,
  replacement = st_replace)

st_file_updated <- gsub(x = st_file_updated, pattern = '# ', replacement = '# ')
st_file_updated <- gsub(x = st_file_updated, pattern = '## ', replacement = '## ')
st_file_updated <- gsub(x = st_file_updated, pattern = '### ', replacement = '# ')

spn_file = '_file/rmd/fs_rmd_pdf_html_mod.Rmd'
fileConn_sr <- file(spn_file)
st_file <- writeLines(st_file_updated, fileConn_sr)
```

#### 11.1.2.4 Search and Render Rmd File and Save HTML, PDF or R

1. Search files satisfying conditions in a folder
2. knit files to HTML (and re-run the contents of the file)
3. Save output to a different folder

```
# Specify Parameters
ar_spt_root = c('C:/Users/fan/R4Econ/amto/array/', 'C:/Users/fan/R4Econ/math/integration')
bl_recursive = TRUE
st_rmd_suffix_pattern = "*.Rmd"
ar_spn_skip <- c('basics', 'integrate', 'main', 'mesh')
ls_bool_convert <- list(bl_pdf=TRUE, bl_html=TRUE, bl_R=TRUE)
spt_out_directory <- 'C:/Users/fan/Downloads/_data'
```

```

bl_verbose <- TRUE

# Get Path
ls_sfls <- list.files(path=ar_spt_root,
                     recursive=bl_recursive,
                     pattern=st_rmd_suffix_pattern,
                     full.names=T)

# Exclude Some Files given ar_spn_skip
if(!missing(ar_spn_skip)) {
  ls_sfls <- ls_sfls[!grepl(paste(ar_spn_skip, collapse = "|"), ls_sfls)]
}

# Loop over files
for (spn_file in ls_sfls) {

  # Parse File Name
  spt_file <- dirname(spn_file)
  sna_file <- tools::file_path_sans_ext(basename(spn_file))

  # Output Files
  spn_file_pdf <- paste0(spt_file, sna_file, '.pdf')
  spn_file_html <- paste0(spt_file, sna_file, '.html')
  spn_file_R <- paste0(spt_file, sna_file, '.R')

  # render to PDF
  if (ls_bool_convert$bl_pdf) {
    if (bl_verbose) message(paste0('spn_file_pdf:', spn_file_pdf, ', PDF started'))
    rmarkdown::render(spn_file, output_format='pdf_document',
                      output_dir = spt_out_directory, output_file = sna_file)
    if (bl_verbose) message(paste0('spn_file_pdf:', spn_file_pdf, ', PDF finished'))
    spn_pdf_generated <- paste0(spt_out_directory, '/', spn_file_pdf)
  }

  # render to HTML
  if (ls_bool_convert$bl_html) {
    if (bl_verbose) message(paste0('spn_file_html:', spn_file_html, ', HTML started.'))
    rmarkdown::render(spn_file, output_format='html_document',
                      output_dir = spt_out_directory, output_file = sna_file)
    if (bl_verbose) message(paste0('spn_file_html:', spn_file_html, ', HTML finished.'))
    spn_html_generated <- paste0(spt_out_directory, '/', spn_file_html)
  }

  # purl to R
  if (ls_bool_convert$bl_R) {
    if (bl_verbose) message(paste0('spn_file_R:', spn_file_R, '.R'))
    knitr::purl(spn_file, output=paste0(spt_out_directory, '/', sna_file, '.R'), documentation = 1)
    spn_R_generated <- paste0(spt_out_directory, '/', sna_file, '.R')
  }

  # return(list(ls_spt_pdf_generated=ls_spt_pdf_generated,
  #             ls_spt_html_generated=ls_spt_html_generated,
  #             ls_spt_R_generated=ls_spt_R_generated))
}

```

## 11.2 Python with R

### 11.2.1 Reticulate Basics

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

#### 11.2.1.1 Basic Python Tests with RMD

Could specify: `python, engine.path = "C:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe"`, this is already set inside Rprofile: `knitr::opts_chunk$set(engine.path = "C:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe")`

```
1+1
```

```
## 2
```

#### 11.2.1.2 Install and Python Path

Install reticulate from github directly to get latest version: `devtools::install_github("rstudio/reticulate")`

Check python version on computer:

```
Sys.which('python')
```

```
##                                python
## "G:\\ProgramData\\Anaconda3\\envs\\wk_pyfan\\python.exe"
```

After installing reticulate, load in the library: `library(reticulate)`. With `py_config()` to see python config. First time, might generate “No non-system installation of Python could be found.” and ask if want to install Miniconda. Answer NO.

Correct outputs upon checking `py_config()`:

```
python:      C:/ProgramData/Anaconda3/python.exe
libpython:   C:/ProgramData/Anaconda3/python37.dll
pythonhome:  C:/ProgramData/Anaconda3
version:     3.7.9 (default, Aug 31 2020, 17:10:11) [MSC v.1916 64 bit (AMD64)]
Architecture: 64bit
numpy:       C:/ProgramData/Anaconda3/Lib/site-packages/numpy
numpy_version: 1.19.1
```

```
python versions found:
C:/ProgramData/Anaconda3/python.exe
C:/ProgramData/Anaconda3/envs/wk_cgefi/python.exe
C:/ProgramData/Anaconda3/envs/wk_jinja/python.exe
C:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe
```

Set which python to use:

```
# Sys.setenv(RETICULATE_PYTHON = "C:/programdata/Anaconda3/python.exe")
# Sys.setenv(RETICULATE_PYTHON = "C:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe")
library(reticulate)
# What is the python config
py_config()
```

```
## python:      G:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe
## libpython:   G:/ProgramData/Anaconda3/envs/wk_pyfan/python38.dll
## pythonhome:  G:/ProgramData/Anaconda3/envs/wk_pyfan
## version:     3.8.5 (default, Sep  3 2020, 21:29:08) [MSC v.1916 64 bit (AMD64)]
## Architecture: 64bit
## numpy:       G:/ProgramData/Anaconda3/envs/wk_pyfan/Lib/site-packages/numpy
## numpy_version: 1.19.4
##
## NOTE: Python version was forced by use_python function
```

```
# set python
# use_python("C:/programdata/Anaconda3/python.exe")
# use_python("C:/ProgramData/Anaconda3/envs/wk_pyfan/python.exe")
use_condaenv('wk_pyfan')
# Sys.which('python')
py_run_string('print(1+1)')
```

### 11.2.1.3 Error

**11.2.1.3.1 py\_call\_impl error** The error appeared when calling any python operations, including “1+1”, resolved after installing reticulate from github: `devtools::install_github("rstudio/reticulate")`

```
Error in py_call_impl(callable, dots$args, dots$keywords) :
  TypeError: use() got an unexpected keyword argument 'warn'
```

## 11.3 Command Line

### 11.3.1 Shell and System Commands

Go back to [fan's REconTools Package](#), [R Code Examples Repository](#) ([bookdown site](#)), or [Intro Stats with R Repository](#) ([bookdown site](#)).

#### 11.3.1.1 Basic Shell Commands

Run basic shell commands in windows:

```
# detect current path
print(toString(shell(paste0("echo %cd%"), intern=TRUE)))
```

```
## [1] "G:\\repos\\R4Econ"
```

```
# Show directory
print(toString(shell(paste0("dir"), intern=TRUE)))
```

```
## [1] " Volume in drive G is New Volume, Volume Serial Number is 009D-37E9, , Directory of G:\\re"
```

#### 11.3.1.2 Run Python Inside a Conda Environment

Use shell rather than system to activate a conda environment, check python version:

```
# activate conda env
print(toString(shell(paste0("activate base & python --version"), intern=TRUE)))
```

```
## [1] ", G:\\repos\\R4Econ>conda.bat activate base , Python 3.8.5"
```

Activate conda env and run a line:

```
spg_runpython <- paste0("activate base &",
                        "python --version &",
                        "python -c ",
                        "\"st_var='this is string var';",
                        "print(f'{st_var}');",
                        "\"")
print(toString(shell(spg_runpython, intern=TRUE)))
```

```
## [1] ", G:\\repos\\R4Econ>conda.bat activate base , Python 3.8.5, this is string var"
```



# Appendix A

## Index and Code Links

### A.1 Array, Matrix, Dataframe links

#### A.1.1 Section 1.1 List links

1. [Multi-dimensional Named Lists: rmd | r | pdf | html](#)
  - Initiate Empty List. Named one and two dimensional lists. List of Dataframes.
  - Collapse named and unnamed list to string and print input code.
  - **r:** `deparse(substitute())) + vector(mode = "list", length = it_N) + names(list) <- paste0('e',seq())) + dimnames(ls2d)[[1]] <- paste0('r',seq())) + dimnames(ls2d)[[2]] <- paste0('c',seq()))`
  - **tidyr:** `unnest()`

#### A.1.2 Section 1.2 Array links

1. [Arrays Operations in R: rmd | r | pdf | html](#)
  - Basic array operations in R, rep, head, tail, na, etc.
  - E notation.
  - **r:** `rep() + head() + tail() + na_if()`
2. [Generate Special Arrays: rmd | r | pdf | html](#)
  - Generate special arrays: log spaced array
  - **r:** `seq()`
3. [String Operations: rmd | r | pdf | html](#)
  - Split, concatenate, subset, replace, substring strings
  - **r:** `paste0() + sub() + gsub() + grepl() + sprintf() + tail() + strsplit() + basename() + dirname() + substring()`
4. [Meshgrid Matrices, Arrays and Scalars: rmd | r | pdf | html](#)
  - Meshgrid Matrices, Arrays and Scalars to form all combination dataframe.
  - **tidyr:** `expand_grid() + expand.grid()`

#### A.1.3 Section 1.3 Matrix links

1. [Matrix Basics: rmd | r | pdf | html](#)
  - Generate and combine NA, fixed and random matrixes. Name columns and rows.
  - **R:** `rep() + rbind() + matrix(NA) + matrix(NA_real_) + matrix(NA_integer_) + colnames() + rownames()`
2. [Linear Algebra Operations: rmd | r | pdf | html](#)

#### A.1.4 Section 1.4 Variables in Dataframes links

1. [Tibble Basics: rmd | r | pdf | html](#)
  - generate tibbles, rename tibble variables, tibble row and column names
  - rename numeric sequential columns with string prefix and suffix

- **dplyr**: `as_tibble(mt) + rename_all(~c(ar_names)) + rename_at(vars(starts_with("xx")), funs(str_replace(., "yy", "yyyy"))) + rename_at(vars(num_range(' ', ar_it)), funs(paste0(st, .))) + rowid_to_column() + colnames + rownames`
- 2. **Label and Combine Factor Variables**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Convert numeric variables to factor variables, generate joint factors, and label factors.
  - Graph MPG and 1/4 Miles Time (qsec) from the mtcars dataset over joint shift-type (am) and engine-type (vs) categories.
  - **forcats**: `as_factor() + fct_recode() + fct_cross()`
- 3. **Randomly Draw Subsets of Rows from Matrix**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Given matrix, randomly sample rows, or select if random value is below threshold.
  - **r**: `rnorm() + sample() + df[sample(dim(df)[1], it_M, replace=FALSE),]`
  - **dplyr**: `case_when() + mutate(var = case_when(rnorm(n(), mean=0, sd=1) < 0 ~ 1, TRUE ~ 0)) %>% filter(var == 1)`
- 4. **Generate Variables Conditional on Other Variables**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Use case\_when to generate elseif conditional variables: NA, approximate difference, etc.
  - **dplyr**: `case_when() + na_if() + mutate(var = na_if(case_when(rnorm(n()) < 0 ~ -99, TRUE ~ mpg), -99))`
  - **r**: `e-notation + all.equal() + isTRUE(all.equal(a,b,tol)) + is.na() + NA_real_ + NA_character_ + NA_integer_`
- 5. **R Tibble Dataframe String Manipulations**: [rmd](#) | [r](#) | [pdf](#) | [html](#)

## A.2 Summarize Data links

### A.2.1 Section 2.1 Counting Observation links

1. **Counting Basics**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - uncount to generate panel skeleton from years in survey
  - **dplyr**: `uncount(yr_n) + group_by() + mutate(yr = row_number() + start_yr)`

### A.2.2 Section 2.2 Sorting, Indexing, Slicing links

1. **Sorted Index, Interval Index and Expand Value from One Row**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Sort and generate index for rows
  - Generate negative and positive index based on deviations
  - Populate Values from one row to other rows
  - **dplyr**: `arrange() + row_number() + mutate(lowest = min(Sepal.Length)) + case_when(row_number() == x ~ Sepal.Length) + mutate(Sepal.New = Sepal.Length[Sepal.Index == 1])`
2. **Group and sort, and Slice and Summarize**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Group a dataframe by a variable, sort within group by another variable, keep only highest rows.
  - **dplyr**: `arrange() + group_by() + slice_head(n=1)`

### A.2.3 Section 2.3 Group Statistics links

1. **Cummean Test, Cumulative Mean within Group**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - There is a dataframe with a grouping variable and some statistics sorted by another within group
  - variable, calculate the cumulative mean of that variable.
  - **dplyr**: `cummean() + group_by(id, isna = is.na(val)) + mutate(val_cummean = ifelse(isna, NA, cummean(val)))`
2. **Count Unique Groups and Mean within Groups**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Unique groups defined by multiple values and count obs within group.
  - Mean, sd, observation count for non-NA within unique groups.
  - **dplyr**: `group_by() + summarise(n()) + summarise_if(is.numeric, funs(mean = mean(., na.rm = TRUE), n = sum(is.na(.)==0)))`
3. **By Groups, One Variable All Statistics**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Pick stats, overall, and by multiple groups, stats as matrix or wide row with name=(ctsvar + catevar + catelabel).



- **tidyr**: `group_by()` + `summarize_at(, funs())` + `rename(!var := !!sym(var))` + `mutate(!var := paste0(var, 'str', !!syms(vars)))` + `gather()` + `unite()` + `spread(varcates, value)`
4. **By within Individual Groups Variables, Averages**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
    - By Multiple within Individual Groups Variables.
    - Averages for all numeric variables within all groups of all group variables. Long to Wide to very Wide.
    - **tidyr**: `*gather()` + `group_by()` + `summarise_if(is.numeric, funs(mean(., na.rm = TRUE)))` + `mutate(all_m_cate = paste0(variable, '_c', value))` + `unite()` + `spread()*`

### A.2.4 Section 2.4 Distributional Statistics links

1. **Tibble Basics**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - input multiple variables with comma separated text strings
  - quantitative/continuous and categorical/discrete variables
  - histogram and summary statistics
  - **tibble**: `ar_one <- c(107.72, 101.28)` + `ar_two <- c(101.72, 101.28)` + `mt_data <- cbind(ar_one, ar_two) + as_tibble(mt_data)`

### A.2.5 Section 2.5 Summarize Multiple Variables links

1. **Apply the Same Function over Columns of Matrix**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Replace NA values in selected columns by alternative values.
  - Cumulative sum over multiple variables.
  - Rename various various with common prefix and suffix appended.
  - **r**: `cumsum()` + `gsub()` + `mutate_at(vars(contains('V')), .funs = list(cumu = ~cumsum(.)))` + `rename_at(vars(contains("V")), list(~gsub("M", "", .)))`
  - **dplyr**: `rename_at()` + `mutate_at()` + `rename_at(vars(starts_with("V")), funs(str_replace(., "V", "var")))` + `mutate_at(vars(one_of(c('var1', 'var2'))), list(~replace_na(., 99)))`

## A.3 Functions links

### A.3.1 Section 3.1 Dataframe Mutate links

1. **Nonlinear Function of Scalars and Arrays over Rows**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Five methods to evaluate scalar nonlinear function over matrix.
  - Evaluate non-linear function with scalar from rows and arrays as constants.
  - **r**: `.fl_A + fl_A = '(., 'fl_A') + .[[svr_fl_A]]`
  - **dplyr**: `rowwise()` + `mutate(out = funct(inputs))`
2. **Evaluate Functions over Rows of Meshes Matrices**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Mesh states and choices together and rowwise evaluate many matrixes.
  - Cumulative sum over multiple variables.
  - Rename various various with common prefix and suffix appended.
  - **r**: `ffi <- function(fl_A, ar_B)`
  - **tidyr**: `expand_grid()` + `rowwise()` + `df %>% rowwise() %>% mutate(var = ffi(fl_A, ar_B))`
  - **ggplot2**: `geom_line()` + `facet_wrap()` + `geom_hline()` + `facet_wrap(. ~ var_id, scales = 'free')` + `geom_hline(yintercept=0, linetype="dashed", color="red", size=1)` +

### A.3.2 Section 3.2 Dataframe Do Anything links

1. **Dataframe Row to Array (Mx1 by N) to (MxQ by N+1)**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Generate row value specific arrays of varying Length, and stack expanded dataframe.
  - Given row-specific information, generate row-specific arrays that expand matrix.
  - **dplyr**: `do()` + `unnest()` + `left_join()` + `df %>% group_by(ID) %>% do(inc = rnorm(.Q, mean = .mean, sd = .sd)) %>% unnest(c(inc))`
2. **Dataframe Subset to Scalar (MxP by N) to (Mx1 by 1)**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - MxQ rows to Mx1 Rows. Group dataframe by categories, compute category specific output scalar or arrays based on within category variable information.

- **dplyr**: `group_by(ID) + do(inc = rnorm(.N, mean = .mn, sd = .sd)) + unnest(c(inc)) + left_join(df, by = "ID")`
- 3. **Dataframe Subset to Dataframe (MxP by N) to (MxQ by N+Z-1)**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Group by mini dataframes as inputs for function. Stack output dataframes with group id.
  - **dplyr**: `group_by() + do() + unnest()`

### A.3.3 Section 3.3 Apply and pmap links

1. **Apply and Sapply function over arrays and rows**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Evaluate function `f(x_i, y_i, c)`, where `c` is a constant and `x` and `y` vary over each row of a matrix, with index `i` indicating rows.
  - Get same results using `apply` and `sapply` with defined and anonymous functions.
  - **r**: `do.call() + apply(mt, 1, func) + sapply(ls_ar, func, ar1, ar2)`
2. **Mutate rowwise, mutate pmap, and rowwise do unnest**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Evaluate function `f(x_i, y_i, c)`, where `c` is a constant and `x` and `y` vary over each row of a matrix, with index `i` indicating rows.
  - Get same results using various types of `mutate rowwise`, `mutate pmap` and `rowwise do unnest`.
  - **dplyr**: `rowwise() + do() + unnest()`
  - **purrr**: `pmap(func)`
  - **tidyr**: `unlist()`

## A.4 Panel links

### A.4.1 Section 4.1 Generate and Join links

1. **R dplyr Group by Index and Generate Panel Data Structure**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Build skeleton panel frame with `N` observations and `T` periods with gender and height.
  - Generate group Index based on a list of grouping variables.
  - **r**: `runif() + rnorm() + rbinom(n(), 1, 0.5) + cumsum()`
  - **dplyr**: `group_by() + row_number() + ungroup() + one_of() + mutate(var = (row_number() == 1) * )`
  - **tidyr**: `uncount()`
2. **R DPLYR Join Multiple Dataframes Together**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Join dataframes together with one or multiple keys. Stack dataframes together.
  - **dplyr**: `filter() + rename(!sym(vsta) := !sym(vstb)) + mutate(var = rnom(n())) + left_join(df, by = (c('id' = 'id', 'vt' = 'vt'))) + left_join(df, by = setNames(c('id', 'vt'), c('id', 'vt'))) + bind_rows()`

### A.4.2 Section 4.2 Wide and Long links

1. **TIDYR Pivot Wider and Pivot Longer Examples**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Long roster to wide roster and cumulative sum attendance by date.
  - **dplyr**: `mutate(var = case_when(rnorm(n()) < 0 ~ 1, TRUE ~ 0)) + rename_at(vars(num_range("ar_it")), list(~paste0(st_prefix, ., "))) + mutate_at(vars(contains(str)), list(~replace_na(., 0))) + mutate_at(vars(contains(str)), list(~cumsum(.)))`
2. **R Wide Data to Long Data Example (TIDYR Pivot Longer)**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - A matrix of `ev` given states, rows are states and cols are shocks. Convert to Long table with shock and state values and `ev`.
  - **dplyr**: `left_join() + pivot_longer(cols = starts_with('zi'), names_to = c('zi'), names_pattern = paste0("zi(.)"), values_to = "ev")`

## A.5 Linear Regression links

### A.5.1 Section 5.1 OLS and IV links

1. **IV/OLS Regression**: [rmd](#) | [r](#) | [pdf](#) | [html](#)

- R Instrumental Variables and Ordinary Least Square Regression store all Coefficients and Diagnostics as Dataframe Row.
  - **aer**: `library(aer) + ivreg(as.formula, diagnostics = TRUE)`
2. **M Outcomes and N RHS Alternatives**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- There are M outcome variables and N alternative explanatory variables. Regress all M outcome variables on N endogenous/independent right hand side variables one by one, with controls and/or IVs, collect coefficients.
  - **dplyr**: `bind_rows(lapply(listx, function(x)(bind_rows(lapply(listy, regf.iv)))) + starts_with() + ends_with() + reduce(full_join)`

### A.5.2 Section 5.2 Decomposition links

1. **Regression Decomposition**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Post multiple regressions, fraction of outcome variables' variances explained by multiple subsets of right hand side variables.
  - **dplyr**: `gather() + group_by(var) + mutate_at(vars, funs(mean = mean(.))) + rowSums(matmat) + mutate_if(is.numeric, funs(frac = (./value_var)))`\*

## A.6 Nonlinear Regression links

### A.6.1 Section 6.1 Logit Regression links

1. **Logit Regression**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Logit regression testing and prediction.
  - **stats**: `glm(as.formula(), data, family='binomial') + predict(rs, newdata, type = "response")`

### A.6.2 Section 6.2 Quantile Regression links

1. **Quantile Regressions with Quantreg**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Quantile regression with continuous outcomes. Estimates and tests quantile coefficients.
  - **quantreg**: `rq(mpg ~ disp + hp + factor(am), tau = c(0.25, 0.50, 0.75), data = mtcars) + anova(rq(), test = "Wald", joint=TRUE) + anova(rq(), test = "Wald", joint=FALSE)`

## A.7 Optimization links

### A.7.1 Section 7.1 Bisection links

1. **Concurrent Bisection over Dataframe Rows**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Post multiple regressions, fraction of outcome variables' variances explained by multiple subsets of right hand side variables.
  - **tidyr**: `*pivot_longer(cols = starts_with('abc'), names_to = c('a', 'b'), names_pattern = paste0('prefix', "(.)_(.)"), values_to = val) + pivot_wider(names_from = !!sym(name), values_from = val) + mutate(!!sym(abc) := case_when(efg < 0 ~ !!sym(opq), TRUE ~ iso))`\*
  - **ggplot2**: `geom_line() + facet_wrap() + geom_hline()`

## A.8 Mathematics and Statistics links

### A.8.1 Section 8.1 Distributions links

1. **Integrate Normal Shocks**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Random Sampling (Monte Carlo) integrate shocks.
  - Trapezoidal rule (symmetric rectangles) integrate normal shock.

### A.8.2 Section 8.2 Analytical Solutions links

1. **linear solve x with f(x) = 0**: [rmd](#) | [r](#) | [pdf](#) | [html](#)
- Evaluate and solve statistically relevant problems with one equation and one unknown that permit analytical solutions.

### A.8.3 Section 8.3 Inequality Models links

1. Gini for Discrete Samples: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Given sample of data points that are discrete, compute the approximate gini coefficient.
  - **r**: `sort() + cumsum() + sum()`
2. CES and Atkinson Utility: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Analyze how changing individual outcomes shift utility given inequality preference parameters.
  - Draw Cobb-Douglas, Utilitarian and Leontief indifference curve
  - **r**: `apply(mt, 1, funct(x){}) + do.call(rbind, ls_mt)`
  - **tidyr**: `expand_grid()`
  - **ggplot2**: `geom_line() + facet_wrap()`
  - **econ**: *Atkinson (JET, 1970)*

## A.9 Tables and Graphs links

### A.9.1 Section 9.1 R Base Plots links

1. R Base Plot Line with Curves and Scatter: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Plot scatter points, line plot and functional curve graphs together.
  - Set margins for legend to be outside of graph area, change line, point, label and legend sizes.
  - Generate additional lines for plots successively, record successively, and plot all steps, or initial steps results.
  - **r**: `plot() + curve() + legend() + title() + axis() + par() + recordPlot()`

### A.9.2 Section 9.2 Write and Read Plots links

1. Base R Save Images At Different Sizes: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Base R store image core, add legends/titles/labels/axis of different sizes to save figures of different sizes.
  - **r**: `png() + setEPS() + postscript() + dev.off()`

## A.10 Get Data links

### A.10.1 Section 10.1 Environmental Data links

1. CDS ECMWF Global Enviornmental Data Download: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Using Python API get get ECMWF ERA5 data.
  - Dynamically modify a python API file, run python inside a Conda virtual environment with R-reticulate.
  - **r**: `file() + writeLines() + unzip() + list.files() + unlink()`
  - **r-reticulate**: `use_python() + Sys.setenv(RETICULATE_PYTHON = sph_conda_env)`

## A.11 Code and Development links

### A.11.1 Section 11.1 File in and Out links

1. Save Text to File, Read Text from File, Replace Text in File: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Save data to file, read text from file, replace text in file.
  - **r**: `kable() + file() + writeLines() + readLines() + close() + gsub()`
2. Convert R Markdown File to R, PDF and HTML: [rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Find all files in a folder with a particula suffix, with exclusion.
  - Convert R Markdow File to R, PDF and HTML.
  - Modify markdown pounds hierarchy.
  - **r**: `file() + writeLines() + readLines() + close() + gsub()`

### A.11.2 Section 11.2 Python with R links

1. Python in R with Reticulate: [rmd](#) | [r](#) | [pdf](#) | [html](#)

- Use Python in R with Reticulate
- **reticulate**: `py_config()` + `use_condaenv()` + `py_run_string()` + `Sys.which('python')`

### A.11.3 Section 11.3 Command Line links

1. [System and Shell Commands in R: rmd](#) | [r](#) | [pdf](#) | [html](#)
  - Run system executable and shell commands.
  - Activate conda environment with shell script.
  - **r**: `system()` + `shell()`



# Bibliography

- R Core Team (2019). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria.
- Wang, F. (2020). *REconTools: R Tools for Panel Data and Optimization*. R package version 0.0.0.9000.
- Wickham, H. (2019). *tidyverse: Easily Install and Load the 'Tidyverse'*. R package version 1.3.0.
- Xie, Y. (2020). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.18.