

A Collection of Python Examples

Fan Wang

2020-10-09

Contents

Preface	5
1 Array, Matrix, Dataframe	7
1.1 Array	7
1.1.1 Strings	7
1.2 Dictionary	9
1.2.1 Dictionary	9
2 Tables and Graphs	13
2.1 Matplotlib Base Plots	13
2.1.1 Line and Scatter Plots	13
2.1.2 Text Plot	14
3 Amazon Web Services	17
3.1 AWS Setup	17
3.1.1 AWS Setup	17
4 Docker Container	21
4.1 Docker Setup	21
4.1.1 Docker Setup	21
4.1.2 ECR Setup	23
5 Get Data	27
5.1 Environmental Data	27
5.1.1 ECMWF ERA5 Data	27
6 System and Support	37
6.1 Command Line	37
6.1.1 Python Command Line	37
6.1.2 Run Matlab Functions	39
6.2 File In and Out	40
6.2.1 Read and Write and Convert	40
6.2.2 Folder Operations	44
6.2.3 Parse Yaml	49
6.3 Install Python	53
6.3.1 Core Installations	53
A Index and Code Links	55
A.1 Array, Matrix, Dataframe links	55
A.1.1 Section 1.1 Array links	55
A.1.2 Section 1.2 Dictionary links	55
A.2 Tables and Graphs links	55
A.2.1 Section 2.1 Matplotlib Base Plots links	55
A.3 Tables and Graphs links	55
A.3.1 Section 3.1 Matplotlib Base Plots links	55
A.4 Amazon Web Services links	56
A.4.1 Section 4.1 AWS Setup links	56

A.5	Docker Container links	56
A.5.1	Section 5.1 Docker Setup links	56
A.6	Get Data links	56
A.6.1	Section 6.1 Environmental Data links	56
A.7	System and Support links	56
A.7.1	Section 7.1 Command Line links	56
A.7.2	Section 7.2 File In and Out links	57
A.7.3	Section 7.3 Install Python links	57

Preface

The work-in-progress [pyfan](#) repository contains:

1. Tutorials and examples for various research tasks: [bookdown site](#) and [bookdown pdf](#).
2. A package for basic data, graph and research tasks: [readthedocs](#) and [pypi](#).

Materials are gathered from various [projects](#) in which python code is used for research and paper-administrative tasks. Files are from [Fan's pyfan](#) repository which has an associated [package](#). The package functionalize various tasks tested out in the Rmd files. In addition, the [pyecon](#) repository and the associated [package](#) ([readthedocs](#)) contain functions and rmd files related explicitly to solving economic models.

From [Fan's](#) other repositories: For dynamic borrowing and savings problems, see [Dynamic Asset Repository \(Matlab\)](#); For code examples, see also [Matlab Example Code](#), [R Example Code](#), and [Stata Example Code](#); For intro econ with Matlab, see [Intro Mathematics for Economists](#), and for intro stat with R, see [Intro Statistics for Undergraduates](#). See [here](#) for all of [Fan's](#) public repositories.

The site is built using [Bookdown](#) (Xie, 2020).

Please contact [FanWangEcon](#) for issues or problems.

Chapter 1

Array, Matrix, Dataframe

1.1 Array

1.1.1 Strings

Go back to [fan's Python Code Examples Repository \(bookdown site\)](#).

1.1.1.1 Search if Names Include Strings

Given a list of strings, loop but skip if string contains elements string list.

```
# define string
ls_st_ignore = ['abc', 'efg', 'xyz']
ls_st_loop = ['ab cefg sdf', '12345', 'xyz', 'abc xyz', 'good morning']

# zip and loop and replace
for st_loop in ls_st_loop:
    if sum([st_ignore in st_loop for st_ignore in ls_st_ignore]):
        print('skip:', st_loop)
    else:
        print('not skip:', st_loop)
```

```
## skip: ab cefg sdf
## not skip: 12345
## skip: xyz
## skip: abc xyz
## not skip: good morning
```

1.1.1.2 Replace a Set of Strings in String

Replace terms in string

```
# define string
st_full = """
abc is a great efg, probably xyz. Yes, xyz is great, like efg.
eft good, EFG capitalized, efg good again.
A B C or abc or ABC. Interesting xyz.
"""

# define new and old
ls_st_old = ['abc', 'efg', 'xyz']
ls_st_new = ['123', '456', '789']

# zip and loop and replace
for old, new in zip(ls_st_old, ls_st_new):
```

```

st_full = st_full.replace(old, new)

# print
print(st_full)

##
## 123 is a great 456, probably 789. Yes, 789 is great, like 456.
## eft good, EFG capitalized, 456 good again.
## A B C or 123 or ABC. Interesting 789.

```

1.1.1.3 Wrap String with Fixed Width

Given a long string, wrap it into multiple lines with fixed width.

```

import textwrap

# A long Path
st_path = """
C:/Users/fan/Documents/Dropbox (UH-ECON)/Project Emily Minority Survey/EthLang/reg_lang_abi_cls_minority_survey/attain_m_vs_f/talk_m2c_hfracle02.tex
"""

# Wrap text with tight width
st_wrapped = textwrap.fill(st_path, width = 20)
print(st_wrapped)

## C:/Users/fan/Docume
## nts/Dropbox (UH-
## ECON)/Project Emily
## Minority Survey/EthL
## ang/reg_lang_abi_cls
## _mino/tab3_fm/attain
## _m_vs_f/tab3_mand_ta
## lk_m2c_hfracle02.tex

```

Combine Strings that are wrapped and not Wrapped

```

# Paths
st_path_a = "C:/Users/fan/Documents/Dropbox (UH-ECON)/Project Emily Minority Survey/EthLang/reg_lang_abi_cls_minority_survey/attain_m_vs_f/talk_m2c_hfracle02.tex"
st_path_b = 'C:/Users/fan/R4Econ/support/development/fs_packaging.html'

# Combine Strings and Wrap
str_dc_records = 'First Path:'.upper() + '\n' + \
    textwrap.fill(st_path_a, width=25) + '\n\n' + \
    'Second Path:'.upper() + '\n' + \
    textwrap.fill(st_path_b, width=25)

# Print
print(str_dc_records)

## FIRST PATH:
## C:/Users/fan/Documents/Dr
## opbox (UH-ECON)/Project
## Emily Minority Survey/Eth
## Lang/reg_lang_abi_cls_min
## o/tab3_fm/attain_m_vs_f/t
## ab3_mand_talk_m2c_hfracle
## 02.tex
##
## SECOND PATH:
## C:/Users/fan/R4Econ/suppo

```



```
##             'Dataset.',
##   'file': 'mat_algebra_rules',
##   'title': 'Opening '
##             'a '
##             'Dataset',
##   'val': 1.1}]
```

1.2.1.2 Iteratively Add to A Dictionary

Iteratively add additional Key and Value pairs to a dictionary.

```
ls_snm_tex = ["file1.tex", "file2.tex", "file3.tex"]
ls_snm_pdf = ["file1.pdf", "file2.pdf", "file3.pdf"]

dc_tex_pdf = {}
for tex, pdf in zip(ls_snm_tex, ls_snm_pdf):
    dc_tex_pdf[tex] = pdf

pprint.pprint(dc_tex_pdf, width=1)
```

```
## {'file1.tex': 'file1.pdf',
##  'file2.tex': 'file2.pdf',
##  'file3.tex': 'file3.pdf'}
```

1.2.1.3 Select by Keys in Dictionary

Given a list of dictionary, search if key name is in list:

```
# string to search through
ls_str_file_ids = ['mat_matlab', 'mat_algebra_rules']
# select subset
ls_dc_selected = [dc_exa
                   for dc_exa in ls_dc_exa
                   if dc_exa['file'] in ls_str_file_ids]

# print
pprint.pprint(ls_dc_selected, width=1)
```

```
## [{'date': datetime.date(2020, 5, 2),
##   'description': 'Frequency '
##                 'table, '
##                 'bar '
##                 'chart '
##                 'and '
##                 'histogram',
##   'file': 'mat_matlab',
##   'title': 'One '
##           'Variable '
##           'Graphs '
##           'and '
##           'Tables',
##   'val': 1},
##  {'date': datetime.date(2018, 12, 1),
##   'description': 'Opening '
##                 'a '
##                 'Dataset.',
##   'file': 'mat_algebra_rules',
##   'title': 'Opening '
##           'a '
##           'Dataset',
##   'val': 1.1}]
```

Search and Select by Multiple Keys in Dictionary. Using two keys below:

```
# string to search through
ls_str_file_ids = ['mat_matlab', 'mat_algebra_rules']
# select subset
ls_dc_selected = [dc_exa
                   for dc_exa in ls_dc_exa
                   if ((dc_exa['file'] in ls_str_file_ids)
                       and
                       (dc_exa['val'] == 1))]

# print
pprint.pprint(ls_dc_selected, width=1)

## [{'date': datetime.date(2020, 5, 2),
##   'description': 'Frequency '
##                  'table, '
##                  'bar '
##                  'chart '
##                  'and '
##                  'histogram',
##   'file': 'mat_matlab',
##   'title': 'One '
##           'Variable '
##           'Graphs '
##           'and '
##           'Tables',
##   'val': 1}]
```


Chapter 2

Tables and Graphs

2.1 Matplotlib Base Plots

2.1.1 Line and Scatter Plots

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

2.1.1.1 Plot Random Walk and White Noise Jointly

Given x and y coordinates, plot out two lines. see [matplotlib.pyplot.plot](#). Here we will plot out the extremes of AR(1), white noise (no persistence), and random walk (fully persistent shocks).

```
# Import Packages
import numpy as np
import matplotlib.pyplot as plt

# Generate X and Y
np.random.seed(123)
ar_fl_y1_rand = np.random.normal(0, 2, 100)
ar_fl_y2_rand = np.cumsum(np.random.normal(0, 1, 100))
ar_it_x_grid = np.arange(1, len(ar_fl_y1_rand)+1)

# Start Figure
fig, ax = plt.subplots()

# Graph
ax.plot(ar_it_x_grid, ar_fl_y1_rand,
        color='blue', linestyle='dashed',
        label='sd=2, 0 persistence')

## [<matplotlib.lines.Line2D object at 0x000002120935C488>]
ax.plot(ar_it_x_grid, ar_fl_y2_rand,
        color='red', linestyle='solid',
        label='sd=1, random walk')

# Labeling

## [<matplotlib.lines.Line2D object at 0x000002120BCA1088>]
ax.legend(loc='upper left')

## <matplotlib.legend.Legend object at 0x000002120935C6C8>
plt.ylabel('Random Standard Normal Draws')
```


```

## Text(0, 0.5, 'Random Standard Normal Draws')
plt.xlabel('Time Periods')

## Text(0.5, 0, 'Time Periods')
plt.title('White Noise')

## Text(0.5, 1.0, 'White Noise')
plt.grid()
plt.show()

```

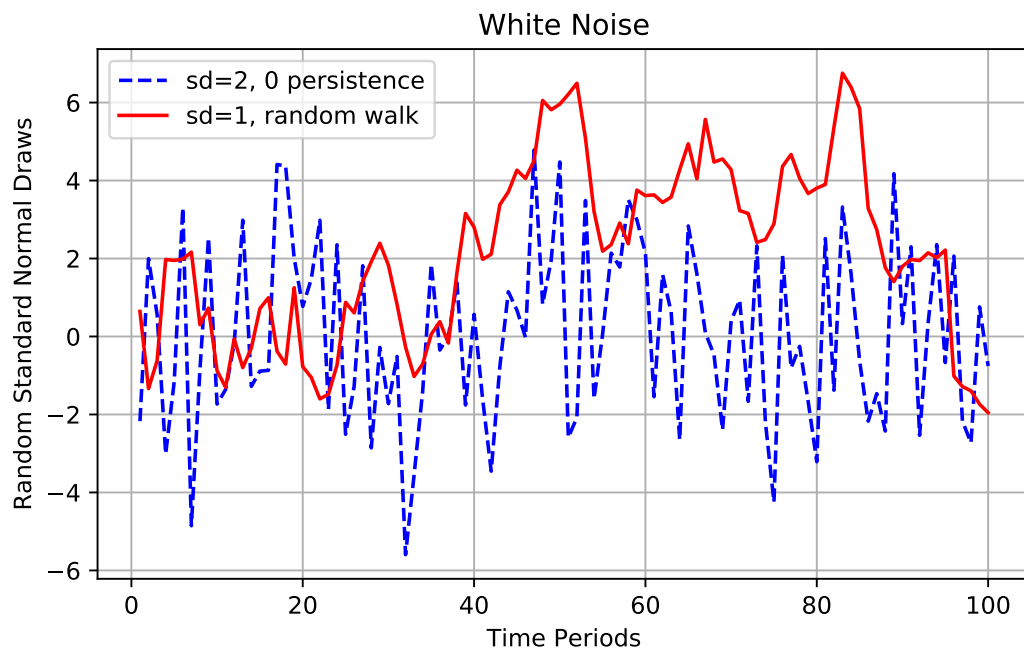

2.1.2 Text Plot

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

2.1.2.1 Plot Text

Plot Text as Image. [Create text with different alignment and rotation.](#)

```

# Import Packages
import matplotlib.pyplot as plt
import textwrap
import json

# Dict of String to String
dc_path = {'C:\\Users\\fan\\Documents\\Dropbox (UH-ECON)\\repos\\Tex4Econ\\'
           '_other\\equation\\cases.tex':
           'C:/Users/fan/Documents/cases.pdf',
           'C:\\Users\\fan\\Documents\\Dropbox (UH-ECON)\\repos\\Tex4Econ\\'
           '_other\\symbols\\fs_symbols.tex':
           'C:/Users/fan/Documents/fs_symbols.pdf'}
st_dc_path = textwrap.fill(json.dumps(dc_path), width = 70)

# Start Plot
fig, ax = plt.subplots()

```

```

# Text Plot
ax.text(0.5, 0.5, st_dc_path,
        horizontalalignment='center',
        verticalalignment='center',
        fontsize=14, color='black',
        transform=ax.transAxes)

# Labeling
## Text(0.5, 0.5, '{"C:\\\\Users\\\\fan\\\\Documents\\\\Dropbox (UH-\\nECON)\\\\repos\\\\Tex4Econ\\\\
ax.set_axis_off()
plt.show()

```

```

        {"C:\\Users\\fan\\Documents\\Dropbox (UH-
ECON)\\repos\\Tex4Econ\\_other\\equation\\cases.tex":
        "C:/Users/fan/Documents/cases.pdf",
        "C:\\Users\\fan\\Documents\\Dropbox (UH-
ECON)\\repos\\Tex4Econ\\_other\\symbols\\fs_symbols.tex":
        "C:/Users/fan/Documents/fs_symbols.pdf"}

```


Chapter 3

Amazon Web Services

3.1 AWS Setup

3.1.1 AWS Setup

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

3.1.1.1 Installation on Local Machine

First install [anaconda](#), [git](#), and associated programs.

1. Putty
2. access to .pem key
3. conda aws environment below

3.1.1.2 Conda AWS Environment

Can Start and Stop instances from Conda Prompt after this.

```
conda deactivate
conda list env
conda env remove -n wk_aws
conda create -n wk_aws -y
conda activate wk_aws

# Install External Tools
conda install -c anaconda pip -y

# Command line interface
conda install -c conda-forge awscli -y
# Programmatically send JSON instructions with boto3
conda install -c anaconda boto3 -y
```

3.1.1.3 AWS Account set-up

1. Sign-up for AWS web services account (can be the same as your Amazon shopping account)
2. Register for [AWS Educate](#) to get student or faculty voucher.
 - The University of Houston is a part of AWS Educate, choose educator or student, should hear back within 24 hours with coupon code.
 - UH students can get \$100, faculty can get \$200.

3.1.1.4 Start a AWS Instance and Link Local to Remote

Amazon has a lot of tutorials. Here is an outline.

1. Generate keypair on AWS, [aws guide](#)
 - this gives you a .pem file which you download and Amazon also remembers
 - local computers with the right .pem file can talk to your AWS instances
 - You might need to invoke the chmod command below to set permission:
2. *Launching Instance*: Go to your console, choose EC2, choose launch instance, select Amazon Linux Instance (review and launch)
3. *Instance security*: select VPC security group: I have for example: fan_wang_SG_us_east_nv_VPC (edit security group and submit)
 - Security group can allow any IP address to access your instance or just specific ones.
 - AWS has a tool here that just allows your current IP to access the EC2 instance
4. *Instance access key*: Select right keypair (your .pem key), fan_wang-key-pair-us_east_nv (prompted after submitting)
5. For SSH in, you can use Putty. [aws guide](#)
 - tell Putty your AWS instance DNS address and where your pem key is
 - Can use a Putty client to enter an EC2 instance
6. For SSH, can also do the process below:
 - [open git bash](#) (install putty before)

```
chmod 400 "C:/Users/fan/Documents/Dropbox (UH-ECON)/Programming/AWS/fan_wang-key-pair-us_east_nv.pem"
ssh-agent -s
eval $(ssh-agent -s)
```

- Tell SSH where pem key is:

```
ssh-add "C:/Users/fan/Documents/Dropbox (UH-ECON)/Programming/AWS/fan_wang-key-pair-us_east_nv.pem"
```

- You will find a public DNS address for your aws instance on the AWS user interface page

```
# ssh git bash command line
# for ubuntu machine
ssh ubuntu@ec2-54-197-6-153.compute-1.amazonaws.com
# for aws linux
ssh ec2-user@ec2-52-23-218-117.compute-1.amazonaws.com
# quit aws instance
# ctrl + D
```

- if get: Permission denied (publickey), see:
 1. Trying to connect with the wrong key. Are you sure this instance is using this keypair?
 2. Trying to connect with the wrong username. ubuntu is the username for the ubuntu based AWS distribution, but on some others it's ec2-user (or admin on some Debians, according to Bogdan Kulbida's answer)(can also be root, fedora, see below)
 3. Trying to connect the wrong host. Is that the right host you are trying to log in to?
- You can log in generally like this, note the instance gets new public DNS IP address every time you restart it:

```
LOCALPEM="C:/Users/fan/Documents/Dropbox (UH-ECON)/Programming/AWS/fan_wang-key-pair-us_east_nv.pem"
IPADD=34.207.250.160
REMOTEIP=ec2-user@$IPADD
ssh-keygen -R $IPADD
ssh -i "$LOCALPEM" $REMOTEIP
```

3.1.1.5 Use AWSCLI to Start and Stop an Instance

1. Install AWS CLI
2. Create individual IAM users
3. [Configure your awscli](#)

```
bash $ aws configure
AWS Access Key ID [None]: XXXXIOSFODNN7EXAMPLE
AWS Secret Access Key [None]: wXalrXXtnXXXX/X7XXXXX/bXxXfiCXXXXXXXXXXXXX Default
region name [None]: us-west-1 Default output format [None]: json
```

 - do not copy and paste the Key ID and Access Key. They are example
 - this creates under a folder like this: C:/Users/fan/.aws, inside the folder these info will be stored in a configuration file.
 - then when you use aws cli, you will automatically be authenticated

3. Start an instance in console first (or directly in command line). Stop it. do not terminate. Now this instance will have a fixed instance ID. Its DNS IP address will change every time you restart it, but its instance ID is fixed. Instance ID is found easily in the EC2 Console.

- [Launch an instance](#)

```
aws ec2 run-instances --image-id ami-xxxxxxx --count 1 --instance-type t2.micro --key-name MyK
```

- [Start](#) an instance

```
aws ec2 start-instances --instance-ids i-XXXXXXX
```

```
aws ec2 start-instances --instance-ids i-040c856530b2619bc
```

- [Stop](#) an instance

```
aws ec2 stop-instances --instance-ids i-XXXXXXX
```

```
aws ec2 stop-instances --instance-ids i-040c856530b2619bc
```

3.1.1.6 Set-up SSM on EC2 Instance

To execute commandlines etc remote on EC2, need to set up SSM: AWS Systems Manager Agent ([SSM Agent](#))

SSM-agent is already installed in Amazon Linux.

[Error Message regarding InvalidInstanceId](#). The following scenarios can result in this error message:

- Instance id is invalid (in the comments you have verified it isn't)
- Instance is in a different region (in the comments you have verified it isn't)
- Instance is not currently in the Running state
- Instance does not have the AWS SSM agent installed and running.

“You have to create and attach the policy AmazonSSMFullAccess to the machine (thats maybe more broad than you need) but that was why it wasn't working for me... You do that by clicking on (when selected on the ec2 instance) Action > Instance Settings > Attach/Replace IAM Role then create a role for ec2 that has that permission then attach, should take like 5-10 mins to pop up in SYSTEMS MANAGER SHARED RESOURCES - Managed Instances as mark mentions. – Glen Thompson Sep 20 '18 at 16:31”

```
# Start SSM Agent with
```

```
sudo systemctl start amazon-ssm-agent
```


Chapter 4

Docker Container

4.1 Docker Setup

4.1.1 Docker Setup

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

4.1.1.1 Install Docker on AWS

Installation Instructions

1. Putty
2. access to .pem key
3. conda aws environment below

For Amazon Linux 2:

```
# SSH into EC2 Instance
ssh ec2-user@ec2-52-23-218-117.compute-1.amazonaws.com
# Update
sudo yum update -y
# install
sudo amazon-linux-extras install docker -y
# start service
sudo service docker start
sudo service docker status
# execute docker commands without sudo
sudo usermod -a -G docker ec2-user
# log out and in reboot does not change public address
sudo reboot
# if docker info does not work, docker start again
docker info
```

4.1.1.2 Create a Dockerfile and build it

Create a Dockerfile and build it. Building a dockerfile generates a docker image:

```
# docker folder
mkdir ~/docker
# cd into docker folder
cd ~/docker
# create a Dockerfile in the docker folder
# copy the Example Dockerfile below to the Dockerfile
vim Dockerfile
```

```
# in the docker directory build the docker file
docker build -t hello-world .
```

Example Dockerfile:

```
FROM ubuntu:12.04

# Install dependencies
RUN apt-get update -y
RUN apt-get install -y apache2

# Install apache and write hello world message
RUN echo "Hello World!" > /var/www/index.html

# Configure apache
RUN a2enmod rewrite
RUN chown -R www-data:www-data /var/www
ENV APACHE_RUN_USER www-data
ENV APACHE_RUN_GROUP www-data
ENV APACHE_LOG_DIR /var/log/apache2

EXPOSE 80

CMD ["/usr/sbin/apache2", "-D", "FOREGROUND"]
```

4.1.1.3 Run, Enter and Exit

`docker build` generates a docker image, we start the docker container, run using the image created.

```
# list docker images available to run
docker images
```

These could be some images that are shown after running `*docker images*`:

REPOSITORY	TAG	IMAGE ID
XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com/fanconda	latest	5d1a0df0796e
XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com/fanconda2020	latest	2db5e859d70c
fanconda2020	latest	2db5e859d70c
fanconda5	latest	fa55672e7753
fanconda3	latest	2083f1124465

Run the image and enter into it (use an image name) and run commands with programs, upon exit, container is stopped. Entering back into the container, the data was generated before now is no longer there, it is a new container based on the same image.

```
# will be inside now the conda image (base)
docker run -t -i fanconda /bin/bash

# can run programs inside here that have been loaded into the image
python /fanProg/invoke/run.py -A ng_s_t=kap_m0_nld_m_simu=2=3 -B b -C 20180814_beta -D esti_param.be
# review generated outputs inside docker, results are stored by the run.py program and associated fi
cd /data
ls
# To exit the currently running docker
exit
# show docker container exited
docker ps -a
```

Root directory in conda docker: `> fanProg bin boot data dev etc home lib lib64 media mnt opt proc pyfan root run sbin srv sys tmp usr var`

Run the image with program without entering into it.

```
docker run fancondajmp python /ThaiJMP/invoke/run.py -A ng_s_t=kap_m0_nld_m_simu=2=3 -B b -C 2018081
```

- Docker container will automatically stop after “docker run -d”

4.1.1.4 Status and Cleaning

4.1.1.4.1 Docker file and Git Repo To have docker file access a git repo without exposing git repo password. Generate a private token, and access as below. See [stackoverflow-23391839](https://stackoverflow.com/questions/23391839/docker-file-access-git-repo-without-exposing-git-repo-password).

```
RUN git clone https://b123451234dfc025a836927PRIVATETOKEND1239@github.com/FanWangEcon/ThaiJMP.git /T
```

4.1.1.4.2 Docker Status, Space and Clean First, start service:

```
# start docker
sudo service docker start
# see status
sudo service docker status
```

Second, list all docker related space usages, containers and images:

```
# check disk usage
docker system df
```

Third, clean containers

```
# see docker containers
docker container ls -a
# Remove all stopped docker containers
docker rm $(docker ps -a -q)
```

Fourth, clean images

```
# list all images
docker images
docker images --all
# Clean all images not referenced by a container
docker image prune
```

4.1.2 ECR Setup

Go back to fan’s [Python Code Examples](#) Repository ([bookdown site](#)).

4.1.2.1 Pull from Elastic Container Registry (ECR)

Given docker files already on ECR, in EC2, first, get password, then pull.

```
# log in
# copy the output from the line below and paste
aws ecr get-login --no-include-email
# this is copied from output of the command above
docker login -u AWS -p PASSWORDPASSWORDPASSWORDPASSWORD https://XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com
# pull from docker
docker pull XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com/fancondaXX
```

4.1.2.2 Update Elastic Container Registry (ECR)

There is a local conda file, perhaps some project repo have been updated, need to update docker file on ECR (or create new ones). Controlling EC2 can be done manually, or via [SSM](#).

1. Start a EC2 Instance
2. Create a docker folder on EC2 instance (on remote)
3. scp update dockerfile in EC2 docker folder (local to remote)
4. build on remote server docker container (on remote)

5. push from EC2 updated docker to ECR (on remote)

First, after creating/starting a EC2 instance, create a docker file and scp update:

```
# Then a sequences of SSM calls:
# on local machine:
ssh -i "C:/Users/fan/ThaiJMP/boto3aws/aws_ec2/pem/fan_wang-key-pair-us_east_nv.pem" ec2-user@54.161.

# if new instance, create a docker folder under main
# on remote machine
mkdir /home/ec2-user/docker

# ssm call to remove current dockerfile
# on remote machine
rm /home/ec2-user/docker/Dockerfile

# run local scp command to copy latest Dockerfile to EC2, local scp generated by ec2managee
# on local machine
scp -o StrictHostKeyChecking=accept-new -i C:/Users/fan/ThaiJMP/boto3aws/aws_ec2/pem/fan_wang-key-pa
```

Second, start container service remotely, and build new container:

```
# start docker service on ec2
# on remote machine
sudo service docker start

# On remote machine
cd /home/ec2-user/docker
docker build -t fanconda6 --build-arg CACHE_DATE=2020-09-21-22-43-52 .
```

Third, push new container to ECR (tag, get token, login, push):

```
# Start Container Service
sudo service docker start

# CD into folder on remote
cd /home/ec2-user/docker

# tag docker
docker tag fancondaxxx XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com/fancondaxxx

# ECR Docker Log in
# ssm.get_authorization_token(registryIds=[boto3aws.aws_keys()['main_aws_id']])
# Decode authorization token
docker login -u AWS -p TOKENX6XXXXXXg1XXg30X0= https://XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com

# ECR Docker Push to ECR
docker push XXXX7367XXXX.dkr.ecr.us-east-1.amazonaws.com/fancondaxxx
```

```
# aws_keys stores keys
aws_keys_dict = aws_keys()
ssm = boto3.client('ssm',
                    aws_access_key_id=aws_keys_dict['aws_access_key_id'],
                    aws_secret_access_key=aws_keys_dict['aws_secret_access_key'],
                    region_name=aws_keys_dict['region'])
commands = 'rm /home/ec2-user/docker/Dockerfile'
resp = client.send_command(
    DocumentName="AWS-RunShellScript", # One of AWS' preconfigured documents
    Parameters={'commands': commands},
```



```
InstanceIds=[instance_id])
```

4.1.2.2.1 Example SSM communication

4.1.2.2.2 Outputs from Docker Build outputs from docker build

```
json.py - jdump - 47 - 2020-09-22 16:04:32,459 - INFO list_command_invocation-cur_output
:[
  "Sending build context to Docker daemon 3.072kB\r\r",
  "Step 1/16 : FROM continuumio/anaconda3",
  " ---> 472a925c4385",
  "Step 2/16 : VOLUME /data",
  " ---> Using cache",
  " ---> cf4e6a503f00",
  "Step 3/16 : RUN conda update conda",
  " ---> Using cache",
  " ---> 542901f01365",
  "Step 4/16 : RUN apt-get update && apt-get install libgl1-mesa-glx -y",
  " ---> Using cache",
  " ---> 6672960aa00c",
  "Step 5/16 : RUN conda install -c conda-forge interpolation",
  " ---> Using cache",
  " ---> efd86a4259a4",
  "Step 6/16 : RUN conda install -c conda-forge boto3",
  " ---> Using cache",
  " ---> bd0146dac9b3",
  "Step 7/16 : ARG CACHE_DATE=2000-01-01",
  " ---> Using cache",
  " ---> dc40688e3720",
  "Step 8/16 : RUN git clone https://XXXX@github.com/FanWangEcon/pyfan.git /pyfan/",
  " ---> Running in 9c0c2a444540",
  "\u001b[91mCloning into '/pyfan'...",
  "\u001b[0mRemoving intermediate container 9c0c2a444540",
  " ---> c80480cc51a1",
  "Step 9/16 : RUN git clone https://XXXX@github.com/FanWangEcon/CondaProg.git /CondaProg/",
  " ---> Running in 07d9f665b760",
  "\u001b[91mCloning into '/CondaProg'...",
  "\u001b[0mRemoving intermediate container 07d9f665b760",
  " ---> a5ac6c6e1458",
  "Step 10/16 : EXPOSE 80",
  " ---> Running in 1a8ef516e236",
  "Removing intermediate container 1a8ef516e236",
  " ---> 13ab2965e892",
  "Step 11/16 : ENV PYTHONPATH /pyfan/",
  " ---> Running in 2d9e4b68164b",
  "Removing intermediate container 2d9e4b68164b",
  " ---> 0a74e69ce1c8",
  "Step 12/16 : ENV PYTHONPATH $PYTHONPATH:/CondaProg/",
  " ---> Running in ba59f1273f51",
  "Removing intermediate container ba59f1273f51",
  " ---> 11fd9d732e2e",
  "Step 13/16 : ENV AWS_BUCKET_NAME=BucketName",
  " ---> Running in e7a052d3eacf",
  "Removing intermediate container e7a052d3eacf",
  " ---> 5e294f562838",
  "Step 14/16 : ENV AWS_ACCESS_KEY_ID=XXXXX5GSDZSXXXX43XXX",
  " ---> Running in 60d810a8514f",
  "Removing intermediate container 60d810a8514f",
```

```

" ---> 2fa1ac4e7d3b",
"Step 15/16 : ENV AWS_SECRET_ACCESS_KEY=XXXXXXXXXXXX",
" ---> Running in 8b34126cee5d",
"Removing intermediate container 8b34126cee5d",
" ---> 93bd8b521d61",
"Step 16/16 : CMD [\"python\", \"/ThaiJMP/invoke/invoke.py\"],
" ---> Running in dd3ed44dcca7",
"Removing intermediate container dd3ed44dcca7",
" ---> 506f92a794cd",
"Successfully built 506f92a794cd",
"Successfully tagged fanconda:latest",
"Total reclaimed space: 0B",
""
]

```

```

json.py - jdump - 47 - 2020-09-22 16:05:32,986 - INFO list_command_invocation-cur_output
:[
    "The push refers to repository [710673677961.dkr.ecr.us-east-1.amazonaws.com/fanconda]",
    "63cc929545c3: Preparing",
    "d849f5d67bbb: Preparing",
    "f9c77b2e4c5f: Preparing",
    "7ffd6385ae0e: Preparing",
    "2fc88e09d363: Preparing",
    "50e089036495: Preparing",
    "6637031dbcc2: Preparing",
    "68d0bdfd0715: Preparing",
    "d0f104dc0a1f: Preparing",
    "50e089036495: Waiting",
    "6637031dbcc2: Waiting",
    "68d0bdfd0715: Waiting",
    "d0f104dc0a1f: Waiting",
    "2fc88e09d363: Layer already exists",
    "7ffd6385ae0e: Layer already exists",
    "50e089036495: Layer already exists",
    "6637031dbcc2: Layer already exists",
    "68d0bdfd0715: Layer already exists",
    "d0f104dc0a1f: Layer already exists",
    "d849f5d67bbb: Pushed",
    "f9c77b2e4c5f: Pushed",
    "63cc929545c3: Pushed",
    "latest: digest: sha256:XXXXXXXXXXXXXXXXXXXXXXXXXXXX size: 2226",
    ""
]

```

4.1.2.2.3 Output from Docker Push

Chapter 5

Get Data

5.1 Environmental Data

5.1.1 ECMWF ERA5 Data

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

5.1.1.1 Basic Conda Setup

1. Download [Anaconda](#) for Python 3. For more involved conda instructions see [here](#)
2. Open up *anaconda prompt* with admin rights (right click choose as admin).

```
# Inside anaconda prompt
where python
where anaconda
# C:/ProgramData/Anaconda3/Scripts/anaconda.exe
# C:/ProgramData/Anaconda3/python.exe
```

3. Add to Path
4. Install cdsapi and eccodes

```
conda config --add channels conda-forge
conda install -c anaconda pandas
conda install -c conda-forge eccodes -y
conda install -c conda-forge cfrib -y
conda install -c anaconda xarray
```

5.1.1.2 Account Registration

1. Register for an [account](#)
2. [Agree to Licence](#)
3. Go to your CDS user page copy the url and key: [Get url and key](#)
 - this has UID, 4XXXX, and API KEY, 4XXXXfXXX-XXXf-4XXX-9XXX-7XXXebXXfdXX
 - together they should look like: 4XXXX:4XXXXfXXX-XXXf-4XXX-9XXX-7XXXebXXfdXX
4. Open up an editor (notepad++ for example), create an empty file, paste the url and your UID:APIKEY into the file as below. Save file as: *C:/Users/fan/.cdsapirc*. Under user root, as *.cdsapirc*. Note *.cdsapirc* is the file name, you are saving that under the directory *C:/Users/fan/*.

```
url: https://cds.climate.copernicus.eu/api/v2
key: 4XXXX:4XXXXfXXX-XXXf-4XXX-9XXX-7XXXebXXfdXX
```

5.1.1.3 Run API Request via Jupyter Notebook

1. open up Jupyter Notebook (this opens up a browser page)
 - cd "C:/Users/fan/Downloads"
 - jupyter notebook
2. create a new *python3* file somewhere you like
3. name the file *cdstest* (saved as ipynb file)
4. paste the code below inside the *ipynb* file you opened (modify *spt_root*):

```
import cdsapi
import urllib.request
# download folder
spt_root = "C:/Users/fan/downloads/_data/"
spn_dl_test_grib = spt_root + "test_china_temp.grib"
# request
c = cdsapi.Client()
res = c.retrieve("reanalysis-era5-pressure-levels",
{
    'product_type': 'reanalysis',
    'variable': 'temperature',
    'pressure_level': '1000',
    'year': '2008',
    'month': '01',
    'day': '01',
    'time': '12:00',
    'format': 'netcdf',
    'area'      : [53.31, 73, 4.15, 135],
    'grid'      : [1.0, 1.0],
    "format": "grib"
},
    spn_dl_test_grib
)
# show results
print('print results')
print(res)
print(type(res))
```

5. click run

5.1.1.4 Run API request via Ipython

1. In Anaconda Prompt: *ipython*
2. Open a file in notepad++ or elsewhere, copy the code above over and edit the *spt_root* to reflect your directories
3. Select the entire code in the notepad++ page, and copy all lines
4. Now inside ipython, type percentage and paste: *%paste*
5. This should run the file above and save the grib file in the folder you specified with the name you specified.

5.1.1.5 Convert CRIB data to CSV

1. inside conda prompt cd into the folder where you downloaded the grib file
2. *grib_ls* shows what is in the grib file
3. *grib_get_data* translates grib to csv

```
cd "C:/Users/fan/downloads/_data/"
grib_ls test_china_temp.grib
grib_get_data test_china_temp.grib > test_china_temp_raw.csv
```

5.1.1.6 More Advanced Download Setup and Instructions

5.1.1.6.1 Conda Environment and Installation In conda, set up a conda environment for downloading ECMWF data using the ECMWF API. ([Conda Set-up](#))

```
# Set up
conda deactivate
conda list env
conda env remove -n wk_ecmwf
conda create -n wk_ecmwf -y
conda activate wk_ecmwf

# Add conda-forge to channel in env
conda config --env --add channels conda-forge
conda config --get channels
conda config --get channels --env

# Install
conda install cdsapi -y
conda install -c anaconda pandas
conda install -c conda-forge eccodes -y
conda install -c conda-forge cfrib -y
conda install -c anaconda xarray
```

This creates the conda env that we are using here for python.

5.1.1.6.2 Config File .cdsapirc Open up the *cdsapirc*, create new if does not exist. Below, open up the file and save the text. See [Python Reading and Writing to File Examples](#).

First, get the text for the config file:

```
stf_cds_cdsapirc = """\
url: https://cds.climate.copernicus.eu/api/v2
key: 4XXX:4XXXfXXX-XXXf-4XXX-9XXX-7XXXebXXfdXX\
"""
print(stf_cds_cdsapirc)
```

Second save text to file:

```
# Relative file name
spt_file_cds = "C:/Users/fan/"
snm_file_cds = ".cdsapirc"
spn_file_cds = spt_file_cds + snm_file_cds
# Open new file
fl_cdsapirc_contents = open(spn_file_cds, 'w')
# Write to File
fl_cdsapirc_contents.write(stf_cds_cdsapirc)
# Close
fl_cdsapirc_contents.close()

# Open the config file to check
code "C:/Users/fan/.cdsapirc"
```

5.1.1.7 Generate API Requests

Go to the sites below, choose download data, pick what is needed, and then select *Show API request* at the bottom of page:

ERA5 pressure levels from 1979 to present

- [ERA5 hourly pressure](#)
- [ERA5 monthly pressure](#)

ERA5 single levels from 1979 to present

- [ERA5 hourly pressure](#)
- [ERA5 monthly pressure](#)

5.1.1.7.1 API Request China Temp Test API function is [here](#).

Select based on China's area, some testing data and download grib file. The data is from 2008, Jan 1st, at 12 noon?

Open up Jupyter notebook: *jupyter notebook*

```
# import module in conda env wk_ecmwf
import cdsapi
import urllib.request

# download folder
spt_root = "C:/Users/fan/pyfan/vig/getdata/envir/"
spn_dl_test_grib = spt_root + "_data/test/test_china_temp.grib"

# request
c = cdsapi.Client()
res = c.retrieve("reanalysis-era5-pressure-levels",
{
    'product_type': 'reanalysis',
    'variable': 'temperature',
    'pressure_level': '1000',
    'year': '2008',
    'month': '01',
    'day': '01',
    'time': '12:00',
    'format': 'netcdf',
    'area'      : [53.31, 73, 4.15, 135],
    'grid'      : [1.0, 1.0],
    "format": "grib"
},
    spn_dl_test_grib
)

# show results
print('print results')
print(res)
print(type(res))

# download
# response = urllib.request.urlopen('http://www.example.com/')
# html = response.read()
```

```
2020-06-17 23:51:35,107 INFO Welcome to the CDS
2020-06-17 23:51:35,107 INFO Sending request to https://cds.climate.copernicus.eu/api/v2/resources/reanalysis-era5-pressure-levels
2020-06-17 23:51:36,441 INFO Request is queued
2020-06-17 23:51:39,183 INFO Request is running
2020-06-17 23:51:45,059 INFO Request is completed
2020-06-17 23:51:45,060 INFO Downloading > http://136.156.133.25/cache-compute-0008/cache/data2/adaptor.mars.internal-1592455900.8655114-11162-11-68e1ea23-8985-4926-95e6-9f181cc7792> 7.grib to C:/Users/fan/pyfan/vig/getdata/envir/_data/test/test_china_temp.grib (6.3K)
2020-06-17 23:51:45,441 INFO Download rate 16.6K/s print results Result(content_length=6480,content_type=application/x-grib,location=http://136.156.133.25/cache-compute-0008/cache/data2/adaptor.mars.inte>
```

```
rnal-1592455900.8655114-11162-11-68e1ea23-8985-4926-95e6-9f181cc77927.grib) <class
'cdsapi.api.Result'>
```

Convert grib to raw csv, open up command line:

```
cd "C:/Users/fan/pyfan/vig/getdata/envir/_data/test/"
grib_ls test_china_temp.grib
grib_get_data test_china_temp.grib > test_china_temp_raw.csv
```

Format the CSV file (is not comma separated)

```
spt_root = "C:/Users/fan/pyfan/vig/getdata/envir/_data/test/"
spn_csv_raw = spt_root + "test_china_temp_raw.csv"
spn_csv_edl = spt_root + "test_china_temp.csv"

with open(spn_csv_raw, 'r') as f_in, open(spn_csv_edl, 'w') as f_out:
    f_out.write(next(f_in))
    [f_out.write(','.join(line.split()) + '\n') for line in f_in]
```

Show CSV results:

```
# Path and Read
spt_root = "C:/Users/fan/pyfan/vig/getdata/envir/"
spn_dl_test_csv = paste0(spt_root, "_data/test/test_china_temp.csv")
china_weather_data <- read.csv(spn_dl_test_csv)

# Top 50 rows
kable(head(china_weather_data, 50),
       caption="Chinese Long and Lat, Temperature Pressure, 2008 Jan 1st at 12 noon?") %>%
  kable_styling_fc()
```

Chinese Long and Lat, Temperature Pressure, 2008 Jan 1st at 12 noon?

time	latitude	longitude	u10	v10	d2m	t2m	msl	sp
2008-01-01 02:00:00	23.25	113	-2.6031342	-4.829605	265.4314	284.8363	102918.8	102616.0
2008-01-01 02:00:00	23.25	114	-2.7173920	-3.808121	262.7693	284.2719	102862.1	101628.0
2008-01-01 02:00:00	22.25	113	-2.6246185	-6.311050	266.9294	284.2602	102796.6	102059.0
2008-01-01 02:00:00	22.25	114	-2.6285248	-6.152847	267.4978	285.3168	102710.1	102201.0
2008-01-01 12:00:00	23.25	113	-1.1495056	-2.728592	265.8091	286.1729	102588.9	102290.7
2008-01-01 12:00:00	23.25	114	-1.4454040	-2.477615	265.3033	285.0987	102591.6	101374.7
2008-01-01 12:00:00	22.25	113	-0.6924744	-4.270584	268.0396	286.5753	102482.9	101757.7
2008-01-01 12:00:00	22.25	114	-1.9668884	-4.906326	266.7486	288.0030	102440.1	101940.7

“ERA5 is a comprehensive reanalysis, from 1979 (soon to be backdated to 1950) to near real time, which assimilates as many observations as possible in the upper air and near surface. The ERA5 atmospheric model is coupled with a land surface model and a wave model.”

1. Register for an [account](#)
2. [Agree to Licence](#)

5.1.1.8 Learning

5.1.1.8.1 Terminologies Links:

- [status of the CDS queue](#).

Terminologies:

- single level parameters

5.1.1.8.2 Single Level Parameters [ERA5 Variables?](#)

1. [Table 1: surface and single level parameters: invariants](#)

2. Table 9: pressure level parameters: instantaneous

- Temperature

ER5 Data Download Instructions.

5.1.1.9 UTCI, NC Format Data, Download, Unzip, Convert to combined CSV

The data downloaded from CDS climate could become very large in size. We want to process parts of the data one part at a time, summarize and aggregate over each part, and generate a file output file with aggregate statistics over the entire time period of interest.

This code below accomplishes the following tasks:

1. download data from derived-utci-historical as ZIP: [API request by itself](#)
2. unzip
3. convert *nc* files to *csv* files
4. individual csv files are half year groups

Parameter Control for the code below:

1. *spt_root*: root folder where everything will be at
2. *spth_conda_env*: the conda virtual environment python path, eccodes and cdsapi packages are installed in the conda virtual environment. In the example below, the first env is: wk_ecmwf
3. *st_nc_prefix*: the downloaded individual nc files have dates and prefix before and after the date string in the nc file names. This is the string before that.
4. *st_nc_suffix*: see (3), this is the suffix
5. *ar_years*: array of years to download and aggregate over
6. *ar_months_g1*: months to download in first half year
7. *ar_months_g2*: months to download in second half year

```
#####
# ----- Parameters
#####

# Where to store everything
spt_root <- "C:/Users/fan/Downloads/_data/"
spth_conda_env <- "C:/ProgramData/Anaconda3/envs/wk_ecmwf/python.exe"
# nc name prefix
st_nc_prefix <- "ECMWF_utci_"
st_nc_suffix <- "_v1.0_con.nc"
# Years list
# ar_years <- 2001:2019
ar_years <- c(2005, 2015)
# ar_months_g1 <- c('01','02','03','04','05','06')
ar_months_g1 <- c('01', '03')
# ar_months_g2 <- c('07','08','09','10','11','12')
ar_months_g2 <- c('07', '09')

# folder to download any nc zips to
nczippath <- spt_root
# we are changing the python api file with different requests stirngs and storing it here
pyapipath <- spt_root
# output directory for AGGREGATE CSV with all DATES from this search
csvpath <- spt_root

#####
# ----- Packages
#####

library("ncdf4")
```



```

library("chron")
library("lattice")
library("RColorBrewer")
library("stringr")
library("tibble")
library("dplyr")
Sys.setenv(RETICULATE_PYTHON = sph_conda_env)
library("reticulate")

#####
# ----- Define Loops
#####
for (it_yr in ar_years) {
  for (it_mth_group in c(1,2)) {
    if(it_mth_group == 1) {
      ar_months = ar_months_g1
    }
    if(it_mth_group == 2) {
      ar_months = ar_months_g2
    }

    #####
    # ----- Define Python API Call
    #####

    # name of zip file
    nczipname <- "derived_utci_2010_2.zip"
    unzipfolder <- "derived_utci_2010_2"

    st_file <- paste0("import cdsapi
import urllib.request
# download folder
spt_root = '', nczippath, ''
spn_dl_test_grib = spt_root + '', nczipname, ''
# request
c = cdsapi.Client()
res = c.retrieve(
  'derived-utci-historical',
  {
    'format': 'zip',
    'variable': 'Universal thermal climate index',
    'product_type': 'Consolidated dataset',
    'year': '', it_yr, '',
    'month': [
      "", paste("", ar_months, ""), sep = "", collapse = ", "), ""
    ],
    'day': [
      '01', '03'
    ],
    'area' : [53.31, 73, 4.15, 135],
    'grid' : [0.25, 0.25],
  },
  spn_dl_test_grib)
# show results
print('print results')
print(res)
print(type(res))")

```

```

# st_file = "print(1+1)"

# Store Python Api File
fl_test_tex <- paste0(pyapipath, "api.py")
fileConn <- file(fl_test_tex)
writeLines(st_file, fileConn)
close(fileConn)

#####
# ----- Run Python File
#####
# Set Path
setwd(pyapipath)
# Run py file, api.py name just defined
use_python(spth_conda_env)
source_python('api.py')

#####
# ----- uNZIP
#####
spn_zip <- paste0(nczippath, nczipname)
spn_unzip_folder <- paste0(nczippath, unzipfolder)
unzip(spn_zip, exdir=spn_unzip_folder)

#####
# ----- Find All files
#####
# Get all files with nc suffix in folder
ncpath <- paste0(nczippath, unzipfolder)
ls_sfls <- list.files(path=ncpath, recursive=TRUE, pattern=".nc", full.names=T)

#####
# ----- Combine individual NC files to JOINT Dataframe
#####
# List to gather dataframes
ls_df <- vector(mode = "list", length = length(ls_sfls))
# Loop over files and convert nc to csv
it_df_ctr <- 0
for (spt_file in ls_sfls) {
  it_df_ctr <- it_df_ctr + 1

  # Get file name without Path
  snm_file_date <- sub(paste0('\\', st_nc_suffix, '$'), '', basename(spt_file))
  snm_file_date <- sub(st_nc_prefix, '', basename(snm_file_date))

  # Dates Start and End: list.files is auto sorted in ascending order
  if (it_df_ctr == 1) {
    snm_start_date <- snm_file_date
  }
  else {
    # this will give the final date
    snm_end_date <- snm_file_date
  }

  # Given this structure: ECMWF_utci_20100702_v1.0_con, sub out prefix and suffix
  print(spt_file)
  ncin <- nc_open(spt_file)

```

```

nchist <- ncatt_get(ncin, 0, "history")

# not using this missing value flag at the moment
missingval <- str_match(nchist$value, "setmisstoc,\\s*(.*?)\\s* ")[,2]
missingval <- as.numeric(missingval)

lon <- ncvar_get(ncin, "lon")
lat <- ncvar_get(ncin, "lat")
tim <- ncvar_get(ncin, "time")
tunits <- ncatt_get(ncin, "time", "units")

nlon <- dim(lon)
nlat <- dim(lat)
ntim <- dim(tim)

# convert time -- split the time units string into fields
# tustr <- strsplit(tunits$value, " ")
# tdstr <- strsplit(unlist(tustr)[3], "-")
# tmonth <- as.integer(unlist(tdstr)[2])
# tday <- as.integer(unlist(tdstr)[3])
# tyear <- as.integer(unlist(tdstr)[1])
# mytim <- chron(tim, origin = c(tmonth, tday, tyear))

tmp_array <- ncvar_get(ncin, "utci")
tmp_array <- tmp_array - 273.15

lonlat <- as.matrix(expand.grid(lon = lon, lat = lat, hours = tim))
temperature <- as.vector(tmp_array)
tmp_df <- data.frame(cbind(lonlat, temperature))

# extract a rectangle
eps <- 1e-8
minlat <- 22.25 - eps
maxlat <- 23.50 + eps
minlon <- 113.00 - eps
maxlon <- 114.50 + eps
# subset data
subset_df <- tmp_df[tmp_df$lat >= minlat & tmp_df$lat <= maxlat &
                    tmp_df$lon >= minlon & tmp_df$lon <= maxlon, ]

# add Date
subset_df_date <- as_tibble(subset_df) %>% mutate(date = snm_file_date)

# Add to list
ls_df[[it_df_ctr]] <- subset_df_date

# Close NC
nc_close(ncin)
}

# List of DF to one DF
df_all_nc <- do.call(rbind, ls_df)

# Save File
fname <- paste0(paste0(st_nc_prefix,
                      snm_start_date, "_to_", snm_end_date,
                      ".csv"))

```

```
csvfile <- paste0(csvpath, fname)
write.table(na.omit(df_all_nc), csvfile, row.names = FALSE, sep = ",")

# Delete folders
unlink(spn_zip, recursive=TRUE, force=TRUE)
unlink(spn_unzip_folder, recursive=TRUE, force=TRUE)

# end loop months groups
}
# end loop year
}
```

Chapter 6

System and Support

6.1 Command Line

6.1.1 Python Command Line

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

6.1.1.1 Run Command Line from Inside Python

Use subprocess, where is python:

```
import subprocess
cmd_popen = subprocess.Popen(["where", "python"],
                              stdin=subprocess.PIPE,
                              stdout=subprocess.PIPE,
                              stderr=subprocess.PIPE)
output, err = cmd_popen.communicate()
print(output.decode('utf-8'))
```

```
## C:\ProgramData\Anaconda3\python.exe
## C:\Users\fan\windows-build-tools\python27\python.exe
## C:\Users\fan\AppData\Local\Microsoft\WindowsApps\python.exe
## C:\Program Files\Inkscape\python.exe
```

Command line file redirection symbol,

```
# The > command line sends current console output to file.txt
# cd "C:\users\fan"
# ls > ls_files.txt
# rm ls_files.txt
```

```
import os
import subprocess
```

```
# ls in current location
```

```
cmd_ls = subprocess.Popen(["ls"], stdin=subprocess.PIPE, stdout=subprocess.PIPE, stderr=subprocess.PIPE)
stf_out_cmd_ls, err = cmd_ls.communicate()
stf_out_cmd_ls = stf_out_cmd_ls.decode('utf-8')
print(stf_out_cmd_ls)
```

```
## A Collection of Python Examples.Rmd
## A-Collection-of-Python-Examples.Rmd
## A-Collection-of-Python-Examples_files
## LICENSE
## README.md
## README_appendix.md
```

```

## README_end.md
## README_pre.md
## README_toc.md
## _bookdown.yml
## _bookdown_files
## _config.yml
## _file
## _folder
## _log
## _m
## _output.yml
## _output_kniti_html.yaml
## _output_kniti_pdf.yaml
## _templates
## book.bib
## bookdown
## build
## dist
## doc
## hdga.html
## htmlpdf
## img
## index.Rmd
## packages.bib
## poetry.lock
## preamble.tex
## preamble_book.tex
## pyfan
## pyfan.egg-info
## pyproject.toml
## setup.py
## style.css
## tests
## title.Rmd
## vig

srt_file_tex = "_file/"
sna_file_tex = "test_ls_pyfanvig_stdout"
srn_file_tex = srt_file_tex + sna_file_tex + ".txt"
fl_tex_contents = open(srn_file_tex, 'w')
fl_tex_contents.write(stf_out_cmd_ls)

## 520
fl_tex_contents.close()

```

6.1.1.2 Execute Command Line Python Functions

- run python from command line
- run python function with parameters from command line

Here run python from command line inside python itself.

```

# Run:
from py.fan.util.rmd.mattexmd import fp_mlxtex2md
fp_mlxtex2md(spt_root='C:/Users/fan/Math4Econ/matrix_application/', ls_srt_subfolders=None, st_rglob

# Run:
python -c "from pyfan.util.rmd.mattexmd import fp_mlxtex2md; fp_mlxtex2md(spt_root='C:/Users/fan/Mat

```

6.1.2 Run Matlab Functions

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

6.1.2.1 Generate A template Matlab Script

Generate an example matlab script file with parameter x .

```
# Example Matlab Function
stf_m_contents = """\
a = x + 1
b = 10*x\
"""
# Print
print(stf_m_contents)
# Open new file

## a = x + 1
## b = 10*x

fl_m_contents = open("_m/fs_test.m", 'w')
# Write to File
fl_m_contents.write(stf_m_contents)
# print

## 18
fl_m_contents.close()
```

6.1.2.2 Run the Matlab Function from Commandline

- [run matlab function from command line](#)
- [Retrieving the output of subprocess.call](#)
- <https://www.mathworks.com/help/matlab/ref/matlabwindows.html>

First, check where matlab is installed:

```
import subprocess
cmd_popen = subprocess.Popen(["where", "matlab"],
                              stdin=subprocess.PIPE,
                              stdout=subprocess.PIPE,
                              stderr=subprocess.PIPE)
output, err = cmd_popen.communicate()
print(output.decode('utf-8'))
```

```
## C:\Program Files\MATLAB\R2020b\bin\matlab.exe
## C:\Program Files\MATLAB\R2019b\bin\matlab.exe
```

Second, run the matlab file, first definet he parameter x :

```
import os
# print and set directory
print(os.getcwd())

## C:\Users\fan\pyfan
os.chdir('_m')
print(os.getcwd())
# run matlab script saved prior
# running command line: matlab -batch "fs_test; exit"

## C:\Users\fan\pyfan\_m
cmd_popen = subprocess.Popen(["matlab", "-batch", "\"x=1; fs_test; exit\""],
                              stdin=subprocess.PIPE,
```

```

                                stdout=subprocess.PIPE,
                                stderr=subprocess.PIPE)
output, err = cmd_popen.communicate()
print(output.decode('utf-8'))

```

```

##
## a =
##
##      2
##
##
## b =
##
##      10
##

```

Third, run the function again, but with $x=3$:

```

os.chdir('_m')
print(os.getcwd())

```

```

## C:\Users\fan\pyfan\_m
print(subprocess.Popen(["matlab", "-batch", "\"x=5; fs_test; exit\""],
                        stdin=subprocess.PIPE,
                        stdout=subprocess.PIPE,
                        stderr=subprocess.PIPE).communicate()[0].decode('utf-8'))

```

```

##
## a =
##
##      6
##
##
## b =
##
##      50
##

```

6.2 File In and Out

6.2.1 Read and Write and Convert

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

- python create a text file
- python write file from paragraphs

6.2.1.1 Generate a tex file

Will a bare-bone tex file with some texts inside, save inside the `*_file*` subfolder.

First, create the text string, note the the linebreaks utomatically generate linebreaks, note that slash need double slash:

```

# Create the Tex Text
# Note that trible quotes begin first and end last lines
stf_tex_contents = """\\documentclass[12pt,english]{article}
\\usepackage[bottom]{footmisc}
\\usepackage[urlcolor=blue]{hyperref}
\\begin{document}

```



```

\\title{A Latex Testing File}
\\author{\\href{http://fanwangecon.github.io/}{Fan Wang} \\thanks{See information \\href{https://fanw
\\maketitle
Ipsum information dolor sit amet, consectetur adipiscing elit. Integer Latex placerat nunc orci.
\\paragraph{\\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}
Village closure information is taken from a village head survey.\\footnote{Generally students went t
\\end{document}""
# Print
print(stf_tex_contents)

```

```

## \documentclass[12pt,english]{article}
## \usepackage[bottom]{footmisc}
## \usepackage[urlcolor=blue]{hyperref}
## \begin{document}
## \title{A Latex Testing File}
## \author{\\href{http://fanwangecon.github.io/}{Fan Wang} \thanks{See information \href{https://fanw
## \maketitle
## Ipsum information dolor sit amet, consectetur adipiscing elit. Integer Latex placerat nunc orci.
## \paragraph{\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}
## Village closure information is taken from a village head survey.\footnote{Generally students went
## \end{document}

```

Second, write the contents of the file to a new tex file stored inside the `*_file*` subfolder of the directory:

```

# Relative file name
srt_file_tex = "_file/"
sna_file_tex = "test_fan"
srn_file_tex = srt_file_tex + sna_file_tex + ".tex"
# Open new file
fl_tex_contents = open(srn_file_tex, 'w')
# Write to File
fl_tex_contents.write(stf_tex_contents)
# print

```

```
## 617
```

```
fl_tex_contents.close()
```

6.2.1.2 Replace Strings in a tex file

Replace a set of strings in the file just generated by a set of alternative strings.

```

# Open file Get text
fl_tex_contents = open(srn_file_tex)
stf_tex_contents = fl_tex_contents.read()
print(srn_file_tex)

# define new and old

## _file/test_fan.tex
ls_st_old = ['information', 'Latex']
ls_st_new = ['INFOREPLACE', 'LATEX']

# zip and loop and replace
for old, new in zip(ls_st_old, ls_st_new):
    stf_tex_contents = stf_tex_contents.replace(old, new)
print(stf_tex_contents)

# write to file with replacements

```

```

## \documentclass[12pt,english]{article}
## \usepackage[bottom]{footmisc}
## \usepackage[urlcolor=blue]{hyperref}
## \begin{document}
## \title{A LATEX Testing File}
## \author{\href{http://fanwangecon.github.io/}{Fan Wang} \thanks{See INFOREPLACE \href{https://fanw
## \maketitle
## Ipsum INFOREPLACE dolor sit amet, consectetur adipiscing elit. Integer LATEX placerat nunc orci.
## \paragraph{\href{https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132}{Data}}
## Village closure INFOREPLACE is taken from a village head survey.\footnote{Generally students went
## \end{document}

sna_file_edited_tex = "test_fan_edited"
srn_file_edited_tex = srt_file_tex + sna_file_edited_tex + ".tex"
fl_tex_ed_contents = open(srn_file_edited_tex, 'w')
fl_tex_ed_contents.write(stf_tex_contents)

## 617

fl_tex_ed_contents.close()

```

6.2.1.3 Convert Tex File to Pandoc and Compile Latex

Compile tex file to pdf and clean up the extraneous pdf outputs. See [ff_pdf_gen_clean](#).

```

import subprocess
import os

# Change to local directory so path in tex respected.
os.chdir("C:/Users/fan/pyfan/vig/support/inout")

# Convert tex to pdf
subprocess.call(['C:/texlive/2019/bin/win32/xelatex.exe', '-output-directory',
                srt_file_tex, srn_file_edited_tex], shell=False)
# Clean pdf extraneous output

## 0

ls_st_remove_suffix = ['aux', 'log', 'out', 'bbl', 'blg']
for st_suffix in ls_st_remove_suffix:
    srn_cur_file = srt_file_tex + sna_file_edited_tex + "." + st_suffix
    if (os.path.isfile(srn_cur_file)):
        os.remove(srt_file_tex + sna_file_edited_tex + "." + st_suffix)

```

Use pandoc to convert tex file

```

import subprocess

# md file name
srn_file_md = srt_file_tex + "test_fan_edited.md"
# Convert tex to md
subprocess.call(['pandoc', '-s', srn_file_tex, '-o', srn_file_md])
# Open md file

## 0

fl_md_contents = open(srn_file_md)
print(fl_md_contents.read())

## ---
## author:
## - '[Fan Wang](http://fanwangecon.github.io/) [^1]'
## title: A Latex Testing File

```

```
## ---
##
## Ipsum information dolor sit amet, consectetur adipiscing elit. Integer
## Latex placerat nunc orci.
##
## ##### [Data](https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3140132)
##
## Village closure information is taken from a village head survey.[^2]
##
## [^1]: See information
##      [Tex4Econ](https://fanwangecon.github.io/Tex4Econ/) for more.
##
## [^2]: Generally students went to schools.
```

6.2.1.4 Search for Files with Suffix in Several Folders

- python search all files in folders with suffix

Search for files in several directories that have a particular suffix. Then decompose directory into sub-components.

Search file inside several folders (not recursively in subfolders):

```
from pathlib import Path

# directories to search in
ls_spt_srh = ["C:/Users/fan/R4Econ/amto/",
              "C:/Users/fan/R4Econ/function/"]

# get file names in folders (not recursively)
ls_spn_found = [spn_file for spt_srh in ls_spt_srh
                 for spn_file in Path(spt_srh).glob('*.Rmd')]
for spn_found in ls_spn_found:
    print(spn_found)
```

```
## C:\Users\fan\R4Econ\amto\main.Rmd
## C:\Users\fan\R4Econ\function\main.Rmd
```

Search file recursively in all subfolders of folders:

```
from pathlib import Path

# directories to search in
ls_spt_srh = ["C:/Users/fan/R4Econ/amto/array/",
              "C:/Users/fan/R4Econ/amto/list"]

# get file names recursively in all subfolders
ls_spn_found = [spn_file for spt_srh in ls_spt_srh
                 for spn_file in Path(spt_srh).rglob('*.R')]
for spn_found in ls_spn_found:
    drive, path_and_file = os.path.splitdrive(spn_found)
    path_no_suffix = os.path.splitext(spn_found)[0]
    path_no_file, file = os.path.split(spn_found)
    file_no_suffix = Path(spn_found).stem
    print('file:', file, '\ndrive:', drive,
          '\nfile no suffix:', file_no_suffix,
          '\nfull path:', spn_found,
          '\npt no file:', path_no_file,
          '\npt no suf:', path_no_suffix, '\n')
```

```
## file: fs_ary_basics.R
```

```

## drive: C:
## file no suffix: fs_ary_basics
## full path: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_basics.R
## pt no file: C:\Users\fan\R4Econ\amto\array\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_basics
##
## file: fs_ary_generate.R
## drive: C:
## file no suffix: fs_ary_generate
## full path: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_generate.R
## pt no file: C:\Users\fan\R4Econ\amto\array\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_generate
##
## file: fs_ary_mesh.R
## drive: C:
## file no suffix: fs_ary_mesh
## full path: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_mesh.R
## pt no file: C:\Users\fan\R4Econ\amto\array\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_mesh
##
## file: fs_ary_string.R
## drive: C:
## file no suffix: fs_ary_string
## full path: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_string.R
## pt no file: C:\Users\fan\R4Econ\amto\array\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\array\htmlpdf\fs_ary_string
##
## file: fs_listr.R
## drive: C:
## file no suffix: fs_listr
## full path: C:\Users\fan\R4Econ\amto\list\htmlpdf\fs_listr.R
## pt no file: C:\Users\fan\R4Econ\amto\list\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\list\htmlpdf\fs_listr
##
## file: fs_lst_basics.R
## drive: C:
## file no suffix: fs_lst_basics
## full path: C:\Users\fan\R4Econ\amto\list\htmlpdf\fs_lst_basics.R
## pt no file: C:\Users\fan\R4Econ\amto\list\htmlpdf
## pt no suf: C:\Users\fan\R4Econ\amto\list\htmlpdf\fs_lst_basics

```

6.2.2 Folder Operations

Go back to fan's [Python Code Examples](#) Repository ([bookdown site](#)).

6.2.2.1 New Folder and Files

1. create a folder and subfolder
2. create two files in the new folder

```

import pathlib

# folder root
srt_folder = "_folder/"

# new folder
srt_subfolder = srt_folder + "fa/"
# new subfolder
srt_subfolder = srt_subfolder + "faa/"

```

```

# generate folders recursively
pathlib.Path(srt_subfolder).mkdir(parents=True, exist_ok=True)

# Open new file
fl_tex_contents_aa = open(srt_subfolder + "file_a.txt", 'w')
# Write to File
fl_tex_contents_aa.write('contents of file a')

## 18
fl_tex_contents_aa.close()

# Open another new file and save
fl_tex_contents_ab = open(srt_subfolder + "file_b.txt", 'w')
# Write to File
fl_tex_contents_ab.write('contents of file b')

## 18
fl_tex_contents_ab.close()

```

Generate more folders without files:

```

# generate folders recursively
pathlib.Path("_folder/fb/fba/").mkdir(parents=True, exist_ok=True)
# generate folders recursively
pathlib.Path("_folder/fc/").mkdir(parents=True, exist_ok=True)
# generate folders recursively
pathlib.Path("_folder/fd/").mkdir(parents=True, exist_ok=True)

```

6.2.2.2 Copy a File from One Folder to Another

Move the two files from `*_folder/fa/faa*` to `*_folder/faa*` as well as to `*_folder/fb/faa`. Use `shutil.copy2*` so that more metadata is copied over. But `copyfile` is faster.

- [How do I copy a file in Python?](#)

Moving one file:

```

import shutil
# Faster method
shutil.copyfile('_folder/fa/faa/file_a.txt', '_folder/fb/file_a.txt')
# More metadata copied, and don't need to specify name

## '_folder/fb/file_a.txt'
shutil.copy2('_folder/fa/faa/file_a.txt', '_folder/fb/fba')

## '_folder/fb/fba\\file_a.txt'

```

6.2.2.3 Copy Folder to Multiple Destinations

Move Entire Folder, [How do I copy an entire directory of files into an existing directory using Python?](#):

```

from distutils.dir_util import copy_tree

# Move contents from fa/faa/ to fc/faa
srt_curroot = '_folder/fa/'
srt_folder = 'faa/'
srt_newroot = '_folder/fc/'

# Full source and destination
srt_sourc = srt_curroot + srt_folder

```

```

srt_desct = srt_newroot + srt_folder

# Check/Create new Directory
pathlib.Path(srt_desct).mkdir(parents=True, exist_ok=True)

# Move
copy_tree(srt_sourc, srt_desct)

## ['_folder/fc/faa/file_a.txt', '_folder/fc/faa/file_b.txt']

Move contents to multiple destinations:

from distutils.dir_util import copy_tree
# Check/Create new Directory
pathlib.Path('_folder/fd/faa/fa_images').mkdir(parents=True, exist_ok=True)
pathlib.Path('_folder/fd/faa/fb_images').mkdir(parents=True, exist_ok=True)
pathlib.Path('_folder/fd/faa/fc_images').mkdir(parents=True, exist_ok=True)
pathlib.Path('_folder/fd/faa/fz_img').mkdir(parents=True, exist_ok=True)
pathlib.Path('_folder/fd/faa/fz_other').mkdir(parents=True, exist_ok=True)

# Move
copy_tree('_folder/fa/faa/', '_folder/fd/faa/fa_images')

## ['_folder/fd/faa/fa_images\\file_a.txt', '_folder/fd/faa/fa_images\\file_b.txt']
copy_tree('_folder/fa/faa/', '_folder/fd/faa/fb_images')

## ['_folder/fd/faa/fb_images\\file_a.txt', '_folder/fd/faa/fb_images\\file_b.txt']
copy_tree('_folder/fa/faa/', '_folder/fd/faa/fc_images')

## ['_folder/fd/faa/fc_images\\file_a.txt', '_folder/fd/faa/fc_images\\file_b.txt']
copy_tree('_folder/fa/faa/', '_folder/fd/faa/fz_img')

## ['_folder/fd/faa/fz_img\\file_a.txt', '_folder/fd/faa/fz_img\\file_b.txt']
copy_tree('_folder/fa/faa/', '_folder/fd/faa/fz_other')
# Empty Folder

## ['_folder/fd/faa/fz_other\\file_a.txt', '_folder/fd/faa/fz_other\\file_b.txt']
pathlib.Path('_folder/fd/faa/fd_images').mkdir(parents=True, exist_ok=True)
pathlib.Path('_folder/fd/faa/fe_images').mkdir(parents=True, exist_ok=True)

```

6.2.2.4 Search for Files in Folder

Find the total number of files in a folder.

```

import pathlib
# the number of files in folder found with search critiera
st_file_search = '*.txt'
ls_spn = [Path(spn).stem for spn in Path('_folder/fd/faa/fa_images').rglob(st_file_search)]
print(ls_spn)

# count files in a non-empty folder

## ['file_a', 'file_b']

srn = '_folder/fd/faa/fa_images'
[spn for spn in Path(srn).rglob(st_file_search)]

## [WindowsPath('_folder/fd/faa/fa_images/file_a.txt'), WindowsPath('_folder/fd/faa/fa_images/file_b')]

```

```

bl_folder_is_empty = len([spn for spn in Path(srn).rglob(st_file_search)])>0
print(bl_folder_is_empty)

# count files in an empty folder

## True

srn = '_folder/fd/faa/fd_images'
[spn for spn in Path(srn).rglob(st_file_search)]

## []

bl_folder_is_empty = len([spn for spn in Path(srn).rglob(st_file_search)])>0
print(bl_folder_is_empty)

## False

```

6.2.2.5 Search for Folder Names

- [python search for folders containing strings](#)

Search for folders with certain search word in folder name, and only keep if folder actually has files.

```

import os

# get all folder names in folder
ls_spt = os.listdir('_folder/fd/faa/')
print(ls_spt)

# Select only subfolder names containing _images

## ['fa_images', 'fb_images', 'fc_images', 'fd_images', 'fe_images', 'fz_img', 'fz_other', '_img']

srt = '_folder/fd/faa/'
st_search = '_images'
ls_srt_found = [srt + spt
                for spt in os.listdir(srt)
                if st_search in spt]
print(ls_srt_found)

## ['_folder/fd/faa/fa_images', '_folder/fd/faa/fb_images', '_folder/fd/faa/fc_images', '_folder/fd/

```

6.2.2.6 Find Non-empty Folders by Name

Search:

1. Get subfolders in folder with string in name
2. Only collect if there are files in the subfolder

```

import pathlib

# Select only subfolder names containing _images
srt = '_folder/fd/faa/'
# the folder names must contain _images
st_srt_srh = '_images'
# there must be files in the folder with this string
st_file_srh = '*.txt'

# All folders that have String
ls_srt_found = [srt + spt
                for spt in os.listdir(srt)
                if st_srt_srh in spt]
print(ls_srt_found)

```

```

# All folders that have String and that are nonempty

## ['_folder/fd/faa/fa_images', '_folder/fd/faa/fb_images', '_folder/fd/faa/fc_images', '_folder/fd/
ls_srt_found = [srt + spt
                 for spt in os.listdir(srt)
                 if ((st_srt_srh in spt)
                     and
                     (len([spn for spn
                           in Path(srt + spt).rglob(st_file_srh)]>0)) )
                 ]
print(ls_srt_found)

## ['_folder/fd/faa/fa_images', '_folder/fd/faa/fb_images', '_folder/fd/faa/fc_images']

```

6.2.2.7 Found Folders to new Folder

1. Search for subfolders by folder name string in a folder
2. Select nonempty subfolders
3. Move nonempty subfolders to one new folder
4. Move this single combination folder

The results here are implemented as function in the [pyfan](#) package: [fp_agg_move_subfiles](#).

```

import pathlib
import os
import shutil
from distutils.dir_util import copy_tree

# 1 Define Parameters

# Select only subfolder names containing _images
srt = '_folder/fd/faa/'
# the folder names must contain _images
st_srt_srh = '_images'
# there must be files in the folder with this string
st_file_srh = '*.txt'

# new aggregating folder name
srt_agg = '_img'

# folders to move aggregation files towards
ls_srt_dest = ['_folder/fd/faa/', '_folder/']

# delete source
bl_delete_source = False

# 2 Gather Folders
ls_ls_srt_found = [[srt + spt, spt]
                   for spt in os.listdir(srt)
                   if ((st_srt_srh in spt)
                       and
                       (len([spn for spn
                             in Path(srt + spt).rglob(st_file_srh)]>0)) )
                   ]
print(ls_ls_srt_found)

# 3 Loop over destination folders, loop over source folders

## [['_folder/fd/faa/fa_images', 'fa_images'], ['_folder/fd/faa/fb_images', 'fb_images'], ['_folder/

```



```

for srt in ls_srt_dest:

    # Move each folder over
    for ls_srt_found in ls_ls_srt_found:

        # Paths
        srt_source = ls_srt_found[0]
        srt_dest = os.path.join(srt, srt_agg, ls_srt_found[1])

        # dest folders
        pathlib.Path(srt_dest).mkdir(parents=True, exist_ok=True)

        # move
        copy_tree(ls_srt_found[0], srt_dest)

# 4. Delete Sources

## ['_folder/fd/faa/_img\\fa_images\\file_a.txt', '_folder/fd/faa/_img\\fa_images\\file_b.txt']
## ['_folder/fd/faa/_img\\fb_images\\file_a.txt', '_folder/fd/faa/_img\\fb_images\\file_b.txt']
## ['_folder/fd/faa/_img\\fc_images\\file_a.txt', '_folder/fd/faa/_img\\fc_images\\file_b.txt']
## ['_folder/_img\\fa_images\\file_a.txt', '_folder/_img\\fa_images\\file_b.txt']
## ['_folder/_img\\fb_images\\file_a.txt', '_folder/_img\\fb_images\\file_b.txt']
## ['_folder/_img\\fc_images\\file_a.txt', '_folder/_img\\fc_images\\file_b.txt']

if bl_delete_source:
    for ls_srt_found in ls_ls_srt_found:
        shutil.rmtree(ls_srt_found[0])

```

6.2.3 Parse Yaml

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

Use the [PyYAML](#) to parse yaml.

6.2.3.1 Write and Create a Simple YAML file

First, Yaml as a string variable:

```

# Create the Tex Text
# Note that tribble quotes begin first and end last lines
stf_tex_contents = """\
- file: matrix_matlab
  title: "One Variable Graphs and Tables"
  description: |
    Frequency table, bar chart and histogram.
    R function and lapply to generate graphs/tables for different variables.
  core:
  - package: r
    code: |
      c('word1','word2')
      function()
      for (ctr in c(1,2)) {}
  - package: dplyr
    code: |
      group_by()
date: 2020-05-02
output:
  pdf_document:
    pandoc_args: '../_output_kniti_pdf.yaml'
    includes:

```

```

    in_header: '../preamble.tex'
    urlcolor: blue
- file: matrix_algebra_rules
  title: "Opening a Dataset"
  titleshort: "Opening a Dataset"
  description: |
    Opening a Dataset.
  core:
- package: r
  code: |
    setwd()
- package: readr
  code: |
    write_csv()
date: 2020-05-02
date_start: 2018-12-01
- file: matrix_two
  title: "Third file"
  titleshort: "Third file"
  description: |
    Third file description.
# Print
print(stf_tex_contents)

## - file: matrix_matlab
##   title: "One Variable Graphs and Tables"
##   description: |
##     Frequency table, bar chart and histogram.
##     R function and lapply to generate graphs/tables for different variables.
##   core:
##   - package: r
##     code: |
##       c('word1','word2')
##       function()
##       for (ctr in c(1,2)) {}
##   - package: dplyr
##     code: |
##       group_by()
##   date: 2020-05-02
##   output:
##   pdf_document:
##     pandoc_args: '../_output_kniti_pdf.yaml'
##     includes:
##       in_header: '../preamble.tex'
##   urlcolor: blue
## - file: matrix_algebra_rules
##   title: "Opening a Dataset"
##   titleshort: "Opening a Dataset"
##   description: |
##     Opening a Dataset.
##   core:
##   - package: r
##     code: |
##       setwd()
##   - package: readr
##     code: |
##       write_csv()
##   date: 2020-05-02

```

```
##  date_start: 2018-12-01
## - file: matrix_two
##  title: "Third file"
##  titleshort: "Third file"
##  description: |
##    Third file description.
```

Second, write the contents of the file to a new tex file stored inside the `*_file*` subfolder of the directory:

```
# Relative file name
srt_file_tex = "_file/"
sna_file_tex = "test_yaml_fan"
srn_file_tex = srt_file_tex + sna_file_tex + ".yaml"
# Open new file
fl_tex_contents = open(srn_file_tex, 'w')
# Write to File
fl_tex_contents.write(stf_tex_contents)
# print

## 908

fl_tex_contents.close()
```

6.2.3.2 Select Subset of Values by Key

Load Yaml file created prior, the output is a list of dictionaries:

```
import yaml
import pprint
# Open yaml file
fl_yaml = open(srn_file_tex)
# load yaml
ls_dict_yaml = yaml.load(fl_yaml, Loader=yaml.BaseLoader)
# type
type(ls_dict_yaml)

## <class 'list'>

type(ls_dict_yaml[0])
# display

## <class 'dict'>

pprint.pprint(ls_dict_yaml, width=1)

## [{'core': [{'code': "c('word1','word2')\n"
##           'function()\n'
##           'for '
##           '(ctr '
##           'in '
##           'c(1,2)) '
##           '{}\n',
##           'package': 'r'},
##          {'code': 'group_by()\n',
##           'package': 'dplyr'}]},
##  'date': '2020-05-02',
##  'description': 'Frequency '
##                'table, '
##                'bar '
##                'chart '
##                'and '
##                'histogram.\n']
```

```

##          'R '
##          'function '
##          'and '
##          'lapply '
##          'to '
##          'generate '
##          'graphs/tables '
##          'for '
##          'different '
##          'variables.\n',
##  'file': 'matrix_matlab',
##  'output': {'pdf_document': {'includes': {'in_header': '../preamble.tex'},
##                                'pandoc_args': '../_output_kniti_pdf.yaml'}},
##  'title': 'One '
##          'Variable '
##          'Graphs '
##          'and '
##          'Tables',
##  'urlcolor': 'blue'},
##  {'core': [{'code': 'setwd()\n',
##                  'package': 'r'},
##            {'code': 'write_csv()\n',
##                  'package': 'readr'}]},
##  'date': '2020-05-02',
##  'date_start': '2018-12-01',
##  'description': 'Opening '
##               'a '
##               'Dataset.\n',
##  'file': 'matrix_algebra_rules',
##  'title': 'Opening '
##          'a '
##          'Dataset',
##  'titleshort': 'Opening '
##               'a '
##               'Dataset'},
##  {'description': 'Third '
##                 'file '
##                 'description.',
##   'file': 'matrix_two',
##   'title': 'Third '
##           'file',
##   'titleshort': 'Third '
##                'file'}}]

```

Select yaml information by *file* name which is a key shared by components of the list:

```

ls_str_file_ids = ['matrix_two']
ls_dict_selected = [dict_yaml for dict_yaml in ls_dict_yaml if dict_yaml['file'] in ls_str_file_ids]
pprint.pprint(ls_dc_selected, width=1)

```

```

##  [{'date': datetime.date(2020, 5, 2),
##    'description': 'Frequency '
##                  'table, '
##                  'bar '
##                  'chart '
##                  'and '
##                  'histogram',
##    'file': 'mat_matlab',
##    'title': 'One '

```

```
##          'Variable '
##          'Graphs '
##          'and '
##          'Tables',
##  'val': 1}]
```

6.2.3.3 Dump List of Dictionary as YAML

- [py yaml dump pipe](#)

Given a list of dictionaries, dump values to yaml. Note that dumped output does not use pipe for long sentences, but use single quote and space line, which works with the [rmdparse.py](#) function without problem.

```
ls_dict_selected = [dict_yaml for dict_yaml in ls_dict_yaml
                     if dict_yaml['file'] in ['matrix_two', 'matrix_matlab']]
print(yaml.dump(ls_dict_selected))

## - core:
##   - code: 'c(''word1'', ''word2'')
##
##     function()
##
##     for (ctr in c(1,2)) {}
##
##     '
##   package: r
## - code: 'group_by()
##
##     '
##   package: dplyr
##   date: '2020-05-02'
##   description: 'Frequency table, bar chart and histogram.
##
##     R function and lapply to generate graphs/tables for different variables.
##
##     '
##   file: matrix_matlab
##   output:
##     pdf_document:
##       includes:
##         in_header: ../preamble.tex
##         pandoc_args: ../_output_kniti_pdf.yaml
##   title: One Variable Graphs and Tables
##   urlcolor: blue
## - description: Third file description.
##   file: matrix_two
##   title: Third file
##   titleshort: Third file
```

6.3 Install Python

6.3.1 Core Installations

Go back to [fan's Python Code Examples Repository](#) ([bookdown site](#)).

Use the [PyYAML](#) to parse yaml.

6.3.1.1 Git Bash

1. Download and install [git](#)

6.3.1.2 Conda Install

1. Download [Anaconda](#) for Python 3. For more involved conda instructions see [here](#)
2. Get where you installed conda: open up *anaconda prompt* with admin rights (press windows button, and search for anaconda prompt, right click on the resulting terminal icon, choose as admin, a terminal opens up).

```
where python
where anaconda
```

```
# C:/ProgramData/Anaconda3/Scripts/anaconda.exe
# C:/ProgramData/Anaconda3/python.exe
```

3. Add to Path: open up windows *Path* and copy the paths found above inside.

6.3.1.2.1 Add To Path Details To Add Anaconda to Path, In Windows

1. Search for: Environment Variables
2. Edit Environment Variables
3. Add new to Path (lower half):
 - C:/ProgramData/Anaconda3/Scripts/
 - C:/ProgramData/Anaconda3/
4. Now open up regular windows command Prompt, Type in: conda -version
5. Close and Open up Git Bash: conda -version

Alternatively, in windows, directly search for Path, and add the python and anaconda exe paths to paths.

Appendix A

Index and Code Links

A.1 Array, Matrix, Dataframe links

A.1.1 Section 1.1 Array links

1. [Python String Manipulation Examples: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Search for substring, replace string, wrap string.
 - **py**: `zip()` + `upper()`
 - **textwrap**: `fill(st, width = 20)`

A.1.2 Section 1.2 Dictionary links

1. [Python Dictionary Exampels and Usages: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - List comprehension with dictionary
 - **py**: `dc = {'key': "name", 'val': 1}`

A.2 Tables and Graphs links

A.2.1 Section 2.1 Matplotlib Base Plots links

1. [Mabplotlib Scatter and Line Plots: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Plot several arrays of data, grid, figure title, and line and point patterns and colors.
 - Plot out random walk and white noise first-order autoregressive processes.
 - **matplotlib**: `subplots()` + `ax.plot()` + `ax.legend()` + `ylabel()` + `xlabel()` + `title()` + `grid()` + `show()`
 - **numpy**: `random.normal()` + `random.seed()` + `cumsum()` + `arange()`
2. [Mabplotlib Text Plots: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Print text as figure.
 - **matplotlib**: `ax.text()`
 - **textwrap**: `fill()`
 - **json**: `dump()`

A.3 Tables and Graphs links

A.3.1 Section 3.1 Matplotlib Base Plots links

1. [Mabplotlib Scatter and Line Plots: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Plot several arrays of data, grid, figure title, and line and point patterns and colors.
 - Plot out random walk and white noise first-order autoregressive processes.
 - **matplotlib**: `subplots()` + `ax.plot()` + `ax.legend()` + `ylabel()` + `xlabel()` + `title()` + `grid()` + `show()`
 - **numpy**: `random.normal()` + `random.seed()` + `cumsum()` + `arange()`

2. Matplotlib Text Plots: [rmd](#) | [r](#) | [pdf](#) | [html](#)

- Print text as figure.
- **matplotlib**: *ax.text()*
- **textwrap**: *fill()*
- **json**: *dump()*

A.4 Amazon Web Services links

A.4.1 Section 4.1 AWS Setup links

1. [AWS Account Set-up and Start Instance: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Generate keypair on AWS, launch instance, launch security, ssh access, and AWSCLI.
 - **ssh**: *ssh-agent + ssh-keygen + ssh ec2-user@ec2-52-23-218-117.compute-1.amazonaws.com*
 - **aws**: *aws ec2 start-instances + aws ec2 stop-instances + systemctl start amazon-ssm-agent*

A.5 Docker Container links

A.5.1 Section 5.1 Docker Setup links

1. [Docker Container Set-Up and Run on AWS: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Install Docker on AWS and build Docker image.
 - Start docker container and run programs inside Docker.
 - **aws**: *ssh + yum update -y + amazon-linux-extras install docker -y*
 - **docker**: *service docker start + service docker status + docker build + docker images + docker image prune + docker run -t -i fanconda /bin/bash + python /fanProg/invoke/run.py + docker ps -a + docker system df + docker container ls -a*
2. [AWS Account Set-up and Start Instance: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Generate keypair on AWS, launch instance, launch security, ssh access, AWSCLI.
 - **scp**: *scp -o StrictHostKeyChecking=accept-new -i*
 - **aws**: *aws ecr get-login*
 - **docker**: *docker login + docker build + docker tag + docker push + docker pull*

A.6 Get Data links

A.6.1 Section 6.1 Environmental Data links

1. [CDS ECMWF Global Enviornmental Data Download: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Using Python API get get ECMWF ERA5 data.
 - Dynamically modify a python API file, run python inside a Conda virtual environment with R-reticulate.
 - **r**: *file() + writeLines() + unzip() + list.files() + unlink()*
 - **r-reticulate**: *use_python() + Sys.setenv(RETICULATE_PYTHON = sph_conda_env)*

A.7 System and Support links

A.7.1 Section 7.1 Command Line links

1. [Execute Python from Command Line and Run Command Line in Python: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Run python functions from command line.
2. [Run Matlab Command Line Operations: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Generate a matlab script and run the script with parameters.
 - **subprocess**: *cmd = Popen(ls_str, stdin=PIPE, stdout=PIPE, stderr=PIPE) + cmd.communicate()*
 - **decode**: *decode('utf-8')*
 - **os**: *chdir() + getcwd()*

A.7.2 Section 7.2 File In and Out links

1. [Python Reading and Writing to File Examples: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Reading from file and replace strings in file.
 - Convert text file to latex using pandoc and clean.
 - Search for files in several folders with file substring.
 - Get path root, file name, file stem, etc from path.
 - **py**: `open()` + `write()` + `replace()` + `[c for b in [[1,2],[2,3]] for c in b]`
 - **subprocess**: `call()`
 - **pathlib**: `Path().rglob()` + `Path().stem`
 - **os**: `remove()` + `listdir()` + `path.isfile()` + `path.splitdrive()` + `os.path.splitext()` + `os.path.split()`
2. [Python Directory and Folder Operations: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Generate new folders and files.
 - Generate subfolder recursively.
 - Copying and moving files across folders.
 - Aggregate subfolders into a folder and move.
 - **py**: `open(srt, 'w')` + `write()` + `close()`
 - **os**: `os.listdir()` + `os.path.join('/', 'c:', 'fa', 'fb')`
 - **pathlib**: `Path(srt).mkdir(parents=True, exist_ok=True)` + `[Path(spn).stem for spn in Path(srt).rglob(st)]`
 - **shutil**: `shutil.copyfile('/fa/fl.txt', '/fb/fl.txt')` + `shutil.copy2('/fa/fl.txt', '/fb')` + `shutil.rmtree('/fb')`
 - **distutils**: `dir_util.copy_tree('/fa', '/fb')`
3. [Python Yaml File Parsing: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Parse and read yaml files.
 - **yaml**: `load(fl_yaml, Loader=yaml.BaseLoader)` + `dump()`
 - **pprint**: `pprint.pprint(ls_dict_yaml, width=1)`

A.7.3 Section 7.3 Install Python links

1. [Basic Conda Setup Instructions: rmd](#) | [r](#) | [pdf](#) | [html](#)
 - Conda and git installations
 - **bash**: `where`

Bibliography

Xie, Y. (2020). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.18.