

Informatika 9.1 installation manual

准备数据库环境


- Oracle 10g
- 创建表空间
- 创建用户 `pc_domain/infa`; `pc_rep/infa` ; `grant connect,resource,create any view to pc_domain`; `grant connect,resource,create any view to pc_rep`;
- `/* 如果要将client 的中文改为英文,需将regional 区域中的语言选项,设为英文.*/`

安装PowerCenter Server 901


- X:\V901HF1\901HF1_Server_Installer_win32-x86\install.bat



安装PowerCenter Server 901

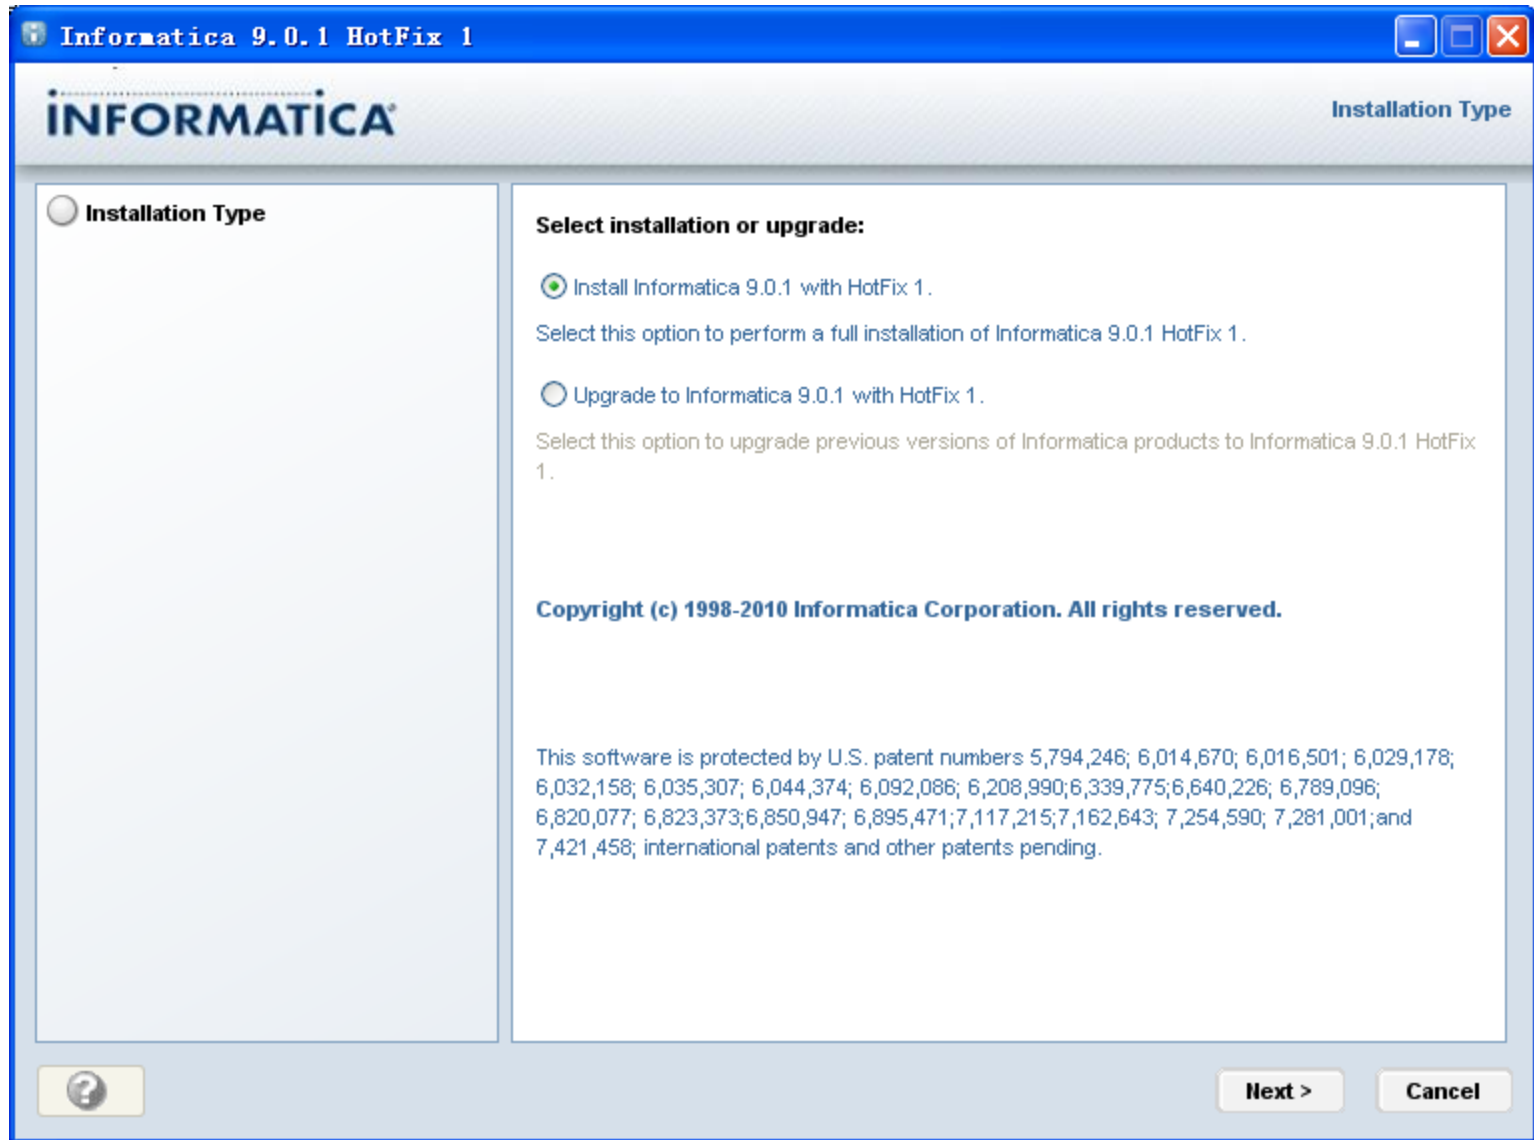

安装PowerCenter Server 901

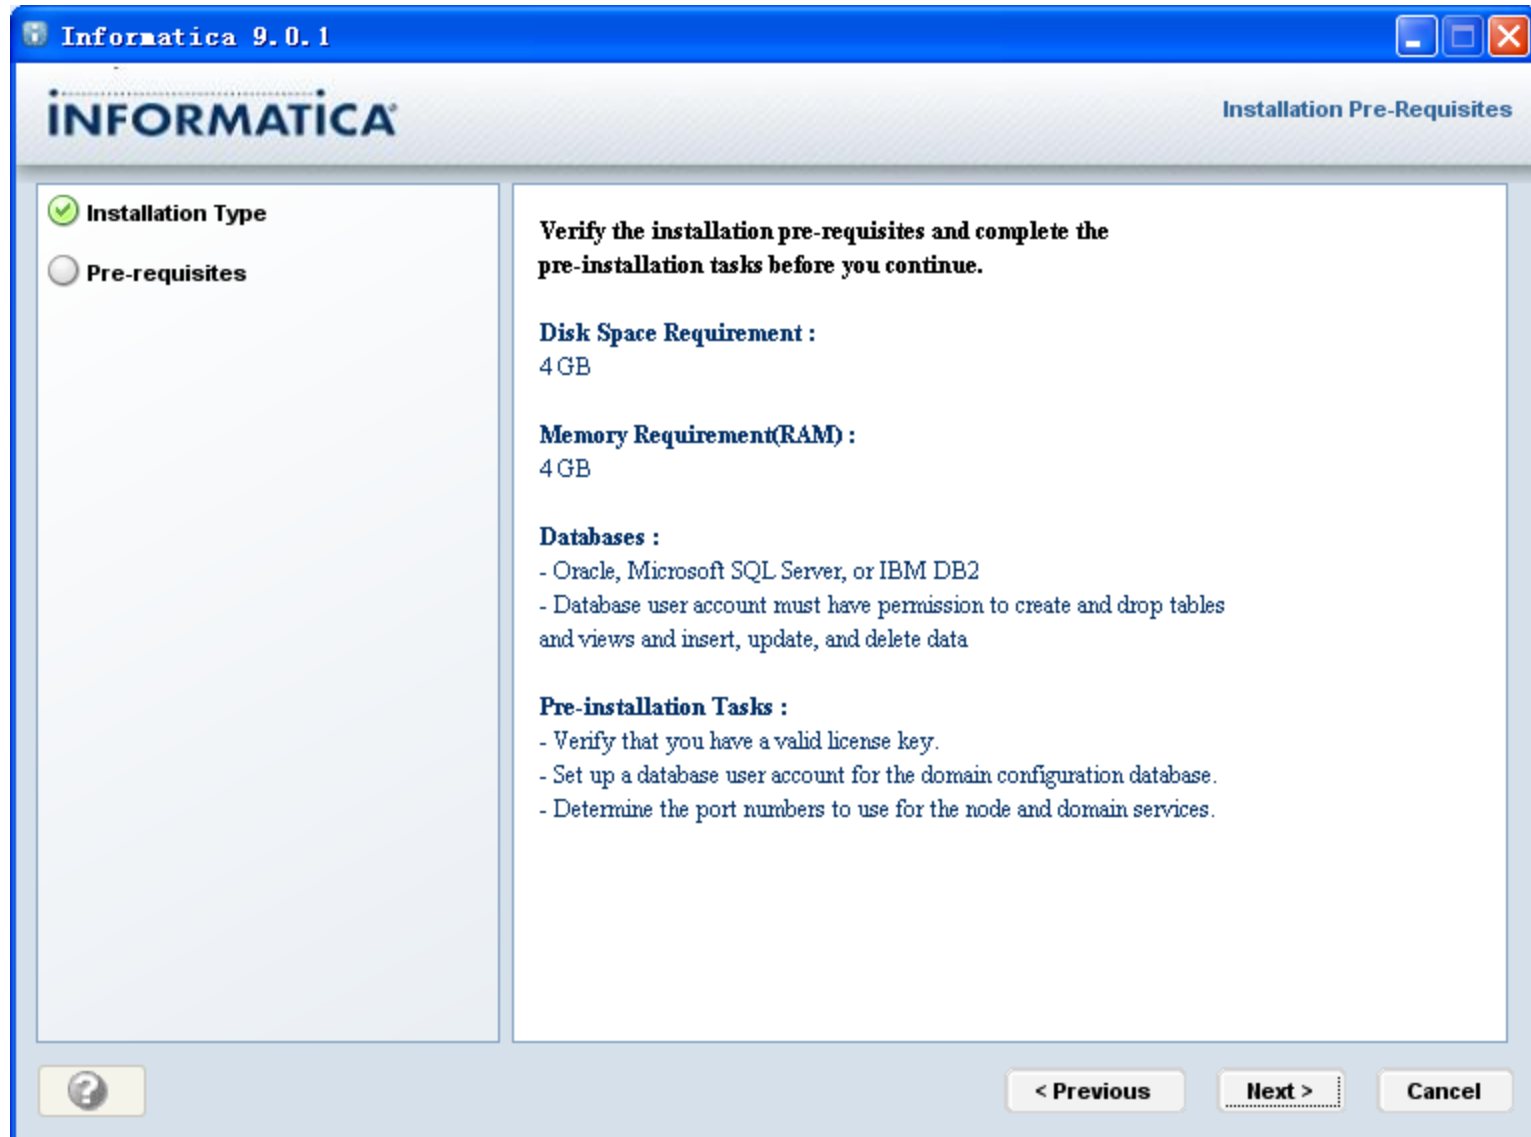

安装PowerCenter Server 901

Informatica 9.0.1

INFORMATICA®

License and Installation Directory

☒ Installation Type
☒ Pre-requisites
☐ License and directory

Select the license key and directory for installation.

Enter a license key file:


C:\w901\license.key

Enter the installation directory:


C:\Informatica\9.0.1

< Previous Next > Cancel

安装PowerCenter Server 901

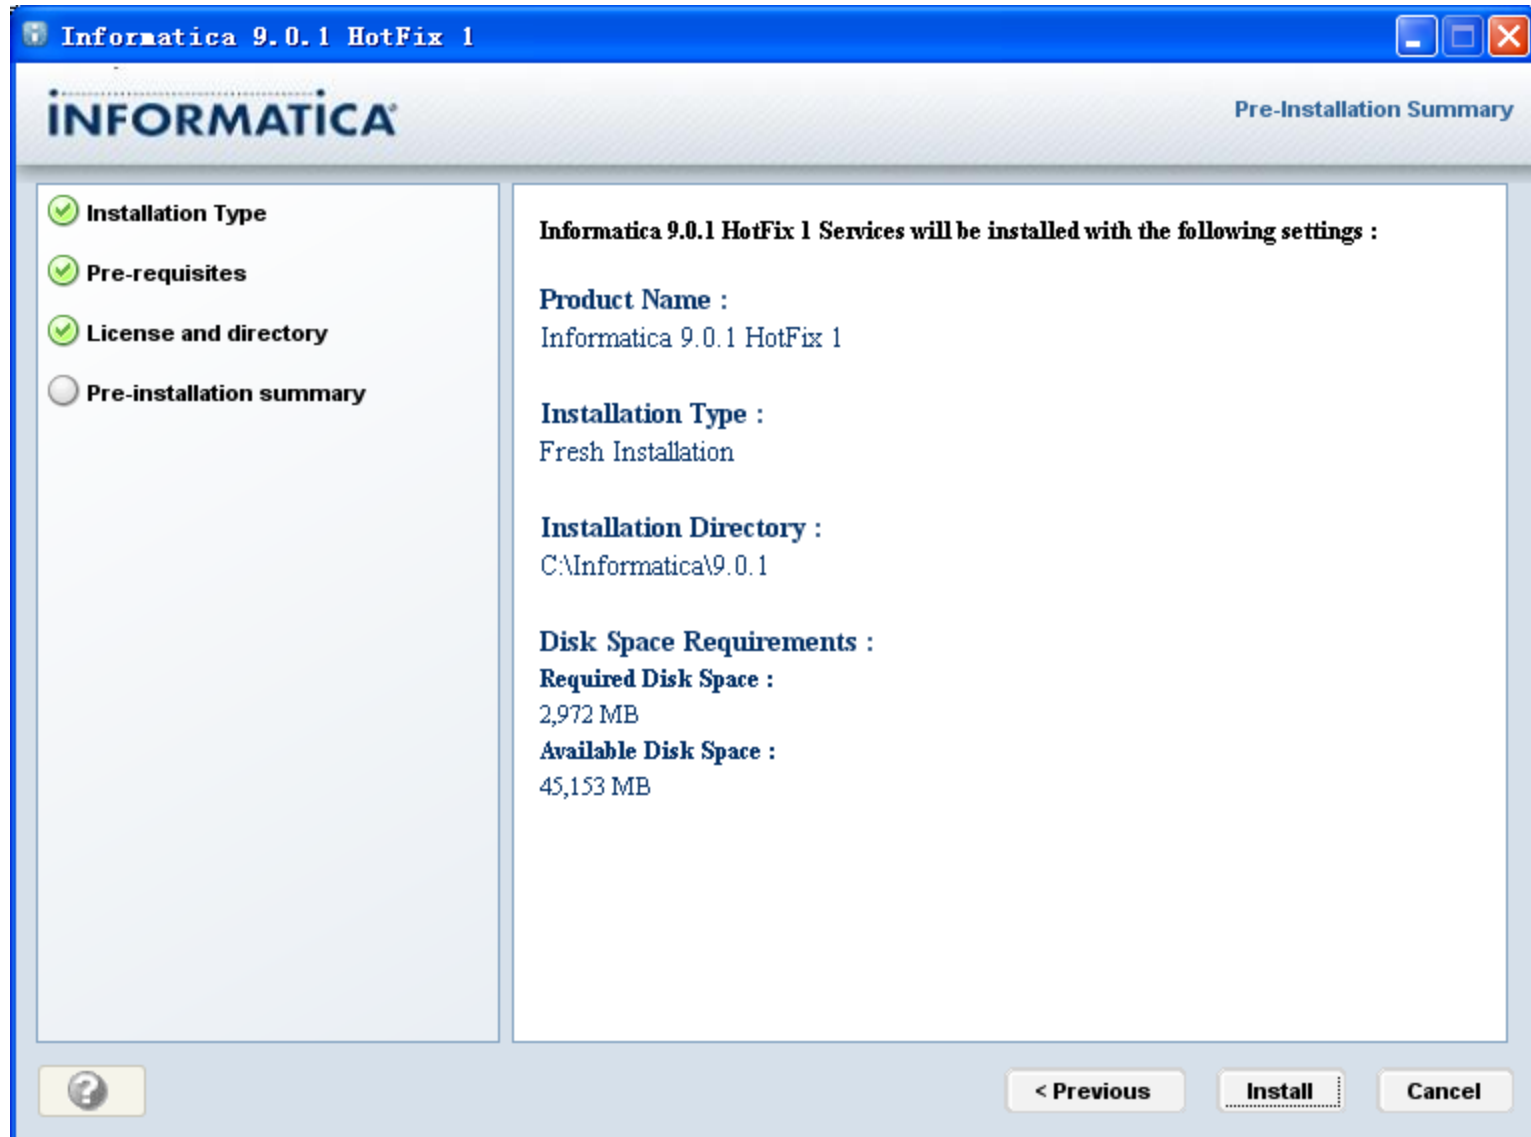

安装PowerCenter Server 901

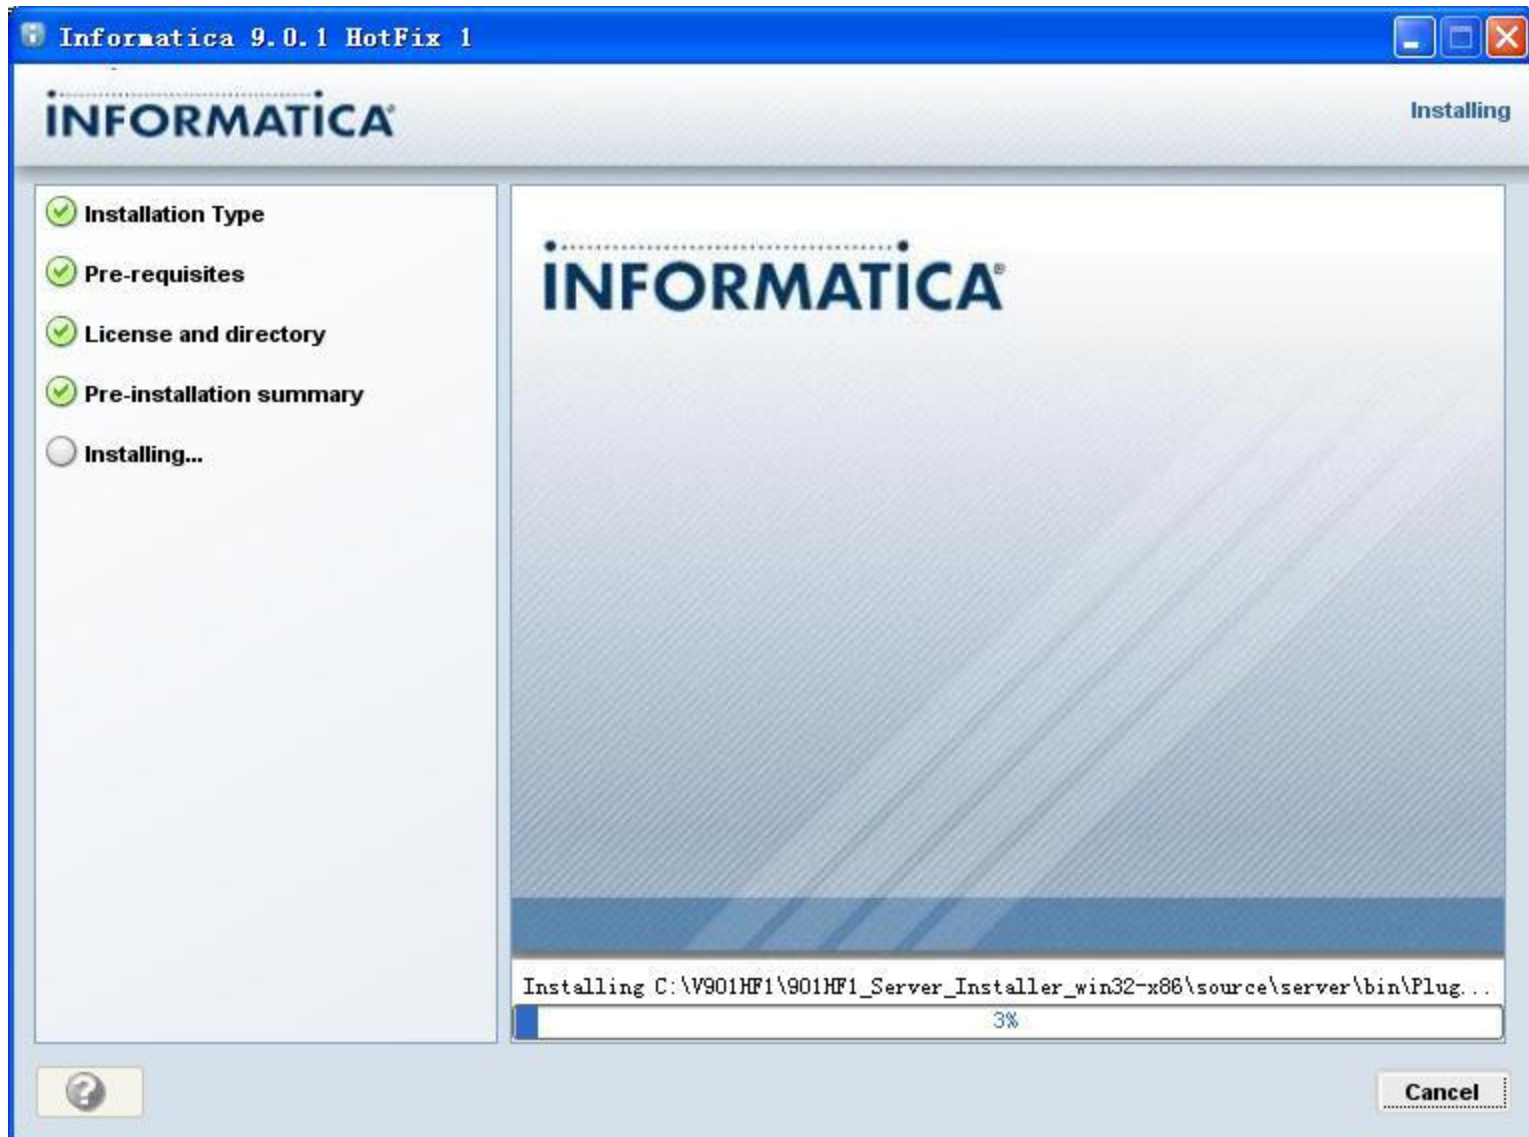

安装PowerCenter Server 901

Informatica 9.0.1 HotFix 1

INFORMATICA

Domain Selection

- ✓ Installation Type
- ✓ Pre-requisites
- ✓ License and directory
- ✓ Pre-installation summary
- ✓ Installing...
- Domain creation

Create a domain for this node or join an existing domain

☒ Create a domain

Create an Informatica domain if you are installing for the first time or if you are creating multiple domains.

☐ Join a Domain

Join an Informatica domain created during a previous installation on another node.

☐ Configure this node as a gateway

☐ Enable HTTPS for Informatica Administrator Port: 8443

☒ Use a keystore file generated by the installer

☐ Use an existing keystore file

Keystore password:

Keystore file:

Next > Cancel

安装PowerCenter Server 901

Informatica 9.0.1 HotFix 1

Domain Configuration Database

Installation Type

Pre-requisites

License and directory

Pre-installation summary

Installing...

Domain creation

Configuration database

Configure the database for the domain configuration repository:

Database type: **Oracle**

Database user ID: **pc_domain**

User password: **••••**

Database connection

☒ **JDBC URL**

Database address: **23b014151772402:1521**

Database service name: **prcl**

☒ **JDBC parameters:**

Default

☐ **Custom JDBC Connection String**

Test Connection

< Previous **Next >** **Cancel**

点击” Test Connection”，确认连接测试通过。

安装PowerCenter Server 901

Informatica 9.0.1 HotFix 1

INFORMATICA®

Domain and Node Configuration

- ✓ Installation Type
- ✓ Pre-requisites
- ✓ License and directory
- ✓ Pre-installation summary
- ✓ Installing...
- ✓ Domain creation
- ✓ Configuration database
- Domain configuration

Enter the information for the Informatica domain to create.

Domain name: Domain_23b014151772402

Node host name: 23b014151772402

Node name: node01_23b014151772402

Node port number: 8005

Domain user name: Administrator


Domain password: ●●●●●●●●●●●●●●●●

Confirm password: ●●●●●●●●●●●●●●●●

☐ Display advanced port configuration page

< Previous Next > Cancel

安装PowerCenter Server 901

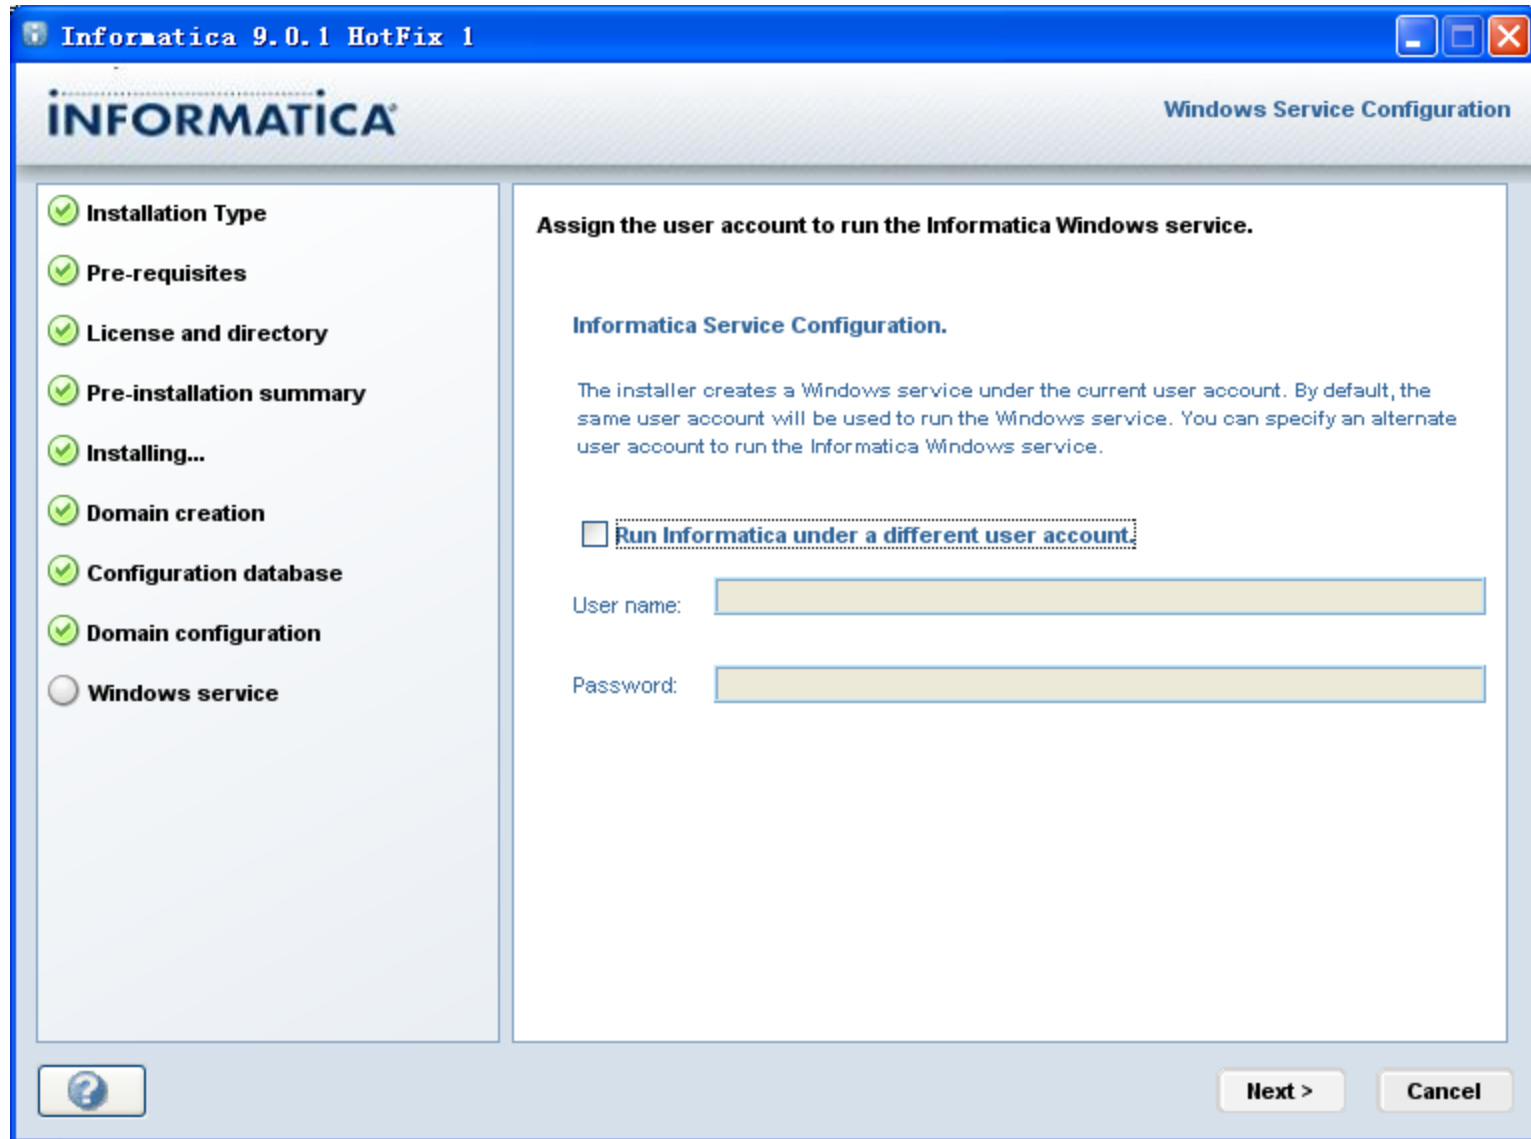

The image shows a Windows Service Configuration window for Informatica 9.0.1 HotFix 1. The window has a blue title bar with the text 'Informatica 9.0.1 HotFix 1' and standard Windows window controls. The main area is divided into two panes. The left pane contains a list of installation steps, each with a green checkmark icon, indicating they are completed. The right pane is titled 'Windows Service Configuration' and contains instructions for assigning a user account to run the Informatica Windows service. It includes a checkbox for 'Run Informatica under a different user account', which is currently unchecked. Below this checkbox are two text input fields labeled 'User name:' and 'Password:'. At the bottom of the window, there is a 'Next >' button and a 'Cancel' button.

Informatica 9.0.1 HotFix 1

INFORMATICA® Windows Service Configuration

☒ Installation Type

☒ Pre-requisites

☒ License and directory

☒ Pre-installation summary

☒ Installing...

☒ Domain creation

☒ Configuration database

☒ Domain configuration

☐ Windows service

Assign the user account to run the Informatica Windows service.


Informatica Service Configuration.

The installer creates a Windows service under the current user account. By default, the same user account will be used to run the Windows service. You can specify an alternate user account to run the Informatica Windows service.

☐ Run Informatica under a different user account.

User name:

Password:


 **Next >** **Cancel**

安装PowerCenter Server 901




创建PowerCenter Repository Service

在IE中打开: <http://23b014151772402:6007/administrator/>

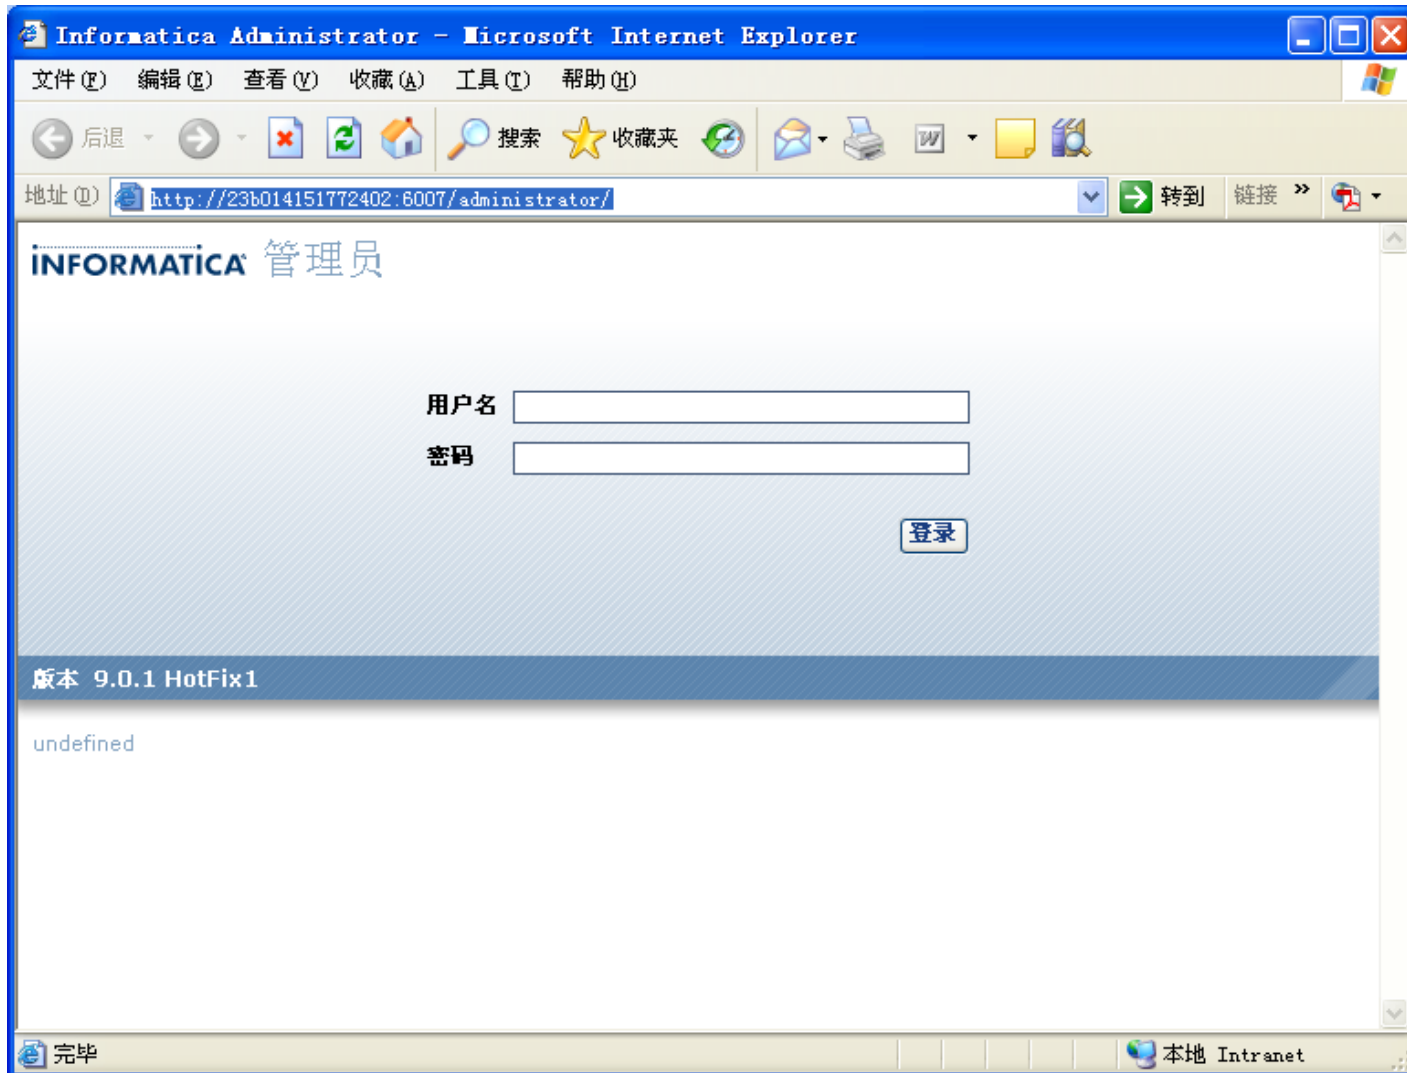


创建PowerCenter Repository Service

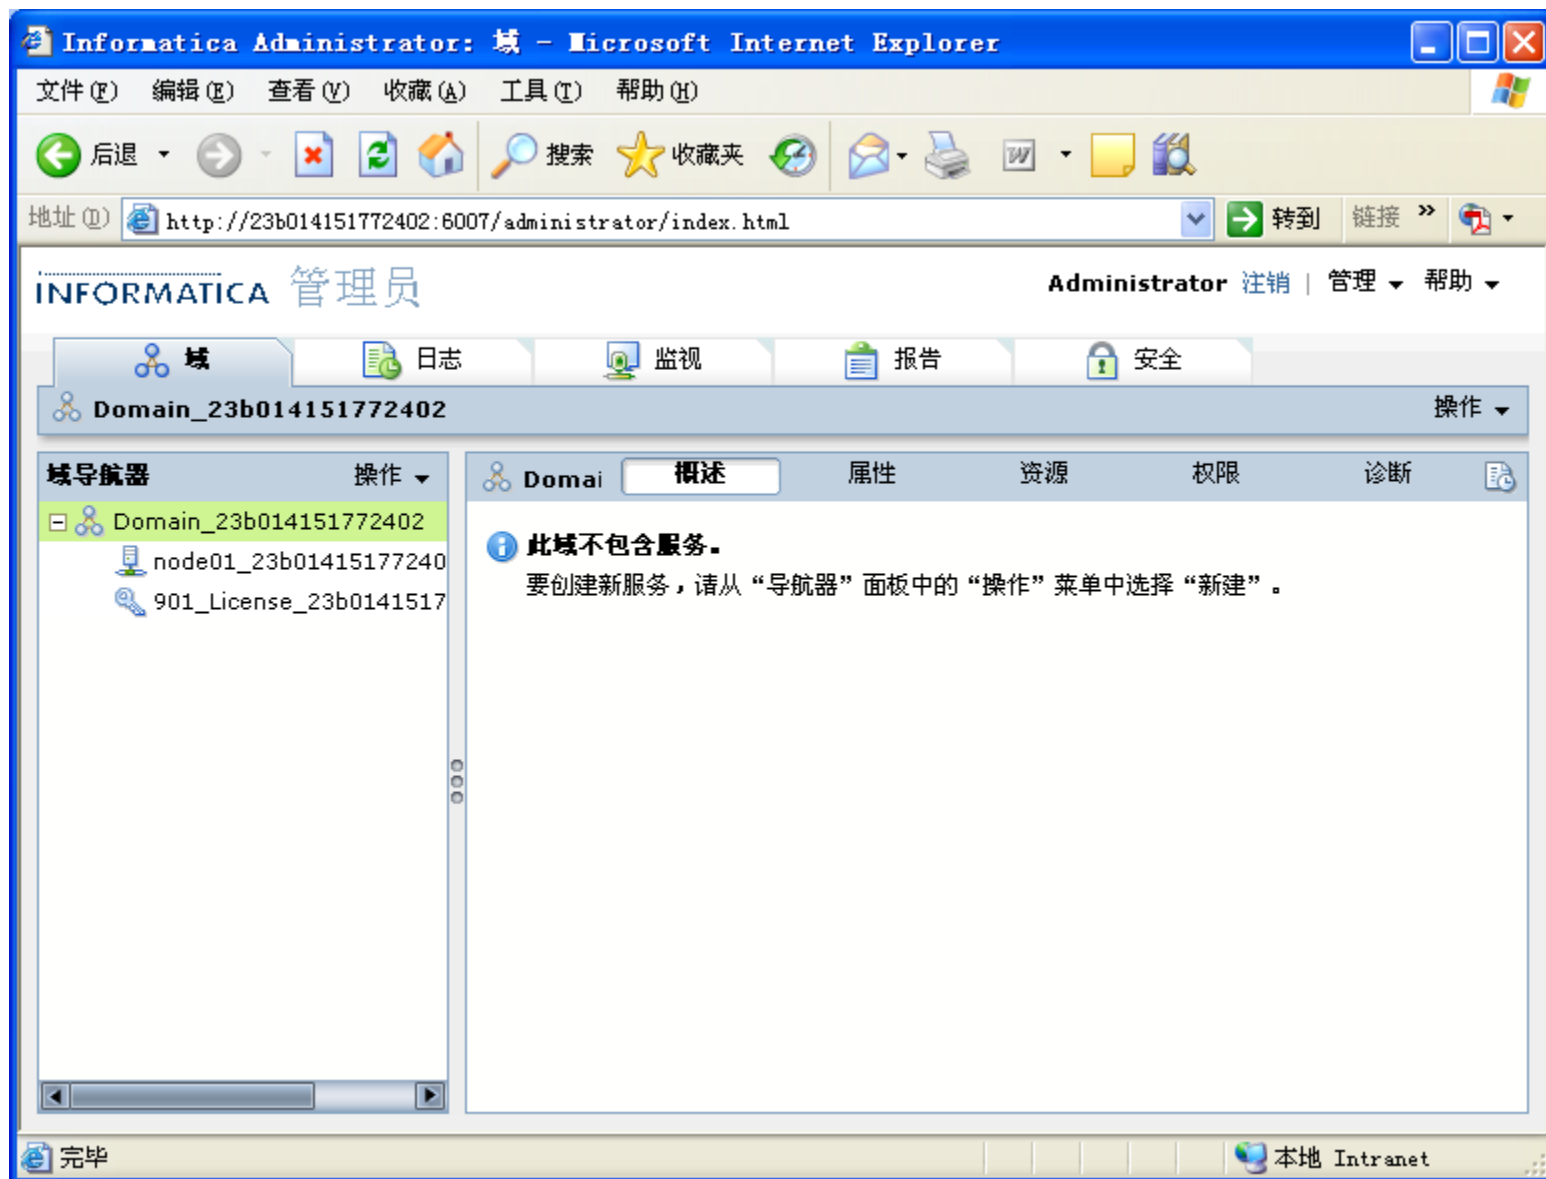

创建PowerCenter Repository Service

创建PowerCenter Repository Service

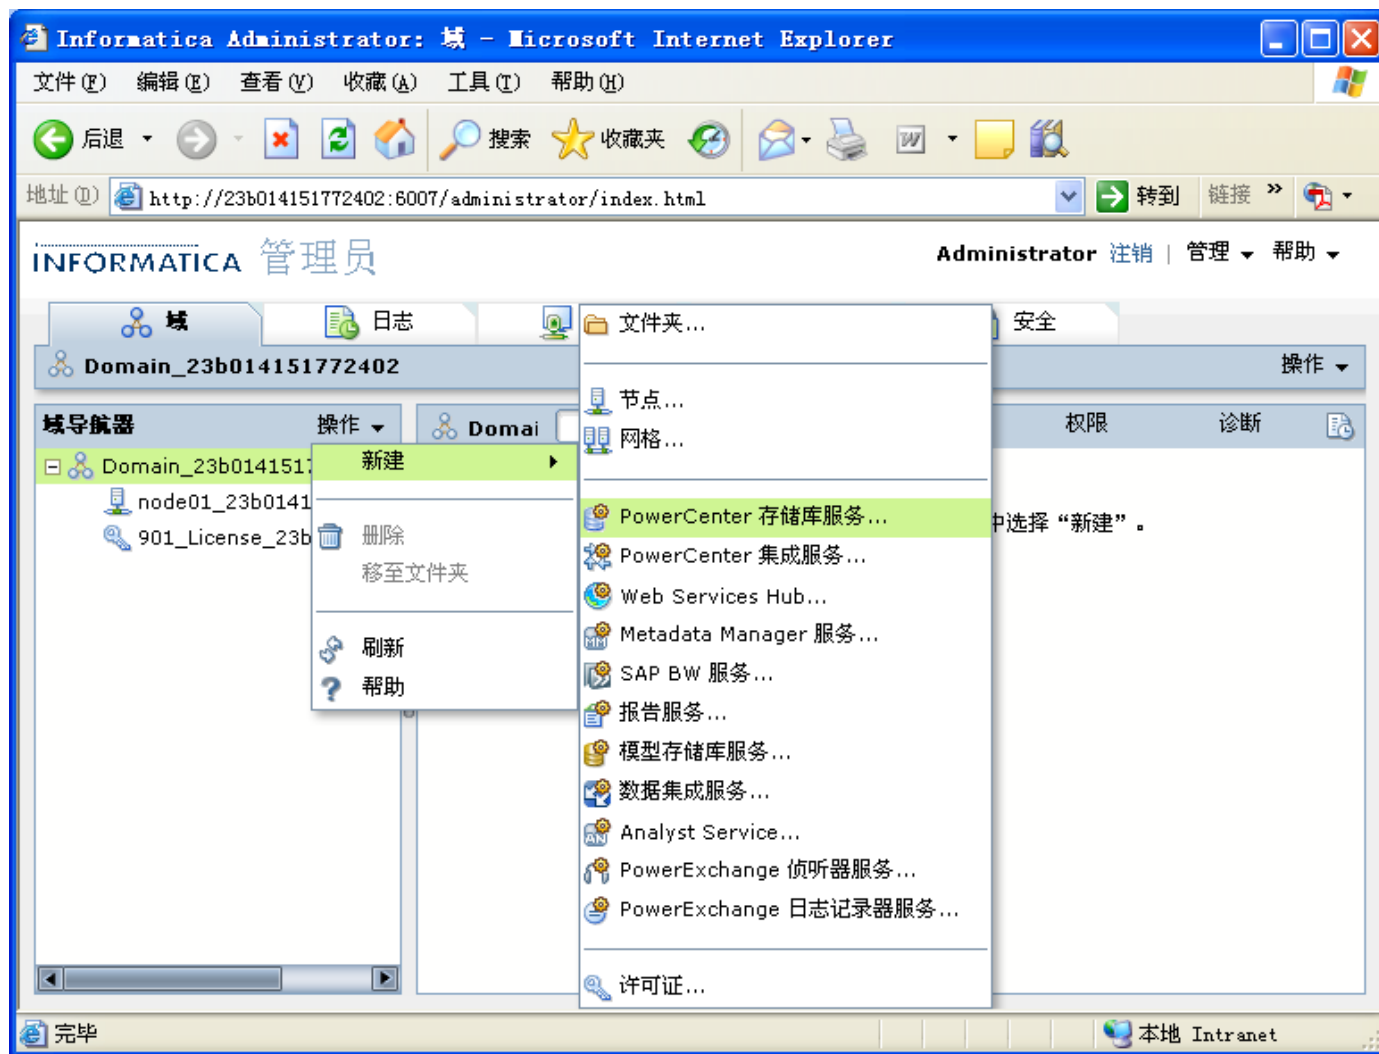

创建PowerCenter Repository Service

Informatica Administrator: 域 - Microsoft Internet Explorer

文件(F) 编辑(E) 查看(V) 收藏(A) 工具(T) 帮助(H)

后退 前进 刷新 搜索 收藏夹 打印 链接

地址() http://23b014151772402:6007/administrator/index.html 转到 链接

新建 PowerCenter 存储库服务 - 第 1 步(共 2 步)

为此新 PowerCenter 存储库服务指定属性。

名称 *	<input type="text" value="pc_rep"/>
说明	<input type="text"/>
位置 *	<input type="text" value="Domain_23b014151772402"/> 浏览...
许可证	<input type="text" value="901_License_23b014151772402_31378"/> ▼
主节点 *	<input type="text" value="node01_23b014151772402"/> ▼
备份节点	<input type="text"/> 选择...

? < 上一步 下一步 > 取消

完毕 本地 Intranet

创建PowerCenter Repository Service

Informatica Administrator: 域 - Microsoft Internet Explorer

文件(F) 编辑(E) 查看(V) 收藏(A) 工具(T) 帮助(H)

后退 前进 刷新 打印 搜索 收藏夹 地址 转到 链接

地址: http://23b014151772402:6007/administrator/index.html

新建 PowerCenter 存储库服务 - 第 2 步(共 2 步)

为此新 PowerCenter 存储库服务指定数据库属性。

数据库类型 * Oracle

用户名 * pc_rep

密码 *

连接字符串 * orcl

代码页 * MS Windows Simplified Chinese, superset of GB 2312-80, EUC

表空间名称

为此新 PowerCenter 存储库服务指定创建选项。

☐ 在指定的连接字符串下存在内容。 不创建新内容。

☒ 在指定的连接字符串下不存在任何内容。 创建新内容。

☐ 创建为全局存储库(可能不会还原为局部存储库)


☐ 启用版本控制(有版本控制的存储库不能取消版本控制)

☒ 启用 PowerCenter 存储库服务

< 上一步 完成 取消


完毕 本地 Intranet

创建PowerCenter Repository Service

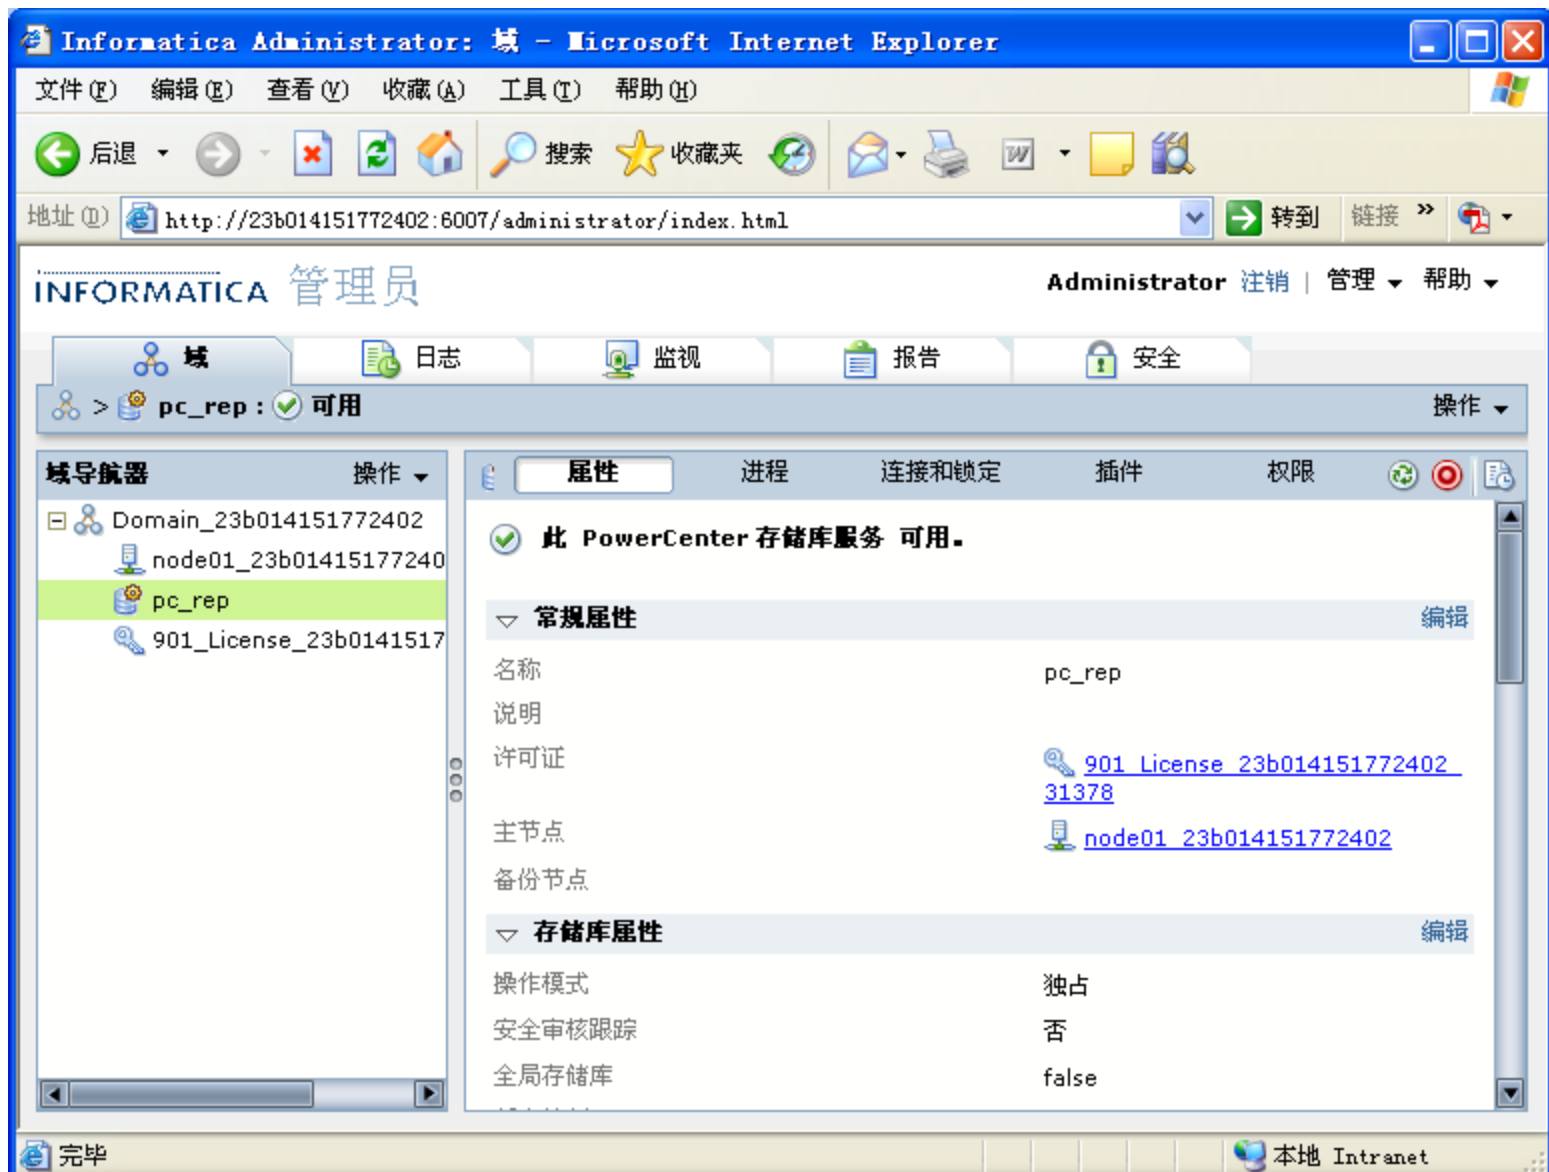


创建PowerCenter Repository Service


编辑Repository Properties-> Operation Mode(操作模式)
由 Exclusive(独占) 模式, 改为 Normal(普通) 模式.

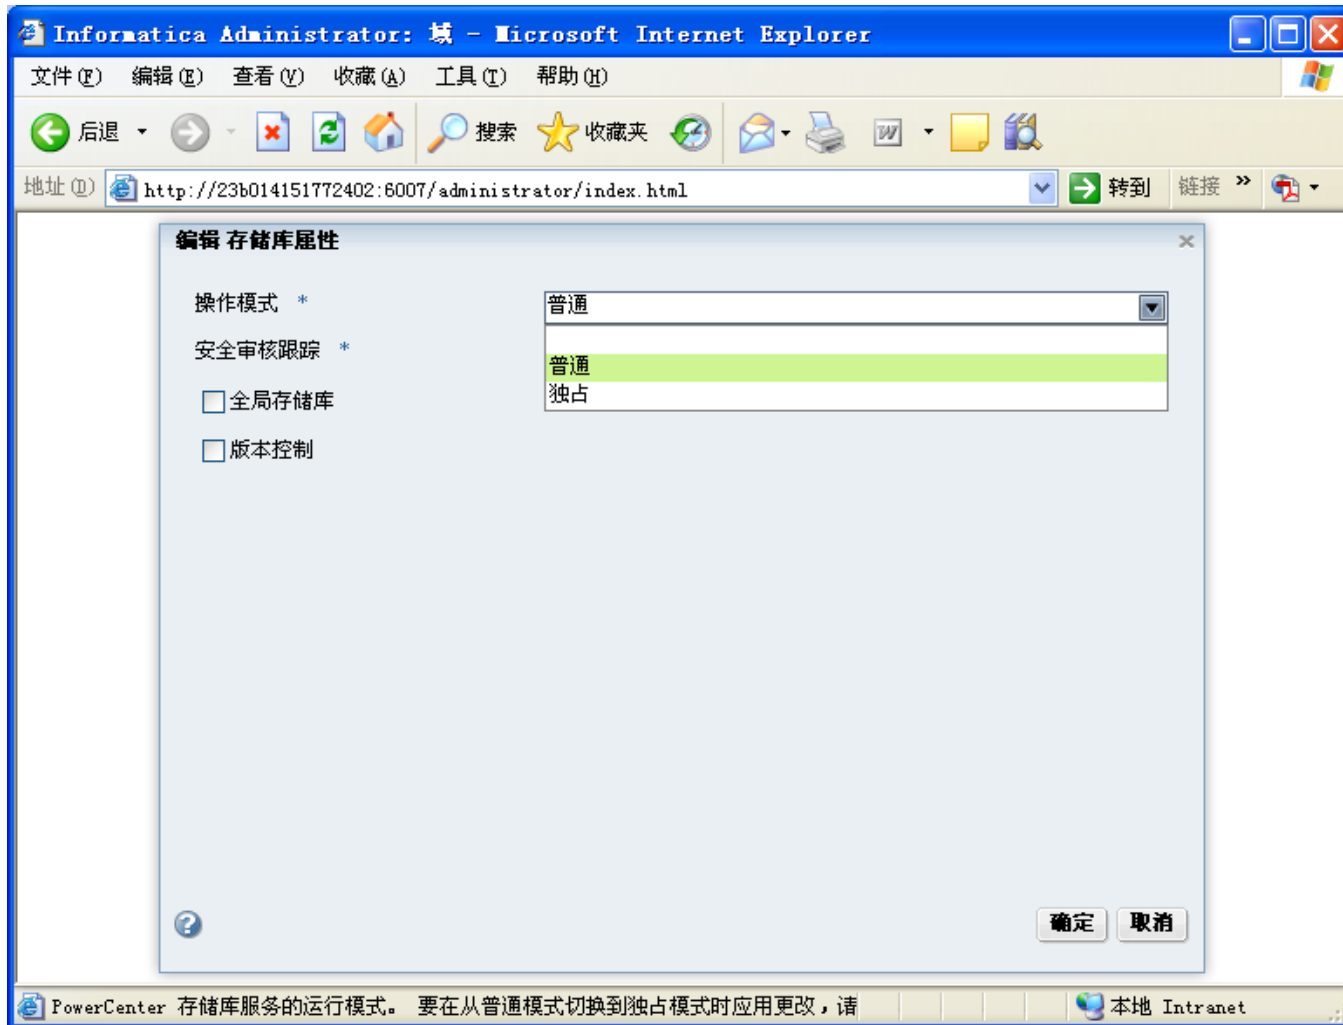

创建PowerCenter Repository Service

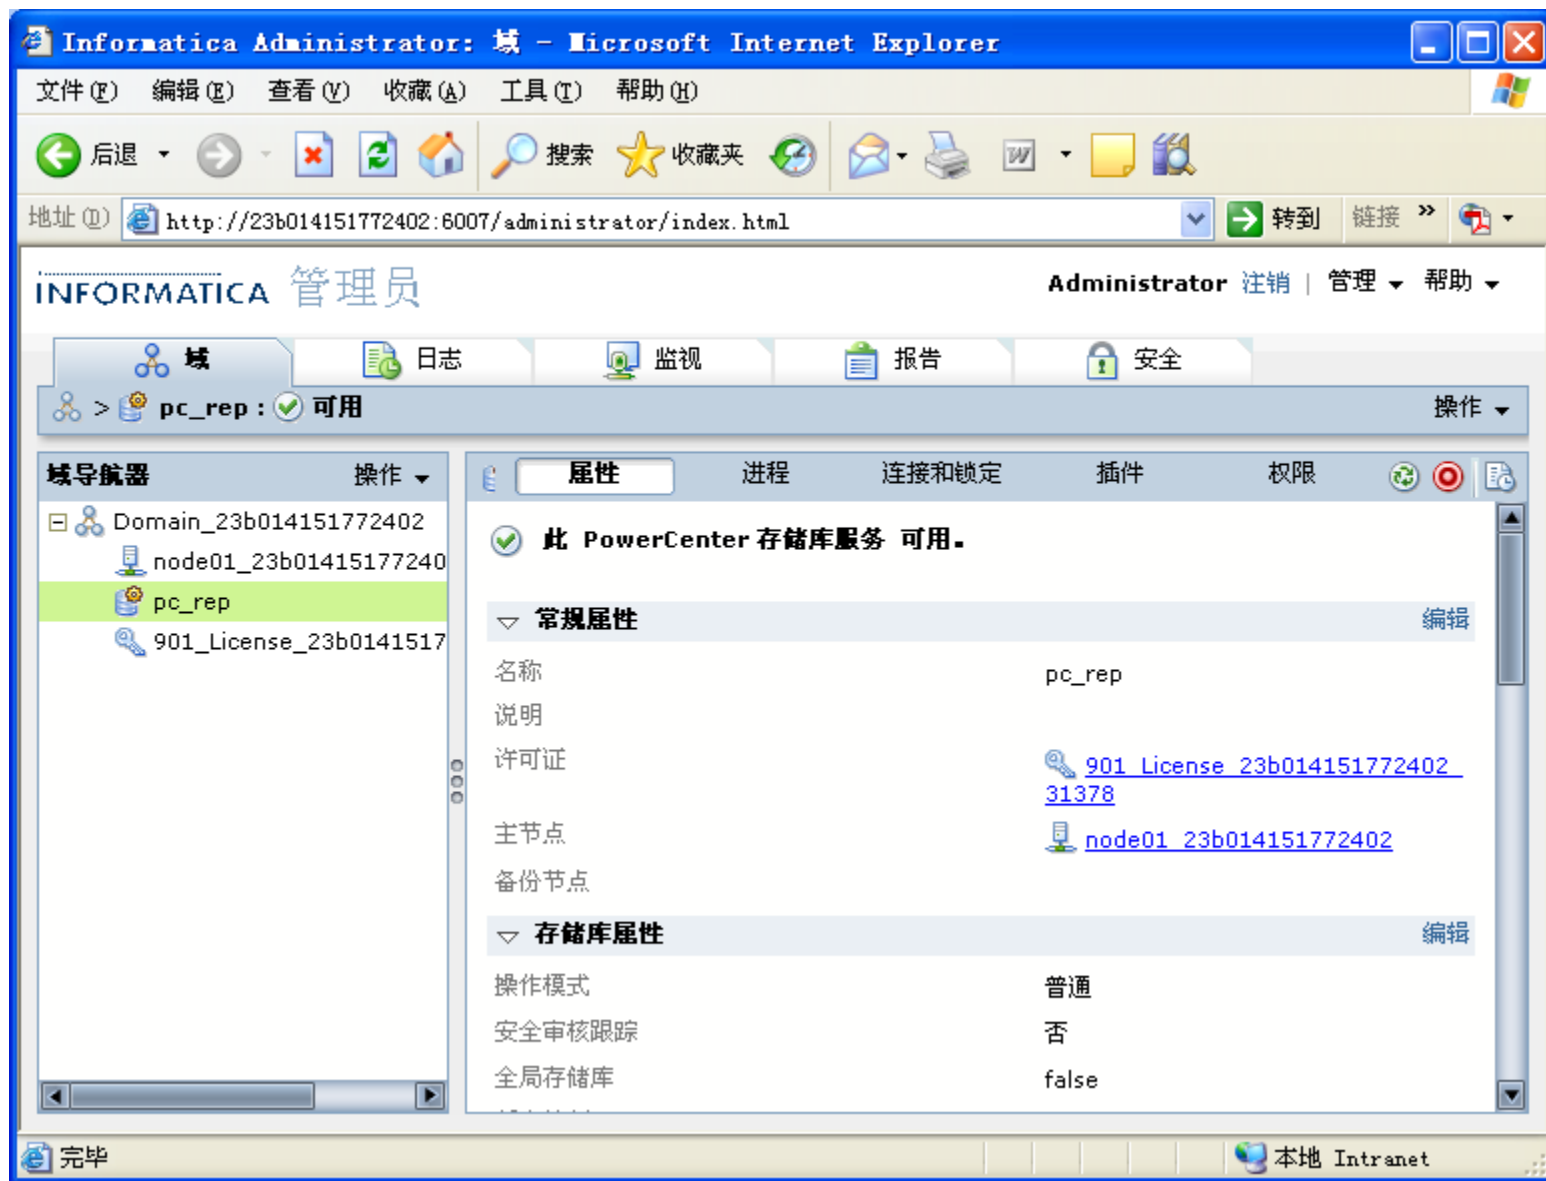

创建PowerCenter Integration Service

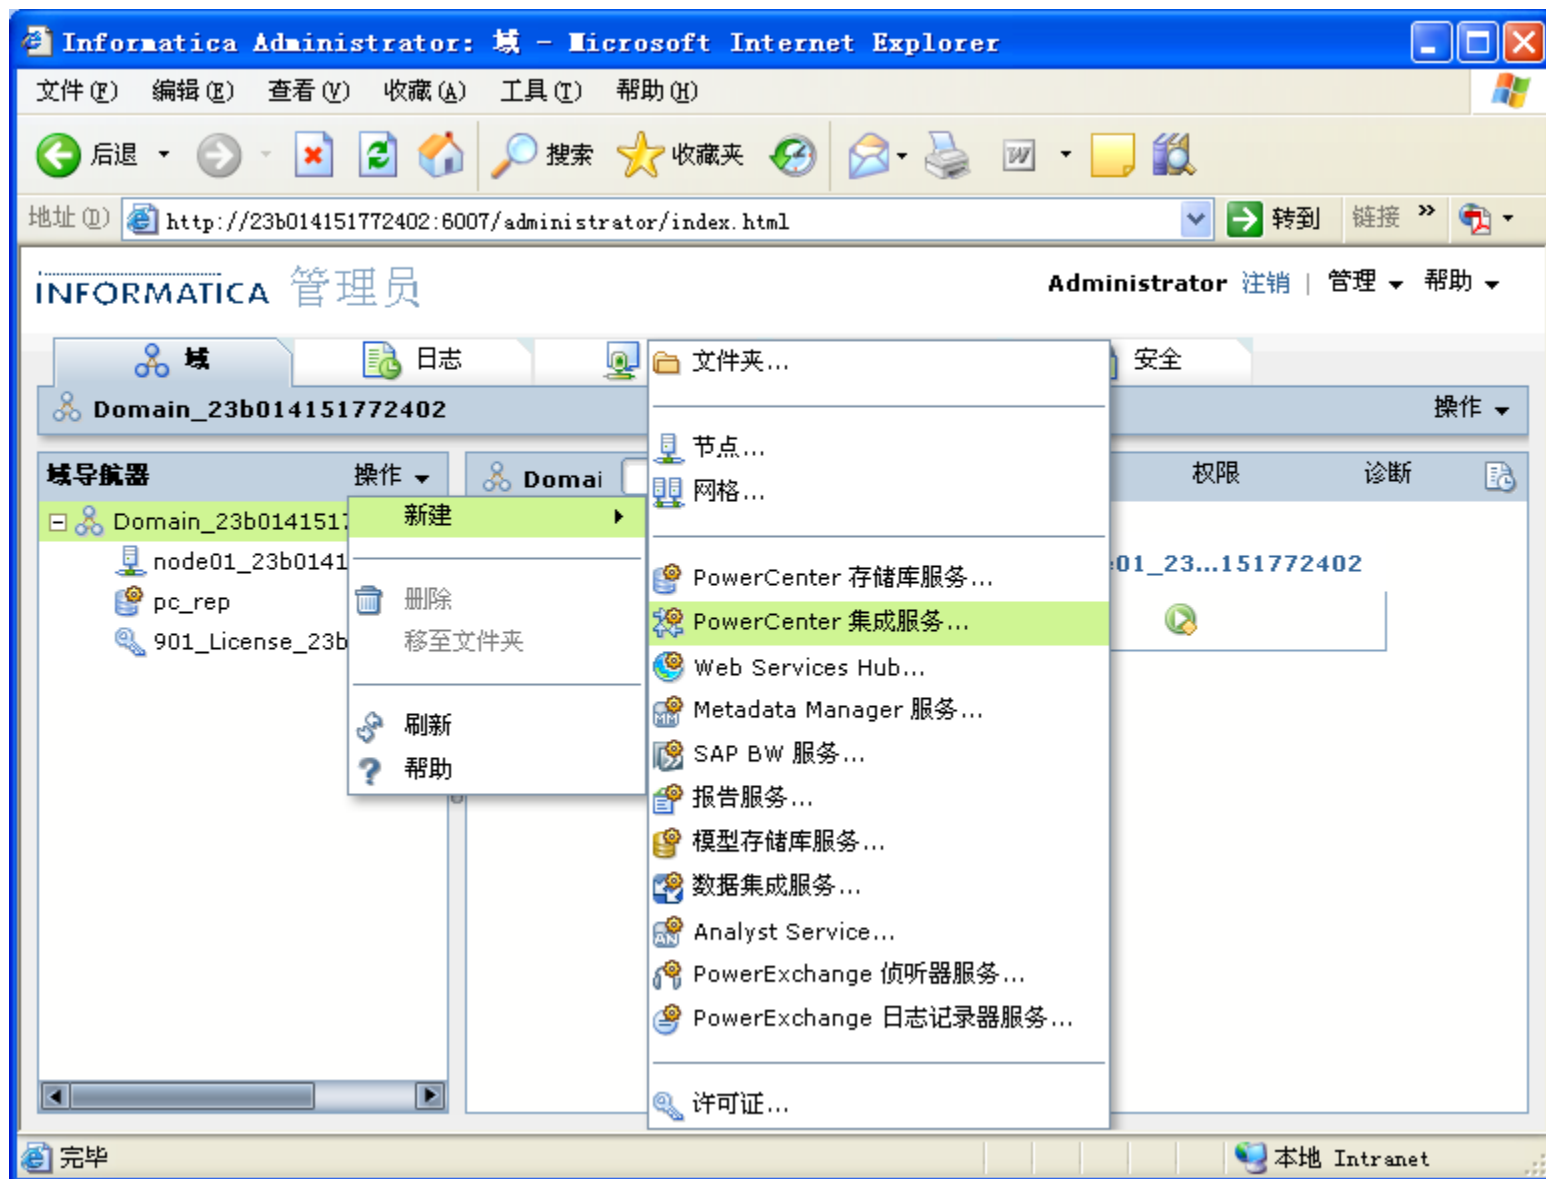

创建PowerCenter Integration Service

Informatica Administrator: 域 - Microsoft Internet Explorer

文件(F) 编辑(E) 查看(V) 收藏(A) 工具(T) 帮助(H)

后退 前进 刷新 地址 搜索 收藏夹 打印 转到 链接

地址 http://23b014151772402:6007/administrator/index.html

新建 PowerCenter 集成服务 - 第 1 步(共 2 步)

为此新 PowerCenter 集成服务指定属性。

名称 * pc_DI

说明

位置 * Domain_23b014151772402 浏览...

许可证 901_License_23b014151772402_31378

分配 * ☐ 网络 ☒ 节点

主节点 * node01_23b014151772402

备份节点 选择...

< 上一步 下一步 > 取消

将运行此服务的节点 本地 Intranet

创建PowerCenter Integration Service

Informatica Administrator: 域 - Microsoft Internet Explorer

文件(F) 编辑(E) 查看(V) 收藏(A) 工具(T) 帮助(H)

后退 前进 刷新 地址 搜索 收藏夹 打印 保存 删除 地址 转到 链接

地址 http://23b014151772402:6007/administrator/index.html

新建 PowerCenter 集成服务 - 第 2 步(共 2 步)

指定 PowerCenter 存储库服务及其登录凭据。

PowerCenter 存储库服务 pc_rep

用户名 * Administrator

密码 *


选择数据移动模式。

数据移动模式 * Unicode


< 上一步 完成 取消


数据移动模式 本地 Intranet

创建PowerCenter Integration Service

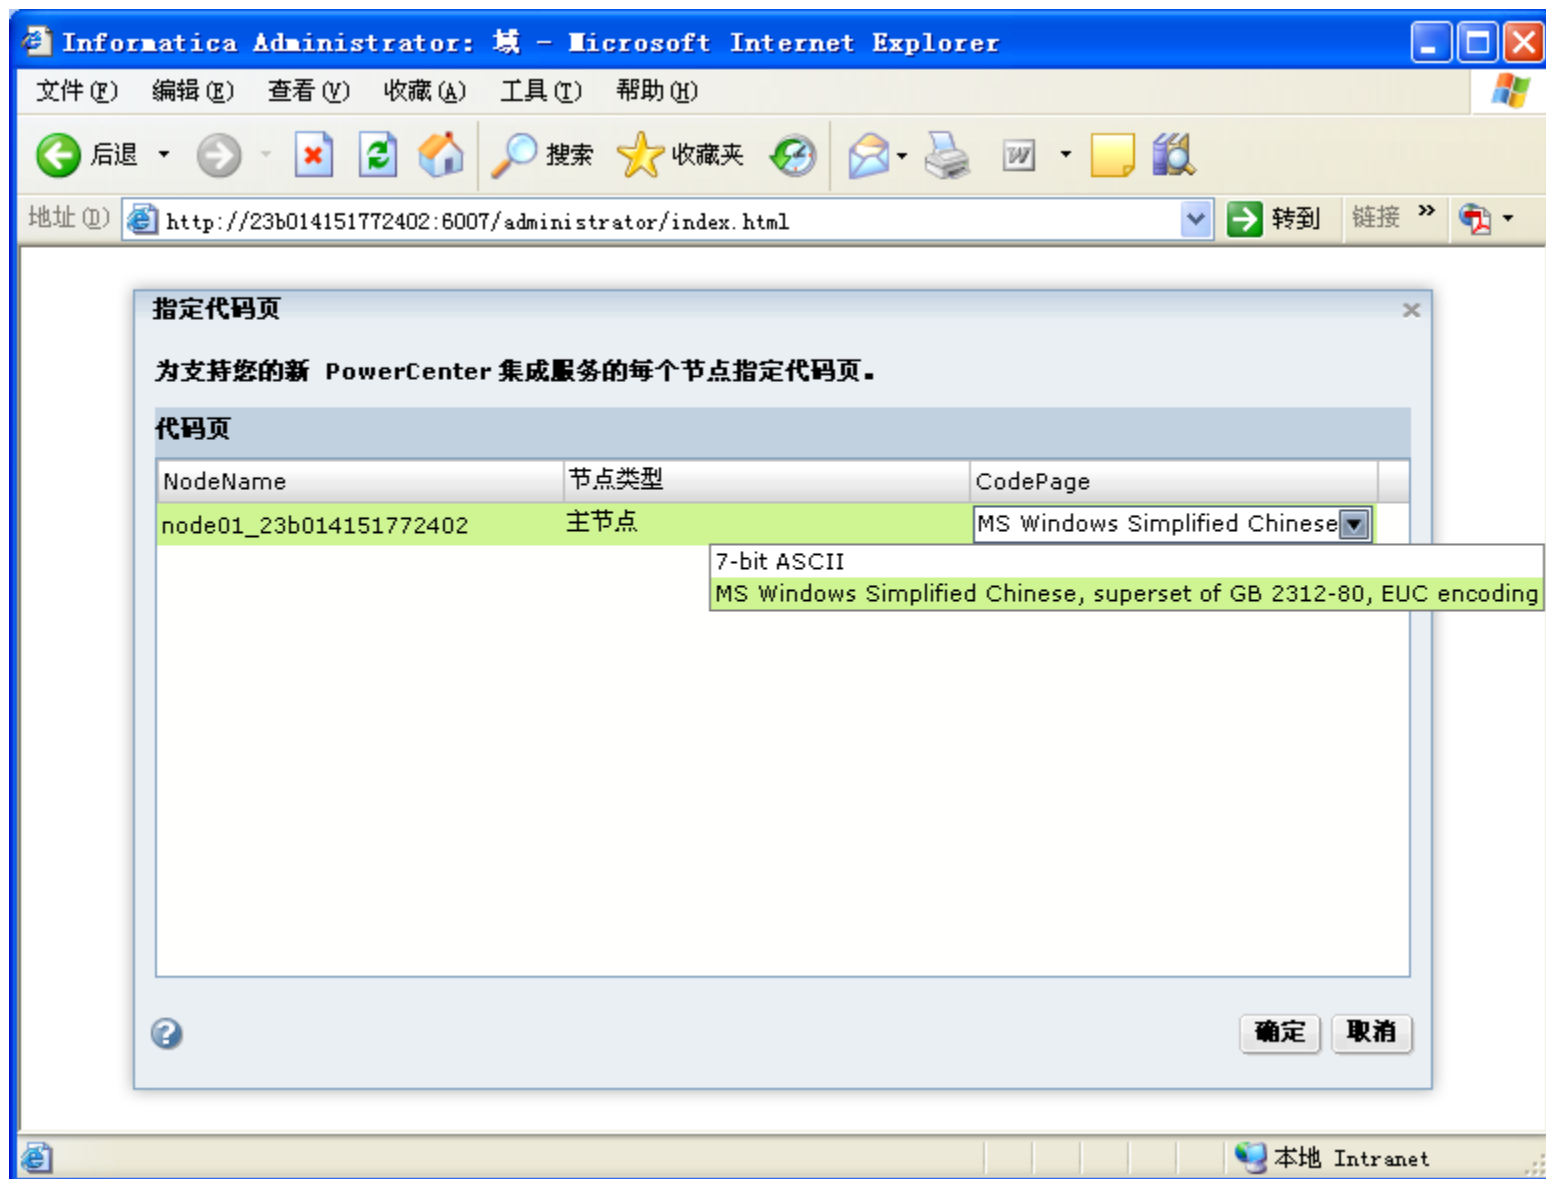

创建PowerCenter Integration Service

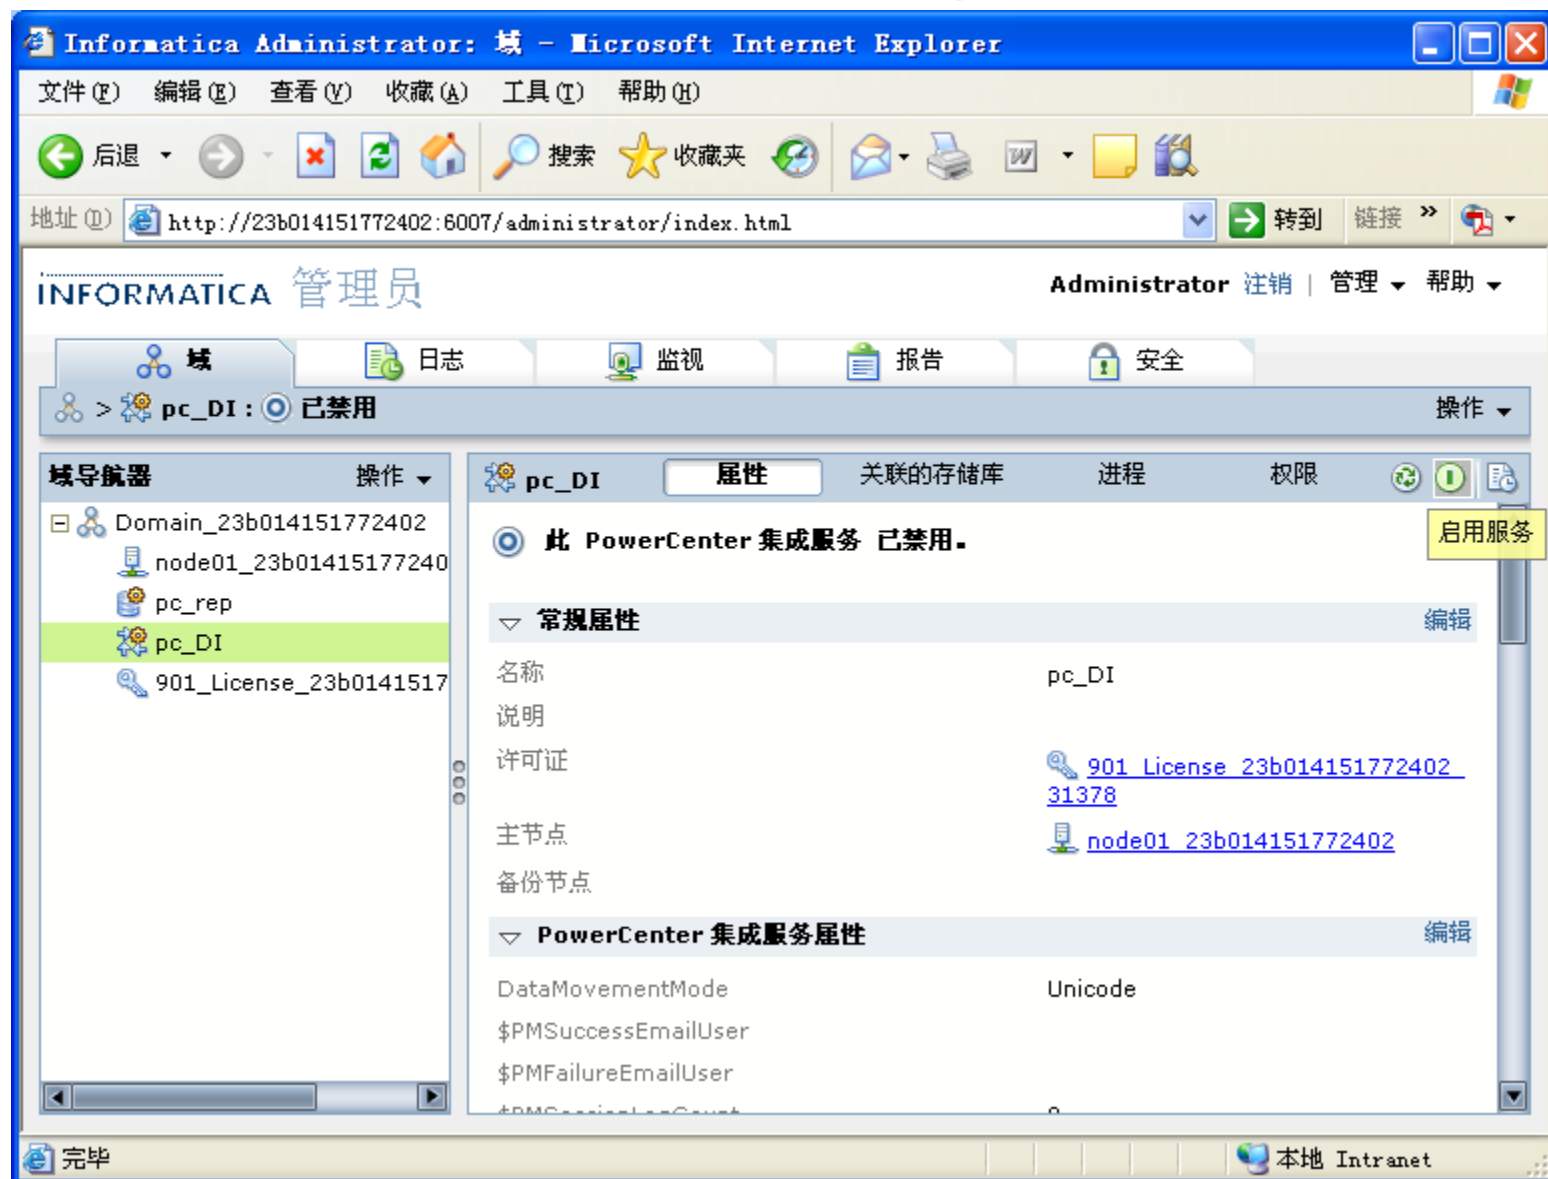

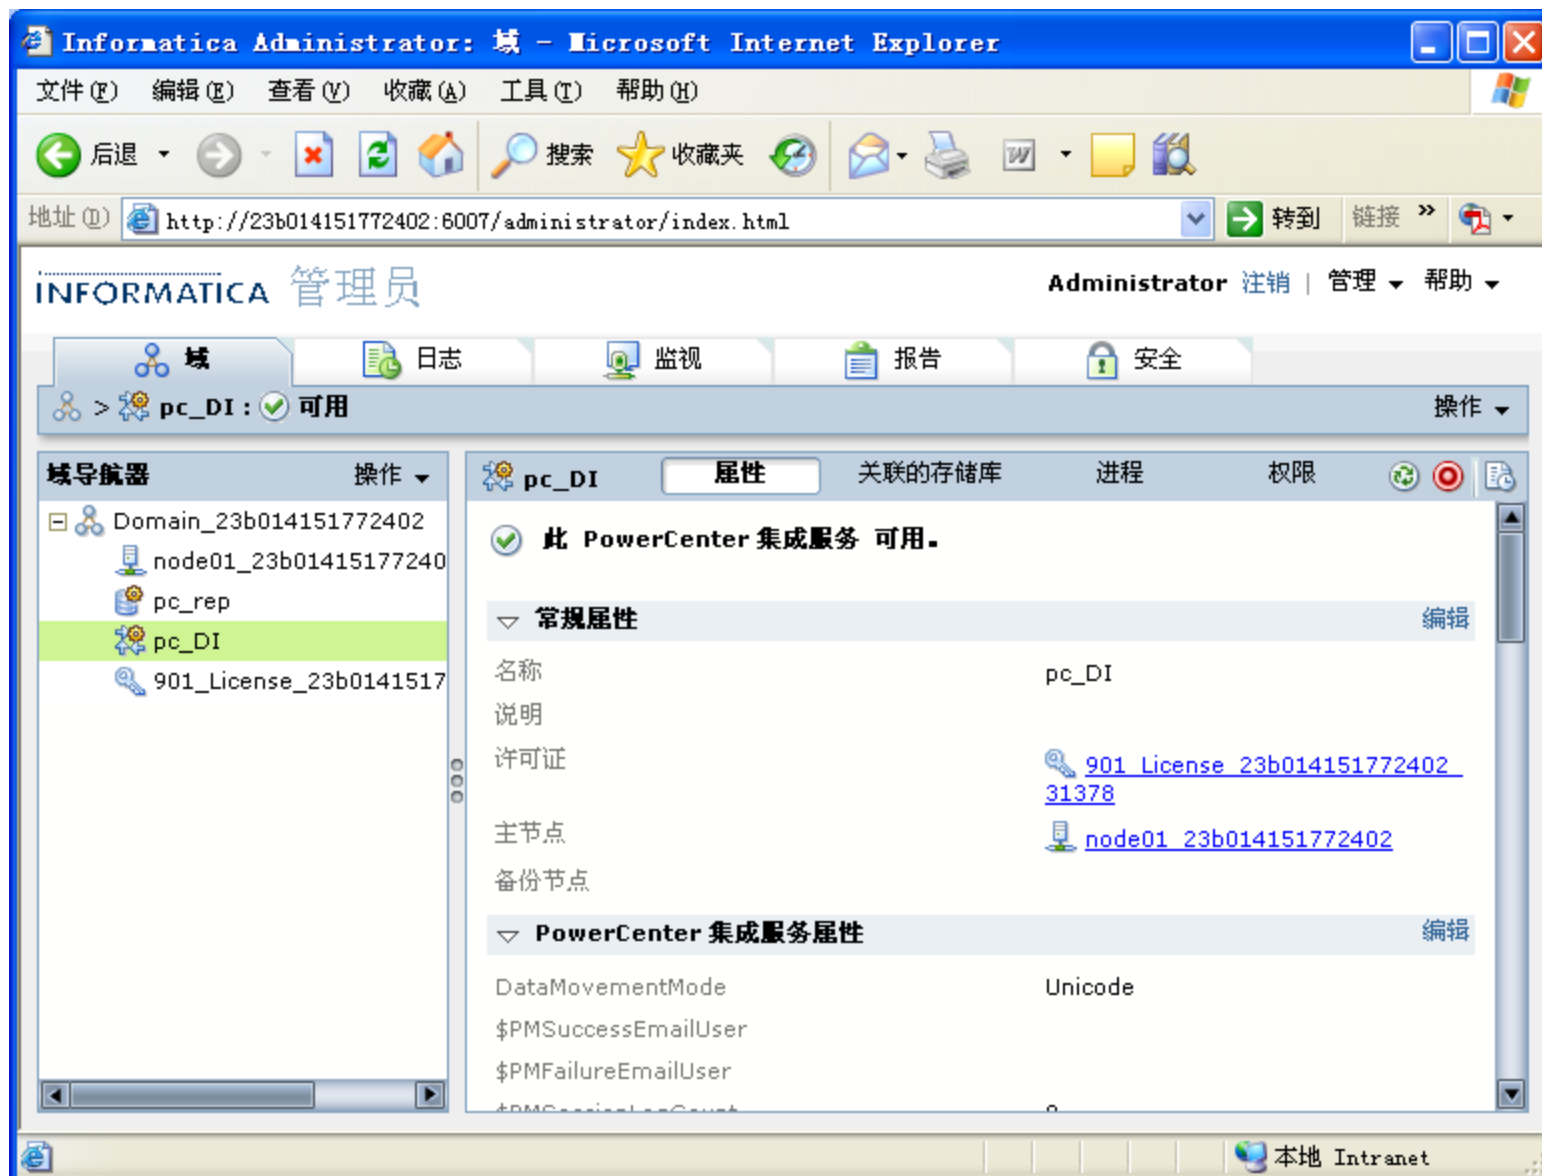

安装PowerCenter Client 901

\\V901HF1\901HF1_Client_Installer_win32-x86\install.bat




安装PowerCenter Client 901


\\V901HF1\901HF1_Client_Installer_win32-x86\install.bat




安装PowerCenter Client 901

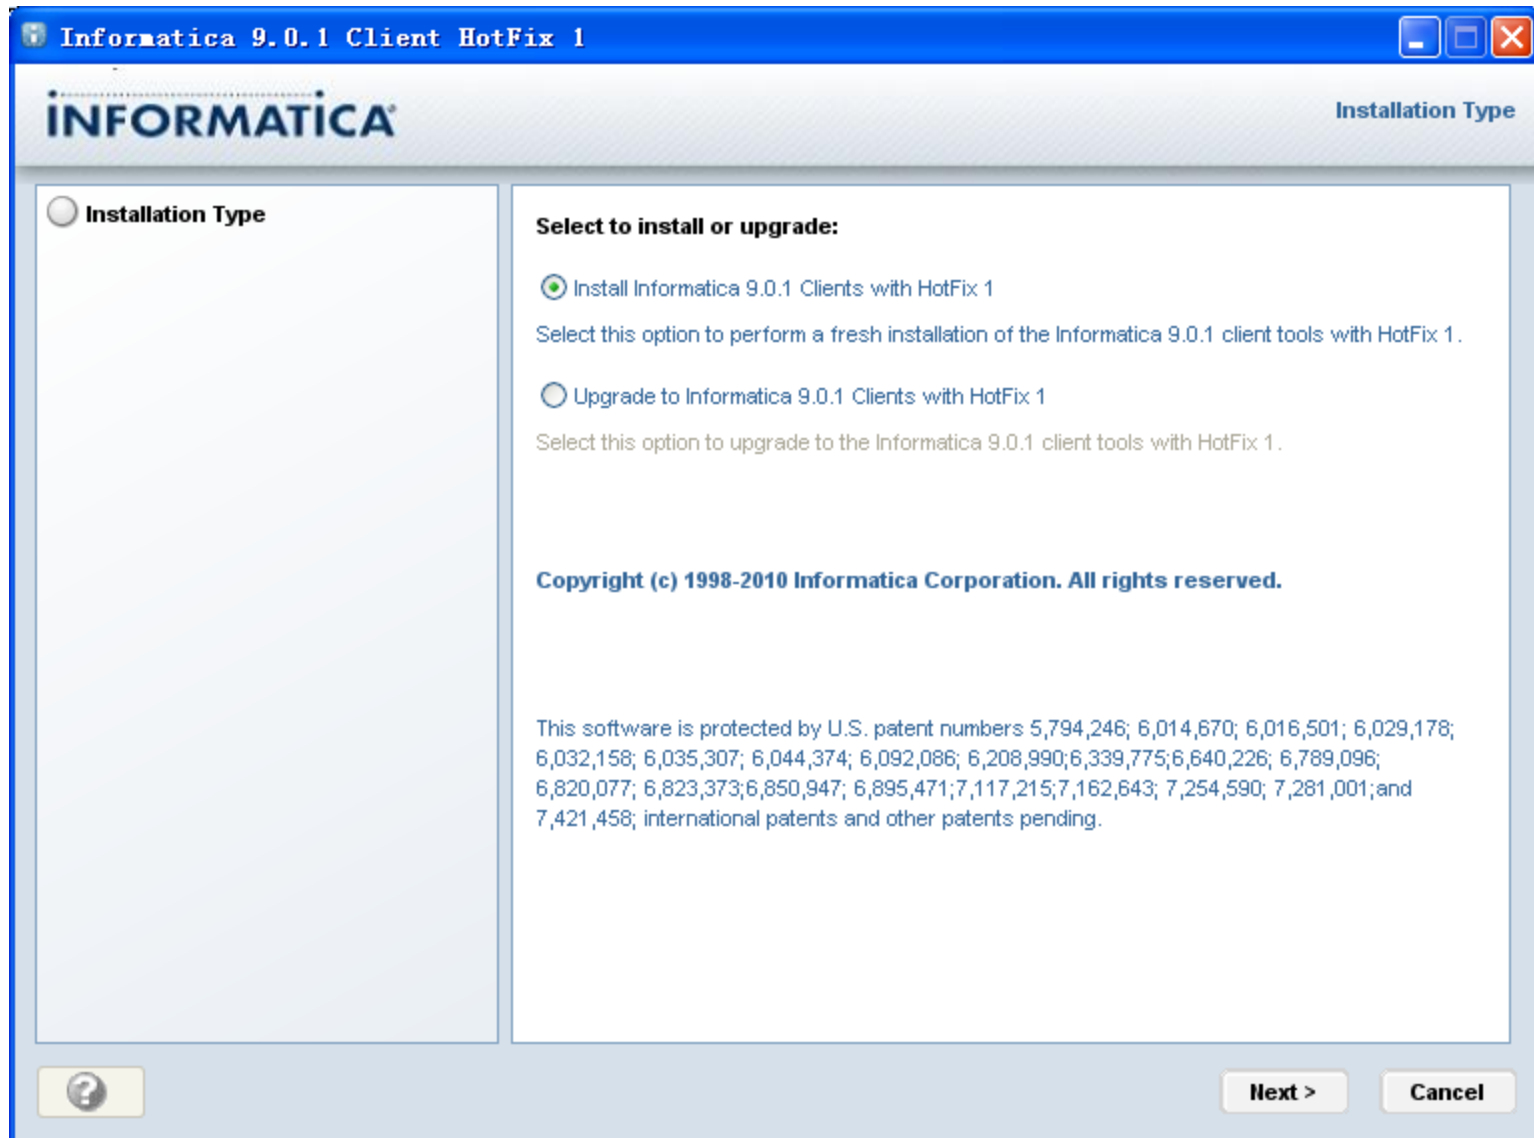

安装PowerCenter Client 901

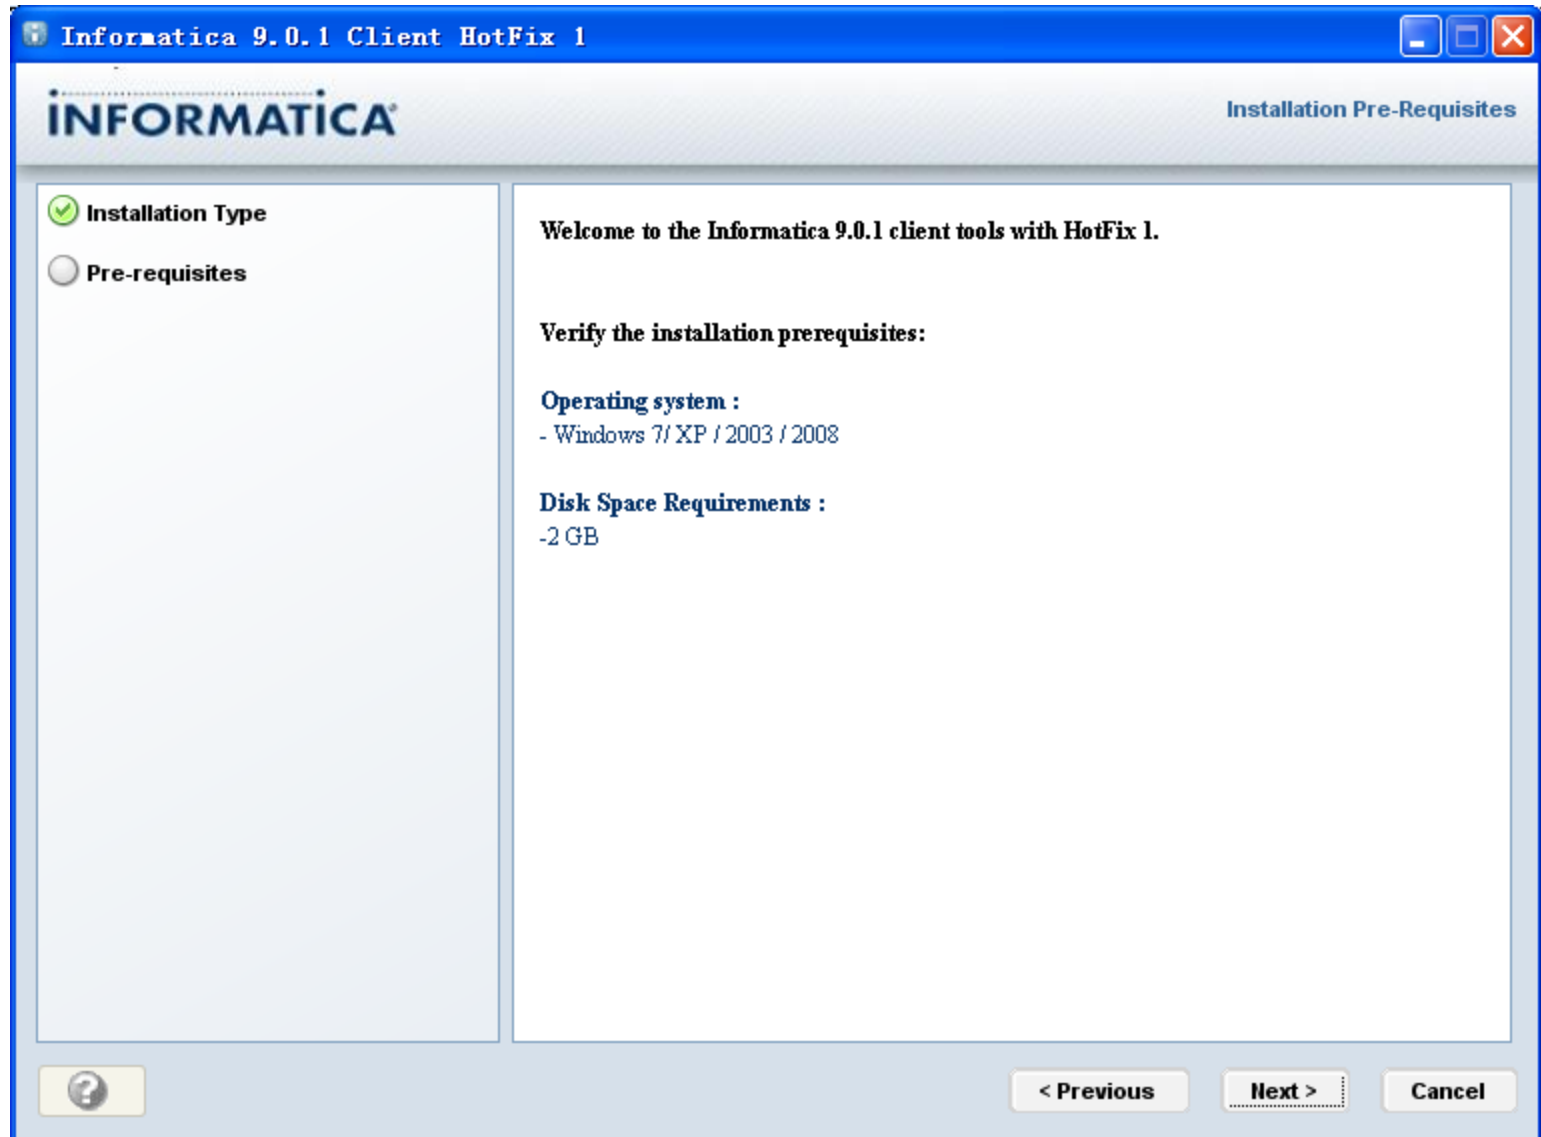

安装PowerCenter Client 901

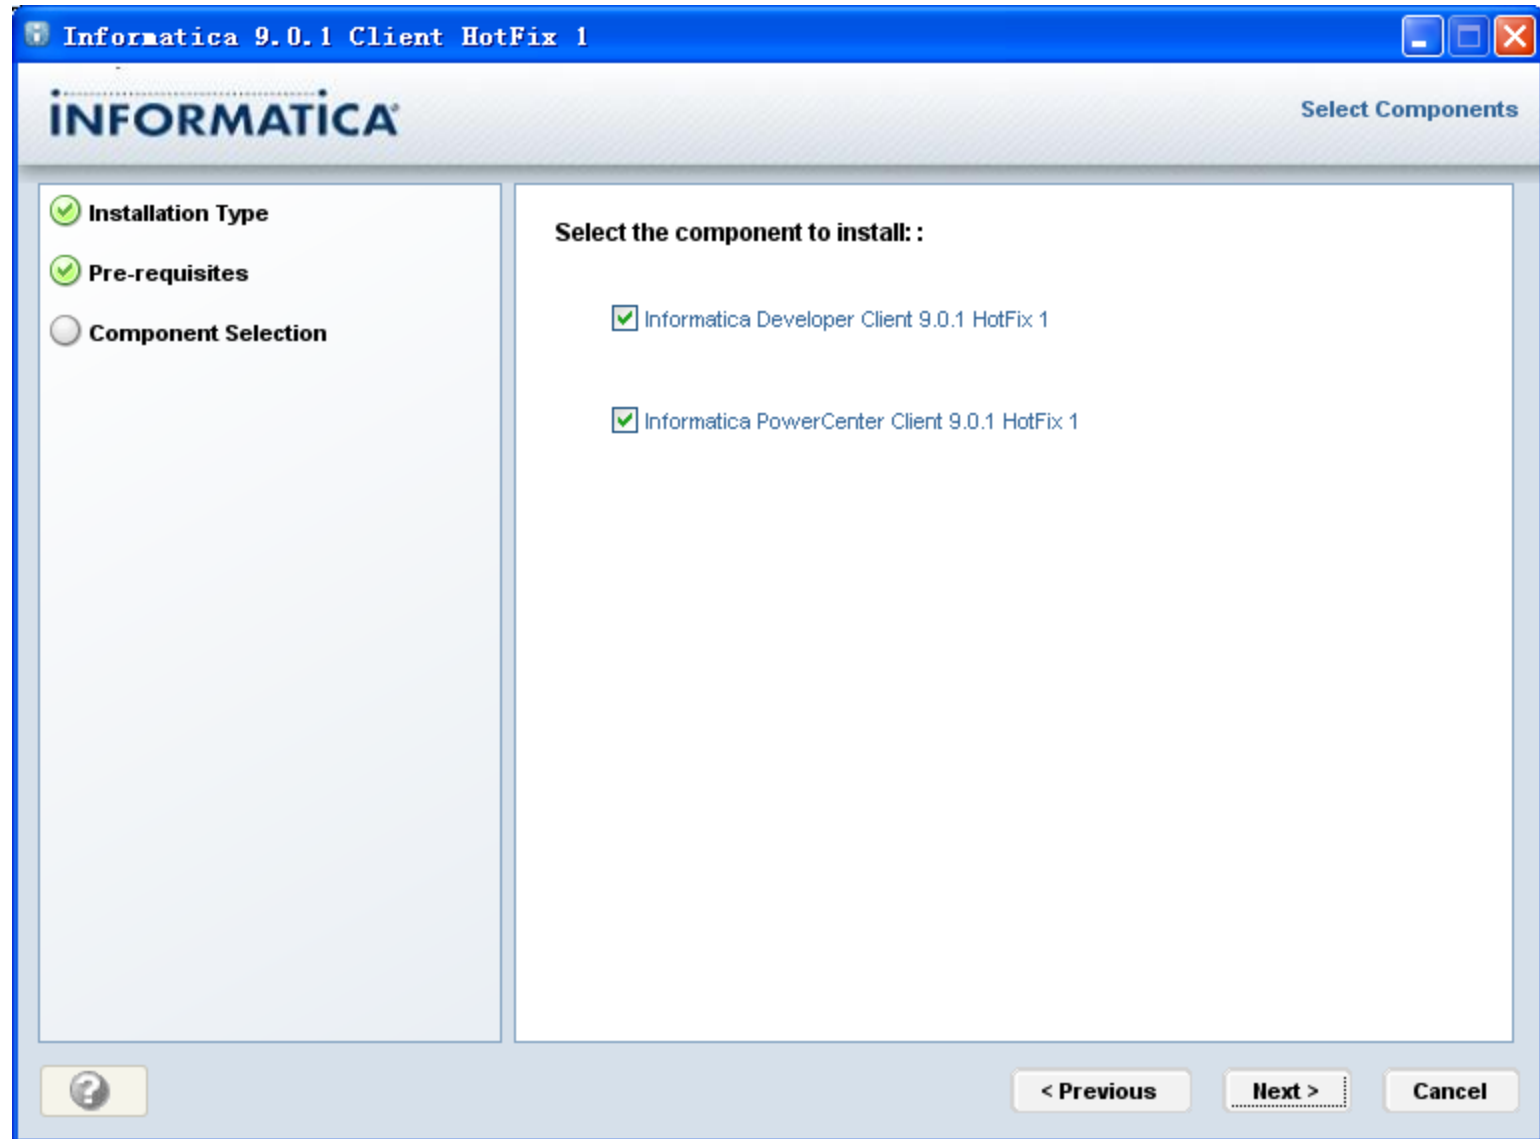

安装PowerCenter Client 901

Informatica 9.0.1 Client HotFix 1

INFORMATICA®

Installation Directory

☒ Installation Type

☒ Pre-requisites

☒ Component Selection

☐ Installation directory

Enter the installation directory :

C:\Informatica\9.0.1


Default ...

< Previous


Next >

Cancel


安装PowerCenter Client 901

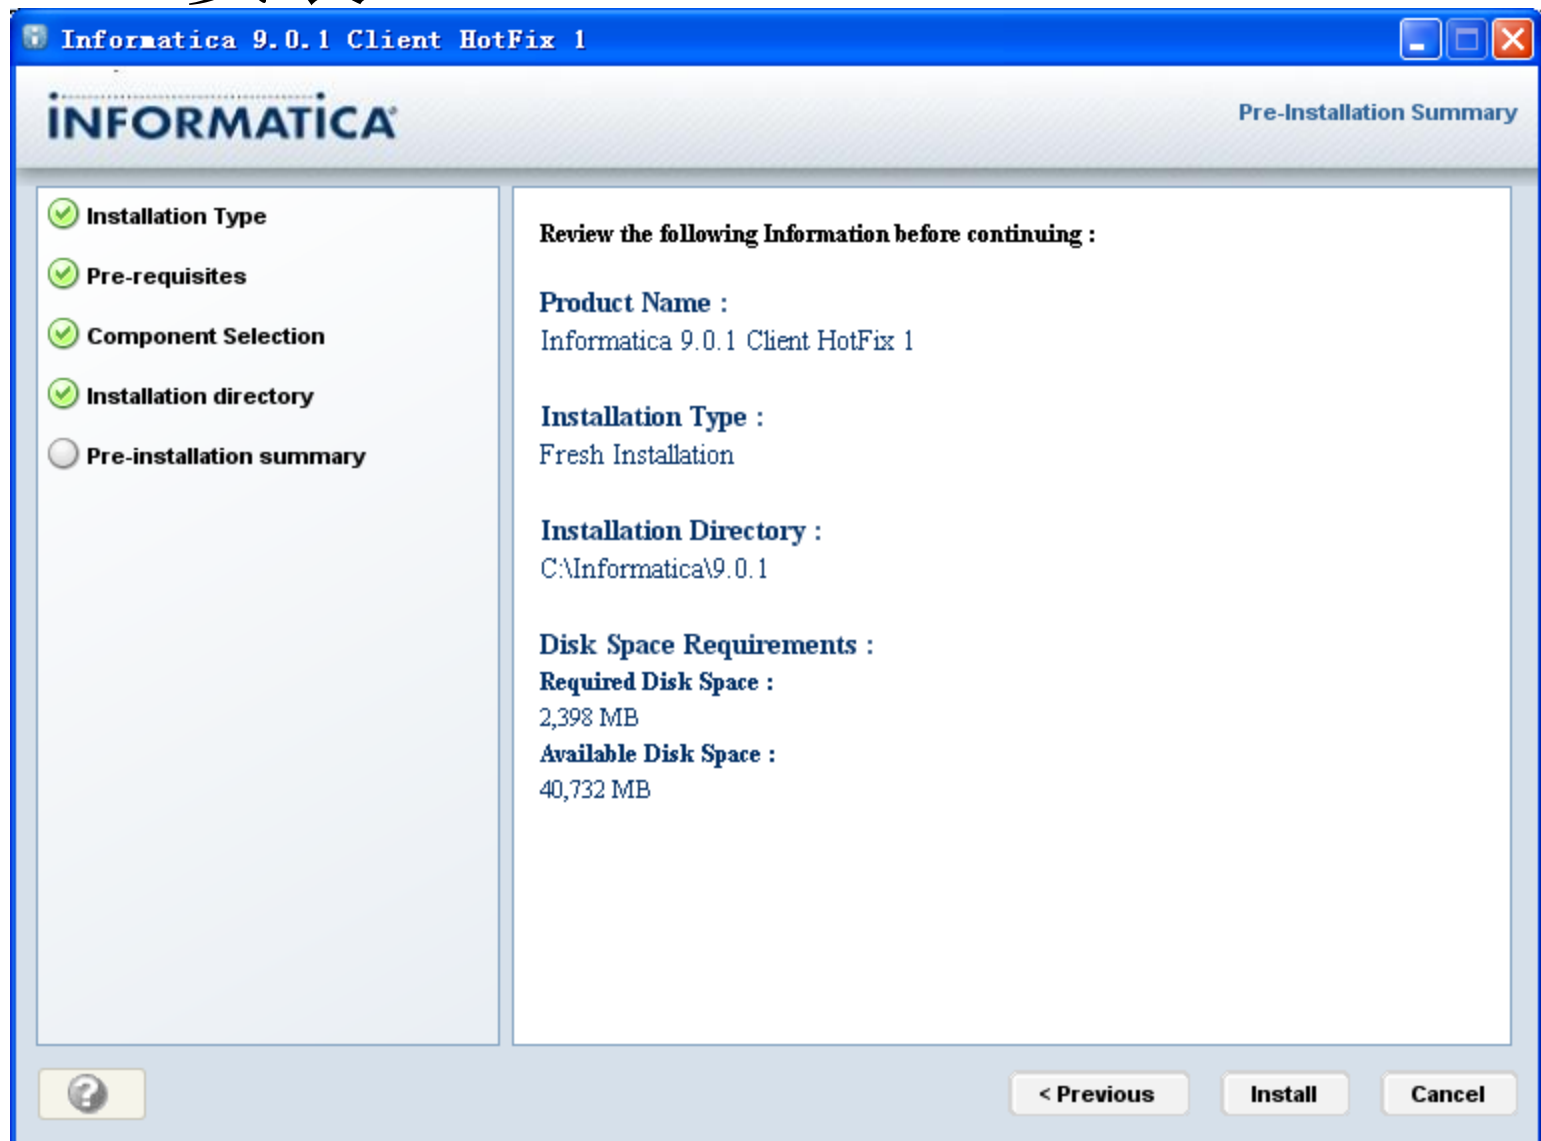


安装PowerCenter Client 901

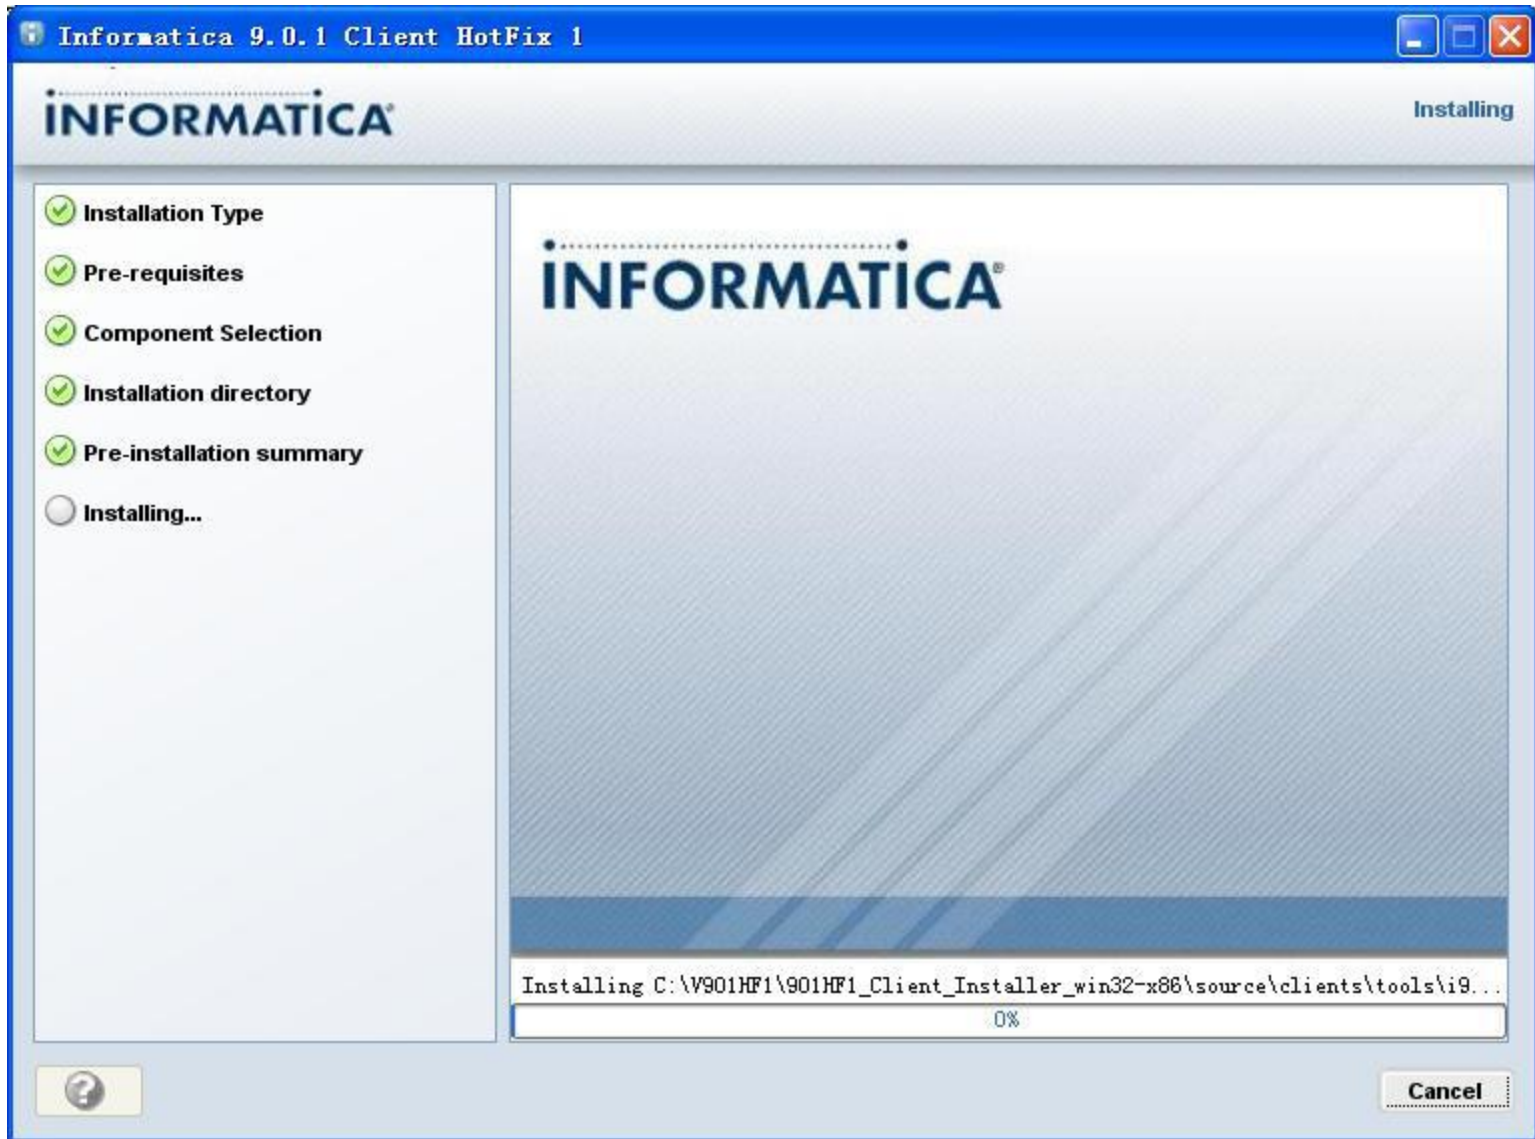

安装PowerCenter Client 901

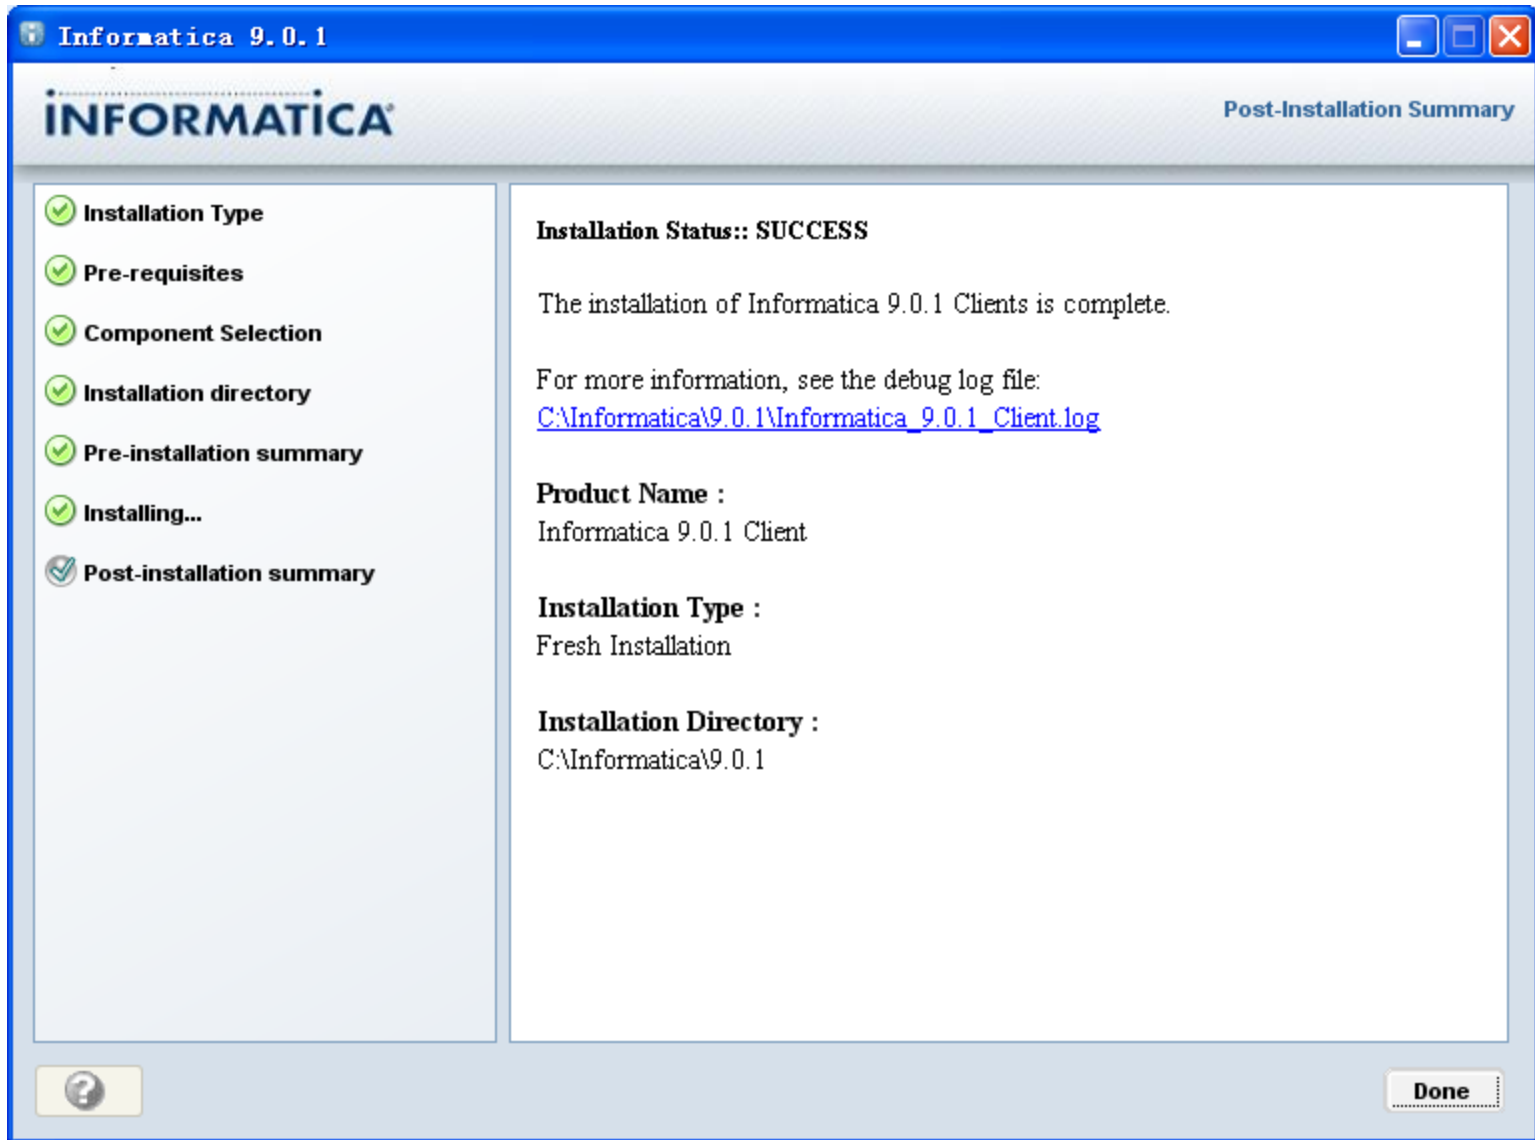


配置PowerCenter client 与server的连接:

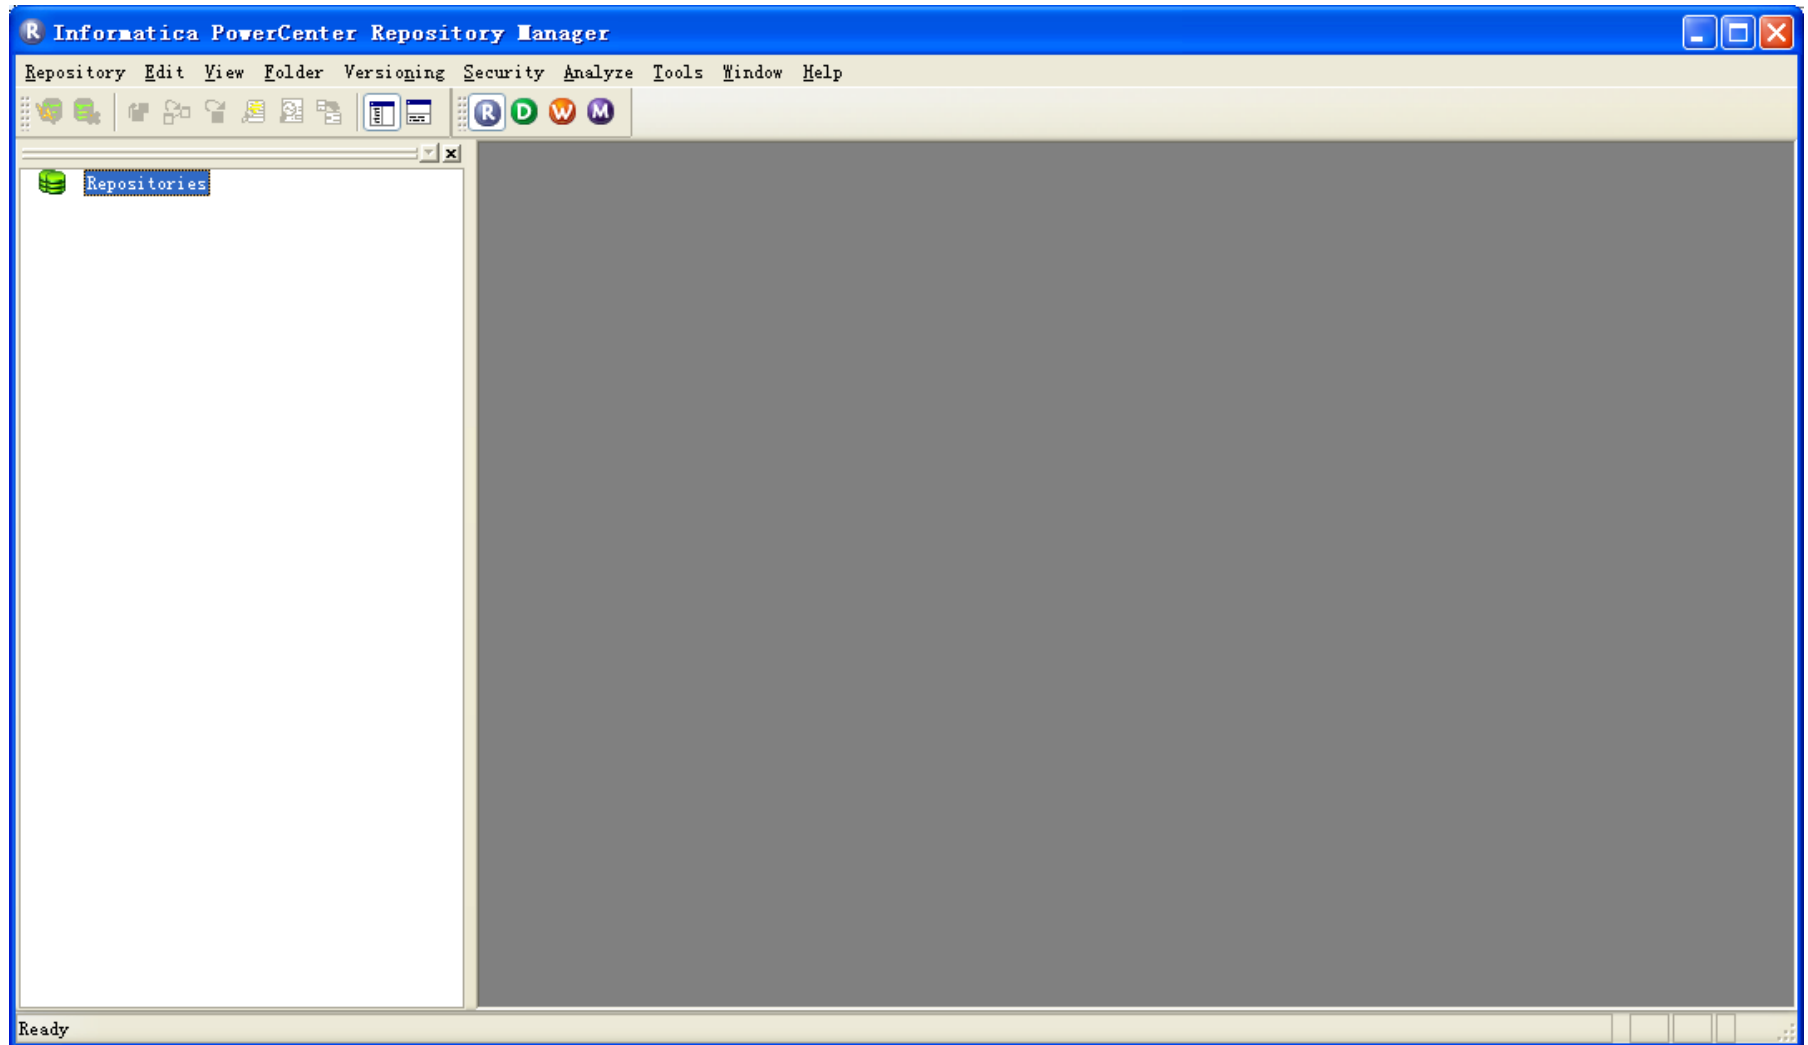


配置PowerCenter client 与server的连接:

菜单 Repository -> Configure Domains

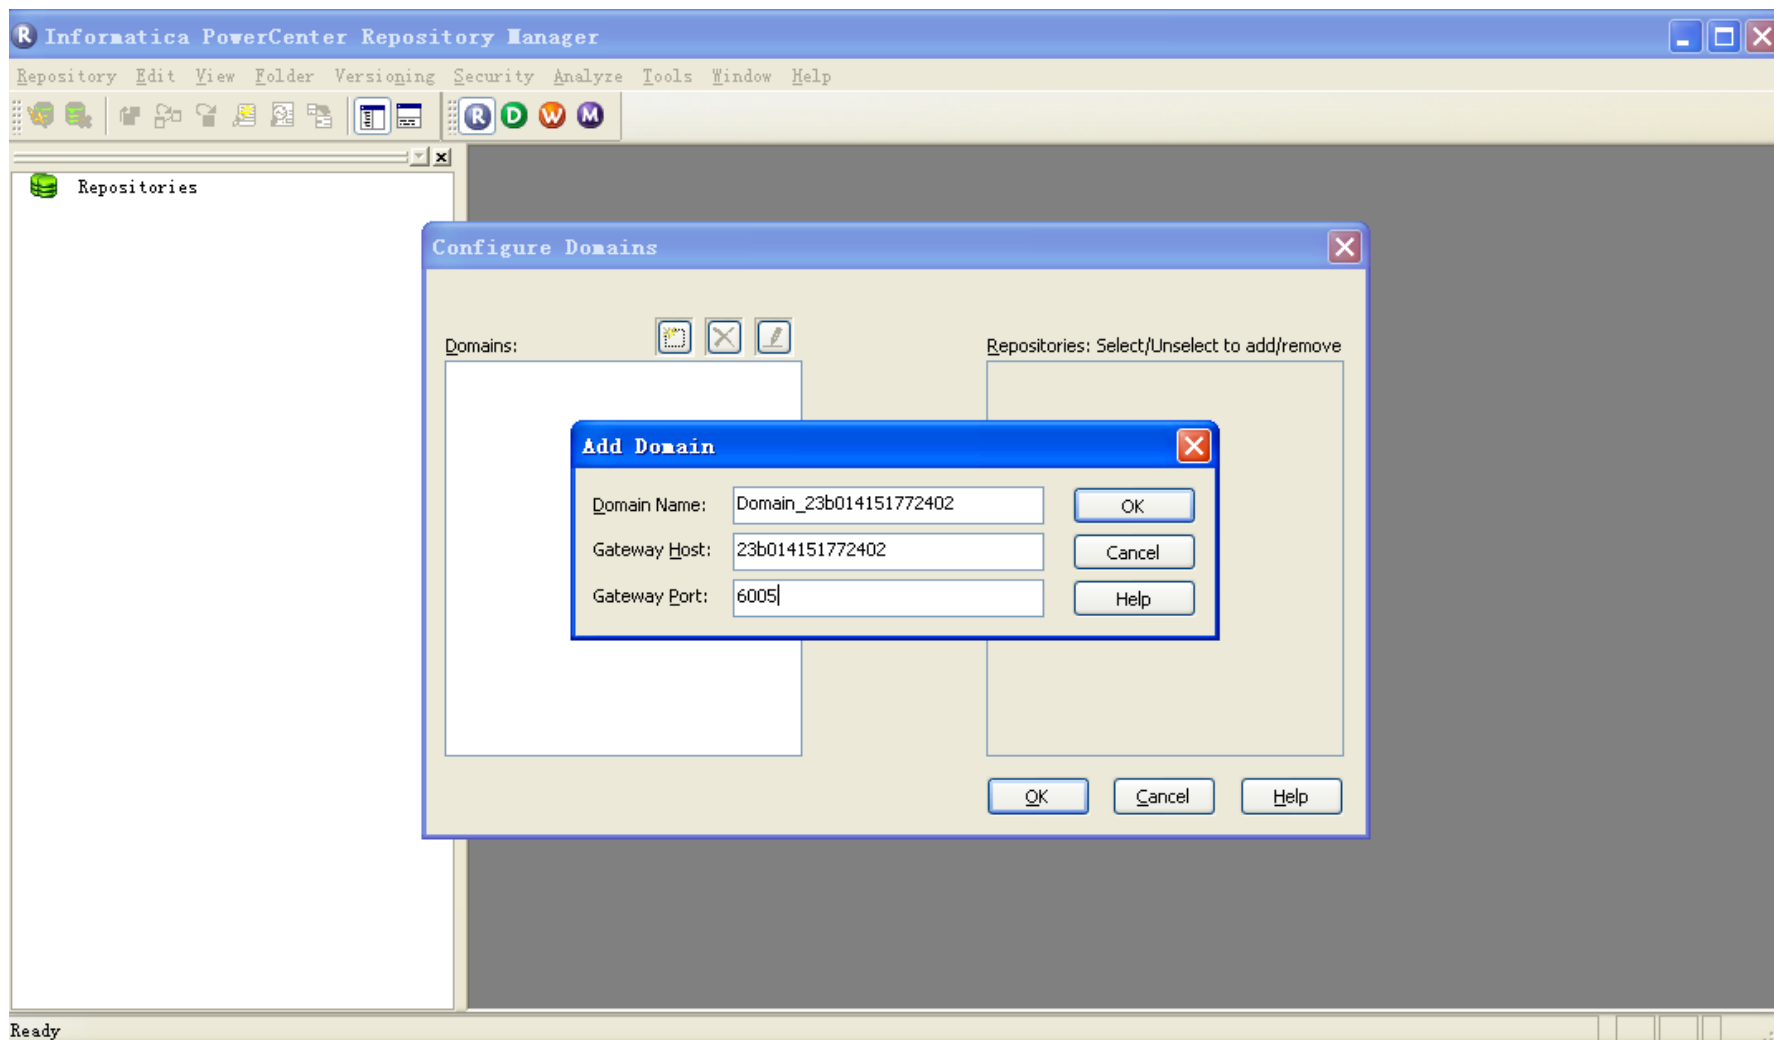

配置PowerCenter client 与server的连接:

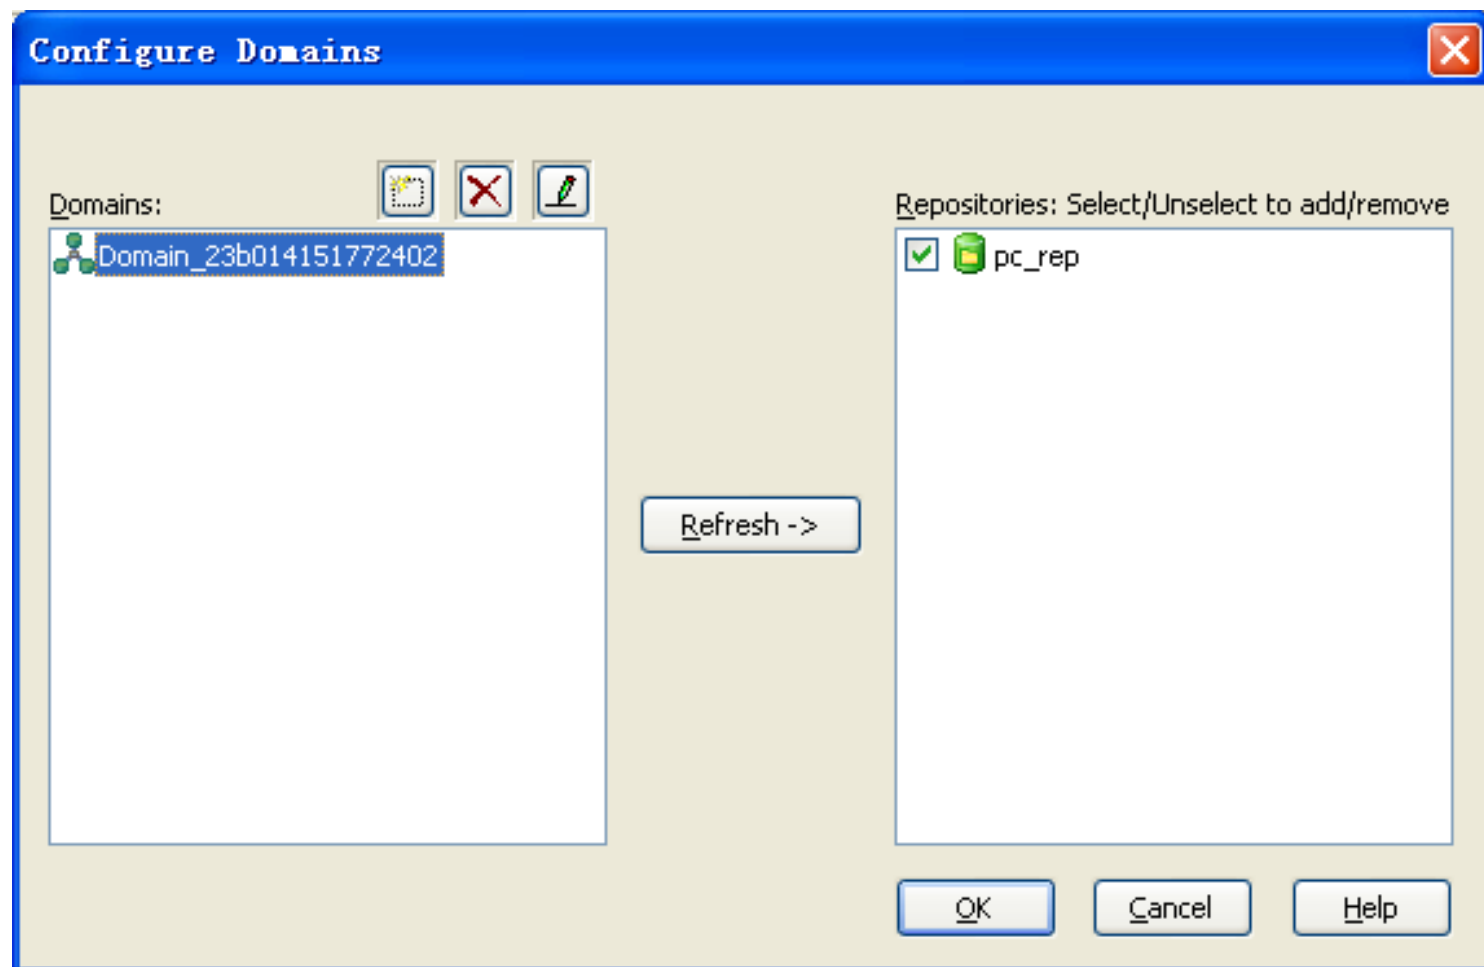

配置PowerCenter client 与server的连接:

