inspHire Office Edition REST API

Table of Contents

1. About 3
2. Getting Started 3
3. Browsing the API 6
4. Creating a new API session 6
5. Executing the API 9
6. Logging out of the session 11
7. HTTP Return codes 13
8. API Objects 14
9. API Objects (PUSH and PUT) 16

Version	Details	Author	Date
1.475.060	First draft	Mark Taylor	04/12/2020

1. About

inspHire Office Edition REST API is a web interface to the rich data sets within the inspHire schema. The service is built in a RESTful manner and supports common web protocols such as ODATA for HTTP data querying.

2. Getting Started

Open the homepage and click the 'Click here' hyperlink to get started browsing the Office WebAPI.

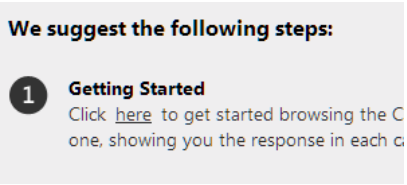

This will present you with all the API endpoints.

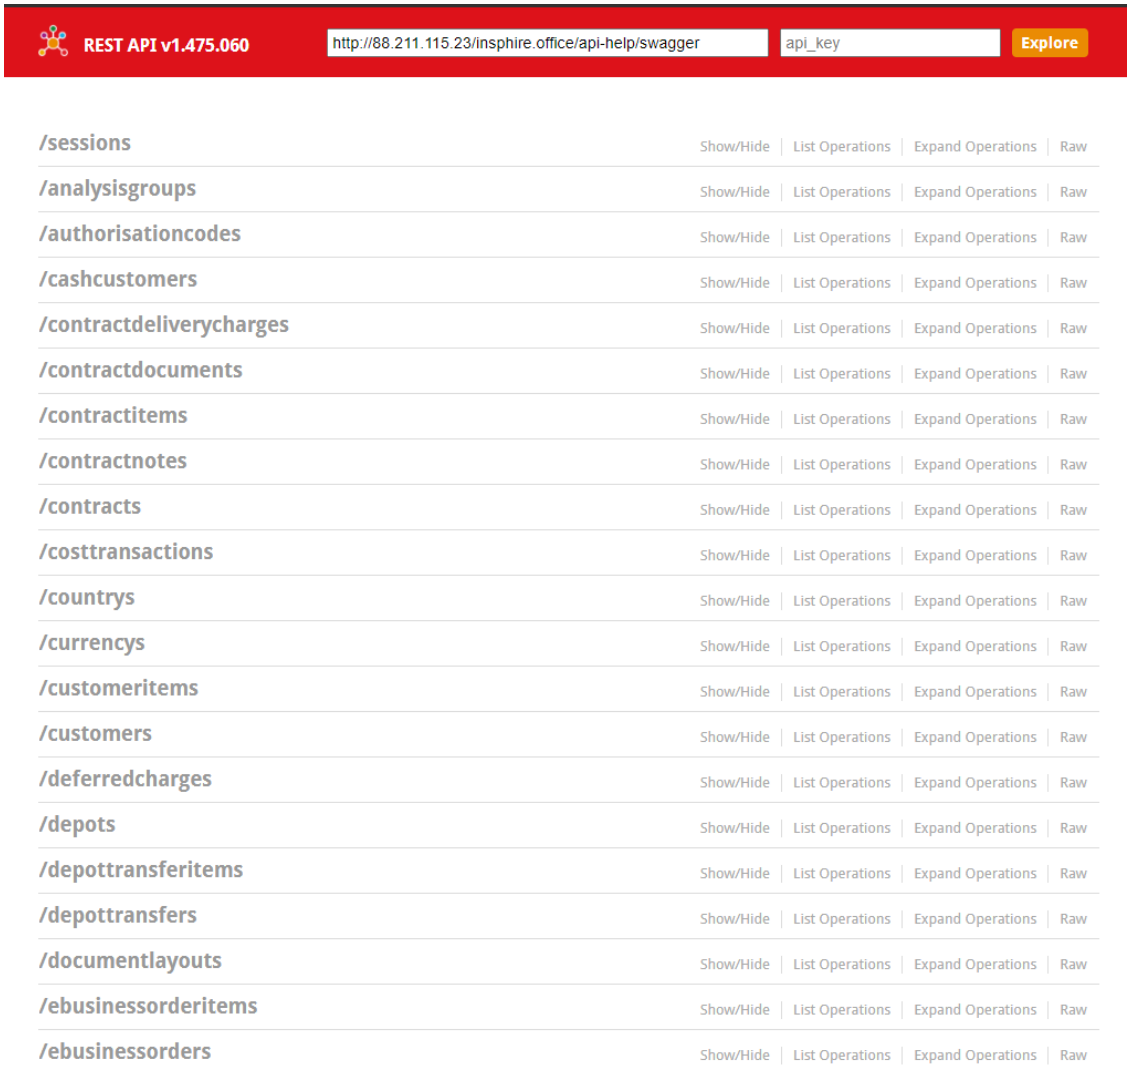

/fars	Show/Hide | List Operations | Expand Operations | Raw
/groupitemdetails	Show/Hide | List Operations | Expand Operations | Raw
/groupitems	Show/Hide | List Operations | Expand Operations | Raw
/invoiceitems	Show/Hide | List Operations | Expand Operations | Raw
/invoices	Show/Hide | List Operations | Expand Operations | Raw
/jobitems	Show/Hide | List Operations | Expand Operations | Raw
/jobtypes	Show/Hide | List Operations | Expand Operations | Raw
/jobs	Show/Hide | List Operations | Expand Operations | Raw
/offhireinfos	Show/Hide | List Operations | Expand Operations | Raw
/postcodes	Show/Hide | List Operations | Expand Operations | Raw
/productgroups	Show/Hide | List Operations | Expand Operations | Raw
/proofofdeliverys	Show/Hide | List Operations | Expand Operations | Raw
/purchaseorderitems	Show/Hide | List Operations | Expand Operations | Raw
/purchaseorders	Show/Hide | List Operations | Expand Operations | Raw
/rates	Show/Hide | List Operations | Expand Operations | Raw
/ratetypes	Show/Hide | List Operations | Expand Operations | Raw
/recordlocks	Show/Hide | List Operations | Expand Operations | Raw
/reports	Show/Hide | List Operations | Expand Operations | Raw
/routeheaders	Show/Hide | List Operations | Expand Operations | Raw
/routeitems	Show/Hide | List Operations | Expand Operations | Raw
/salesorderdeliverycharges	Show/Hide | List Operations | Expand Operations | Raw
/salesorderitems	Show/Hide | List Operations | Expand Operations | Raw
/salesorders	Show/Hide | List Operations | Expand Operations | Raw

/servicetypes	Show/Hide | List Operations | Expand Operations | Raw
/sites	Show/Hide | List Operations | Expand Operations | Raw
/statics	Show/Hide | List Operations | Expand Operations | Raw
/stock	Show/Hide | List Operations | Expand Operations | Raw
/stockdepots	Show/Hide | List Operations | Expand Operations | Raw
/stockprices	Show/Hide | List Operations | Expand Operations | Raw
/subgroups	Show/Hide | List Operations | Expand Operations | Raw
/suppliers	Show/Hide | List Operations | Expand Operations | Raw
/systemoptions	Show/Hide | List Operations | Expand Operations | Raw
/testdefinitions	Show/Hide | List Operations | Expand Operations | Raw
/testresults	Show/Hide | List Operations | Expand Operations | Raw
/users	Show/Hide | List Operations | Expand Operations | Raw

3. Browsing the API

Click an endpoint to explore the operation available.

/customers Show/Hide | List Operations | Expand Operations | Raw

The customer table for example allows read (GET), update and create (POST and PUT), delete (DELETE) operations.

/customers Show/Hide | List Operations | Expand Operations | Raw

GET	/api/customers	Fetches all Customers.
GET	/api/customers/{recid}	Fetches the Customer with the specified RECID.
GET	/api/customers/{acctno}	Fetches the Customer with the specified Account Code.
POST	/api/customers	Adds a new Customer record.
PUT	/api/customers/{acct}	Updates an existing Customer record.
DELETE	/api/customers/{acct}	Deletes an existing Customer record.

Click the operation to explore.

GET /api/customers Fetches all Customers.

You can read the Implementation notes for further explanation of the action.

GET /api/customers Fetches all Customers.

Implementation Notes

Fetches all Customers. Note; as well as the parameters shown below you can also shape the response using the 'fields' parameter (i.e. fields=recid, recorder).

Parameters

Parameter	Value	Description
odata		OData filter. Used to filter the response and only return those entries that satisfy the predicate expression specified. See the OData $Filter querying syntex for more information.

Try it out!

4. Creating a new API session

To execute an endpoint of the API you first need to logon and create a live session. To do this you need to go to 'api/sessions/logon', provide a valid authentication object, and click "Try it out!"

This can be within the GUI via the endpoint sessions.

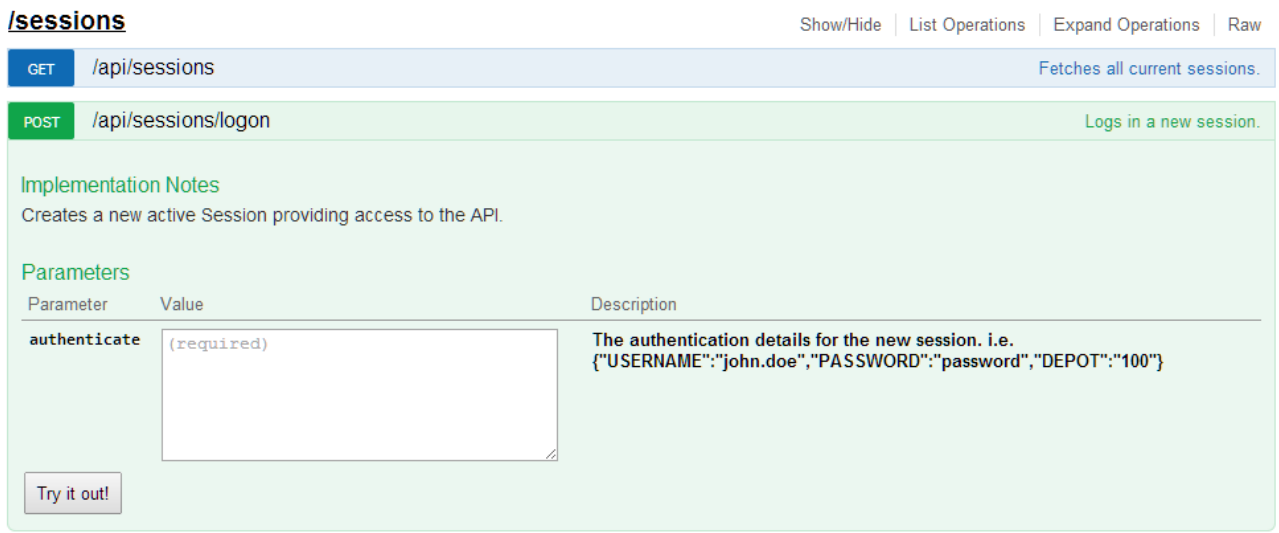

The logon requires an inspire user account and takes the format:

{"USERNAME":"john.doe","PASSWORD":"password","DEPOT":"100"}

Enter credentials and press 'Try it out!'

If the logon is successful (Response code 200) a valid authenticated session will be created and returned within the response.

Request URL

```
http://localhost/insphire.corporate/api/sessions/logon
```

Response Body


```
{
  "LOGGEDIN": 1,
  "SESSIONID": "F5AB476EAD604B8E81ABF0F0540E09DE",
  "USERNAME": "kirk",
  "RECID": "0B78B390DD444E82B30C8E5E9C33D414",
  "TIMESTAMP": "2014-03-31T11:14:39.8174921+01:00",
  "RECORDER": 1,
  "DEPOT": "100"
}
```


Response Code

```
200
```

Response Headers

```
Pragma: no-cache
Date: Mon, 31 Mar 2014 10:14:42 GMT
Server: Microsoft-IIS/8.0
X-AspNet-Version: 4.0.30319
X-Powered-By: ASP.NET
Content-Type: application/json; charset=utf-8
Cache-Control: no-cache
Content-Length: 201
Expires: -1
```

You then need to copy the SessionID value, paste it into the 'api_key' field (at the top of the page) and click 'Explore'.

Response Body


```
{
  "LOGGEDIN": 1,
  "SESSIONID": "9D99FB2C00EA46DC90D8EBF31E682888",
  "USERNAME": "DEMO",
  "RECID": "20140325091907034#5096EC#001",
  "TIMESTAMP": "2020-12-04T13:15:16.5806586+00:00",
  "RECORDER": 1,
  "DEPOT": "NOTT"
}
```




5. Executing the API

Click the link of the endpoint that you wish to explore, provide the appropriate parameters as needed and then click "Try it out!" After a few seconds the response will be returned. In each case where a collection is being returned an ODATA command can be provided to filter the data (i.e. $filter=ITEMNO eq '10101001').

Below displays the /api/countrys GET results, the response body contains each record within the country table:

/countrys

Show/Hide | List Operations | Expand Operations | Raw

GET /api/countrys — Fetches all Countrys.

Implementation Notes

Fetches all Countrys. Note; as well as the parameters shown below you can also shape the response using the 'fields' parameter (i.e. fields=recid, recorder).

Parameters

Parameter	Value	Description
odata		OData filter. Used to filter the response and only return those entries that satisfy the predicate expression specified. See the OData $Filter querying syntex for more information.

Try it out! Hide Response

Request URL

```
http://88.211.115.23/insphire.office/api/countrys?api_key=9D99FB2C00EA46DC90D8EBF31E682888
```

Response Body

```
[]
```

Response Code

```
200
```

Response Headers

```
access-control-allow-origin: *
cache-control: no-cache
content-length: 2
content-type: application/json; charset=utf-8
date: Fri, 04 Dec 2020 13:22:23 GMT
expires: -1
pragma: no-cache
server: Microsoft-IIS/7.5
x-aspnet-version: 4.0.30319
x-powered-by: ASP.NET
```

Also, within the same 'filter' option you can also specify a 'fields' parameter (i.e. fields=name, code) to shape the payload returned.

Parameter	Value
filter	fields=name, code

Response Body


```
[
  {
    "name": "Default Country",
    "code": "DEF"
  },
  {
    "name": "English",
    "code": "EN"
  },
  {
    "name": "Espanol",
    "code": "ES"
  },
  {
    "name": "Netherlands",
    "code": "NL"
  },
  {
    "name": "Hungary",
    "code": "HU"
  },
  {
    "name": "France",
    "code": "FR"
  }
]
```


Note; if you try to execute the endpoints without a valid session an appropriate error will be returned.

Request URL

```
https://insphireapi.scaniarentaloffice.com/Live/api/rates
```

Response Body


```
{
  "Message": "Invalid Session ID. Please provide a valid API Session ID. Obtained by calling 'api/sessions/logon'."
}
```


Response Code

```
400
```

Response Headers

```
Pragma: no-cache
Date: Mon, 31 Mar 2014 10:30:02 GMT
Server: Microsoft-IIS/8.0
X-AspNet-Version: 4.0.30319
X-Powered-By: ASP.NET
Content-Type: text/plain; charset=utf-8
Cache-Control: no-cache
Content-Length: 114
Expires: -1
```

6. Logging out of the session

When finished you can logoff the current session using 'api/sessions/logoff/{id}' (id being the SessionID).

/sessions Show/Hide | List Operations | Expand Operations | Raw

GET	/api/sessions	Fetches all current sessions.
POST	/api/sessions/logon	Logs in a new session.
POST	/api/sessions/logoff/{id}	Logs off an active Session.

Implementation Notes

Loggs off a currently active API Session.

Parameters

Parameter	Value	Description
id	9D99FB2C00EA46DC90D8I	**The active Session ID.**

Try it out!

Request URL


```
http://88.211.115.23/insphire.office/api/sessions/logoff/9D99FB2C00EA46DC90D8EBF31E682888?api_key=9D99FB2C00EA46DC90D8EBF31E682888
```


Response Body


```
{
  "LOGGEDIN": 0,
  "SESSIONID": "9D99FB2C00EA46DC90D8EBF31E682888",
  "USERNAME": "DEMO",
  "RECID": "20140325091907034#5096EC#001",
  "TIMESTAMP": "2020-12-04T13:29:43.130985+00:00",
  "RECORDER": 1,
  "DEPOT": "NOTT"
}
```


Response Code

```
200
```

Response Headers

```
access-control-allow-origin: *
cache-control: no-cache
content-length: 197
content-type: application/json; charset=utf-8
date: Fri, 04 Dec 2020 13:29:43 GMT
expires: -1
pragma: no-cache
server: Microsoft-IIS/7.5
x-aspnet-version: 4.0.30319
x-powered-by: ASP.NET
```

Note; if you do not log out of the session it will automatically timeout after 30 minutes of inactivity.

You can check current sessions using /api/sessions

/sessions

Show/Hide | List Operations | Expand Operations | Raw

GET /api/sessions — Fetches all current sessions.

Implementation Notes

Fetches all current Sessions. Note; as well as the parameters shown below you can also shape the response using the 'fields' parameter (i.e. fields=recid, recorder).

Parameters

Parameter	Value	Description
filter		OData filter. Used to filter the response and only return those entries that satisfy the predicate expression specified. See the OData $Filter querying syntex for more information.

Try it out!

Below shows a single session for the user kirk.

Request URL

```
http://localhost/insphire.corporate/api/sessions?api_key=52A27744BFED4C0CA3AD80CA0E8B53DA
```

Response Body


```
[
  {
    "LOGGEDIN": 1,
    "SESSIONID": "",
    "USERNAME": "kirk",
    "RECID": "0B78B390DD444E82B30C8E5E9C33D414",
    "TIMESTAMP": "2014-03-31T12:06:23.353",
    "RECORDER": 1,
    "DEPOT": "100"
  }
]
```


Response Code

```
200
```

7. HTTP Return codes

For return codes we like to keep it simple and so all return codes basically fall into the following categories:

- No access allowed - Unauthorised client
- Everything worked - Success
- The application did something wrong - Client error
- The API did something wrong - Server error

The above 4 categories translate into the following HTTP error codes.

In the case of error conditions (all codes below except for 200) the return code will be accompanied by a more verbose description detailing the error which has occurred.

- 401 - Unauthorised
- 200/201 - OK/Created
- 400/401 - Bad Request/Not Found
- 500 - Internal Server Error

8. API Objects

Below lists all of the API objects within Office REST API v475.060 and the type of operations possible.

Name	GET	POST	PUT	DELETE
/analysisgroups	✓			
/authorisationcodes	✓	✓		✓
/cashcustomers	✓	✓	✓	✓
/contractdeliverycharges	✓			
/contractdocuments	✓	✓	✓	✓
/contractitems	✓	✓	✓	
/contractnotes	✓			
/contracts	✓	✓	✓	✓
/costtransactions	✓			
/countrys	✓			
/currencys	✓			
/customeritems	✓			
/customers	✓	✓	✓	✓
/deferredcharges	✓			
/depots	✓			
/depottransferitems	✓	✓		
/depottransfers	✓	✓		
/documentlayouts	✓			
/ebusinessorderitems	✓	✓	✓	✓
/ebusinessorders	✓	✓	✓	✓
/fars	✓			
/groupitemdetails	✓			
/groupitems	✓			
/invoiceitems	✓			
/invoices	✓	✓		
/jobitems	✓			
/jobtypes	✓			

/jobs	✓	✓		
/offhireinfos	✓	✓	✓	
/postcodes	✓			
/productgroups	✓			
/proofofdeliverys	✓			
/purchaseorderitems	✓			
/purchaseorders	✓	✓		
/rates	✓			
/ratetypes	✓			
/recordlocks	✓			
/reports	✓			
/routeheaders	✓			
/routeitems	✓		✓	
/salesorderdeliverycharges	✓			
/salesorderitems	✓	✓		
/salesorders	✓	✓		
/servicetypes	✓			
/sites	✓			
/statics	✓			
/stock	✓		✓	
/stockdepots	✓			
/stockprices	✓			
/subgroups	✓			
/suppliers	✓	✓	✓	✓
/systemoptions	✓			
/testdefinitions	✓			
/testresults	✓			
/users	✓			

9. API Objects (PUSH and PUT)

A number of the API endpoints (PUSH and PUT) require a valid populated Javascript object to be passed within the request body. Example objects for each of those required is shown below.

Validation when creating, updating or deleting information via the API will mirror existing application validation. For more information regarding object properties see the inspHire Data Dictionary.

Authenticate. Used when logging into the API to create a live session.

```
{
"Username": "john.doe",
"Password": "password",
"Depot": 100
}
```

Contract. Used when creating/updating an inspHire Customer record.

```
{
"IsQuote": 0,
"Account": "",
"Ccrecid": "",
"Memo": "",
"Delcode": "",
"Delname": "",
"Deladdr1": "",
"Deladdr2": "",
"Deladdr3": "",
"Deladdr4": "",
"Delpostcode": "",
"Deltelephone": "",
"Delfax": "",
"Delcontact": "",
"Delemail": "",
"Deldate": "1899-12-30 00:00:00",
"Hiredate": "1899-12-30 00:00:00",
"Estretd": "1899-12-30 00:00:00",
"Ordby": "",
"Theirref": "",
"Includesc": "",
"Delinstruction": "",
"Colinstruction": "",
"Custcollect": 0,
"Custreturn": 0,
"Nodays": 0,
"HireDepot": ""
```

Contract Item Used when adding an item onto a hire contract


```
{
"Itemno": "",
"Qty": 0,
"Sellingprice": 0,
"Istextitem": 0,
"Memo": "",
"Deldate": "1899-12-30 00:00:00",
"Hiredate": "1899-12-30 00:00:00",
"Estretd": "1899-12-30 00:00:00",
"ParItem": "",
"SafeMode": 0,
"Depot": "",
"WeekRate": 0,
"RateCode": "",
"Discount": 0,
"ItemDesc": "",
"GrpFlag": 0
}
```

Sales Order. Used when creating a Sales Order

```
{
"IsQuote": 0,
"Account": "",
"Ccrecid": "",
"Memo": "",
"Delcode": "",
"Delname": "",
"Deladdr1": "",
"Deladdr2": "",
"Deladdr3": "",
"Deladdr4": "",
"Delpostcode": "",
"Deltelephone": "",
"Delfax": "",
"Delcontact": "",
"Delemail": "",
"Deldate": "1899-12-30 00:00:00",
"Ordby": "",
"Theirref": "",
"Includesc": "",
"Delinstruction": "",
"Custcollect": 0,
"HireDepot": ""
```

Sales Order Item. Used when adding items to a Sales Order

```
{
"Itemno": "",
"Qty": 0,
"Sellingprice": 0,
"Istextitem": 0,
"Memo": "",
"Deldate": "1899-12-30 00:00:00",
"ParItem": "",
"SafeMode": 0,
"Depot": "",
"Discount": 0,
"ItemDesc": "",
"GrpFlag": 0
```

Cash Customer. Used when creating/updating a Cash Customer record.

```
{
"Addr1": "",
"Addr2": "",
"Addr3": "",
"Addr4": "",
"Email": "",
"Emailinvoice": 0,
"Emailrecipient": "",
"Fax": "",
"Id1": "",
"Id2": "",
"Inactive": 0,
"Insuranceprompt": 0,
"Invdisc": 0,
"Itemdisc": 0,
"Memo": "",
"Name": "",
"Onstop": 0,
"Postcode": "",
"Pricelist": "",
"Reference": "",
"Sendstat": 0,
"Shortname": "",
"Telephone": "",
"Telephone2": ""
}
```

E Business Order. Used when creating, updating, deleting EBusiness Order records

```
{
"Acct": "",
"Acctname": "",
"Ccrec": "",
"Deladdr": "",
"Delcont": "",
"Deldate": "1899-12-30 00:00:00",
"Delmeth": "",
"Delname": "",
"Delpcode": "",
"Deltel": "",
"Estretd": "1899-12-30 00:00:00",
"Hiredate": "1899-12-30 00:00:00",
"Memo": "",
"Ordby": "",
"Reference": "",
"Refno": 0,
"Spcode": "",
"Type": "",
"Items": [
  {
    "Descr": "",
    "Itemno": "",
    "Price": 0,
    "Qty": 0,
    "Type": 0,
```

```
    "Memo": "",
  },
  {
    "Descr": "",
    "Itemno": "",
    "Price": 0,
    "Qty": 0,
    "Type": 0,
    "Memo": "",
    "Accessories": [
      {
        "Descr": "",
        "Itemno": "",
        "Price": 0,
        "Qty": 0,
        "Type": 0,
        "Memo": "",
      },
      {
        "Descr": "",
        "Itemno": "",
        "Price": 0,
        "Qty": 0,
        "Type": 0,
        "Memo": "",
      }
    ]
  }
]
}
```

EBusiness Order Item. Used when creating, updating or deleting EBusiness Order Item records

```
{
"Descr": "",
"Itemno": "",
"Paritem": "",
"Price": 0,
"Qty": 0,
"Refno": 0,
"Type": 0,
"Memo": "",
}
```

Del Charge Item. Used when adding a delivery charges onto a Contract or Sales Order


```
{
"Charge": 0,
"Contno": "",
"Cost": 0,
"CreatePO": 0,
"Custom": "",
"Deltype": 0,
"Ddate": "1899-12-30 00:00:00",
"Dtime": "",
"Gidocno": "",
"Invstatus": 0,
"L50dept": "",
"Memo": "",
"Method": 0,
"Name": "",
"Nlcc": "",
"Nlcode": "",
"Nldept": "",
"Ourordno": "",
"Pirecid": "",
"Poacct": "",
"Poordno": "",
"Recid": "",
"Vatcode": 0,
"Xhacct": "",
      }
```

CashTran Item. Used when adding a Cash Transcation to a Contract or Sales Order


```
"Acccode": "",
"Acct": "",
"Allocflag": 0,
"Amount": 0,
"Authcode": "",
"Cardexp": "",
"Cardno": "",
"Cardstart": "",
"Cashalloc": 0,
"Contno": "",
"Date": "1899-12-30 00:00:00",
"Depot": "",
"Deprefund": 0,
"Depused": 0,
"Encrypted": 0,
"Gidocno": "",
"Ihrecid": "",
"Issueno": "",
"Paymeth": 0,
"Posteod": 0,
"Recid": "",
"Reference": "",
"S50tran": "",
"Securecode": "",
"Scrdate": "1899-12-30 00:00:00",
"Status": 0,
"Time": "",
"Transmemo": "",
"Type": 0,
"Username": "",
"Vatamt": 0,
"Vatcode": 0,
    }
```


Depot Transfer. Used when creating Depot Transfer records


```
{
    "DepotFrom": "",
"DepotTo": "",
"SDate": "1899-12-30 00:00:00",
"EDate": "1899-12-30 00:00:00",
"Refno": "",

}
```


Depot Transfer Item. Used when creating Depot Transfer Item records


```
{
    "Itemno": "",
"Qty": 0,

}}
```