School of Computing and Engineering

ASSIGNMENT REPORT

WEB TECHNOLOGY

Course Code: B22EF0602

Team Members	
Edwin Johnson	R23EF077
Farhaan Khan	R23EF078
Rushit Jani	R23EF096
Shrikar Kodur	R23EF112

Faculty: Dr. Chaithra MH

Academic Year: 2025 – 2026

Question 3 – Lists and Frames

Demonstrates three HTML list types (Bulleted, Numbered, Definition) displayed inside a two-panel frameset. A navigation frame on the left loads individual list pages into the right frame.

Q3 – Frames (q3_frames.html)

```
<!DOCTYPE html>
<html>
<head>
    <title>Question 3 - List Types</title>
</head>

<frameset cols="25%,75%">
    <frame src="q3_links.html" name="leftFrame">
    <frame src="q3_welcome.html" name="rightFrame">
</frameset>
</html>
```

Q3 – Navigation Links (q3_links.html)

```
<!doctype html>
<html>
  <head>
    <title>List Links</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #f0f8ff;
        padding: 20px;
      }
      a {
        display: block;
        margin: 15px 0;
        color: darkblue;
        text-decoration: none;
        font-weight: bold;
      }
      a:hover {
        color: crimson;
      }
    </style>
  </head>
  <body>
    <h2>List Types</h2>
    <a href="q3_bulleted.html" target="rightFrame">Bulleted List</a>
    <a href="q3_numbered.html" target="rightFrame">Numbered List</a>
    <a href="q3_definition.html" target="rightFrame">Definition List</a>
  </body>
</html>
```

Q3 – Welcome Page (q3_welcome.html)

```
<!doctype html>
<html>
  <head>
    <title>Welcome</title>
    <style>
```

```
      body {
        font-family: Arial, sans-serif;
        background-color: #fffaf0;
        text-align: center;
        padding-top: 100px;
      }
    </style>
  </head>
  <body>
    <h2>Welcome</h2>
    <p>Click any link from the left frame to view the example.</p>
  </body>
</html>
```

Q3 – Bulleted List (q3_bulleted.html)

```
<!doctype html>
<html>
  <head>
    <title>Bulleted List Example</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #e6ffe6;
        padding: 30px;
      }
    </style>
  </head>
  <body>
    <h2>Bulleted List</h2>
    <ul>
      <li>HTML</li>
      <li>CSS</li>
      <li>JavaScript</li>
    </ul>
  </body>
</html>
```

Q3 – Numbered List (q3_numbered.html)

```
<!doctype html>
<html>
  <head>
    <title>Numbered List Example</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #fff0f5;
        padding: 30px;
      }
    </style>
  </head>
  <body>
    <h2>Numbered List</h2>
    <ol>
      <li>Wake up</li>
      <li>Attend class</li>
      <li>Submit assignment</li>
    </ol>
  </body>
```

```
</html>
```

Q3 – Definition List (q3_definition.html)

```
<!doctype html>
<html>
  <head>
    <title>Definition List Example</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #f5f5dc;
        padding: 30px;
      }
    </style>
  </head>
  <body>
    <h2>Definition List</h2>
    <dl>
      <dt><b>HTML</b></dt>
      <dd>HyperText Markup Language used to create web pages.</dd>

      <dt><b>CSS</b></dt>
      <dd>Cascading Style Sheets used for styling web pages.</dd>

      <dt><b>JavaScript</b></dt>
      <dd>A scripting language used to make web pages interactive.</dd>
    </dl>
  </body>
</html>
```

Output

Frame Layout

Bulleted List

Numbered List

Numbered List

1. Wake up
2. Attend class
3. Submit assignment

Definition List

Definition List

HTML
: HyperText Markup Language used to create web pages.

CSS
: Cascading Style Sheets used for styling web pages.

JavaScript
: A scripting language used to make web pages interactive.

Question 4 – Multi-Select Country Dropdown

Implements a scrollable multi-select dropdown using the HTML <select multiple> element. Three countries (India, German, France) are pre-selected by default.

Code (q4_countries.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 4 - Countries List</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #eef7ff;
        padding: 40px;
      }
      .box {
        width: 350px;
        margin: auto;
        background-color: white;
        border: 2px solid #2c3e50;
        padding: 20px;
        border-radius: 10px;
      }
      label {
        font-size: 20px;
        font-weight: bold;
      }
      select  {
        width: 180px;
        height: 220px;
        font-size: 16px;
        margin-left: 20px;
      }
    </style>
  </head>
  <body>
    <div class="box">
      <label>Select Countries :</label>
      <select multiple>
        <option>London</option>
        <option selected>India</option>
        <option>Japan</option>
        <option selected>German</option>
        <option>America</option>
        <option>Canada</option>
        <option>Australia</option>
        <option>Brazil</option>
        <option>China</option>
        <option selected>France</option>
      </select>
    </div>
  </body>
</html>
```

Output

Select Countries :
London
India
Japan
German
America
Canada
Australia
Brazil
China
France

Question 5 – Course-wise Subject Table

Creates a complex HTML table with rowspan and colspan attributes to display subjects under two courses (MBA and MCM), along with internal/external marks and categories.

Code (q5_course_table.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 5 - Course Wise Subjects</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #f7fcff;
        padding: 20px;
      }
      h2 {
        text-align: center;
        color: darkblue;
      }
      table {
        width: 95%;
        margin: auto;
        border-collapse: collapse;
        background-color: white;
      }
      th,
      td {
        border: 1px solid black;
        padding: 8px;
        text-align: center;
      }
      th {
        background-color: #add8e6;
      }
      .course {
        font-weight: bold;
        background-color: #f0f8ff;
      }
    </style>
  </head>
  <body>
    <h2>List of Course-wise Subjects</h2>

    <table>
      <tr>
        <th rowspan="2">Sr. No.</th>
        <th rowspan="2">Course</th>
        <th rowspan="2">Subject</th>
        <th colspan="2">Marks</th>
        <th rowspan="2">Category</th>
        <th rowspan="2">Practical / Theory</th>
      </tr>
      <tr>
        <th>Internal</th>
        <th>External</th>
      </tr>

      <tr>
        <td rowspan="4">1</td>
        <td rowspan="4" class="course">MBA</td>
        <td>Management Accounting</td>
```

```
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>Theory</td>
      </tr>
      <tr>
        <td>Information Technology</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>T and P</td>
      </tr>
      <tr>
        <td>Basics of Marketing</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>Theory</td>
      </tr>
      <tr>
        <td>E-Commerce</td>
        <td>50</td>
        <td>-</td>
        <td>-</td>
        <td>Theory</td>
      </tr>

      <tr>
        <td rowspan="6">2</td>
        <td rowspan="6" class="course">MCM</td>
        <td>Visual Basic</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>T and P</td>
      </tr>
      <tr>
        <td>Internet Technology</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>T and P</td>
      </tr>
      <tr>
        <td>Network Technology</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>Theory</td>
      </tr>
      <tr>
        <td>VB.Net</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>T and P</td>
      </tr>
      <tr>
        <td>Linux</td>
        <td>30</td>
        <td>70</td>
        <td>-</td>
        <td>T and P</td>
      </tr>
      <tr>
        <td>ISA</td>
```

```
        <td>50</td>
        <td>-</td>
        <td>-</td>
        <td>Theory</td>
      </tr>
    </table>
  </body>
</html>
```

Output

List of Course-wise Subjects

Sr. No.	Course	Subject	Marks		Category	Practical / Theory
			Internal	External		
1	MBA	Management Accounting	30	70	-	Theory
		Information Technology	30	70	-	T and P
		Basics of Marketing	30	70	-	Theory
		E-Commerce	50	-	-	Theory
2	MCM	Visual Basic	30	70	-	T and P
		Internet Technology	30	70	-	T and P
		Network Technology	30	70	-	Theory
		VB.Net	30	70	-	T and P
		Linux	30	70	-	T and P
		ISA	50	-	-	Theory

Question 6 – Product Details Page with Anchor Links

Builds a product catalogue page featuring in-page navigation anchors. Clicking a product name in the navigation bar smoothly scrolls to the corresponding product card, which contains an online image and specifications.

Code (q6_products.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 6 - Product Information</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #fffaf2;
        padding: 20px;
      }
      h1 {
        text-align: center;
        color: darkgreen;
      }
      .top-links {
        text-align: center;
        margin-bottom: 30px;
      }
      .top-links a {
        margin: 0 15px;
        font-weight: bold;
        color: darkblue;
        text-decoration: none;
      }
      .product {
        border: 2px solid #ccc;
        border-radius: 12px;
        padding: 20px;
        margin: 20px auto;
        width: 70%;
        background-color: white;
      }
      img {
        width: 180px;
        height: 180px;
        border-radius: 10px;
      }
    </style>
  </head>
  <body>
    <h1>Product Details</h1>

    <div class="top-links">
      <a href="#laptop">Laptop</a>
      <a href="#phone">Smartphone</a>
      <a href="#watch">Smart Watch</a>
    </div>

    <div class="product" id="laptop">
      <h2>Laptop</h2>
      <img
        src="https://images.unsplash.com/photo-1517336714731-489689fd1ca8?w=400"
        alt="Laptop"
      />
      <p><b>Features:</b> 16GB RAM, 512GB SSD, Intel i7 Processor</p>
```

```
      <p><b>Size:</b> 15.6 inch</p>
      <p><b>Price:</b> Rs. 65,000</p>
    </div>

    <div class="product" id="phone">
      <h2>Smartphone</h2>
      <img
        src="https://images.unsplash.com/photo-1511707171634-5f897ff02aa9?w=400"
        alt="Phone"
      />
      <p><b>Features:</b> 8GB RAM, 128GB Storage, 5G Support</p>
      <p><b>Size:</b> 6.5 inch</p>
      <p><b>Price:</b> Rs. 25,000</p>
    </div>

    <div class="product" id="watch">
      <h2>Smart Watch</h2>
      <img
        src="https://images.unsplash.com/photo-1516574187841-cb9cc2ca948b?w=400"
        alt="Watch"
      />
      <p><b>Features:</b> Heart Rate Monitor, GPS, Water Resistant</p>
      <p><b>Size:</b> 1.8 inch display</p>
      <p><b>Price:</b> Rs. 5,000</p>
    </div>
  </body>
</html>
```

Output

Product Details

Laptop Smartphone Smart Watch

Laptop

Laptop

Features: 16GB RAM, 512GB SSD, Intel i7 Processor

Size: 15.6 inch

Price: Rs. 65,000

Smartphone

Phone

Features: 8GB RAM, 128GB Storage, 5G Support

Size: 6.5 inch

Price: Rs. 25,000

Smart Watch

Watch

Features: Heart Rate Monitor, GPS, Water Resistant

Size: 1.8 inch display

Price: Rs. 5,000

Question 7 – Text Formatting Tags

Demonstrates various HTML text formatting elements: superscript, subscript, strikethrough, strong/bold, and CSS-based underline (as an alternative to the <u> tag).

Code (q7_formatting.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 7 - Text Formatting Tags</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #f4fff4;
        padding: 30px;
      }
      h1 {
        color: darkgreen;
        text-align: center;
      }
      .underline-css {
        text-decoration: underline;
      }
    </style>
  </head>
  <body>
    <h1>Text Formatting in HTML</h1>

    <p><b>a) Superscript:</b> X<sup>2</sup> + Y<sup>2</sup></p>

    <p><b>b) Subscript:</b> H<sub>2</sub>O</p>

    <p><b>c) Strike through:</b> <strike>Old Price Rs.500</strike></p>

    <p>
      <b>d) Super bold:</b> <b><strong>This text is extra bold</strong></b>
    </p>

    <p>
      <b>e) Underline (other than U tag):</b>
      <span class="underline-css">This text is underlined using CSS</span>
    </p>
  </body>
</html>
```

Output

Text Formatting in HTML

a) **Superscript:** $X^2 + Y^2$
b) **Subscript:** H_2O
c) **Strike through:** ~~Old Price Rs.500~~
d) **Super bold: This text is extra bold**
e) **Underline (other than U tag):** This text is underlined using CSS

Question 8 – March 2008 Calendar

Renders a monthly calendar for March 2008 using an HTML table. Sundays are highlighted in red, holidays (21st and 22nd) in blue, and regular weekdays in green.

Code (q8_calendar.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 8 - March 2008 Calendar</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #fffdf0;
        padding: 20px;
      }
      h1 {
        text-align: center;
        color: darkblue;
      }
      table  {
        margin: auto;
        border-collapse: collapse;
        width: 70%;
        background-color: white;
      }
      th,
      td {
        border: 1px solid black;
        padding: 15px;
        text-align: center;
        font-size: 18px;
      }
      th {
        background-color: #d9edf7;
      }
      .sunday {
        color: red;
        font-weight: bold;
      }
      .holiday {
        color: blue;
        font-weight: bold;
      }
      .normal {
        color: green;
        font-weight: bold;
      }
    </style>
  </head>
  <body>
    <h1>March 2008</h1>

    <table>
      <tr>
        <th>Sunday</th>
        <th>Monday</th>
        <th>Tuesday</th>
        <th>Wednesday</th>
        <th>Thursday</th>
        <th>Friday</th>
        <th>Saturday</th>
```

```
      </tr>
      <tr>
        <td></td>
        <td></td>
        <td></td>
        <td></td>
        <td></td>
        <td></td>
        <td class="normal">1</td>
      </tr>
      <tr>
        <td class="sunday">2</td>
        <td class="normal">3</td>
        <td class="normal">4</td>
        <td class="normal">5</td>
        <td class="normal">6</td>
        <td class="normal">7</td>
        <td class="normal">8</td>
      </tr>
      <tr>
        <td class="sunday">9</td>
        <td class="normal">10</td>
        <td class="normal">11</td>
        <td class="normal">12</td>
        <td class="normal">13</td>
        <td class="normal">14</td>
        <td class="normal">15</td>
      </tr>
      <tr>
        <td class="sunday">16</td>
        <td class="normal">17</td>
        <td class="normal">18</td>
        <td class="normal">19</td>
        <td class="normal">20</td>
        <td class="holiday">21</td>
        <td class="holiday">22</td>
      </tr>
      <tr>
        <td class="sunday">23</td>
        <td class="normal">24</td>
        <td class="normal">25</td>
        <td class="normal">26</td>
        <td class="normal">27</td>
        <td class="normal">28</td>
        <td class="normal">29</td>
      </tr>
      <tr>
        <td class="sunday">30</td>
        <td class="normal">31</td>
        <td></td>
        <td></td>
        <td></td>
        <td></td>
        <td></td>
      </tr>
    </table>
  </body>
</html>
```

Output

March 2008

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

Question 10 – Customer Information Form

Designs a fully styled customer data entry form containing text input, textarea, radio buttons (gender), checkboxes (languages), a city dropdown, and Submit / Clear action buttons.

Code (q10_customer_form.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 10 - Customer Information Form</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #eef9f1;
      }
      .form-box {
        width: 500px;
        margin: 40px auto;
        background-color: white;
        padding: 25px;
        border-radius: 12px;
        box-shadow: 0 0 10px gray;
      }
      h2 {
        text-align: center;
        color: darkgreen;
      }
      label {
        font-weight: bold;
      }
      input,
      textarea,
      select {
        width: 100%;
        padding: 8px;
        margin-top: 5px;
        margin-bottom: 15px;
      }
      .inline {
        width: auto;
      }
      .buttons {
        text-align: center;
      }
      .buttons input {
        width: 120px;
        margin: 10px;
        background-color: #2e8b57;
        color: white;
        border: none;
        cursor: pointer;
      }
    </style>
  </head>
  <body>
    <div class="form-box">
      <h2>Customer Information Form</h2>

      <form>
        <label>Customer Name:</label>
        <input type="text" name="customerName" />
```

```
        <label>Address:</label>
        <textarea rows="4" name="address"></textarea>

        <label>Gender:</label><br />
        <input class="inline" type="radio" name="gender" value="male" /> Male
        <input class="inline" type="radio" name="gender" value="female" />
        Female
        <input class="inline" type="radio" name="gender" value="other" /> Other
        <br /><br />

        <label>Languages Known:</label><br />
        <input class="inline" type="checkbox" name="lang" value="english" />
        English
        <input class="inline" type="checkbox" name="lang" value="hindi" /> Hindi
        <input class="inline" type="checkbox" name="lang" value="kannada" />
        Kannada
        <input class="inline" type="checkbox" name="lang" value="urdu" /> Urdu
        <br /><br />

        <label>City:</label>
        <select name="city">
          <option>Bangalore</option>
          <option>Mumbai</option>
          <option>Delhi</option>
          <option>Hyderabad</option>
          <option>Chennai</option>
        </select>

        <div class="buttons">
          <input type="submit" value="Submit" />
          <input type="reset" value="Clear" />
        </div>
      </form>
    </div>
  </body>
</html>
```

Output

Customer Information Form
Customer Name:
Address:
Gender:
Male Female Other
Languages Known:
English Hindi Kannada Urdu
City:
Bangalore
Submit
Clear

Question 11 – SELECT and TEXTAREA Tags

Provides an educational reference page explaining the purpose and common attributes of the HTML <select> and <textarea> tags, complete with live working examples of each element.

Code (q11_select_textarea.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 11 - SELECT and TEXTAREA</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #f8f8ff;
        padding: 30px;
        line-height: 1.8;
      }
      h1 {
        text-align: center;
        color: darkblue;
      }
      .box {
        background-color: white;
        border-left: 6px solid steelblue;
        padding: 20px;
        margin-bottom: 25px;
        box-shadow: 0 0 5px #ccc;
      }
    </style>
  </head>
  <body>
    <h1>SELECT and TEXTAREA Tags</h1>

    <div class="box">
      <h2>1) SELECT Tag</h2>
      <p>The SELECT tag is used to create a drop-down list in a web form.</p>
      <p><b>Common attributes:</b> name, size, multiple</p>

      <p><b>Example:</b></p>
      <select name="city">
        <option>Bangalore</option>
        <option>Mumbai</option>
        <option>Delhi</option>
        <option>Chennai</option>
      </select>
    </div>

    <div class="box">
      <h2>2) TEXTAREA Tag</h2>
      <p>
        The TEXTAREA tag is used to accept multi-line text input from the user.
      </p>
      <p><b>Common attributes:</b> name, rows, cols, placeholder</p>

      <p><b>Example:</b></p>
      <textarea
        name="feedback"
        rows="5"
        cols="40"
        placeholder="Enter your feedback here"
      ></textarea>
```

```
    </div>
  </body>
</html>
```

Output

Question 13 – HTML Special Characters

Displays a reference table of HTML special character entities including quotation marks, ampersand, less-than/greater-than symbols, copyright, registered trademark, and non-breaking space.

Code (q13_symbols.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 13 - Special Characters</title>
    <style>
      body {
        font-family: Arial, sans-serif;
        background-color: #fff8f0;
        padding: 30px;
      }
      h1 {
        text-align: center;
        color: brown;
      }
      table {
        width: 70%;
        margin: auto;
        border-collapse: collapse;
        background-color: white;
      }
      th,
      td {
        border: 1px solid black;
        padding: 12px;
        text-align: center;
      }
      th {
        background-color: #f5deb3;
      }
    </style>
  </head>
  <body>
    <h1>Print Other Characters</h1>

    <table>
      <tr>
        <th>SYMBOL</th>
        <th>DESCRIPTION</th>
      </tr>
      <tr>
        <td>&quot;</td>
        <td>Quotation Mark</td>
      </tr>
      <tr>
        <td>&amp;</td>
        <td>Ampersand Sign</td>
      </tr>
      <tr>
        <td>&lt;</td>
        <td>Less Than Sign</td>
      </tr>
      <tr>
        <td>&gt;</td>
        <td>Greater Than Sign</td>
      </tr>
      <tr>
```

```
        <td>&copy;</td>
        <td>Copyright Symbol</td>
      </tr>
      <tr>
        <td>&reg;</td>
        <td>Registered Symbol</td>
      </tr>
      <tr>
        <td> </td>
        <td>A blank space / Non-breaking one space</td>
      </tr>
    </table>
  </body>
</html>
```

Output

Print Other Characters

SYMBOL	DESCRIPTION
"	Quotation Mark
&	Ampersand Sign
<	Less Than Sign
>	Greater Than Sign
©	Copyright Symbol
®	Registered Symbol
	A blank space / Non-breaking one space

Question 16 – Internal and External CSS

Illustrates both internal CSS (embedded inside <style> tags for paragraphs) and external CSS (linked via a separate q16_table.css file for table styling). Two styled paragraphs and a technology comparison table are rendered.

Code – Main HTML (q16_main.html)

```
<!doctype html>
<html>
  <head>
    <title>Question 16 - Internal and External CSS</title>
    <link rel="stylesheet" href="q16_table.css" />
    <style>
      p.first {
        color: darkblue;
        font-size: 18px;
        background-color: #e6f7ff;
        padding: 10px;
        border-left: 5px solid darkblue;
      }

      p.second {
        color: darkgreen;
        font-size: 18px;
        background-color: #f0fff0;
        padding: 10px;
        border-left: 5px solid darkgreen;
      }

      body {
        font-family: Arial, sans-serif;
        background-color: #fffef5;
        padding: 30px;
      }

      h1 {
        text-align: center;
        color: maroon;
      }
    </style>
  </head>
  <body>
    <h1>Table and Paragraph Styling</h1>

    <p class="first">
      HTML is used to create the structure of web pages. It defines headings,
      paragraphs, links, tables, images and many more elements.
    </p>

    <p class="second">
      CSS is used to style web pages. It helps in changing colors, fonts,
      spacing, alignment and overall appearance of the content.
    </p>

    <table>
      <tr>
        <th>Technology</th>
        <th>Purpose</th>
      </tr>
      <tr>
        <td>HTML</td>
```

```
        <td>Structure of web page</td>
      </tr>
      <tr>
        <td>CSS</td>
        <td>Styling of web page</td>
      </tr>
      <tr>
        <td>JavaScript</td>
        <td>Interactivity of web page</td>
      </tr>
    </table>
  </body>
</html>
```

Code – External Stylesheet (q16_table.css)

```
table {
  width: 70%;
  margin: auto;
  border-collapse: collapse;
  background-color: white;
}

th {
  background-color: #ffcccb;
  color: black;
  padding: 12px;
  border: 1px solid black;
}

td {
  background-color: #fffacd;
  color: #333;
  padding: 12px;
  border: 1px solid black;
  text-align: center;
}
```
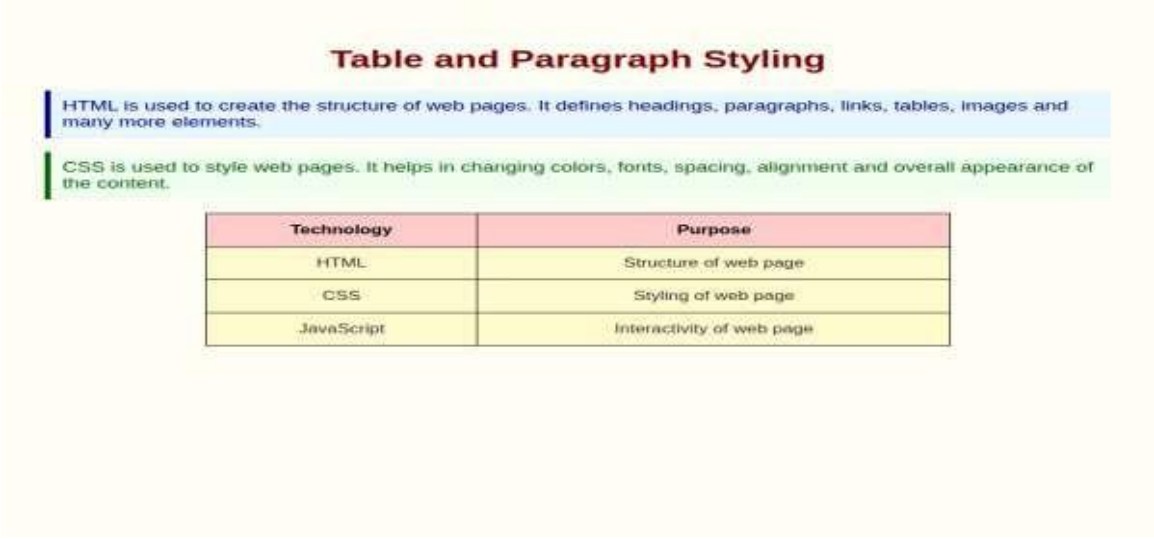
Output