

Big Data and Automated Content Analysis (12EC)

Week 2: »From file (or API) to dataframe
and back«

Wednesday

Damian Trilling

d.c.trilling@uva.nl, @damian0604

February 15, 2022

UvA RM Communication Science

Today

Datatypes

Functions and methods

Modifying lists and dictionaries

for, if/elif/else, try/except

Bonus: Python goodies

Next steps



*Everything clear from last week?
Everyone comfortable with data
structures, for loops, functions?*

Files

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

Some ways of storing data

use case	data type	structure	typical file format
(long) texts	string	unstructured	multiple .txt files
list of messages/words/...	list of strings	newline-delimited	.txt
hierarchical data	dict	(semi-)structured	.json
table	nested lists, dict, dataframe	tabular	.csv (.json)

(Of course, there are many, many, many other formats we can use)

string ↔ file

```
1 data = "Hi I'm a string."  
2 with open("mytext.txt", mode="w", encoding="utf-8") as fo:  
3     fo.write(data)
```

⇒ create (or overwrite(!)) file, assign handler name fo, write string to it.

```
1 with open("mytext.txt", mode="r", encoding="utf-8") as fi:  
2     data = fi.read()
```

⇒ make connection with file for reading, assign handler name fi, read string from it

string ↔ file

```
1 data = "Hi I'm a string."  
2 with open("mytext.txt", mode="w", encoding="utf-8") as fo:  
3     fo.write(data)
```

⇒ create (or overwrite(!)) file, assign handler name `fo`, write string to it.

```
1 with open("mytext.txt", mode="r", encoding="utf-8") as fi:  
2     data = fi.read()
```

⇒ make connection with file for reading, assign handler name `fi`, read string from it

The indented block again...

Do you remember?

- The `with` statement makes sure that at the end of the block, the file connection is automatically closed again
- Of course, you can also loop over *multiple* files: e.g, read all files from a dictionary and put them into a list \Rightarrow just nest these commands in a for loop!
- For that, you can use the `glob` module to get a list of files


```
1 from glob import glob
2
3 data = []
4 for fn in glob("./mydata/*.txt"):
5     with open(fn, mode="r", encoding="utf-8") as fi:
6         data.append(fi.read())
```

The indented block again...

Do you remember?

- The `with` statement makes sure that at the end of the block, the file connection is automatically closed again
- Of course, you can also loop over *multiple* files: e.g, read all files from a dictionary and put them into a list \Rightarrow just nest these commands in a for loop!
- For that, you can use the `glob` module to get a list of files

```
1 from glob import glob
2
3 data = []
4 for fn in glob("./mydata/*.txt"):
5     with open(fn, mode="r", encoding="utf-8") as fi:
6         data.append(fi.read())
```

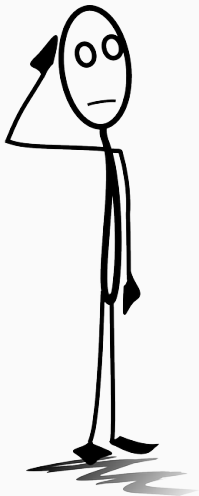

For what can you use this? Think of use cases for both single and multiple files!

list → file

```
1 data = ["ik", "jij", "je", "hij", "zij", "ze", "wij", "we", "jullie"]
2
3 with open("pronouns.txt", mode="w", encoding="utf-8") as fo:
4     for pronoun in data:
5         fo.write(pronoun)
6         fo.write("\n")
```

⇒ create file, assign handler name fo, write each element from list to fo followed by a line break

Result: a file pronouns.txt with this content:

```
1 ik
2 jij
3 je
4 hij
5 zij
6 ze
7 wij
8 we
```


list ← file

```
1 with open("pronouns.txt", mode="r", encoding="utf-8") as fi:
2     data = [line.strip() for line in fi]
3 print(data)
```

⇒ Open file for reading, assign handler name `fi`, loop over all lines in `fi`, strip whitespace from end (such as line endings), put in new list.

Output:

```
1 ['ik', 'jij', 'je', 'hij', 'zij', 'ze', 'wij', 'we', 'jullie']
```



For what can you use this?

dict → file

```
1 import json
2
3 data = {'Alice': {'office': '020222', 'mobile': '0666666'},
4         'Bob': {'office': '030111'},
5         'Carol': {'office': '040444', 'mobile': '0644444'},
6         'Daan': "020222222",
7         'Els': ["010111", "06222"]}
8
9 with open("phonebook.json", mode="w", encoding="utf-8") as f:
10     json.dump(data, f)
```

⇒ Open file for writing, convert dict to JSON, dump in file.

Creates a file `phonebook.json` that looks like this:

```
1 {"Alice": {"office": "020222", "mobile": "0666666"}, "Bob": {"office":
  ↳ "030111"}, "Carol": {"office": "040444", "mobile": "0644444"},
  ↳ "Daan": "020222222", "Els": ["010111", "06222"]}
```

dict ← file

```
1 import json
2
3 with open("phonebook.json", mode="r", encoding="utf-8") as f:
4     data = json.load(f)
5
```

⇒ Reads data from `f`, converts to dict (or list of dicts...), store in `data`

JSON lines

There is also a dialect in which you write *one JSON object per line instead of per file*. For this, you can use a for loop as in the one-string-per-file example, but convert each string with `json.loads` or `json.dumps` to a dict.

dict ← file

```
1 import json
2
3 with open("phonebook.json", mode="r", encoding="utf-8") as f:
4     data = json.load(f)
5
```

⇒ Reads data from `f`, converts to dict (or list of dicts...), store in `data`

JSON lines

There is also a dialect in which you write *one JSON object per line instead of per file*. For this, you can use a for loop as in the one-string-per-file example, but convert each string with `json.loads` or `json.dumps` to a dict.

multiple (thousands?) of dicts

The JSON lines dialect is particularly useful if you have a lot of dictionaries:

```
1 data = [{ 'name': 'Alice', 'office': '020222', 'mobile': '06666666' },
2         { 'name': 'Carol', 'office': '040444', 'mobile': '06444444' },
3         { 'name': 'Daan', 'office': '020222222' }]
4
5
6 # writing
7 with open("phonebook2.json", mode="w", encoding="utf-8") as fo:
8     for entry in data:
9         fo.write(json.dumps(entry))
10        fo.write("\n")
11
12 # reading
13 with open("phonebook2.json", mode="r", encoding="utf-8") as fi:
14     data = [json.loads(line) for line in fi]
```



For what can you use this?

Tabular data

How can we store this data?

```
1 names = ['Alice', 'Bob', 'Carol', 'Daan', 'Els']  
2 phonenumbers = ['020111111', '020222222', '020333333', '020444444',  
↪ '020555555']
```

1. We could convert to some dict and store as json (not too bad...)
2. We can store in a table (next slide)

Tabular data

How can we store this data?

```
1 names = ['Alice', 'Bob', 'Carol', 'Daan', 'Els']
2 phonenumbers = ['020111111', '020222222', '020333333', '020444444',
↪ '020555555']
```

1. We could convert to some dict and store as json (not too bad...)
2. We can store in a table (next slide)

Tabular data

How can we store this data?

```
1 names = ['Alice', 'Bob', 'Carol', 'Daan', 'Els']  
2 phonenumbers = ['020111111', '020222222', '020333333', '020444444',  
↪ '020555555']
```

1. We could convert to some dict and store as json (not too bad...)
2. We can store in a table (next slide)

Tabular data

```
1 import csv
2 with open("mytable.csv", mode="w", encoding="utf-8") as f:
3     mywriter = csv.writer(f)
4     for row in zip(names, phonenumber):
5         mywriter.writerow(row)
```

Results in a file `mytable.csv` that looks like this:

```
1 Alice,020111111
2 Bob,020222222
3 Carol,020333333
4 Daan,020444444
5 Els,020555555
```

But you don't have to do it like this! There is a more user-friendly way (Pandas, later today).

Tabular data

```
1 import csv
2 with open("mytable.csv", mode="w", encoding="utf-8") as f:
3     mywriter = csv.writer(f)
4     for row in zip(names, phonenumber):
5         mywriter.writerow(row)
```

Results in a file `mytable.csv` that looks like this:

```
1 Alice,020111111
2 Bob,020222222
3 Carol,020333333
4 Daan,020444444
5 Els,020555555
```

But you don't have to do it like this! There is a more user-friendly way (Pandas, later today).

Files

Encodings and dialects

Choices to make

For all text-based (as opposed to binary) file formats:

How to separate data?

- new line = new record?
- Unix-style (`\n`, also known as LF), or Windows-style (`\r\n`, also known as CRLF) line endings?
- some delimiter = new field?
- or new file = new record?

How to convert bytes to characters?

- choose right encoding (e.g., UTF-8)
- (seldom) does the file start with a so-called byte-order-marker (BOM) – then the encoding is often referred to as sth like UTF-8-BOM

Choices to make

For all text-based (as opposed to binary) file formats:

How to separate data?

- new line = new record?
- Unix-style (`\n`, also known as LF), or Windows-style (`\r\n`, also known as CRLF) line endings?
- some delimiter = new field?
- or new file = new record?

How to convert bytes to characters?

- choose right encoding (e.g., UTF-8)
- (seldom) does the file start with a so-called byte-order-marker (BOM) – then the encoding is often referred to as sth like UTF-8-BOM

Let's look at csv files

comma-separated values: always a good choice

- All programs can read it
- Even human-readable in a simple text editor
- Plain text, with a comma (or a semicolon) denoting column breaks
- No limits regarding the size
- But: several dialects (e.g., , vs. ; as delimiter)
- Also: tab-separated files (.csv, .tab, .txt – no consensus) (delimiter is \t)

A CSV-file with tweets

- delimiter is ,
- with header row

```
1 text,to_user_id,from_user,id,from_user_id,iso_language_code,  
  source,profile_image_url,geo_type,geo_coordinates_0,  
  geo_coordinates_1,created_at,time  
2 :-) #Lectrr #wereldleiders #uitspraken #Wikileaks #klimaattop  
  http://t.co/Udjpk48EIB,,henklbr  
  ,407085917011079169,118374840,nl,web,http://pbs.twimg.com/  
  profile_images/378800000673845195/  
  b47785b1595e6a1c63b93e463f3d0ccc_normal.jpeg,,0,0,Sun Dec 01  
  09:57:00 +0000 2013,1385891820  
3 Wat zijn de resulataten vd #klimaattop in #Warschau waard?  
  @EP_Environment ontmoet voorzitter klimaattop @MarcinKorolec  
  http://t.co/4Lmiaopf60,,Europarl_NL  
  ,406058792573730816,37623918,en,<a href="http://www.  
  hootsuite.com" rel="nofollow">HootSuite</a>,http://pbs.twimg  
  /_files/.../0042821871/
```

Project — Atom

File Edit View Selection Find Packages Help

Project

2016_primary_results.csv

```
1 state, state_abbreviation, county, fips, party, candidate, votes, fraction_votes
2 Alabama, AL, Autauga, 1001.0, Democrat, Bernie Sanders, 544, 0.182
3 Alabama, AL, Autauga, 1001.0, Democrat, Hillary Clinton, 2387, 0.8
4 Alabama, AL, Baldwin, 1003.0, Democrat, Bernie Sanders, 2694, 0.32899999999999996
5 Alabama, AL, Baldwin, 1003.0, Democrat, Hillary Clinton, 5290, 0.647
6 Alabama, AL, Barbour, 1005.0, Democrat, Bernie Sanders, 222, 0.078
7 Alabama, AL, Barbour, 1005.0, Democrat, Hillary Clinton, 2567, 0.9059999999999999
8 Alabama, AL, Bibb, 1007.0, Democrat, Bernie Sanders, 246, 0.19699999999999998
9 Alabama, AL, Bibb, 1007.0, Democrat, Hillary Clinton, 942, 0.755
10 Alabama, AL, Blount, 1009.0, Democrat, Bernie Sanders, 395, 0.386
11 Alabama, AL, Blount, 1009.0, Democrat, Hillary Clinton, 564, 0.551
12 Alabama, AL, Bullock, 1011.0, Democrat, Bernie Sanders, 178, 0.066
13 Alabama, AL, Bullock, 1011.0, Democrat, Hillary Clinton, 2451, 0.9129999999999999
14 Alabama, AL, Butler, 1013.0, Democrat, Bernie Sanders, 156, 0.065
15 Alabama, AL, Butler, 1013.0, Democrat, Hillary Clinton, 2196, 0.9289999999999999
16 Alabama, AL, Calhoun, 1015.0, Democrat, Bernie Sanders, 1425, 0.218
17 Alabama, AL, Calhoun, 1015.0, Democrat, Hillary Clinton, 5011, 0.765
18 Alabama, AL, Chambers, 1017.0, Democrat, Bernie Sanders, 312, 0.095
19 Alabama, AL, Chambers, 1017.0, Democrat, Hillary Clinton, 2899, 0.8859999999999999
20 Alabama, AL, Cherokee, 1019.0, Democrat, Bernie Sanders, 268, 0.249
21 Alabama, AL, Cherokee, 1019.0, Democrat, Hillary Clinton, 712, 0.6609999999999999
22 Alabama, AL, Chilton, 1021.0, Democrat, Bernie Sanders, 289, 0.24600000000000002
23 Alabama, AL, Chilton, 1021.0, Democrat, Hillary Clinton, 860, 0.731
```

~/Downloads/2016_primary_results.csv 1:1

LF UTF-8 Plain Text GitHub Git (0)

Opening a file in a (good) text editor (here: Atom) to check its encoding and line-ending style.

Why encodings are really, really, REALLY important – and why you shouldn't let Excel mess with them

- Unicode is around for decades, but sometimes legacy encodings (ASCII, ANSI, Windows-1252, ...) are still used
- Problem 1: They don't support all Unicode symbols (emojis, different scripts, ...)
- Problem 2: What is an ä in the one encoding may be an ø in another ⇒ big confusion if you use the wrong one
- Some programs (looking at you, Excel!) may use legacy encodings when saving CSV files without telling you!

Make sure to use UTF-8 from beginning to end, unless you know what you are doing!

Sidenote and outlook: custom file handling

1. Many file formats (CSV, XML, HTML, SVG, many network analysis file formats) are just plain text files.
2. Because `read()` and `write()` do not care about what the content means, you can essentially write an own program to deal with such files
3. Also, it is possible to write a *parser* for semi-structured files (think: newspaper articles where the first line is always the headline etc.)

From file to dataframes and back

What are dataframes?

`pd.DataFrames` (from the pandas package) are

- objects that store tabular data in rows and columns.
- columns and rows can have names
- they have methods built-in for data wrangling and analysis

Creating dataframes


Option 1: transform existing data into a dataframe

```
df =  
pd.DataFrame(list-of-lists,  
dict, or similar)  
(use pd.DataFrame? for help if  
necessary)
```

Option 2: read from file

```
In [1]: import pandas as pd
```

```
In [ ]: df = pd.re
```

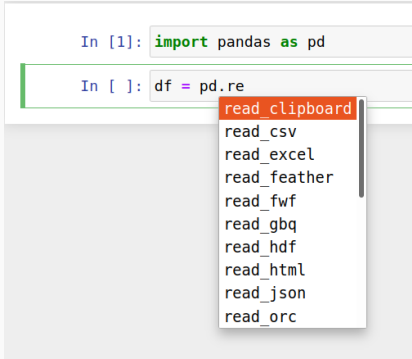

- read_clipboard
- read_csv
- read_excel
- read_feather
- read_fwf
- read_gbq
- read_hdf
- read_html
- read_json
- read_orc

Using tab-completion to see methods to read dataframes from a file)

```
In [6]: # just use the default...
df = pd.read_csv("2016_primary_results.csv")
df
```

Out[6]:


	state	state_abbreviation	county	fips	party	candidate	votes	fraction_votes
0	Alabama	AL	Autauga	1001.0	Democrat	Bernie Sanders	544	0.182
1	Alabama	AL	Autauga	1001.0	Democrat	Hillary Clinton	2387	0.800
2	Alabama	AL	Baldwin	1003.0	Democrat	Bernie Sanders	2694	0.329
3	Alabama	AL	Baldwin	1003.0	Democrat	Hillary Clinton	5290	0.647
4	Alabama	AL	Barbour	1005.0	Democrat	Bernie Sanders	222	0.078
...
24606	Wyoming	WY	Teton-Sublette	95600028.0	Republican	Ted Cruz	0	0.000
24607	Wyoming	WY	Uinta-Lincoln	95600027.0	Republican	Donald Trump	0	0.000
24608	Wyoming	WY	Uinta-Lincoln	95600027.0	Republican	John Kasich	0	0.000
24609	Wyoming	WY	Uinta-Lincoln	95600027.0	Republican	Marco Rubio	0	0.000
24610	Wyoming	WY	Uinta-Lincoln	95600027.0	Republican	Ted Cruz	53	1.000

24611 rows × 8 columns

```
In [10]: # ... or specify encoding, delimiter, or possibly other things (header etc)
df = pd.read_csv("2016_primary_results.csv", encoding="utf-8", delimiter=',')
```


“I get an error!”

1. Use the `?` to get information on which options you can specify: `pd.read_csv?`
2. Specify the encoding!
3. For CSV files, specify the delimiter!
4. For JSON, specify `lines=True` if it's one JSON object per line (instead of per file)
5. But there are many more options!

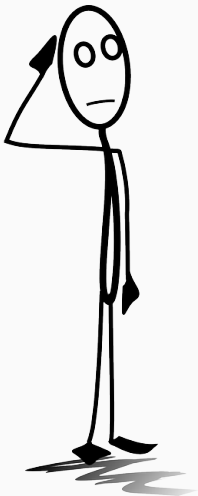

Can you think of a situation when you would use the for-loop approach to reading or writing tabular data instead of the pandas approach? What are pros and cons?

When (not) to use dataframes

use it!

- tabular data
- visual inspection
- data wrangling or statistical analysis

don't use it

- non-tabular data
- when it does not make sense to consider rows as “cases” and columns as “variables”
- if you only care about one (or maybe two) column anyway
- size of dataset > available RAM
- long or expensive operations, play safe and write to / read from file line by line*

* imagine scraping 10,000 pages for a week and your program crashes at nr. 9,999 just before saving the dataframe. . .

Beyond standard data files

Beyond standard data files

API's

Beyond files

It probably has occurred to you by now that

it's all about the structure:

- we can write *anything* to files
- it doesn't really matter whether sth is called "csv" or whatever – as long as we know how records are delimited and what the encoding is
- and ... do we then even need files?

Beyond files

It probably has occurred to you by now that

it's all about the structure:

- we can write *anything* to files
- it doesn't really matter whether sth is called "csv" or whatever – as long as we know how records are delimited and what the encoding is
- and ... do we then even need files?

Beyond files

It probably has occurred to you by now that

it's all about the structure:

- we can write *anything* to files
- it doesn't really matter whether sth is called "csv" or whatever
 - as long as we know how records are delimited and what the encoding is
- and ... do we then even need files?

Beyond files

It probably has occurred to you by now that

it's all about the structure:

- we can write *anything* to files
- it doesn't really matter whether sth is called "csv" or whatever
 - as long as we know how records are delimited and what the encoding is
- and ... do we then even need files?

APIs

Why not just send a JSON object (with a question/request) directly through the internet and get another one (with an answer/response) back?

That's what (most) Application Programming Interfaces (APIs) do.

Great if we have a nested data structure

- Items within news feeds
- Personal data within authors within books
- Bio statements within authors within tweets

APIs

Why not just send a JSON object (with a question/request) directly through the internet and get another one (with an answer/response) back?

That's what (most) Application Programming Interfaces (APIs) do.

Great if we have a nested data structure

- Items within news feeds
- Personal data within authors within books
- Bio statements within authors within tweets

APIs

Why not just send a JSON object (with a question/request) directly through the internet and get another one (with an answer/response) back?

That's what (most) Application Programming Interfaces (APIs) do.

Great if we have a nested data structure

- Items within news feeds
- Personal data within authors within books
- Bio statements within authors within tweets

APIs

Why not just send a JSON object (with a question/request) directly through the internet and get another one (with an answer/response) back?

That's what (most) Application Programming Interfaces (APIs) do.

Great if we have a nested data structure

- Items within news feeds
- Personal data within authors within books
- Bio statements within authors within tweets

A JSON object containing GoogleBooks data

```
1 {'totalItems': 574, 'items': [{'kind': 'books#volume', '
    volumeInfo': {'publisher': '"O\Reilly Media, Inc."', '
    description': u'Get a comprehensive, in-depth introduction
    to the core Python language with this hands-on book. Based
    on author Mark Lutz\u2019s popular training course, this
    updated fifth edition will help you quickly write efficient,
    high-quality code with Python. It\u2019s an ideal way to
    begin, whether you\u2019re new to programming or a
    professional developer versed in other languages. Complete
    with quizzes, exercises, and helpful illustrations, this
    easy-to-follow, self-paced tutorial gets you started with
    both Python 2.7 and 3.3\u2014the
2 ...
3 ...
4 'kind': 'books#volumes'}
```

Who offers APIs?

The usual suspects: Twitter, Facebook, Google – but also Reddit, Youtube, ...

If you ever leave your bag on a bus on Chicago

... but do have Python on your laptop, watch this:

https://www.youtube.com/watch?v=RrPZza_vZ3w.

That guy queries the Chicago bus company's API to calculate when *exactly the vehicle* with his bag arrives the next time at the bus stop in front of his office.

(Yes, he tried calling the help desk before, but they didn't know. He got his bag back.)

Who offers APIs?

The usual suspects: Twitter, Facebook, Google – but also Reddit, Youtube, ...

If you ever leave your bag on a bus on Chicago

... but do have Python on your laptop, watch this:

https://www.youtube.com/watch?v=RrPZza_vZ3w.

That guy queries the Chicago bus company's API to calculate when *exactly the vehicle* with his bag arrives the next time at the bus stop in front of his office.

(Yes, he tried calling the help desk before, but they didn't know. He got his bag back.)

Who offers APIs?

The usual suspects: Twitter, Facebook, Google – but also Reddit, Youtube, ...

If you ever leave your bag on a bus on Chicago

...but do have Python on your laptop, watch this:

https://www.youtube.com/watch?v=RrPZza_vZ3w.

That guy queries the Chicago bus company's API to calculate when *exactly the vehicle* with his bag arrives the next time at the bus stop in front of his office.

(Yes, he tried calling the help desk before, but they didn't know. He got his bag back.)

APIs

Pro

- Structured data (JSON!)
- Easy to process automatically
- Can be directly embedded in your script

Con

- Often limitations (requests per minute, sampling, ...)
- You have to trust the provider that he delivers the right content
- Some APIs won't allow you to go back in time
- Some APIs will charge you money for some or all functions

APIs

Pro

- Structured data (JSON!)
- Easy to process automatically
- Can be directly embedded in your script

Con

- Often limitations (requests per minute, sampling, ...)
- You have to trust the provider that he delivers the right content
- Some APIs won't allow you to go back in time
- Some APIs will charge you money for some or all functions



Any questions?

Next steps

Make sure you understood all of today's
concepts.

Re-read Chapter 5 and read Chapter 12.1.

Ask questions on Friday if needed.

I prepared exercises to work on *during* the
Friday meeting (alone or in teams):

[https://github.com/uvacw/teaching-bdaca/blob/
main/12ec-course/week02/exercises.md](https://github.com/uvacw/teaching-bdaca/blob/main/12ec-course/week02/exercises.md)

