SharingApp — Add a New Item | UML Sequence Diagram

Source scenario: AddItemActivity.onCreate() followed by a valid saveItem(view); the new Item receives id = null.

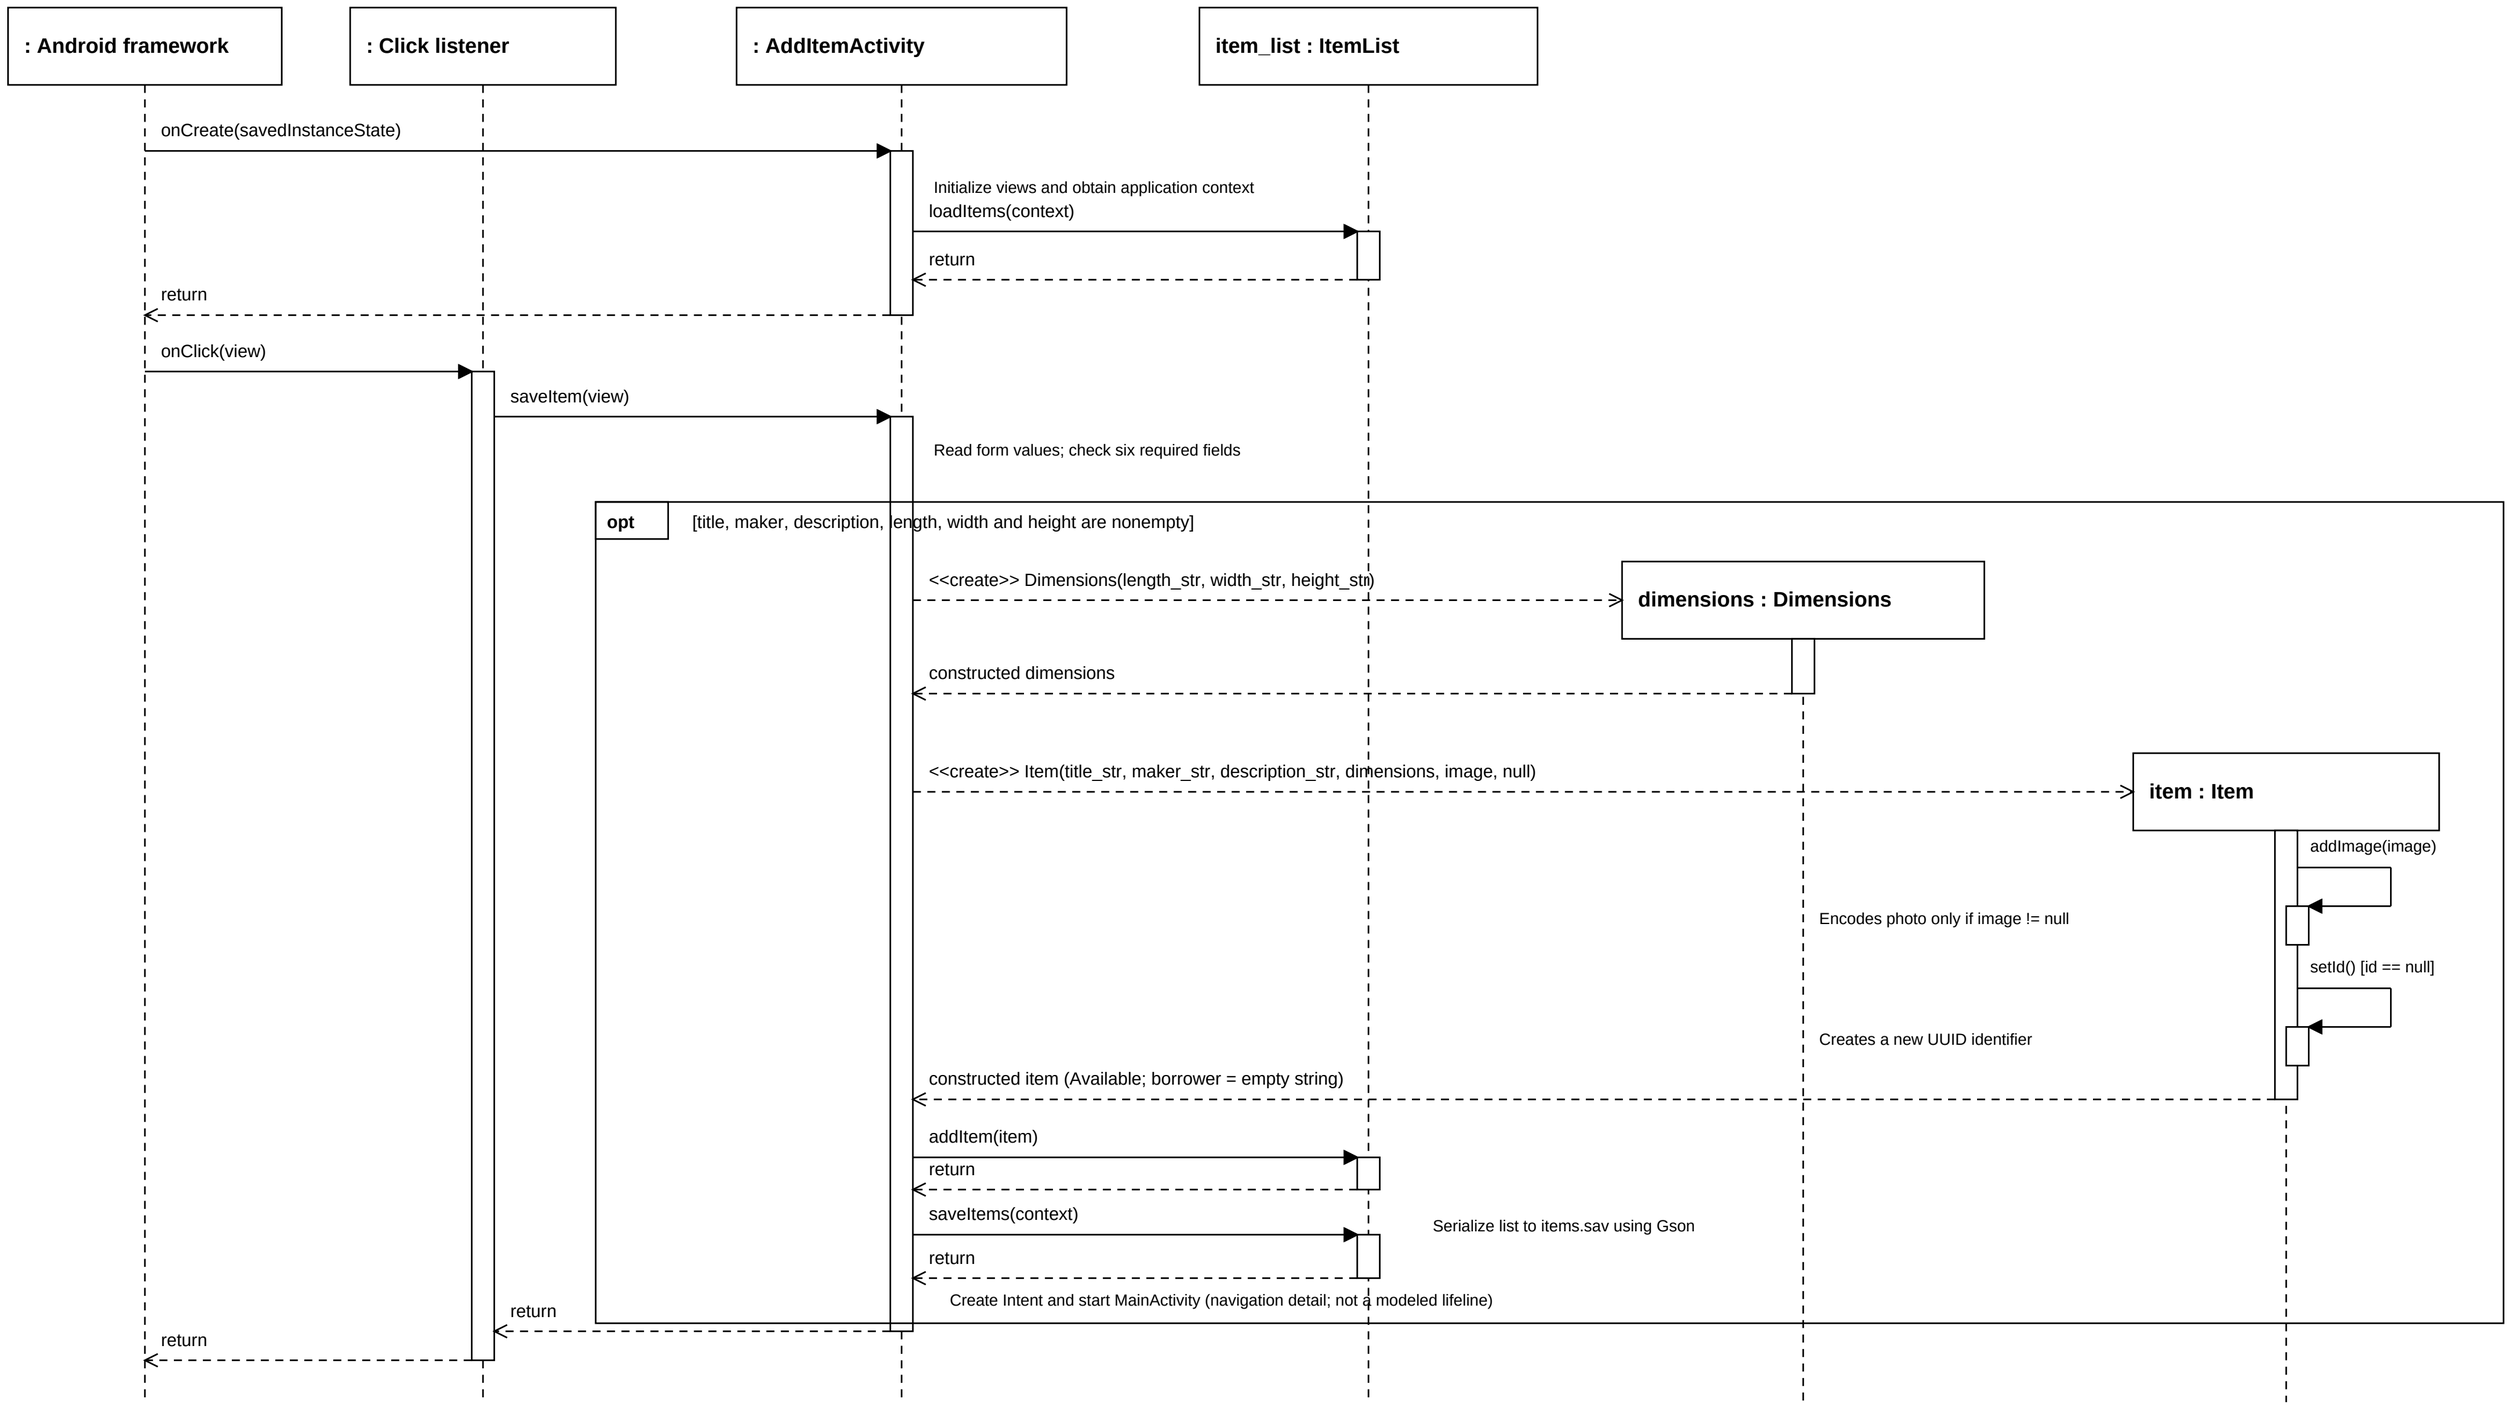

Lifelines proceed downward. Narrow rectangles show execution; solid filled-arrow calls are synchronous; dashed arrows are returns or <<create>> messages.

The ItemList wrapper is initialized by the activity field initializer before onCreate(); it is therefore already present at the start. Its constructor is not called from onCreate().

Validation failure: saveItem() calls setError("Empty field!") on the first empty required EditText and returns. The opt fragment is skipped: no Dimensions/Item is created and no list is saved.

Item construction assigns title/maker/description/dimensions, status = "Available", borrower = "", calls addImage(image), then setId() because the supplied id is null.

UI widgets, Gson, file streams, Intent and UUID are supporting implementation details summarized in notes. loadItems()/saveItems() catch their file I/O exceptions internally.

Framework dispatch and the click listener are external context. Only the four requested application classes are expanded. No author name or submission date is included.