# MODUL 6

# Laravel : Introduction

1. Install Laravel, Routing, View, dan Controller

   a. Code (boleh copy/screenshot dengan syarat terlihat jelas dan tidak blur)

   - Install Laravel

```
Select C:\Windows\System32\cmd.exe - composer create-project laravel/laravel Minggu_6
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\xampp\htdocs>composer create-project laravel/laravel Minggu_6
Creating a "laravel/laravel" project at "./Minggu_6"
Cannot use laravel/laravel's latest version v13.1.2 as it requires php ^8.3 which is not satisfied by your platform.
Installing laravel/laravel (v12.12.2)
  - Installing laravel/laravel (v12.12.2): Extracting archive
Created project in C:\xampp\htdocs\Minggu_6
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
Updating dependencies
Lock file operations: 111 installs, 0 updates, 0 removals
  - Locking brick/math (0.14.8)
  - Locking carbonphp/carbon-doctrine-types (3.2.0)
  - Locking dflydev/dot-access-data (v3.0.3)
  - Locking doctrine/inflector (2.1.0)
  - Locking doctrine/lexer (3.0.1)
  - Locking dragonmantank/cron-expression (v3.6.0)
  - Locking egulias/email-validator (4.0.4)
  - Locking fakerphp/faker (v1.24.1)
  - Locking filp/whoops (2.18.4)
  - Locking fruitcake/php-cors (v1.4.0)
  - Locking graham-campbell/result-type (v1.1.4)
  - Locking guzzlehttp/guzzle (7.10.0)
  - Locking guzzlehttp/promises (2.3.0)
  - Locking guzzlehttp/psr7 (2.9.0)
  - Locking guzzlehttp/uri-template (v1.0.5)
  - Locking hamcrest/hamcrest-php (v2.1.1)
  - Locking laravel/framework (v12.56.0)
  - Locking laravel/pail (v1.2.6)
  - Locking laravel/pint (v1.29.0)
  - Locking laravel/prompts (v0.3.16)
  - Locking laravel/sail (v1.56.0)
  - Locking laravel/serializable-closure (v2.0.11)
  - Locking laravel/tinker (v2.11.1)
  - Locking league/commonmark (2.8.2)
  - Locking league/config (v1.2.0)
  - Locking league/flysystem (3.33.0)
  - Locking league/flysystem-local (3.31.0)
  - Locking league/mime-type-detection (1.16.0)
  - Locking league/uri (7.8.1)
  - Locking league/uri-interfaces (7.8.1)
  - Locking mockery/mockery (1.6.12)
```

   - Routing

```php
<?php

use Illuminate\Support\Facades\Route;

use App\Http\Controllers\SiteController;

use App\Http\Controllers\ProductController;


// Menampilkan halaman welcome.blade.php

Route::get('/', function () {

    return view('welcome');
```

```
});

// Alternatif menggunakan Route::view

Route::view('/', 'welcome');

// Memanggil fungsi dari Controller

Route::post('/auth', [SiteController::class, 'auth']);

// Menggunakan route resource untuk ProductController

Route::resource('products', ProductController::class);

// Jika Anda ingin mendefinisikan route secara individual

Route::get('/products', [ProductController::class, 'index']);

Route::post('/auth', [SiteController::class, 'auth'])-
>name('auth');
```

- View

```
<!DOCTYPE html>

<html lang="en">


<head>

    <meta charset="UTF-8">

    <meta name="viewport" content="width=device-width, initial-
scale=1.0">

    <title>Login</title>

    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstr
ap.min.css" rel="stylesheet">

    <script src="{{ asset('js/jquery.min.js') }}"></script>

</head>


<body class="bg-light">

    <div class="container">

        <div class="row justify-content-center align-items-center
```

```
min-vh-100">
            <div class="col-md-4">
                <div class="card">
                    <div class="card-body">
                        <h3 class="card-title text-center mb-
4">Login</h3>
                        <form method="POST"
action="{{ route('auth') }}">
                            @csrf
                            <div class="mb-3">
                                <label for="email" class="form-
label">Email</label>
                                <input type="email" name="email"
id="email" class="form-control" required>
                            </div>
                            <div class="mb-3">
                                <label for="password" class="form-
label">Password</label>
                                <input type="password"
name="password" id="password" class="form-control" required>
                            </div>
                            <div class="d-grid">
                                <button type="submit" class="btn
btn-primary">Login</button>
                            </div>
                        </form>
                    </div>
                </div>
            </div>
        </div>
    </div>
```

```
    <script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap
.bundle.min.js"></script>

</body>

</html>
```

- Controller

```
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;


class ProductController extends Controller

{

    /**

     * Display a listing of the resource.

     */

    public function index()

    {

        //

    }

    /**

     * Show the form for creating a new resource.

     */

    public function create()

    {

        //

    }

    /**

     * Store a newly created resource in storage.
```

```
     */
    public function store(Request $request)
    {
        //
    }
    /**
     * Display the specified resource.
     */
    public function show(string $id)
    {
        //
    }
    /**
     * Show the form for editing the specified resource.
     */
    public function edit(string $id)
    {
        //
    }
    /**
     * Update the specified resource in storage.
     */
    public function update(Request $request, string $id)
    {
        //
    }
    /**
     * Remove the specified resource from storage.
     */
```

```php
    public function destroy(string $id)
    {
        //
    }
}
```

b. *Screenshot output*

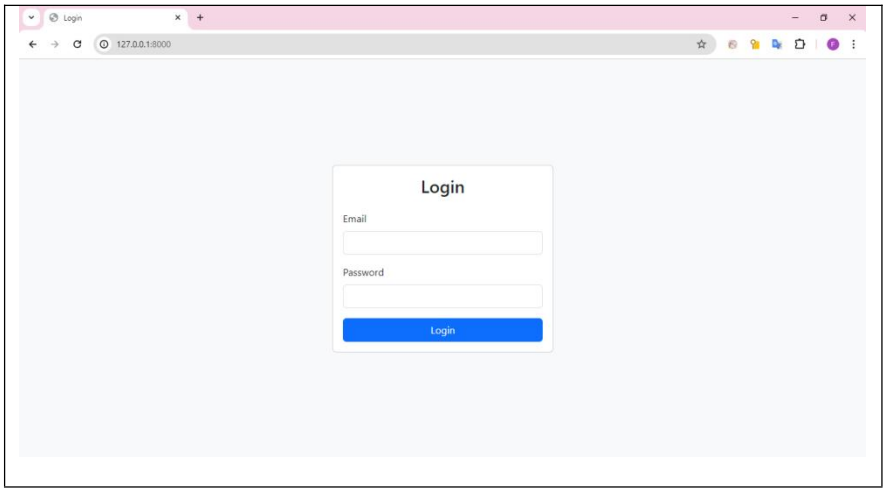


c. Penjelasan dari code dan output (korelasi)

Output yang ditampilkan merupakan halaman login yang dihasilkan dari file Blade (HTML) dengan form berisi input email dan password, di mana saat tombol login ditekan, data dikirim menggunakan metode POST ke route bernama `auth` (`/auth`) yang telah didefinisikan pada file `web.php`, kemudian route tersebut akan memanggil fungsi `auth` pada `SiteController` untuk memproses autentikasi pengguna, sedangkan `ProductController` yang juga didefinisikan dalam route tidak memiliki hubungan langsung dengan halaman login karena fungsinya digunakan untuk mengelola data produk (CRUD) setelah proses login atau pada bagian lain aplikasi.