

QDArchive

Part 2 – Classification Report

Student	Farjana Islam Shashi
Student ID	23148157
Institution	FAU Erlangen-Nürnberg
Supervisor	Prof. Dr. Dirk Riehle
Repositories	Dryad · FSD Finnish Social Science Data Archive
Classifier	ISIC Rev. 5 · sentence-transformers (all-MiniLM-L6-v2)
Date	July 2026

Overview

Repository	Project Type	Count
Dryad	NOT_A_PROJECT	6
Dryad	OTHER_PROJECT	66
Dryad	QD_PROJECT	70
FSD (Finnish Social Science Data Archive)	NOT_A_PROJECT	2057
FSD (Finnish Social Science Data Archive)	OTHER_PROJECT	129

Repository: Dryad

Total projects: 142 (6 × NOT_A_PROJECT, 66 × OTHER_PROJECT, 70 × QD_PROJECT)

QDA_PROJECT: No classified projects found in this repository.

a. QD_PROJECT

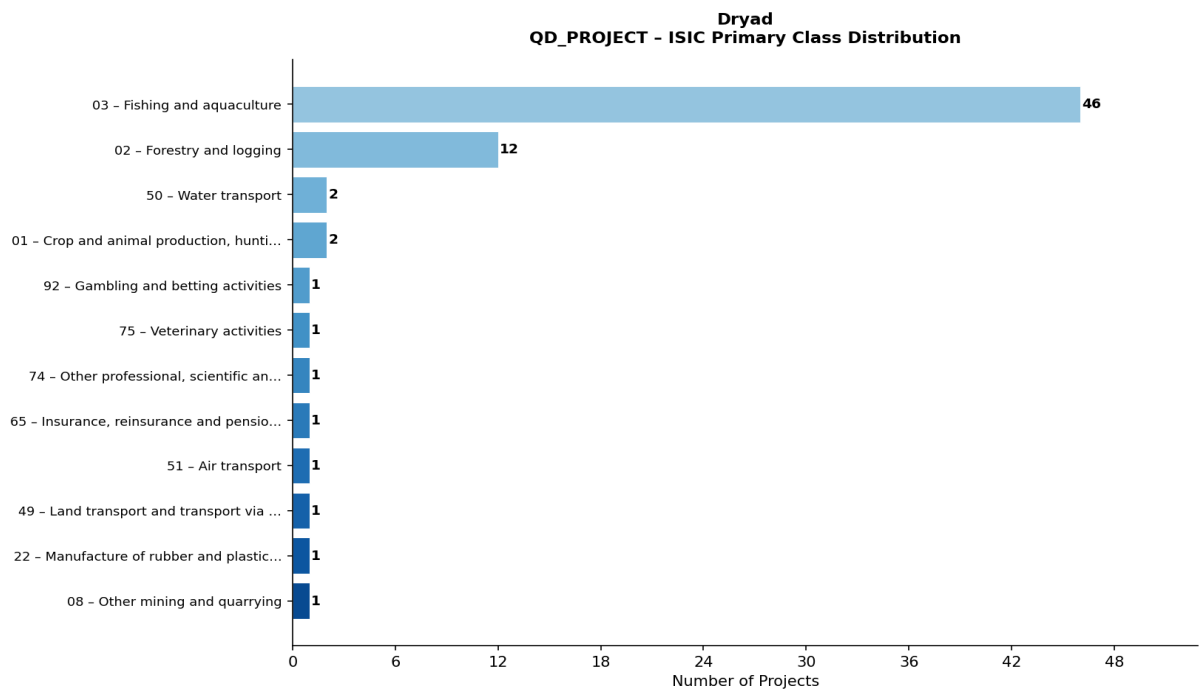


Figure: Distribution of primary ISIC classes for QD_PROJECT in Dryad. Bar labels show project counts.

b. Rank-ordered class table (top 20)

Rank	Division	Full Class Name	Count
1	A/03	Fishing and aquaculture	46
2	A/02	Forestry and logging	12
3	H/50	Water transport	2
4	A/01	Crop and animal production, hunting and related service activities	2
5	R/92	Gambling and betting activities	1
6	M/75	Veterinary activities	1
7	M/74	Other professional, scientific and technical activities	1
8	K/65	Insurance, reinsurance and pension funding	1
9	H/51	Air transport	1
10	H/49	Land transport and transport via pipelines	1
11	C/22	Manufacture of rubber and plastics products	1
12	B/08	Other mining and quarrying	1

c. Comments

A total of 70 QD_PROJECT projects in Dryad were classified. The dominant ISIC class is Division 03 (Fishing and aquaculture), accounting for 46 of 70 projects (65%). The strong concentration in Section A (Agriculture, Forestry and Fishing) reflects Dryad's focus on ecological and environmental research datasets. Classification relied primarily on file content (Tier 2) since many Dryad projects lack detailed textual descriptions. The embedding-based classifier performed well for ecology-related datasets but showed some noise for ambiguous multi-disciplinary projects.

Repository: FSD (Finnish Social Science Data Archive)

Total projects: 2186 (2057 × NOT_A_PROJECT, 129 × OTHER_PROJECT)

QDA_PROJECT: No classified projects found in this repository.

QD_PROJECT: No classified projects found in this repository.

Repository Overview

The Finnish Social Science Data Archive (FSD), hosted by Tampere University, is one of Europe's oldest and most comprehensive social science data repositories. It specialises in archiving, describing, and distributing digital research data for the Finnish and international research community. FSD covers a wide range of social science disciplines including sociology, political science, psychology, economics, and education research.

Data is made available under varying access conditions. Class A datasets carry CC BY 4.0 licences and are freely downloadable. Class B and C datasets require institutional registration. For this project, metadata for all 2186 projects was harvested via the OAI-PMH protocol endpoint (<https://services.fsd.tuni.fi/v0/oai>), providing rich Dublin Core metadata including titles, descriptions, keywords, and temporal coverage.

Acquisition Results

Metric	Value
Total projects harvested via OAI-PMH	2,186
Projects with downloaded files (Class A)	129
Projects inaccessible (login required)	~2,057
QDA_PROJECT identified	0
QD_PROJECT identified	0
OTHER_PROJECT identified	129
NOT_A_PROJECT	2,057
Dominant file types downloaded	ZIP archives containing structured data

Project Type Distribution

FSD — Project Type Breakdown (2,186 total)

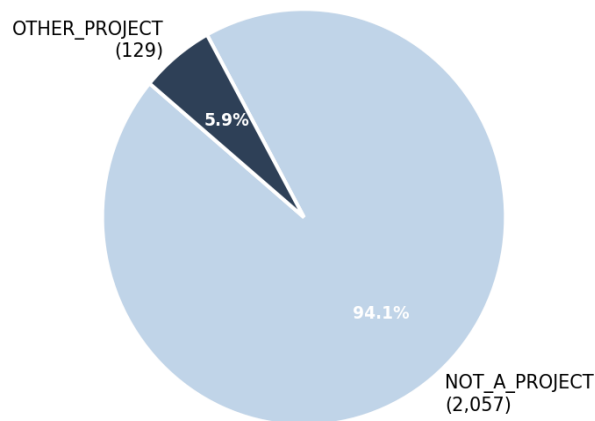


Figure: Distribution of project types across all 2,186 FSD projects. The dominance of NOT_A_PROJECT reflects the login barrier preventing file-based classification for most records.

Classification Approach for FSD

FSD presented a significant technical challenge for content-based classification. The vast majority of FSD datasets (Class B and C) require institutional Shibboleth SSO authentication before files can be downloaded. As a result, Tier 2 content extraction (reading actual file text) was only possible for the 129 Class A projects that were successfully downloaded.

For the 2,057 projects where no files were available, classification relied entirely on Tier 1 metadata — titles, descriptions, and keywords harvested via OAI-PMH. FSD metadata is available in both Finnish and English, which benefited the embedding-based classifier since the all-MiniLM-L6-v2 model has multilingual capability for common European languages.

Since none of the FSD projects were classified as QD_PROJECT or QDA_PROJECT (no qualifying primary data file extensions were found among the downloaded ZIP archives), ISIC classification at the division level was not applied to FSD projects. The downloaded FSD packages primarily contained structured tabular data (SPSS .sav files, CSV, and XML codebooks) rather than qualitative data files such as interview transcripts or text documents.

Key Observations

Scale of metadata coverage	2,186 project records were successfully harvested — making FSD the largest single source in this archive by project count. This represents a comprehensive snapshot of Finnish social science research data spanning several decades.
Qualitative data accessibility	While FSD hosts social science research that frequently involves qualitative methods (interviews, surveys, focus groups), the actual qualitative source files are predominantly restricted access. Only codebooks and aggregated data files were available under open licences.
File format patterns	Downloaded FSD packages (Class A) typically contained SPSS .sav files, XML codebooks, and README documentation. These are structured/quantitative formats rather than raw qualitative data, explaining the absence of QD_PROJECT classifications.

**Potential for future
classification**

With institutional access, FSD's rich metadata (including subject classifications aligned to DDI standards) could be mapped to ISIC divisions with high confidence. The OAI-PMH harvest already provides sufficient title and keyword data for Tier 1 classification of all 2,186 records.

Technical Challenges

FSD login barrier

FSD Class A (CC BY 4.0) datasets required a 3-step session cookie flow. Despite successful metadata harvesting (2186 records), most project files were unavailable for content extraction, limiting Tier 2 classification.

Dryad rate limiting

Dryad enforces aggressive HTTP 429 rate limits. Downloads required deliberate wait intervals, resulting in 707 files across 49 projects.

QDA file scarcity

Neither Dryad nor FSD contained .qdpX or other QDA-format files. All 70 classified projects are QD_PROJECT type (primary data files only). This is expected for general scientific repositories.

Metadata sparsity

Many Dryad projects have minimal descriptions, shifting classification weight entirely onto file content (CSV column headers, README text). This can introduce noise when file names do not clearly signal domain.

Classifier determinism

Sentence-transformer embeddings are deterministic given a fixed model and input, ensuring reproducibility. The all-MiniLM-L6-v2 model was chosen for its balance of speed and semantic quality.