
AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

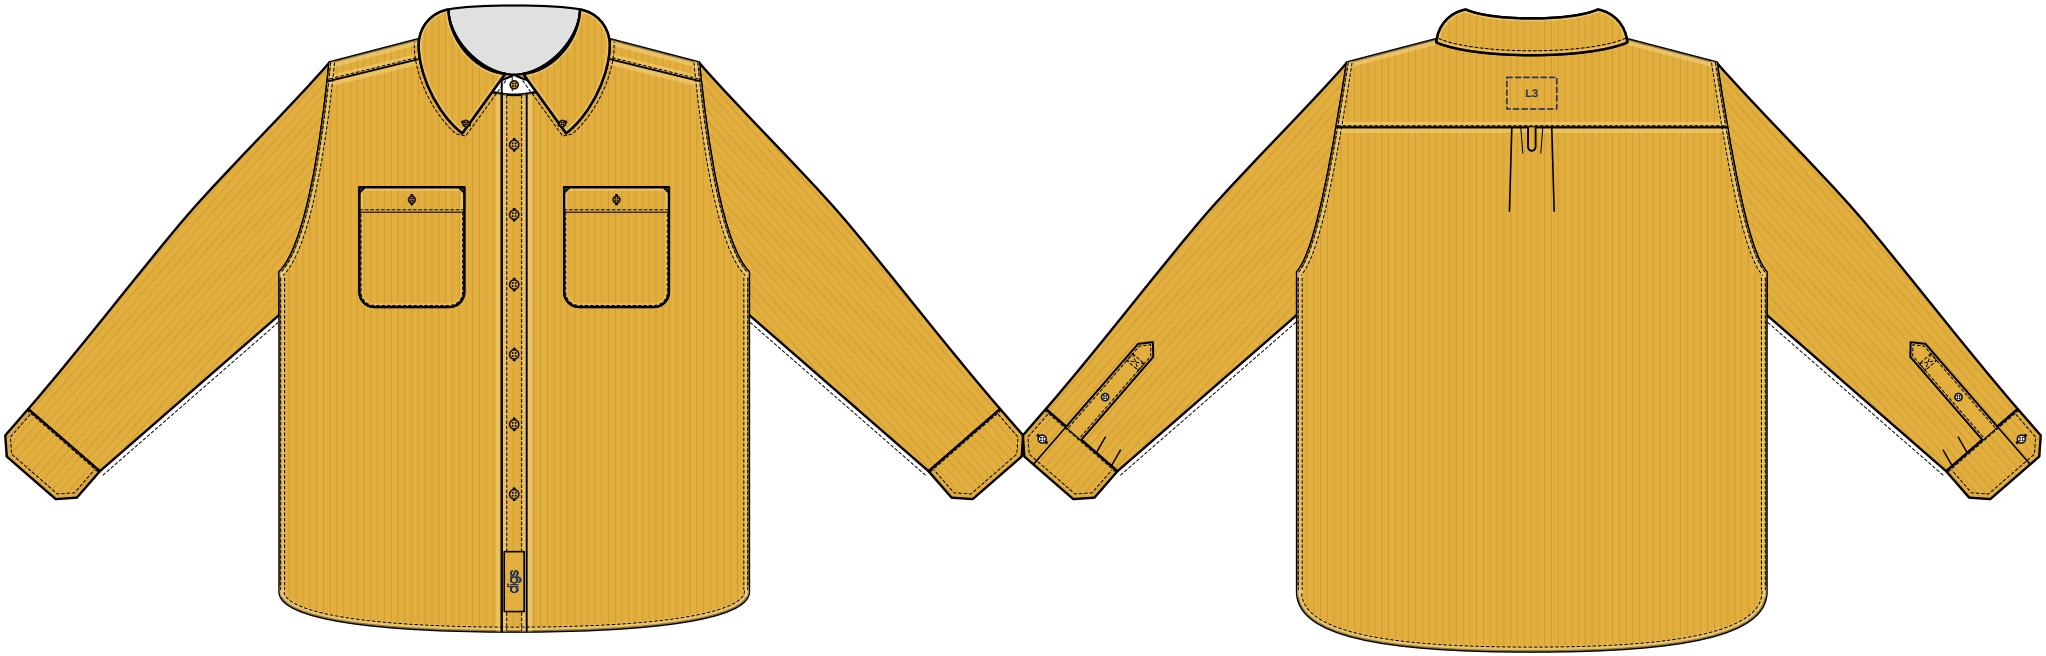

FRONT

BACK

STYLE #	**AC-LSS-001**
STYLE NAME	Pincord button-down shirt
BRAND	digs
SEASON	FW27 (TBC)
CATEGORY	Tops — wovens
STATUS	Proto
SIZE RANGE	S – XL
SAMPLE SIZE	M

BASE BLANK	Crown Vintage mustard pincord button-down (ref. p10)
FABRIC	Fabric A: pincord / pinwale corduroy, 100% cotton
WASH	ASUTE + seam fade; target = 04/10/2025 seam-highlighter look
COLORWAY	#1 MUSTARD
DESIGNER	Antaeus Coe
DATE / REV	10/15/2026 · Rev 1
FIT	Relaxed, untucked; slight drop shoulder
FACTORY	TBC

CONTENTS

1 Cover
2 Comments / change log
3 Development sample specs
4 Material and trim placement
5 Exterior view
6 Interior view
7 Additional detail - collar, front, pockets
8 Additional detail - sleeve, cuff, back
9 Stitch & seam schedule
10 Reference images
11 Garment wash
12 How to measure
13 Graded spec
14 Bill of materials
15 Colorways
16 Labels and packaging
17 Labels and packaging - fold + pack
18 Artwork detail - embroidery
19 Artwork detail - logo tag

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

15 OCTOBER, 2026 - LOGO TAG ADDED (REV 1)

L4 logo tag added at the bottom of the buttonhole placket, the same tag as the stretch needlecord shirt: vertical woven damask label, 1" x 3" finished, centered on the face of the box placket (wearer's left front), bottom edge 1" above the hem at CF. digs wordmark turned 90 deg to read up toward the collar. Ground dyed to match the washed mustard; logo Pantone 19-3943 TCX Bellwether Blue, as the L3 embroidery. Sewn on after the wash, with the buttons. New POMs Y and Y2 (pages 3, 12, 13); artwork and placement on page 19. The L3 back yoke embroidery is unchanged (open item 10).

15 OCTOBER, 2026 - INITIAL TECH PACK CREATION (REV 0)

Base blank: Crown Vintage mustard pincord button-down, 100% cotton washed (f1827ddc-….jpeg, sent to Steph Thiel 04/16/2025). Button-down collar on a stand, box placket, shirttail hem.
Customizations requested 04/21/2025, verbatim: "embroidery · a diagonal cut at the hem of the sleeve cuff · 2 shirt pockets on front left and right chest · the same wash effect as the thermal". Two-pocket reference: camicia-modello-c-in-velluto (p10).
Label COO per 04/22/2025: Designed in USA / Made in China (FTC: both countries must be designated).
Process, 04/20-21/2025: Steph Thiel: "you would likely need a full tech pack for this style, as you are changing the actual silhouette", and she advised reviewing an un-washed sample for fit and construction first. Antaeus: "i'll heed your advice and get the finished one first before ordering 300."
Structure, label system, packaging and embroidery artwork carried from AC-LST-001 (6-15-25). **Changed vs AC-LST-001:** care copy (wash inside out; iron on reverse or steam only, for the pile); neck re-specced for a 16" stand (F 6 1/4, G 2 7/8 at M); L1 moves from CB neck to the inner back yoke, 1/2" below the stand seam; fold sequence adapted for a shirt. W/L = wearer's left, W/R = wearer's right.

OPEN ITEMS - CONFIRM BEFORE THE PROTO IS CUT

#	ITEM	DEFAULT USED IN THIS PACK	ALTERNATIVE / NOTE	STATUS
1	"Diagonal cut" at cuff hem	45 deg cut on both open corners of the cuff, 3/4" legs	One diagonal across the full cuff hem edge	OPEN
2	Pocket closure	Vertical buttonhole in a 1 1/4" band + B2 button, per camicia ref	Open patch pockets, no button	OPEN
3	Wash route	ASUTE garment wash plus seam abrasion	Enzyme + light stone (lower risk to mustard pile). Gate: fabric must take a wash-down dye; if the blank's stock fabric doesn't, Runtang's MOQ for custom-dyed fabric was 300 kg per color, committed before any washed sample exists (p11)	OPEN
4	Back	Two-ply yoke, 2" box pleat + locker loop	Keep the Crown blank's back as is (not shown in the reference photos)	OPEN
5	Embroidery position	CB back yoke, as AC-LST-001	On a chest pocket (2024 concept board)	OPEN
6	Buttons	Corozo, tone-to-tone mustard	Keep the blank's stock buttons	OPEN
7	L1 label size	3 in x 2.25 in, as AC-LST-001	2 in x 1.5 in, sits better in a shirt yoke	OPEN
8	Build route	Customize the Crown blank at its factory	Cut and sew elsewhere from this pack	OPEN
9	Style code / season	AC-LSS-001 / FW27	The stretch needlecord shirt pack also uses AC-LSS-001; one of the two shirts needs a new style number	OPEN
10	Logo on the back	L3 embroidery kept on the CB back yoke, plus the L4 tag on the placket	Tag only, no back embroidery, as the stretch needlecord shirt	OPEN

SAMPLING RULES FOR THIS STYLE

These rules exist because the AC-LST-001 proto came back out of tolerance on six POMs with its topstitching missing, and a second sample arrived unwashed. **1.** Every seam and topstitch on pages 7-9 is required; overlock in place of a felled seam, or missing topstitching, is a reject. **2.** Proto 1 is an unwashed fit and construction sample, measured against this spec plus the reported shrinkage; proto 2 is washed and measured against this spec as written. Return page 3 filled in with every proto. **3.** The panel shrinkage report (page 11) comes back before proto 1 is cut; the wash trial comes back before proto 2. **4.** All pieces cut one way, pile running up. **5.** Any change to fabric, fiber, country of origin or label copy is logged here and updated on every page.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

POM	DESCRIPTION	TOL ±	SPEC M	P1 UNWASH	P2 WASH	IN TOL	COMMENTS
A	Body length at CB, from HPS level to hem	1/2	**31**				
A2	Body length at CF, from HPS level to hem	1/2	**30**				
A3	Shirttail curve depth, CF hem to side seam at hem	1/4	**2**				
B	1/2 chest at 1" below underarm	1/2	**23 1/2**				
C	1/2 hem sweep, straight	1/2	**23 1/2**				
D	Across shoulder, seam to seam	3/8	**18 1/2**				
E	Shoulder slope	1/8	**1 1/2**				
F	Neck width, HPS to HPS, seam to seam	1/4	**6 1/4**				
G	Front neck drop, HPS to CF neck seam	1/4	**2 7/8**				
H	Back neck drop	1/8	**3/4**				
I	Collar stand length, button center to buttonhole end	1/4	**16**				
I2	Collar stand height at CB	1/8	**1 1/4**				
I3	Collar height at CB	1/8	**1 3/4**				
I4	Collar point length	1/8	**3 1/4**				
I5	Collar-point button on front: below HPS level	1/8	**4 1/2**				
I6	Collar-point button on front: from CF	1/8	**2 3/8**				
J	1/2 armhole, straight	1/4	**10 3/4**				
K	1/2 bicep at 1" below underarm	1/4	**9 1/4**				
L	1/2 elbow, 11" below underarm	1/4	**7 3/4**				
M	Cuff length, outer button center to buttonhole end	1/4	**9 1/2**				
M2	Cuff adjustable button spacing	1/8	**3/4**				
O	Cuff height	1/8	**2 1/2**				
O2	Cuff corner diagonal cut, each leg	1/8	**3/4**				
P	Sleeve length, shoulder point to cuff edge	3/8	**25 1/2**				
P2	Sleeve length, CB neck to cuff edge	1/2	**34 3/4**				
Q	Sleeve placket length, cuff seam to base of point	1/8	**5 1/2**				
Q2	Sleeve placket from underarm seam, at cuff seam	1/8	**3**				
X	1/2 sleeve width at cuff seam, before pleating	1/8	**6**				
R	Back yoke depth at CB	1/8	**4**				
S	Front placket width	1/8	**1 1/4**				
T	Pocket width	1/8	**5 1/4**				
T2	Pocket height, incl. band	1/8	**6**				
T3	Pocket band height	1/8	**1 1/4**				
U	Pocket top edge below HPS (both)	1/4	**7 3/4**				
U2	Pocket inner edge from CF (both)	1/8	**2 1/2**				
V	Front button spacing (placket)	1/8	**3 1/2**				
W	First placket buttonhole below neck seam at CF	1/8	**2 1/2**				
Y	Logo tag (L4): bottom edge above finished hem at CF	1/8	**1**				
Y2	Logo tag (L4): centered on buttonhole placket	1/16	**0**				

CONSTRUCTION + FINISH CHECK

- ☐ Felled armhole + side seams, 2 rows, 1/4" gauge
- ☐ No overlock anywhere; all topstitching present
- ☐ Two pockets, bands buttoned, mirrored
- ☐ Cuffs: diagonal-cut corners, 2 buttons
- ☐ Nap one way, pile up; no panel shading
- ☐ Proto 2: wash standard met, seams lighter
- ☐ Labels L1/L2 copy + position; L3 p18, L4 p19
- ☐ Buttons secure, 16+ stitches; spares on L2

Proto # / washed? (Y/N) _____

Received (date) / measured by _____

Decision: approve / revise / reject _____

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

FABRICS:

- FA — Fabric A: pincord, 100% cotton - all shell pieces

INTERLININGS:

- I1 — Light fusible - top collar
- I2 — Medium fusible - stand, cuffs, placket, facing, pocket bands

BUTTONS:


- B1 — 18L corozo - placket x6, stand x1, cuffs x4
- B2 — 14L corozo - collar points, pocket bands, sleeve plackets

LABELS:


- L1 — Brand + size patch, inner back yoke
- L2 — Care / content / COO loop, W/L side seam
- L3 — Embroidery, CB outer yoke
- L4 — Logo tag, vertical woven 1 x 3 in, bottom of buttonhole placket

PACKAGING:

- P1 — Hangtag (TBC), W/L collar stand seam
- P2 — Polybag
- P3 — Barcode sticker

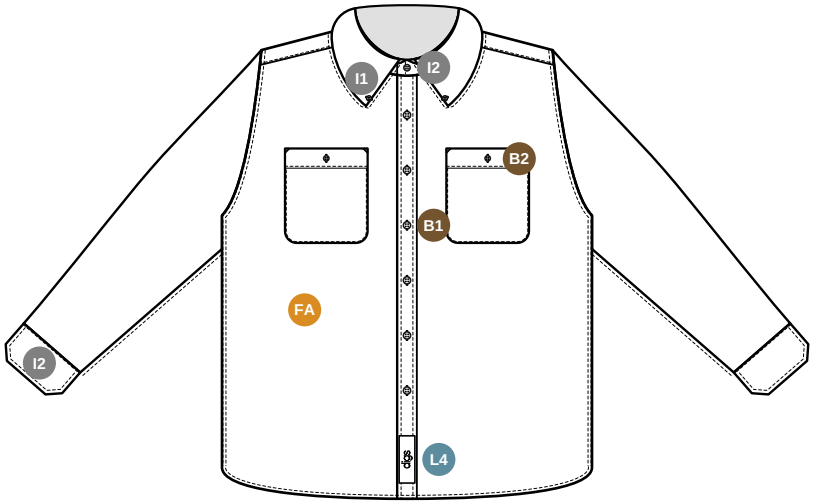


FRONT

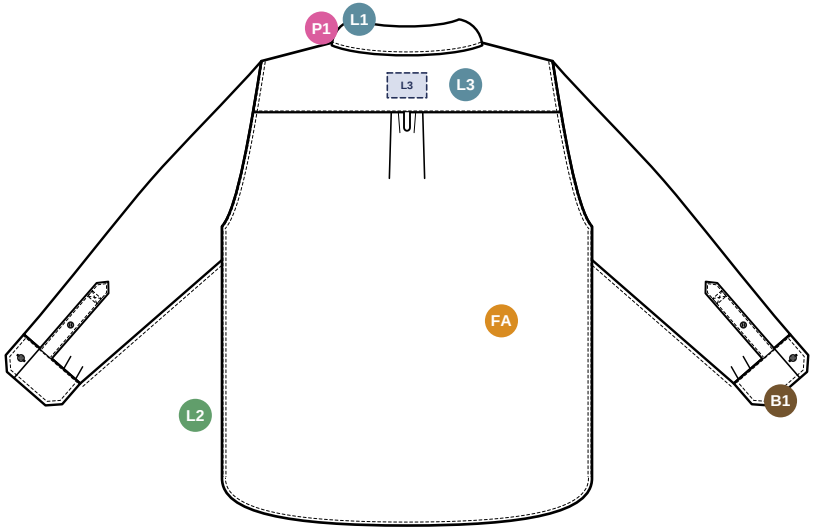

BACK (L1 + L2 sit inside; see p6)


ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

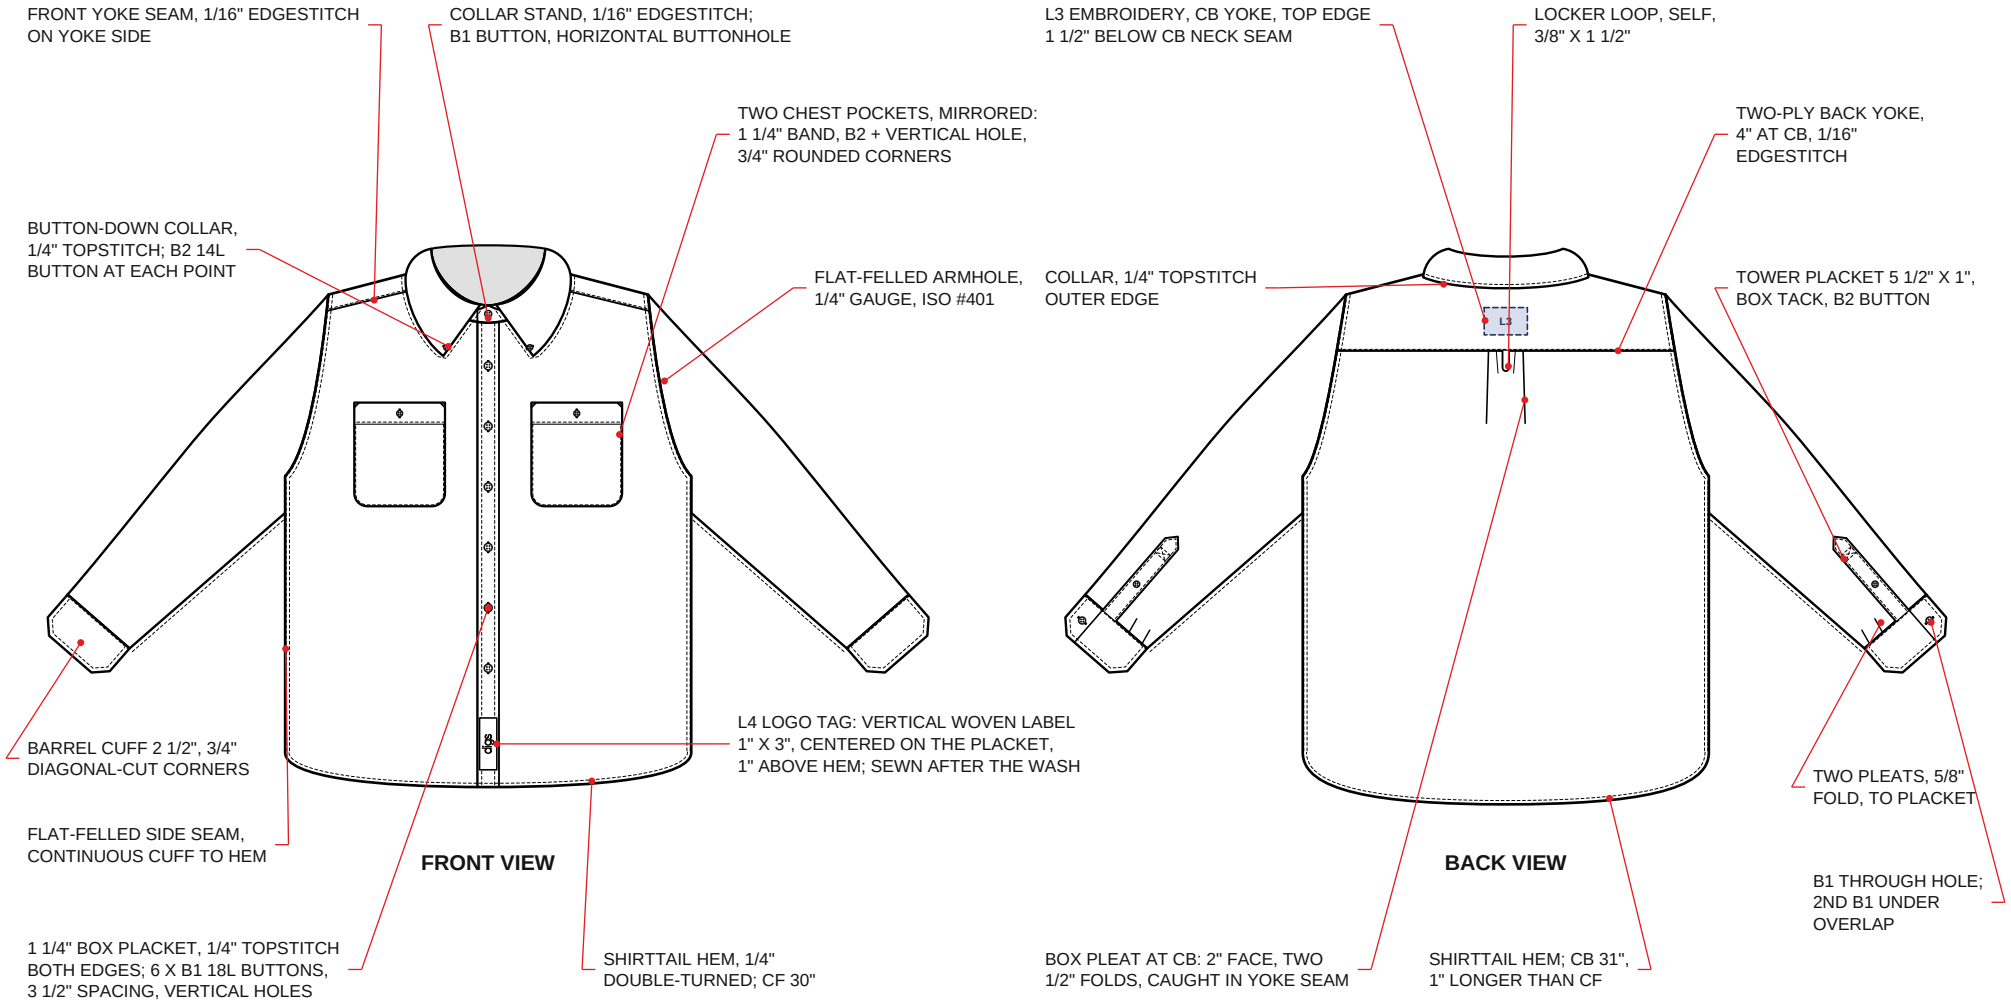

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

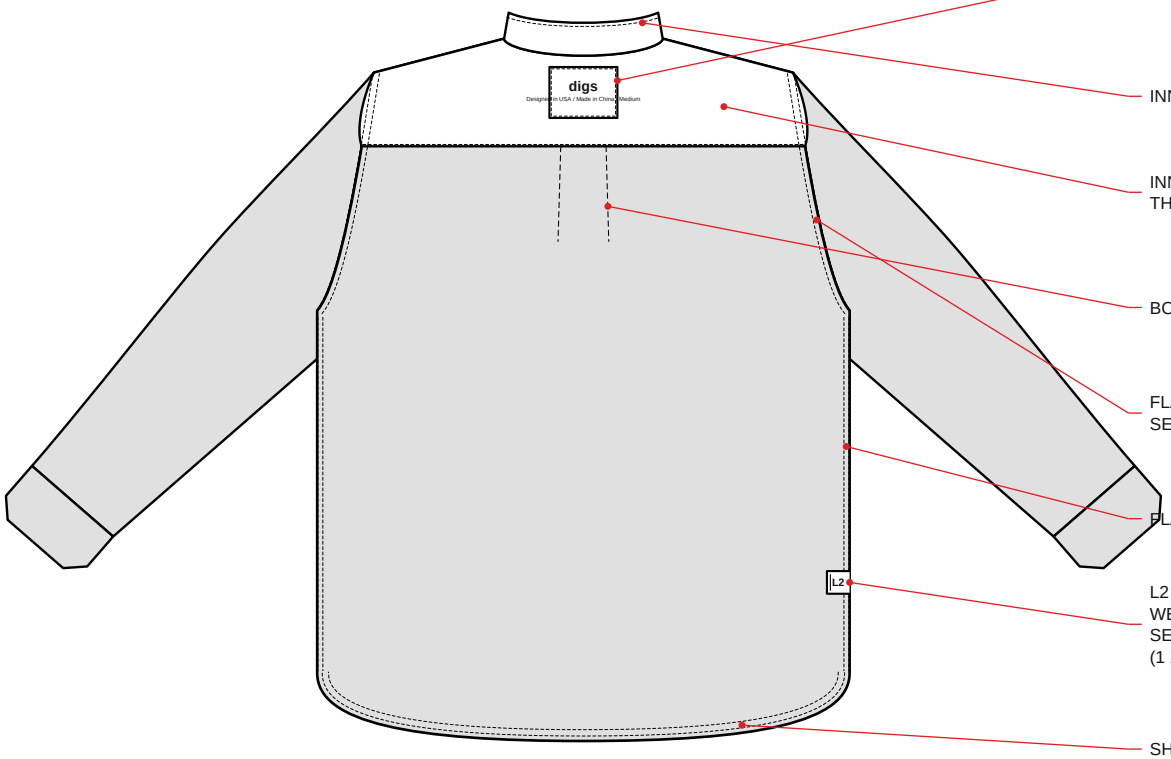

L1 BRAND + SIZE PATCH, 3 X 2.25 IN. CENTERED ON INNER YOKE, TOP EDGE 1/2" BELOW COLLAR STAND SEAM. SEWN TO INNER YOKE ONLY, BEFORE YOKE ASSEMBLY, SO NO STITCHING SHOWS OUTSIDE. ISO #301 ALL AROUND.

INNER COLLAR STAND, 1/16" EDGESTITCH.

INNER YOKE, SELF FABRIC, FACE SIDE SHOWING INSIDE THE GARMENT. ENCLOSED YOKE SEAMS: NO RAW EDGES.

BOX PLEAT UNDERLAY, PRESSED ONLY; HELD AT YOKE SEAM.

FLAT-FELLED ARMHOLE: BOTH ROWS OF STITCHING SHOW INSIDE; SEAM ALLOWANCE FULLY ENCLOSED.

FLAT-FELLED SIDE + UNDERARM SEAM, ONE PASS CUFF TO HEM.

L2 CARE/CONTENT/COO SATIN LOOP LABEL, 1 X 2 IN, CAUGHT IN THE WEARER'S-LEFT SIDE SEAM UNDER THE FELL, 4" ABOVE HEM. SET IN BEFORE FELLING, EXITS TOWARD THE BACK. B3 SPARES (1 X B1, 1 X B2) ATTACHED AFTER THE WASH.

SHIRTTAIL HEM, 1/4" DOUBLE-TURNED; FOLDED EDGE VISIBLE INSIDE.


INSIDE FINISHING STANDARD

No overlock anywhere in the garment. Every seam is felled, enclosed or turned. Interlinings: light fusible on top collar; medium fusible on collar stand, cuffs, buttonhole placket, button-side facing and pocket bands. All fusibles rated for the ASUTE permanganate wash, pyrosulfite neutralizer and silicone softener. Omit all Crown Vintage branding: no printed yoke logo, no neck size tag, no pocket flag tab; the only labels are L1, L2, L3 and the L4 logo tag on the front placket, whose edgestitch shows on the inside of the placket.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

COLLAR — top collar, outside face up

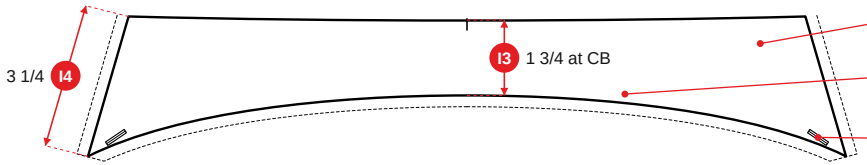


TOP COLLAR: LIGHT FUSIBLE (INTERLINING 1).
UNDER COLLAR: UNFUSED, SELF FABRIC

1/4" TOPSTITCH ALONG OUTER AND FRONT EDGES

BUTTONHOLE 1/2", CENTER 1/2" IN FROM POINT, ANGLED;
B2 14L ON THE FRONT BODY AT I5 / I6 (P13)

COLLAR STAND — outer, outside face up

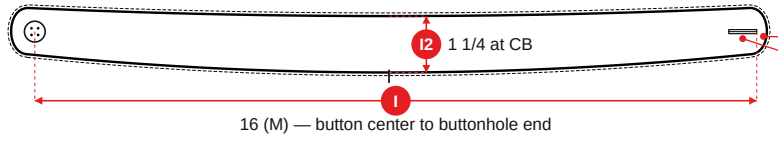

1/16" EDGESTITCH ALL AROUND; HEIGHT 1" AT FRONT;
MEDIUM FUSIBLE (INTERLINING 2)

HORIZONTAL 5/8" BUTTONHOLE ON WEARER'S-LEFT END;
B1 18L BUTTON ON WEARER'S-RIGHT END

FRONT EDGES — CROSS-SECTIONS, NOT TO SCALE




Box placket — wearer's left front
1 1/4" wide, topstitch 1/4" from both edges



Button side — wearer's right front
1 1/4" self-facing folded twice, fused, no face stitching

CHEST POCKET - x2, mirrored

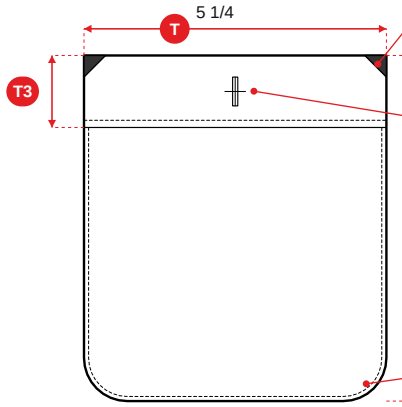

3/8" TRIANGLE TACKS, BOTH

VERTICAL 1/2" HOLE IN BAND; B2 ON FRONT BEHIND, 3/4" FUSIBLE STAY

3/4" ROUNDED CORNERS, 1/16" EDGESTITCH

Band: 1 1/4" self hem, topstitched 1 1/8".
Placement (M): top 7 3/4" below HPS (U), inner edge 2 1/2" from CF (U2), both sides.


Wearer's left (buttonhole side): 1 1/4" box placket, folded twice to enclose the raw edge, topstitched 1/4" from both edges. 6 vertical 5/8" buttonholes at 3 1/2" spacing (V), first hole 2 1/2" below the neck seam. Medium fusible inside the placket. **L4 logo tag:** vertical, 1" x 3", on the placket face, centered, bottom edge 1" above the hem (Y), sewn on after the wash (page 19).

Wearer's right (button side): 1 1/4" self-facing folded twice to the inside, fused, no stitching on the face; held by the buttons. Buttons sewn on CF, cross-stitched, 16 stitches minimum.


ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS


SLEEVE END — back of sleeve

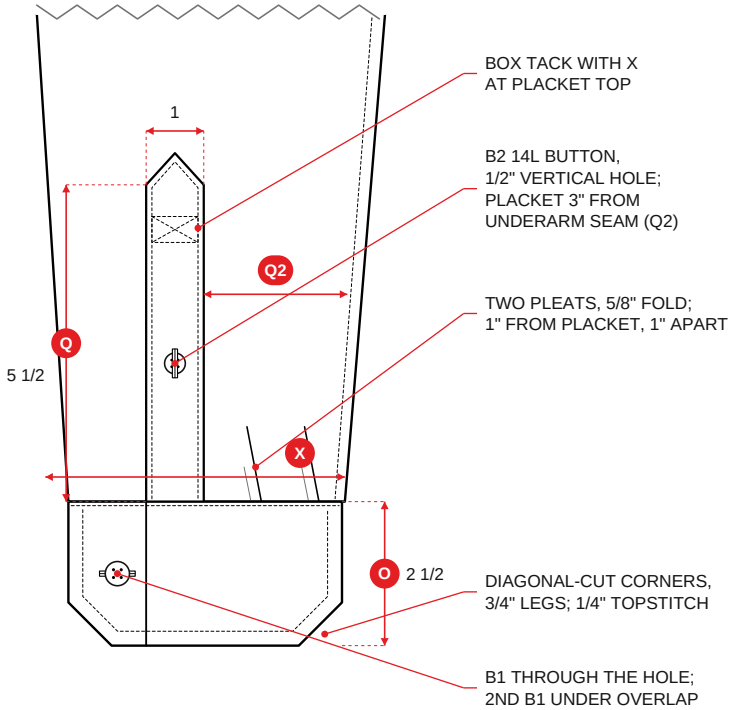


CUFF - outer, outside face up (x4 per garment: 2 outer, 2 inner)

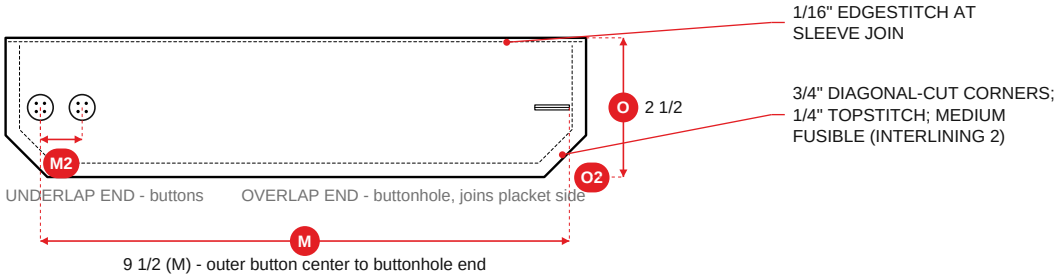

BACK YOKE, PLEAT, LOCKER LOOP — outside

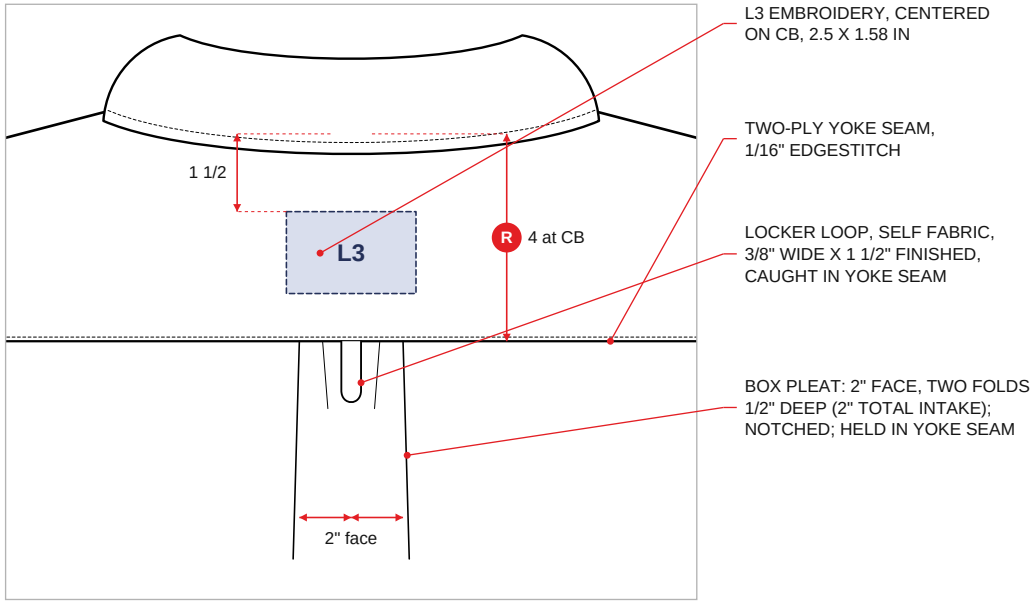

SEAM CROSS-SECTIONS — NOT TO SCALE



Flat-felled seam — armhole, side + underarm, 1/4" gauge
2-needle ISO #401; armhole felled toward body, side toward back



Back yoke seam, enclosed ("burrito")
Outer + inner yoke, 1/16" edgestitch on yoke side, ISO #301



Shirttail hem
1/4" double-turned, ISO #301, 12 SPI

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

AREA	OPERATION	STITCH	SPI	GAUGE / MARGIN	THREAD
Back yoke	Two-ply outer + inner yoke joined to back and fronts, enclosed ("burrito") method	ISO #301	12	1/16" edgestitch, yoke side	T1 join / T2 edge
Back pleat	Box pleat at CB, 2" face, two folds 1/2" deep, notched on pattern, caught in yoke seam only	—	—	2" total intake	—
Locker loop	Self fabric, 3/8" wide x 1 1/2" finished, caught in back yoke seam at CB	ISO #301	12	—	T1
Armhole	Flat-felled, felled toward the body	ISO #401 2-needle	12	1/4" gauge	T2
Side + underarm	One continuous flat-felled seam, cuff to hem, felled toward the back	ISO #401 2-needle	12	1/4" gauge	T2
Box placket (W/L)	1 1/4" folded box placket, raw edge enclosed	ISO #301	12	1/4" from both edges	T2
Button facing (W/R)	1 1/4" folded self-facing, fused; no stitching on face	—	—	—	—
Collar	Top collar fused, under collar unfused; turned and topstitched	ISO #301	12	1/4" outer + front edges	T2
Collar stand	Fused; collar sandwiched in stand; edgestitched	ISO #301	12	1/16" all around	T2
Chest pockets (x2)	1 1/4" self band; 3/4" rounded corners; attached with edgestitch; triangle tacks	ISO #301	12	1 1/8" band; 1/16" edge; 3/8" tacks	T2
Sleeve placket	Tower placket 1" x 5 1/2" + 1/2" point, 3" from underarm seam (M), box tack with X	ISO #301	12	1/16" edgestitch	T2
Sleeve to cuff	Two pleats, 5/8" fold depth each, folded toward placket; first 1" from placket, 1" apart	ISO #301	12	—	T1
Cuff	Two-button adjustable barrel cuff, 3/4" diagonal-cut corners, fused	ISO #301	12	1/4" topstitch; 1/16" at join	T2
Hem	Shirttail, double-turned	ISO #301	12	1/4" + 1/4"	T2
Buttonholes	Straight buttonhole, sewn and cut before wash; placket, pocket bands, sleeve plackets vertical; stand + cuffs horizontal; collar points angled toward the point	ISO #304	—	5/8" for B1, 1/2" for B2	T1
Buttons	Sewn on after the wash. Lockstitch button-sewing machine (no single-thread chainstitch), cross pattern, 16 stitches minimum, locked	Lockstitch	—	—	T1
L1 label	Sewn to inner yoke only, all four edges, before yoke assembly	ISO #301	12	1/16" all around	T1
L2 label	Satin loop set in before felling, exits on the inside toward the front, 4" up from the side-seam hem point; 3/8" caught so both fell rows hold it. Fallback: tack to the felled allowance inside	ISO #401	12	with side seam	T2
L3 embroidery	Embroidered on outer yoke panel before assembly	Satin + zigzag	—	See page 18	T3
L4 logo tag	Woven tag, ends folded under; sewn to the placket face after the wash, through all placket plies; start and finish locked	ISO #301	12	1/16" edgestitch all around; see page 19	T1

GENERAL

Seam allowance 3/8" on all seams except felled seams (1/4" underlay + 1/2" overlay, per the feller attachment). Hem allowance 1/2" (two 1/4" turns). **No overlock (ISO #504/#514) anywhere in this garment. Nap:** all pieces cut one way, pile running up toward the collar; mixed nap reads as a color difference after wash and is a reject. **Wales + nap:** wales vertical as worn on fronts, back, yoke, sleeves, plackets and pockets; collar, stand and cuffs match the base blank, confirmed on proto 1; pile runs up on every piece. **Thread:** T1 Tex 27 for joins, buttonholes, buttons and the L4 tag edgestitch; T2 Tex 40 for every visible topstitch row, felled seams and hem; 12 SPI on all visible topstitching. **Fused ply:** top collar, outer stand, outer cuff, placket face ply, pocket band. **Pressing:** press on the reverse or with a needle board; never press the pile face flat.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS



BASE BLANK - Crown Vintage mustard pincord button-down (sent 04/16/2025)



BASE BLANK - collar, placket and cuff detail



POCKET REFERENCE - two chest pockets with button bands (sent 04/16/2025)



FABRIC - face, reverse and hem of the blank's pincord



FABRIC - wale and drape

CHANGES TO THE BASE BLANK - FROM ANTAEUS, 04/21/2025 + 10/15/2026

#	REQUEST (VERBATIM)	HOW THIS PACK DOES IT	PAGES
1	embroidery	digs wordmark, AC-LST-001 artwork, CB outer yoke, Bellwether Blue	5, 8, 16, 18
2	a diagonal cut at the hem of the sleeve cuff	Both open corners of the cuff cut at 45 deg, 3/4" legs (open item 1)	3, 5, 8, 13
3	2 shirt pockets on front left and right chest	Two patch pockets, 1 1/4" band with B2 button; mirrored and centered (a deviation from the reference)	3, 4, 5, 7, 13
4	the same wash effect as the thermal	ASUTE wash + seam abrasion; fabric must take a wash-down dye	11
5	the same logo tag on the bottom of the button seam like the previous shirt (10/15/2026)	L4 woven tag, vertical 1" x 3", centered at the bottom of the buttonhole placket, as the stretch needlecord shirt	3, 4, 5, 14, 16, 19

Everything else stays as built (button-down collar on a stand, box placket, shirttail hem) except: back (open item 4), buttons (6), the digs label system L1-L4, and removal of all Crown Vintage branding (printed yoke logo, neck size tag, pocket flag tab). The tower sleeve placket is an assumption: neither blank photo shows it. Photos are vendor listing images, for construction intent only.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS



FRONT - TARGET LOOK AFTER WASH



BACK - TARGET LOOK AFTER WASH

Target: the seam-highlighter / sun-faded look Antaeus asked Runtang for on 04/10/2025. Seams, collar, shoulders, cuffs and hem read naturally lighter than the body, over a soft uneven tone. No approved AC-LST-001 wash standard exists yet (its second sample arrived unwashed); the standard is set at approval step 3.

GATE BEFORE ANY WASHED SAMPLE

Runtang (04/11/2025): stock fabric "does not use fuel that can be washed and faded"; for the fade they would customize the fabric and "add, for example, ASUT fuel during the fabric dyeing process", with an MOQ of 300 kg of fabric per color. **The base-blank factory must confirm its mustard pincord takes this wash, or quote custom-dyed fabric.**

APPROVAL STEPS

- ☐ Factory confirms the fabric dye is compatible with the ASUTE wash (or quotes custom dye).
- ☐ Factory runs the wash on a 1 m Fabric A panel with a felled seam sewn through; reports warp/weft shrinkage.
- ☐ Factory submits 3 wash levels (light / medium / heavy) on panels; Antaeus picks one as the wash standard.
- ☐ Pattern enlarged by the measured shrinkage so the washed garment lands on page 13.
- ☐ Interlinings, thread, embroidery, L1/L2 labels and a corozo button run through the panel trial: pass / fail.

PROCESS - ASUTE WASH, AS AC-LST-001

1. **Seam abrasion, before wash**
   Hand scraping or light sanding on raised seam ridges only: collar edge + points, stand edge, placket edges, yoke and shoulder seams, felled armhole + side seams, pocket bands, cuff edges, hem.
2. **ASUTE potassium-permanganate snow wash**
   Permanganate solution absorbed into white stones or foam balls in a snow machine; garment tumbled 3-10 min, time set by the approved wash level.
3. **Neutralize, then clean**
   Sodium pyrosulfite neutralization, then brightening rinse and clean water, per the factory's ASUTE process (Runtang 04/11/2025).
4. **Silicone softener, tumble dry**
   Softener for handfeel, per the AC-LST-001 sample feedback. Steam from inside; never press the pile face.

WATCH-OUTS ON MUSTARD PINCORD

Permanganate fades in speckles; on a saturated mustard that can read patchy, and stones can crush the pile. If the wash trial shows either, fall back to enzyme + light stone with the same seam abrasion (open item 3).


TEST	REQUIREMENT
Residual shrinkage	3% max warp + weft: panel AATCC 135, garment AATCC 150, 3 launderings
Color after wash	Matches the approved washed lab dip (the standard; hex is reference only); seams lighter
Consistency	Within the approved wash level across all panels
Handfeel	Soft; no stiffness at fused areas

REJECTS


Pile crush or bald patches; mixed-nap shading; white streaks or crease marks; bubbling at fused areas; uniform all-over fade with no seam highlight.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

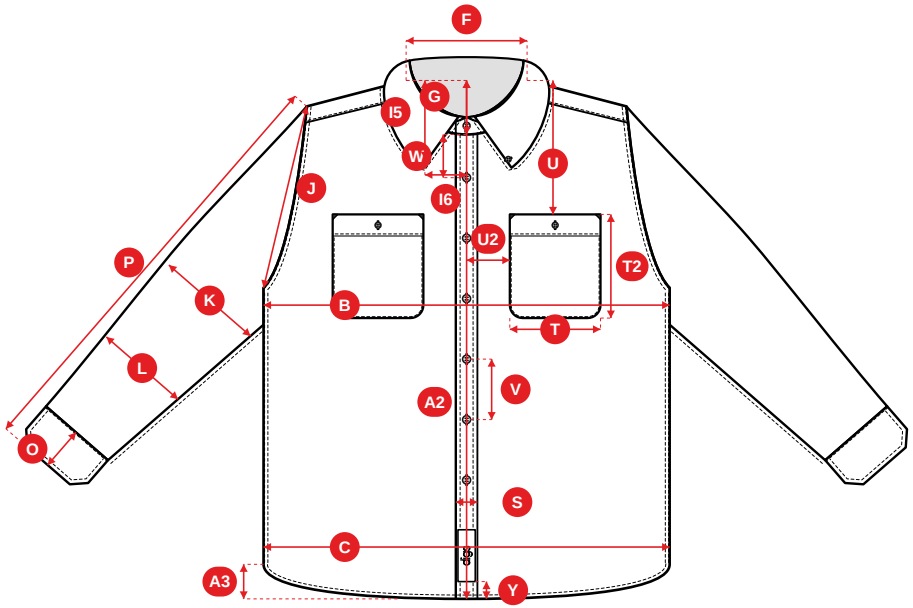

FRONT

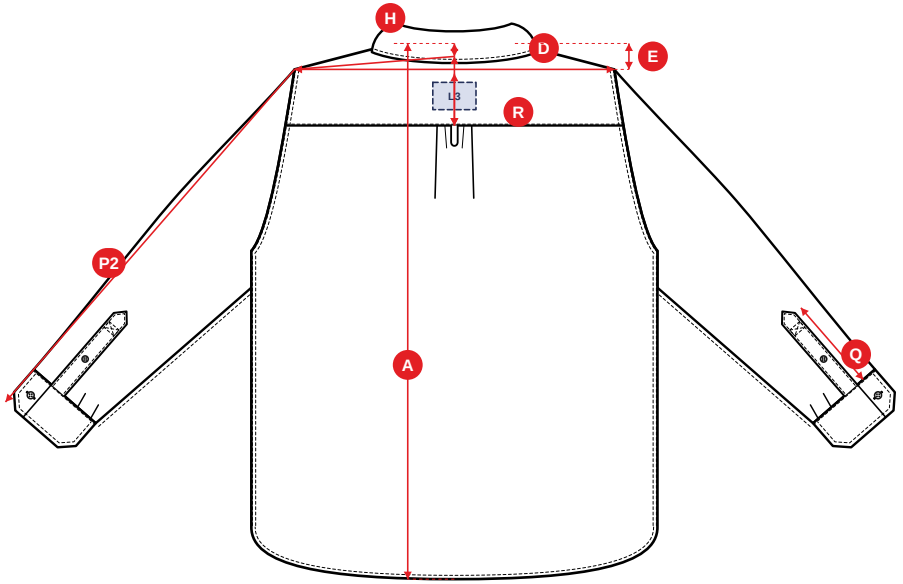

BACK

MEASURING RULES

- Measure after the full garment wash, laid flat for 24 hours. No stretching.
- All buttons fastened, including collar points and cuffs.
- HPS = highest point of the neck seam on the shoulder fold line.
- A and A2: at CB / CF, from a line squared across at HPS level, to the hem.
- B, K measured 1" below underarm, edge to edge; L 11" below underarm.
- P along the outer fold, shoulder point to cuff edge; P2 from CB neck seam, through the shoulder point.
- I-I4 on the collar and stand: see page 7. I5 / I6 and W drawn here.
- M, M2, O, O2, Q, Q2 and X on the cuff and sleeve: see page 8.
- M and I measured unbuttoned, flat, button center to far end of buttonhole.
- Shirttail depth A3 = vertical drop from the side seam hem point to the CF hem.
- Y: L4 tag bottom edge to the hem edge at CF; Y2: tag centered on the placket. See page 19.
- Record every proto on page 3, POM by POM, with the difference to spec.
- Tolerances are on page 13. Anything outside tolerance is corrected before the next proto.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

POM	DESCRIPTION	TOL ±	S	M (SAMPLE)	L	XL
A	Body length at CB, from HPS level to hem	1/2	30	**31**	32	33
A2	Body length at CF, from HPS level to hem	1/2	29	**30**	31	32
A3	Shirttail curve depth, CF hem to side seam at hem	1/4	2	**2**	2	2
B	1/2 chest at 1" below underarm	1/2	22	**23 1/2**	25	27
C	1/2 hem sweep, straight	1/2	22	**23 1/2**	25	27
D	Across shoulder, seam to seam	3/8	17 3/4	**18 1/2**	19 1/4	20 1/4
E	Shoulder slope	1/8	1 1/2	**1 1/2**	1 1/2	1 1/2
F	Neck width, HPS to HPS, seam to seam	1/4	6	**6 1/4**	6 1/2	6 3/4
G	Front neck drop, HPS to CF neck seam	1/4	2 3/4	**2 7/8**	3	3 1/8
H	Back neck drop	1/8	3/4	**3/4**	3/4	3/4
I	Collar stand length, button center to buttonhole end	1/4	15 1/2	**16**	16 1/2	17
I2	Collar stand height at CB	1/8	1 1/4	**1 1/4**	1 1/4	1 1/4
I3	Collar height at CB	1/8	1 3/4	**1 3/4**	1 3/4	1 3/4
I4	Collar point length	1/8	3 1/4	**3 1/4**	3 1/4	3 1/4
I5	Collar-point button on front: below HPS level	1/8	4 3/8	**4 1/2**	4 5/8	4 3/4
I6	Collar-point button on front: from CF	1/8	2 1/4	**2 3/8**	2 1/2	2 5/8
J	1/2 armhole, straight	1/4	10 3/8	**10 3/4**	11 1/8	11 5/8
K	1/2 bicep at 1" below underarm	1/4	8 3/4	**9 1/4**	9 3/4	10 3/8
L	1/2 elbow, 11" below underarm	1/4	7 3/8	**7 3/4**	8 1/8	8 5/8
M	Cuff length, outer button center to buttonhole end	1/4	9 1/4	**9 1/2**	9 3/4	10
M2	Cuff adjustable button spacing	1/8	3/4	**3/4**	3/4	3/4
O	Cuff height	1/8	2 1/2	**2 1/2**	2 1/2	2 1/2
O2	Cuff corner diagonal cut, each leg	1/8	3/4	**3/4**	3/4	3/4
P	Sleeve length, shoulder point to cuff edge	3/8	25 1/8	**25 1/2**	25 7/8	26 1/4
P2	Sleeve length, CB neck to cuff edge	1/2	34	**34 3/4**	35 1/2	36 3/8
Q	Sleeve placket length, cuff seam to base of point	1/8	5 1/2	**5 1/2**	5 1/2	5 1/2
Q2	Sleeve placket from underarm seam, at cuff seam	1/8	2 7/8	**3**	3 1/8	3 1/4
X	1/2 sleeve width at cuff seam, before pleating	1/8	5 7/8	**6**	6 1/8	6 1/4
R	Back yoke depth at CB	1/8	3 7/8	**4**	4 1/8	4 1/4
S	Front placket width	1/8	1 1/4	**1 1/4**	1 1/4	1 1/4
T	Pocket width	1/8	5	**5 1/4**	5 1/2	5 3/4
T2	Pocket height, incl. band	1/8	5 3/4	**6**	6 1/4	6 1/2
T3	Pocket band height	1/8	1 1/4	**1 1/4**	1 1/4	1 1/4
U	Pocket top edge below HPS (both)	1/4	7 1/2	**7 3/4**	8	8 1/4
U2	Pocket inner edge from CF (both)	1/8	2 3/8	**2 1/2**	2 5/8	2 3/4
V	Front button spacing (placket)	1/8	3 5/16	**3 1/2**	3 11/16	3 7/8
W	First placket buttonhole below neck seam at CF	1/8	2 1/2	**2 1/2**	2 1/2	2 1/2
Y	Logo tag (L4): bottom edge above finished hem at CF	1/8	1	**1**	1	1
Y2	Logo tag (L4): centered on buttonhole placket	1/16	0	**0**	0	0

Grade rules follow AC-LST-001: chest +1 1/2, +1 1/2, +2; lengths +1 per size. Woven ease vs the thermal at M: chest +2" per half (23 1/2 vs 21 1/2), shoulder +1 1/4" for the relaxed drop shoulder. Values are first-proto targets, not tested numbers. If built from the Crown Vintage blank, the factory sends its M spec first and differences are reviewed before proto 1. Pattern is built up by the measured wash shrinkage.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS


CODE	COMPONENT	DESCRIPTION / SPEC	COLOR	SUPPLIER	PLACEMENT	QTY / GMT
Fabric A	Pincord / pinwale corduroy	100% cotton, as the Crown Vintage blank; wale count, weight and width TBC from the blank factory. Must be dyed with a wash-down (ASUTE-compatible) dye	Mustard, see p15	Blank factory (TBC)	All shell pieces incl. under collar, inner yoke, inner stand, cuff linings, facing, pockets, locker loop	Per marker (TBC)
Int. 1	Woven fusible, light	Cotton or cotton-blend, rated for the ASUTE wash, neutralizer and silicone softener	White	TBC	Top collar	Per marker
Int. 2	Woven fusible, medium	Same wash rating as Int. 1	White	TBC	Collar stand, cuffs, buttonhole placket, button-side facing, pocket bands	Per marker
B1	Button, 18L (11.5 mm)	Corozo, 4-hole, dyed tone-to-tone; sewn on after the wash	Mustard DTM	TBC	Front placket x6, collar stand x1, cuffs x4 (2 each, adjustable)	11
B2	Button, 14L (9 mm)	Corozo, 4-hole, same finish as B1	Mustard DTM	TBC	Collar points x2, pocket bands x2, sleeve plackets x2	6
B3	Spare buttons	1 x B1 + 1 x B2	Mustard DTM	TBC	Hand-tacked to the L2 label tail after the wash	2
E1	Embroidery topping + backing	Water-soluble film topping; no-show mesh cutaway backing	-	TBC	L3	1 set
P1a	Hangtag tack	Plastic tag pin	Clear	TBC	With P1	1
T1	Construction thread	Poly-core cotton-wrap, Tex 27	DTM	TBC	Seams, buttonholes, button sewing, L4 tag edgestitch	—
T2	Topstitch thread	Poly-core cotton-wrap, Tex 40	DTM	TBC	All visible topstitching	—
T3	Embroidery thread	Polyester embroidery thread	Pantone 19-3943 TCX Bellwether Blue	TBC	L3	—
L1	Brand + size patch label	White, black print, 3 in x 2.25 in (open item 7)	White / black	TBC	Inner back yoke, centered	1
L2	Care / content / COO loop label	White satin, black print, 1 in x 2 in	White / black	TBC	W/L side seam, 4" above hem	1
L3	Embroidery	digs wordmark, 2.5 in x 1.58 in, satin fill + zigzag outline	Bellwether Blue	—	Outer back yoke, CB	1
L4	Logo tag	Woven damask label, 100% polyester, wash-fast yarns; 1 in x 3 in finished, ends folded under; digs wordmark reads up; sewn on after the wash	Mustard ground DTM; Bellwether Blue logo	TBC	Face of buttonhole placket, vertical, centered on CF, bottom edge 1" above hem	1
P1	Hangtag	STILL TBC	-	TBC	Plastic tack at W/L collar stand seam, as AC-LST-001	1
P2	Polybag	Recycled, clear, black print, pressure zipper, air holes, safety warning	Clear	TBC	Garment folded in	1
P3	Barcode sticker	White, black print, 1 3/8 in x 1.25 in	White / black	TBC	Back of polybag	1
Wash	Garment wash	ASUTE wash as AC-LST-001 + seam abrasion + silicone softener (page 11)	-	TBC	Whole garment	-

DTM = dye to match. W/L = wearer's left. Fabric consumption comes from the factory marker after shrinkage is known; report it with the first quote. Buttons (B1, B2) and the L4 tag are sewn on after the wash, so permanganate never touches the corozo or the tag.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS



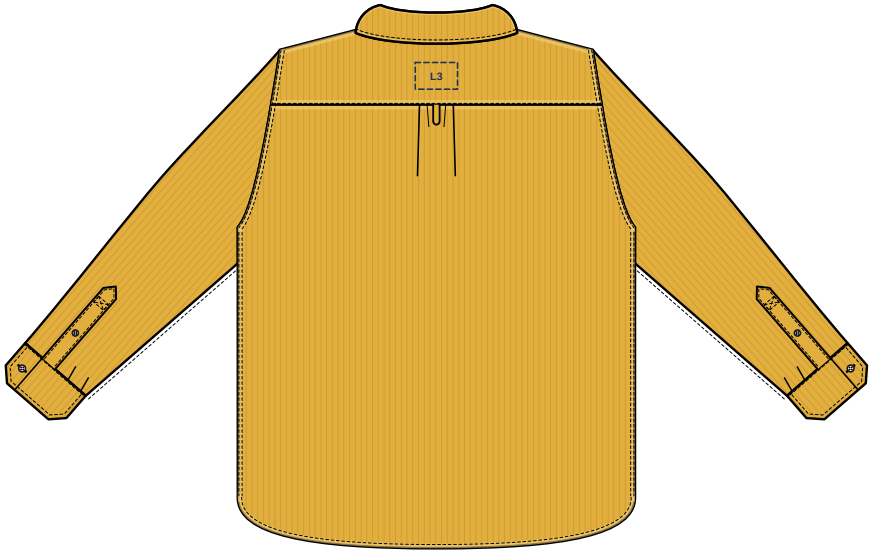

#1 — MUSTARD

Fabric A
Reference #E2AF3F, from vendor file 'blank 20.png' (Sep 20, 2024 cord batch)

Thread T1 / T2
Dye-to-match fabric

Buttons B1-B3
Corozo, tone-to-tone (or blank's stock)

Embroidery T3
Pantone 19-3943 TCX Bellwether Blue

Labels L1 / L2
White, black print

Logo tag L4
Mustard ground (DTM), Bellwether Blue logo

LAB DIP STATUS

- ☐ Blank factory sends stock mustard
- ☐ (or 3 lab dips if custom dye: items 3, 8)
- ☐ Approved fabric washed to the wash standard
- ☐ Washed fabric = color standard; hex = ref only
- ☐ Pantone TCX picked against washed standard

POSSIBLE LATER COLORWAYS, FROM THE SOURCED CORDUROY BLANKS

Tobacco
#76440C

Olive
#6A664C

Washed black
#2A2727

Ecru
#DDD5C2

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

L1 — brand + size patch, 3 in x 2.25 in



White, black print, digs wordmark (BRANDING FILES vector). Copy verbatim from AC-LST-001; size line changes per size. Sewn on all four edges, ISO #301, 1/16" (stitch line dashed).

L2 — care / content / COO loop, 1 in x 2 in

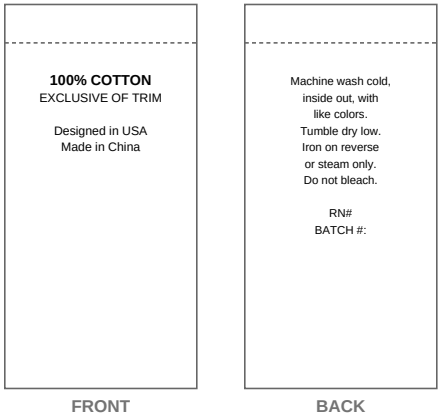

White satin, black print. Dashed line = catch line: 3/8 in caught in the side seam so both fell rows hold it. Care copy updated for corduroy: inside-out wash, no iron on the face.

B1 / B2 — corozo, 4-hole, actual size



B1 18L
11.5 mm · x11 + 1 spare



B2 14L
9 mm · x6 + 1 spare

P3 — barcode sticker, 1 3/8 in x 1.25 in



White, black print.
Back of polybag.

CODE	ITEM	SIZE	PLACEMENT	STATUS
L1	Brand + size sew-in patch, white w/ black print	3 in x 2.25 in	Inner back yoke, centered, top edge 1/2" below collar stand seam; sewn to inner yoke only	Artwork from AC-LST-001
L2	Care / content / COO satin loop, white w/ black print	1 in x 2 in	Caught in wearer's-left side seam under the fell, 4" above hem	Copy updated
L3	Embroidery, digs wordmark	2.5 in x 1.58 in	Outer back yoke, centered on CB, top edge 1 1/2" below CB neck seam	See page 18
L4	Logo tag, woven damask, digs wordmark	1 in x 3 in	Face of buttonhole placket, vertical, centered on CF, bottom edge 1" above hem; sewn on after the wash	See page 19
P1	Hangtag	TBC	Plastic tack at wearer's-left collar stand seam, as AC-LST-001	STILL TBC
P2	Recycled polybag, clear w/ black print, pressure zipper, air holes, safety warning	Fit to fold	Garment folded in, collar at zipper edge	As AC-LST-001
P3	Brand + size barcode sticker, white w/ black print	1 3/8 in x 1.25 in	Back of polybag	UPC TBC

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

1




Button the collar stand, every front button, both collar points, both pocket bands and both cuffs.

2

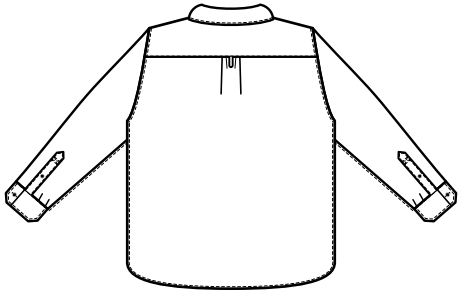


Lay the garment face down and smooth the back flat.

3

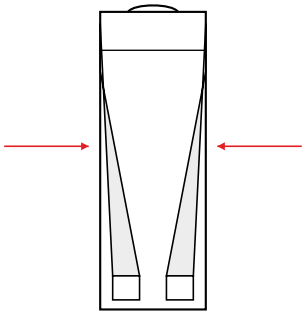


Fold each side in so the body is about 11" wide; sleeves folded back along the sides, cuffs flat at the hem.

4

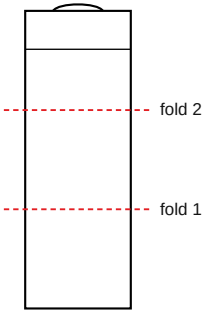


Fold the bottom third up, then fold again so the collar sits at the top.

5

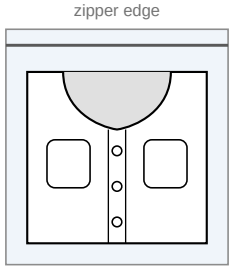

Turn face up. Insert into P2 polybag, collar at the zipper edge.

6

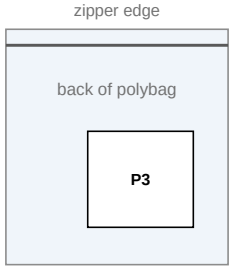


Affix P3 barcode sticker to the back of the polybag.

No collar stays, cardboard, tissue or pins, so the washed finish isn't pressed flat in the bag. Finished fold about 11" x 10 1/2" at M; polybag size set by the factory to fit. One garment per bag.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

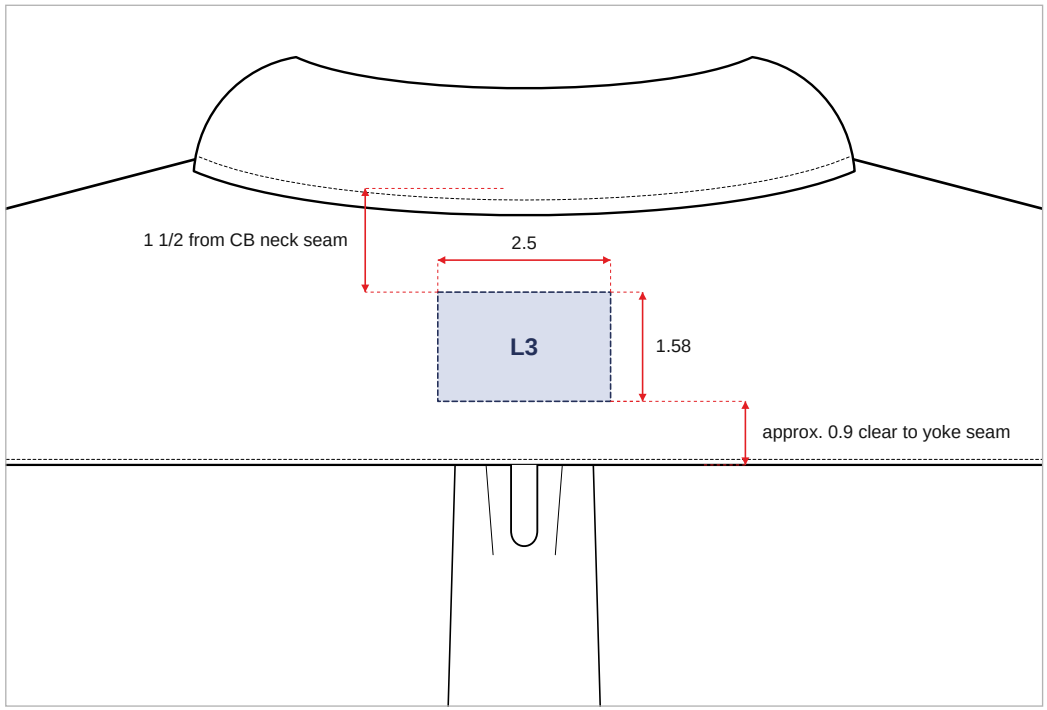

Outer back yoke shown at 36%. Dashed frame = embroidery boundary. Placement follows AC-LST-001 (open item 5). The collar falls about 1/2" below the CB neck seam, so check on the proto that the artwork clears it.

ACTUAL SIZE ARTWORK (from AC-LST-001, 6-15-25, p15)




	SPEC
Size	2.5 in x 1.58 in, same as AC-LST-001
Technique	Satin stitch filled-in lettering + zigzag stitching around letter outlines (as AC-LST-001)
Thread	Polyester, Pantone 19-3943 TCX Bellwether Blue (T3)
Topping	Water-soluble film so stitches sit on top of the wales
Backing	No-show mesh cutaway (tearaway puckers through the wash)
Hooping	Magnetic or floated hoop, or embroider a block and recut, to avoid hoop burn on the pile
Raw-edge placement	Top edge 1 7/8" below the raw neck edge of the outer yoke (1 1/2" + 3/8" SA)
File	Request the DST from Runtang (AC-LST-001 run); thread brand + shade TBC by embroiderer
Why the change	Antaeus on the AC-LST-001 sample, 04/25/2025: "The logo stitching on the outer back could be crisper." Hence topping + cutaway
Sequence	Embroider outer yoke panel before yoke assembly; nothing stitches through the inner yoke
Position	Centered on CB; top edge 1 1/2" below CB neck seam
After wash	No puckering, no color bleed onto mustard; thread color holds

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

ACTUAL SIZE ARTWORK - L4

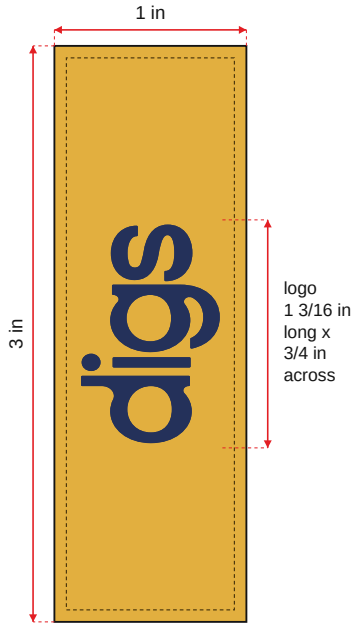


Sewn vertical: the wordmark reads bottom to top, toward the collar.

Ground
Mustard, dyed to match the washed standard

Logo
Pantone 19-3943 TCX Bellwether Blue

Print at 100% to check the size.


LOCATION ON THE FRONT

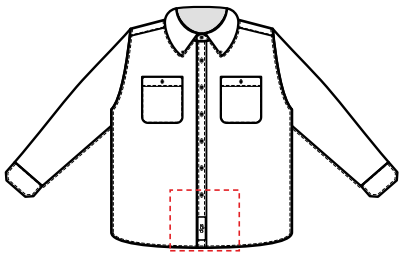

CONSTRUCTION - END FOLD



PLACEMENT - BOTTOM OF THE BUTTONHOLE PLACKET

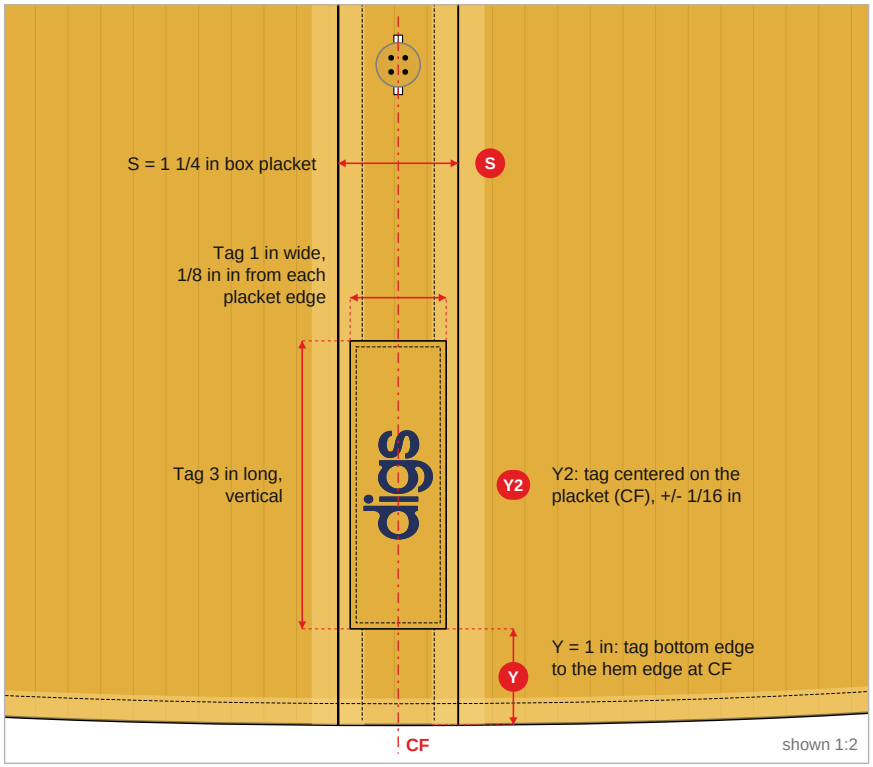

	SPEC
Size	1 in x 3 in finished, vertical as sewn; cut 3 1/2 in long, both ends folded under 1/4 in (end fold)
Quality	HD damask woven label, 100% polyester, wash-fast yarns; sealed long edges; no stiffener, soft hand; approve a 3-tag strip before bulk
Colors	Ground dyed to match the washed mustard standard; logo Pantone 19-3943 TCX Bellwether Blue, as L3. Same tag as the stretch needlecord shirt; the ground color follows the colorway
Artwork	digs wordmark (BRANDING FILES vector), 1 3/16 in long x 3/4 in across, centered; turned 90 deg to read bottom to top, toward the collar
Position	Face of the buttonhole placket (wearer's left front), centered on CF +/- 1/16 in (Y2); bottom edge 1 in above the finished hem at CF (Y); long edges parallel to the placket edges. At M the top of the tag sits about 3 1/8 in below the last button center
Sequence	Sewn on after the garment wash, with the buttons. The polyester tag doesn't shrink, so sewn on before the wash it would pucker the placket around it, and the permanganate would spot the logo
Stitching	1/16 in edgestitch all around, ISO #301, 12 SPI, T1 thread DTM, through all placket plies; start and finish locked. The tag covers the two placket topstitch rows locally
Pressing	From the reverse only. The tag lies flat and straight: no ripple, no twist

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE. MEASUREMENTS IN INCHES, AFTER GARMENT WASH, UNLESS NOTED. FLATS ARE PROPORTIONAL, NOT TO SCALE.