

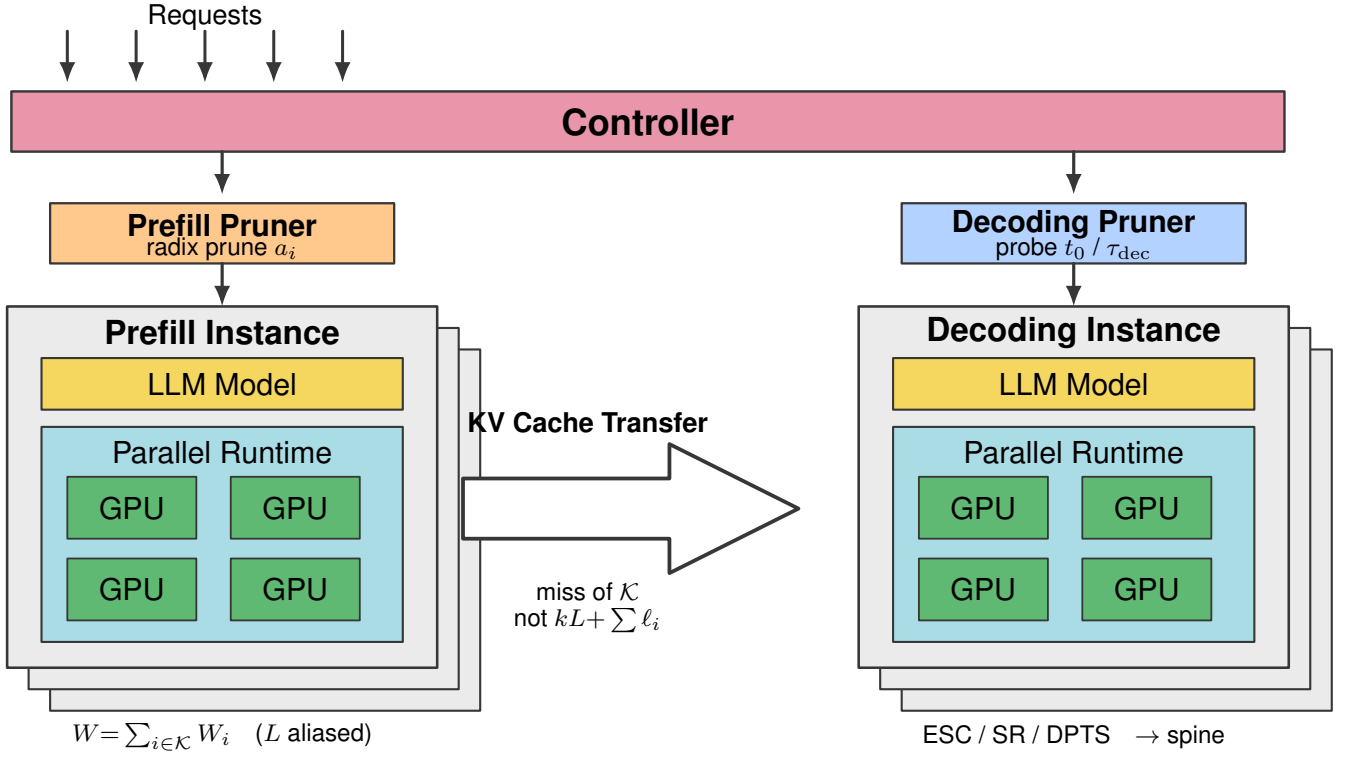


Figure 1: **PD-Prune runtime architecture** (DistServe-style). Requests hit the controller, then a *Prefill Pruner* (radix prune a_i) or a *Decoding Pruner* (probe t_0) before the corresponding instance. Only the miss tail of $\mathcal{K}$ crosses the KV connector; abort retains the spine.