


(a) Shared coordinates create interference

forgotten path f

retained path r

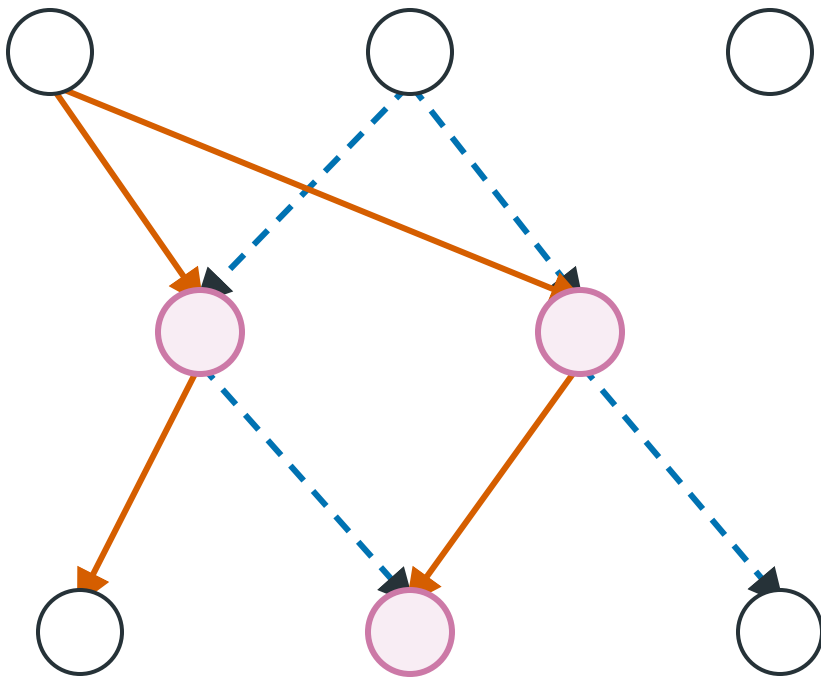

Naive reset of a shared coordinate
causes retained-task drift.

(b) Select retention-sensitive overlap

1 OVERLAP

$$S_{share} = M_f \cap M_r$$



2 RANK

$$q_i = |\nabla_i L_{retain}|$$

use retained buffers only



3 PROTECT TOP- ρ

$$S_{crit} = Top-\rho(S_{share}; q_i)$$

(c) Protected forgetting request

1 Delete target buffer; retire M_f



2 Form M_r and cache retained anchors



3 Apply branch-dependent target reset



4 Retained-only repair with anchors



5 Rebuild active mask; discard temporary state

Empirical — not certified removal