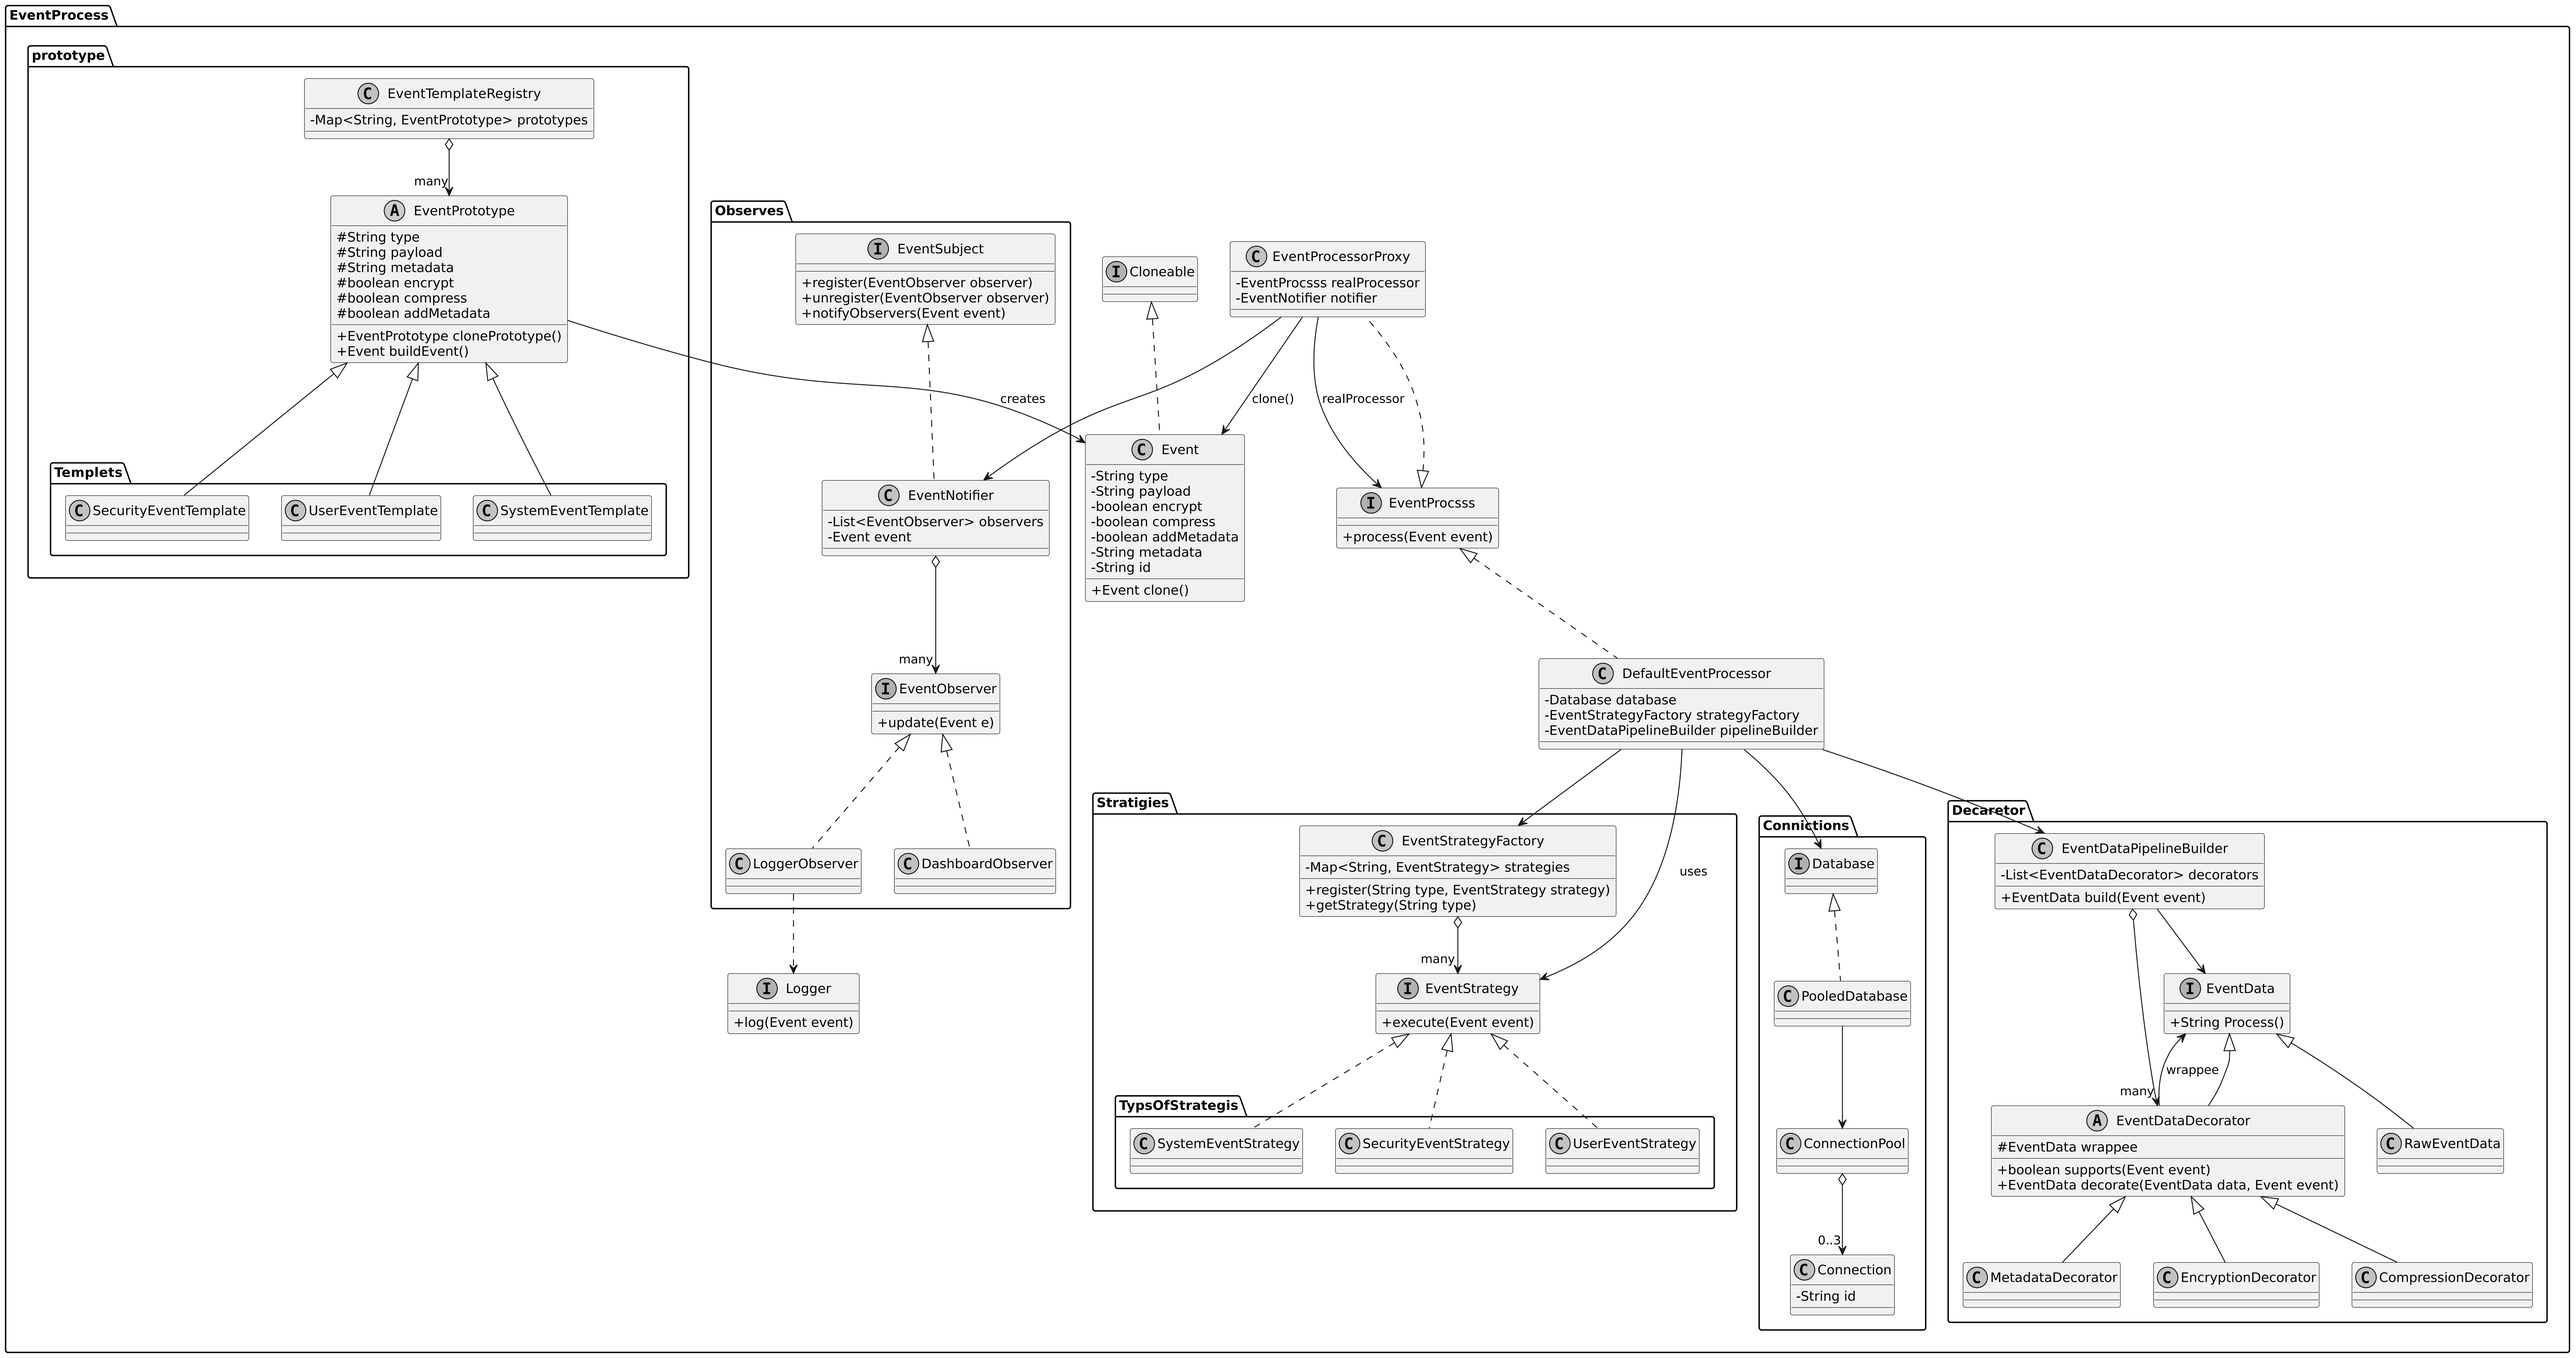
EventProcess
prototype
EventTemplateRegistry
-Map<String, EventPrototype> prototypes
many
EventPrototype
#String type
#String payload
#String metadata
#boolean encrypt
#boolean compress
#boolean addMetadata
+EventPrototype clonePrototype()
+Event buildEvent()
Templets
SecurityEventTemplate
UserEventTemplate
SystemEventTemplate
Observes
EventSubject
+register(EventObserver observer)
+unregister(EventObserver observer)
+notifyObservers(Event event)
creates
EventNotifier
-List<EventObserver> observers
-Event event
many
EventObserver
+update(Event e)
LoggerObserver
DashboardObserver
Logger
+log(Event event)
Cloneable
EventProcessorProxy
-EventProcsss realProcessor
-EventNotifier notifier
clone()
realProcessor
Event
-String type
-String payload
-boolean encrypt
-boolean compress
-boolean addMetadata
-String metadata
-String id
+Event clone()
EventProcsss
+process(Event event)
DefaultEventProcessor
-Database database
-EventStrategyFactory strategyFactory
-EventDataPipelineBuilder pipelineBuilder
Stratigies
EventStrategyFactory
-Map<String, EventStrategy> strategies
+register(String type, EventStrategy strategy)
+getStrategy(String type)
uses
many
EventStrategy
+execute(Event event)
TypsOfStrategis
SystemEventStrategy
SecurityEventStrategy
UserEventStrategy
Connections
Database
PooledDatabase
ConnectionPool
0..3
Connection
-String id
Decaretor
EventDataPipelineBuilder
-List<EventDataDecorator> decorators
+EventData build(Event event)
EventData
+String Process()
wrappee
many
EventDataDecorator
#EventData wrappee
+boolean supports(Event event)
+EventData decorate(EventData data, Event event)
RawEventData
MetadataDecorator
EncryptionDecorator
CompressionDecorator