

Fathurahman AL Faridzi
212310018

1. syntax membuat dan menjalankan laravel

```
C:\Windows\System32\cmd.exe - composer create-project laravel/laravel kuisfthr
Microsoft Windows [Version 10.0.19045.2965]
(c) Microsoft Corporation. All rights reserved.

C:\xampp\htdocs>composer create-project laravel/laravel kuisfthr
Creating a "laravel/laravel" project at "../kuisfthr"
Info from https://repo.packagist.org: #StandWithUkraine
Installing laravel/laravel (v10.2.3)
- Installing laravel/laravel (v10.2.3): Extracting archive
Created project in C:\xampp\htdocs\kuisfthr
> @php -r "file_exists('.env') || copy('.env.example', '.env');"
Loading composer repositories with package information
```

```
C:\Windows\System32\cmd.exe
- Installing spatie/ignition (1.8.1): Extracting archive
- Installing spatie/laravel-ignition (2.1.3): Extracting archive
61 package suggestions were added by new dependencies, use "composer suggest" to see details.
Generating optimized autoload files
> Illuminate\Foundation\ComposerScripts::postAutoloadDump
> @php artisan package:discover --ansi

 INFO  Discovering packages.

laravel/sail ..... DONE
laravel/sanctum ..... DONE
laravel/tinker ..... DONE
nesbot/carbon ..... DONE
nunomaduro/collision ..... DONE
nunomaduro/termwind ..... DONE
spatie/laravel-ignition ..... DONE

82 packages you are using are looking for funding.
Use the "composer fund" command to find out more!
> @php artisan vendor:publish --tag=laravel-assets --ansi --force

 INFO  No publishable resources for tag [laravel-assets].

No security vulnerability advisories found
> @php artisan key:generate --ansi

 INFO  Application key set successfully.

C:\xampp\htdocs>
```

2. buat route dan view

```
Route::get('/', function () {  
    return view('welcome');  
});  
  
Route::get('/home', function () {  
    return view('home');  
});  
  
Route::get('/mahasiswa', function () {  
    return view('mahasiswa');  
});  
  
Route::get('/profile', function () {  
    return view('profile');  
});
```


resources > views > home.blade.php > html > head

```
1 <!DOCTYPE html>  
2 <html lang="en">  
3 <head>  
4     <meta charset="UTF-8">  
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">  
6     <meta http-equiv="X-UA-Compatible" content="ie=edge">  
7     <title>Document</title>  
8 </head>  
9 <body>  
10     <h1>ini home</h1>  
11 </body>  
12 </html>
```


resources > views > mahasiswa.blade.php > html > body > h1

```
1 <!DOCTYPE html>  
2 <html lang="en">  
3 <head>  
4     <meta charset="UTF-8">  
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">  
6     <meta http-equiv="X-UA-Compatible" content="ie=edge">  
7     <title>Document</title>  
8 </head>  
9 <body>  
10     <h1>ini mahasiswa</h1>  
11 </body>  
12 </html>
```


```
resources > views > profile.blade.php > html > body > h1
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <meta http-equiv="X-UA-Compatible" content="ie=edge">
7      <title>Document</title>
8  </head>
9  <body>
10     <h1>ini profile</h1>
11 </body>
12 </html>
```



ini home





ini mahasiswa




ini profile

3.buat layout navbar dan footer

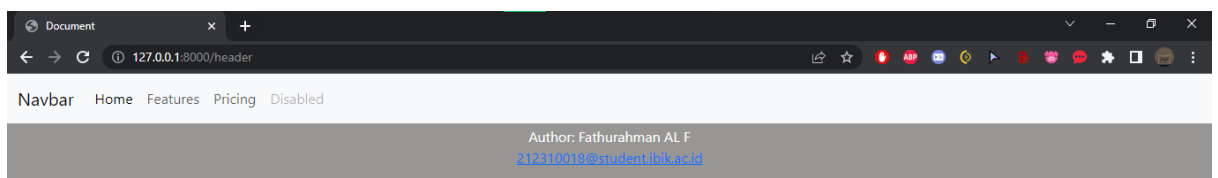

4. Buat perulangan untuk halaman mahasiswa dari data dummy

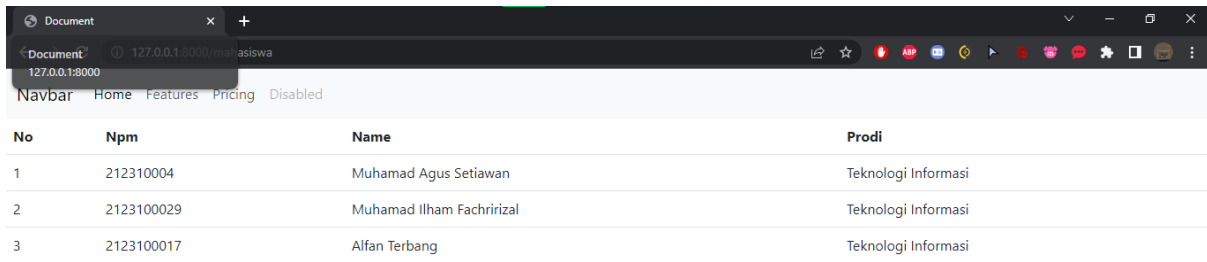

The screenshot shows a web browser window with a dark theme. The address bar displays '127.0.0.1:8000/mahasiswa'. The page has a navigation bar with links: 'Navbar', 'Home', 'Features', 'Pricing', and 'Disabled'. Below the navigation bar is a table with four columns: 'No', 'Npm', 'Name', and 'Prodi'. The table contains three rows of student data.

No	Npm	Name	Prodi
1	212310004	Muhamad Agus Setiawan	Teknologi Informasi
2	2123100029	Muhamad Ilham Fachririzal	Teknologi Informasi
3	2123100017	Alfan Terbang	Teknologi Informasi

```
<section>
  <div class="card-body">
    <table class="table">
      <thead>
        <tr>
          <th>No</th>
          <th>Npm</th>
          <th>Name</th>
          <th>Prodi</th>
        </tr>
      </thead>
      <tbody>
        @foreach ($data['students'] as $index => $result)
          <tr>
            <td>{{ $index+1 }} </td>
            <td>{{ $result['npm'] }} </td>
            <td>{{ $result['name'] }} </td>
            <td>{{ $result['Prodi'] }} </td>
          </tr>
        @endforeach
      </tbody>
    </table>
  </div>
</section>
```

```
class DummyController extends Controller
{
    public function index()
    {
        $data= array();
        $data['title'] = "Blade Directive";
        $data['npm'] = 212310018;
        $students[] = array("npm" =>212310004, "name"=>"Muhamad Agus Setiawan", "Prodi"=>"Teknologi Informasi");
        $students[] = array("npm" =>2123100029, "name"=>"Muhamad Ilham Fachririzal", "Prodi"=>"Teknologi Informasi");
        $students[] = array("npm" =>2123100017, "name"=>"Alfan Terbang", "Prodi"=>"Teknologi Informasi");
        $data['students'] = $students;
        return view('mahasiswa')->with("data",$data);
    }
}
```

5. . Buat model dan database profile yang berisi nama, npm, jenis kelamin, tanggal lahir, dan alamat yang ditampilkan pada halaman profile

15:50
08/06/2023