#### **SYDE 556/750**


Simulating Neurobiological Systems Lecture 10: Symbols and Symbol-like Representations

Chris Eliasmith

November 8 & 13, 2023

- ► Slide design: Andreas Stöckel
- Content: Terry Stewart, Andreas Stöckel, Chris Eliasmith





## Classical Representation of Knowledge

► "The number eight comes after the number nine":

► "All dogs chase cats":

$$\forall x \forall y \ (\mathbf{isDog}(x) \land \mathbf{isCat}(y)) \rightarrow \mathbf{doesChase}(x,y) \,.$$


▶ "Anne knows that Bill thinks that Charlie likes Dave":

$$\mathbf{knows} \Big( \mathtt{ANNE}, ``\mathbf{thinks} \big( \mathtt{BILL}, `\mathbf{likes} (\mathtt{CHARLIE}, \mathtt{DAVE})' \big) " \Big) \; .$$

## Jackendoff's Challenges

- ► The Binding Problem
- ► The Problem of Two
- ► The Problem of Variables
- Working Memory versus Long-Term Memory

# Solution Attempt 1: Neural Synchrony (I)

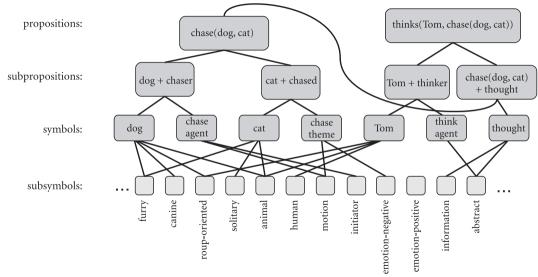


## Solution Attempt 1: Neural Synchrony (II)

- Solves the binding problem
- Localist representation
- Unclear how to solve problems 2 to 4

- Unclear how these oscillations are generated and controlled
- Unclear how the representations are processed
- Exponential explosion of neurons required to represent concepts

## Solution Attempt 2: Neural Blackboard Architecture (I)

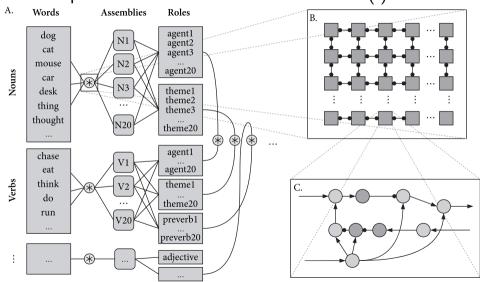

## Solution Attempt 2: Neural Blackboard Architecture (II)

- Fewer resources than LISA
- Solves all four of Jackendoffs challenges (according to the authors)
- Explains limitations of human sentence representation
- (At least partially) localist representation

- Particular structure; does not match biology
- Only considers representation, no control structures

## Solution Attempt 3: Vector Operators

**Idea:** High-dimensional vectors  $\mathbf{x} \in \mathbb{R}^d$  represent symbols; bind using tensor product

$$\begin{pmatrix} a_1 \\ a_2 \\ a_3 \end{pmatrix} \otimes \begin{pmatrix} b_1 \\ b_2 \\ b_3 \end{pmatrix} = \begin{pmatrix} a_1b_1 & a_1b_2 & a_1b_3 \\ a_2b_1 & a_2b_2 & a_2b_3 \\ a_3b_1 & a_3b_2 & a_3b_3 \end{pmatrix}$$

$$\begin{pmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{pmatrix} \otimes \begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} = \begin{pmatrix} a_{11}\begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} & a_{12}\begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} \\ a_{22}\begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} & a_{22}\begin{pmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{pmatrix} \end{pmatrix}$$

$$= \begin{pmatrix} a_{11}b_{11} & a_{11}b_{12} & a_{12}b_{11} & a_{12}b_{12} \\ a_{21}b_{11} & a_{21}b_{12} & a_{22}b_{11} & a_{22}b_{12} \\ a_{21}b_{21} & a_{21}b_{22} & a_{22}b_{21} & a_{22}b_{22} \end{pmatrix}$$

$$= \begin{pmatrix} a_{11}b_{11} & a_{11}b_{22} & a_{12}b_{21} & a_{12}b_{22} \\ a_{21}b_{11} & a_{21}b_{12} & a_{22}b_{11} & a_{22}b_{12} \\ a_{21}b_{21} & a_{21}b_{22} & a_{22}b_{21} & a_{22}b_{22} \end{pmatrix}$$

$$(\text{Outer product})$$


igoplus Scales extremely poorly  $d^n$  for n binding operations

## A Deeper Problem: Cognitive Science vs. Neuroscience

► Trying very hard to map purely symbolic architectures onto neurons.

- Neural aspects are treated as mere implementation details.
- ► Instance of top-down modelling: High-level cognitive architectures are mapped onto biology.
- ► Hope of many cognitive scientists:

  If successful, neurons do not matter.



## Binding Operator Properties for Vector Symbolic Algebras

i. Preservation of Dimensionality

$$\circledast: \mathbb{R}^d \times \mathbb{R}^d \longrightarrow \mathbb{R}^d$$

ii. Approximately Reversible

$$\mathbf{x} \approx (\mathbf{x} \circledast \mathbf{y}) \circledast \mathbf{y}^{-1}$$

iii. Dissimilar to Inputs

$$0 \approx \langle \mathbf{x} \circledast \mathbf{y}, \mathbf{x} \rangle, 0 \approx \langle \mathbf{x} \circledast \mathbf{y}, \mathbf{y} \rangle$$

#### Sentence Encoding Revisited

► "The number eight comes after the number nine":

► "The dog chases the cat":

$$DOG \circledast SUBJ + CAT \circledast OBJ + CHASE \circledast VERB$$
.

"Anne knows that Bill thinks that Charlie likes Dave":

$$\begin{split} \text{SUBJ} \circledast \text{ANNE} + \text{ACT} \circledast \text{KNOWS} + \text{OBJ} \circledast \\ \left( \text{SUBJ} \circledast \text{BILL} + \text{ACT} \circledast \text{THINKS} + \text{OBJ} \circledast \right. \\ \left( \text{SUBJ} \circledast \text{CHARLIE} + \text{ACT} \circledast \text{LIKES} + \text{OBJ} \circledast \text{DAVE} \right) \end{split}.$$

Compression of information; graceful degradation; depends on d

## Using the Reversibility Property to Answer Questions

► "A blue square and a red circle:"

$$\mathbf{x} = \mathtt{BLUE} \circledast \mathtt{SQUARE} + \mathtt{RED} \circledast \mathtt{CIRCLE}$$
.

► "Which object is blue?"

$$\mathbf{y} = (\mathtt{BLUE} \circledast \mathtt{SQUARE} + \mathtt{RED} \circledast \mathtt{CIRCLE}) \circledast \mathtt{BLUE}^{-1}$$

$$= (\mathtt{BLUE} \circledast \mathtt{SQUARE}) \circledast \mathtt{BLUE}^{-1} + (\mathtt{RED} \circledast \mathtt{CIRCLE}) \circledast \mathtt{BLUE}^{-1}$$

$$\approx \mathtt{SQUARE} + \underbrace{\mathtt{RED} \circledast \mathtt{CIRCLE} \circledast \mathtt{BLUE}^{-1}}_{\text{"noise"}}$$

$$\approx \mathtt{SQUARE}.$$

**∆** Supposes that there is a set of valid symbols ⇒ "Cleanup Memory"

# VSAs: Potential Binding Operators (I)

$$\begin{pmatrix}
1 \\ 0 \\ 1 \\ 0
\end{pmatrix} \oplus \begin{pmatrix}
1 \\ 1 \\ 0 \\ 0
\end{pmatrix} = \begin{pmatrix}
0 \\ 1 \\ 1 \\ 0
\end{pmatrix}$$
(XOR)
$$\begin{pmatrix}
A \\ B \\ C \\ D
\end{pmatrix} \odot \begin{pmatrix}
E \\ F \\ G \\ H
\end{pmatrix} = \begin{pmatrix}
AE \\ BF \\ CG \\ DH
\end{pmatrix}$$
(Hadamard Product)

# VSAs: Potential Binding Operators (II)


$$\begin{pmatrix} A \\ B \\ C \\ D \end{pmatrix} \circledast \begin{pmatrix} E \\ F \\ G \\ H \end{pmatrix} = \begin{pmatrix} AE + BH + CG + DF \\ AF + BE + CH + DG \\ AG + BF + CE + DH \\ AH + BG + CF + DE \end{pmatrix}$$
 (Circular Convolution)

Circular Convolution is a "compressed" outer product:

$$\begin{pmatrix} A \\ B \\ C \\ D \end{pmatrix} \otimes \begin{pmatrix} E \\ F \\ G \\ H \end{pmatrix} = \begin{pmatrix} AE & AF & AG & AH \\ BE & BF & BG & BH \\ CE & CF & CG & CH \\ DE & DF & DG & DH \end{pmatrix}$$

(Outer Product)

## Circular Convolution: Dissimilarity and Reversibility

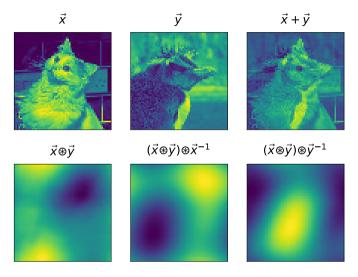

## Circular Convolution: Encoding Numbers

- ▶ Spaun uses an interesting encoding to capture number relations.
- ► Start with a random vector ONE, then


$$\label{eq:two_state} \begin{split} \mathsf{TWO} &= \mathsf{ONE} \circledast \mathsf{ONE} \,, \\ \mathsf{THREE} &= \mathsf{ONE} \circledast \mathsf{TWO} = \mathsf{ONE} \circledast \mathsf{ONE} \circledast \mathsf{ONE} \,, \\ \mathsf{NUMBER-}k &= \underbrace{\mathsf{ONE} \circledast \mathsf{ONE} \circledast \ldots \circledast \mathsf{ONE}}_{k\text{-times}} \\ &= \mathsf{ONE}^k \,. \end{split}$$


▶ Which is a slight abuse of notation. Also note,


$$\mathsf{ONE}^k = \mathcal{DFT}^{-1} \big( \mathcal{DFT} (\mathsf{ONE})^k \big) ,$$


Where inside the bracket is a Hadamard exponent.


## Raven's Progressive Matrices (I)
















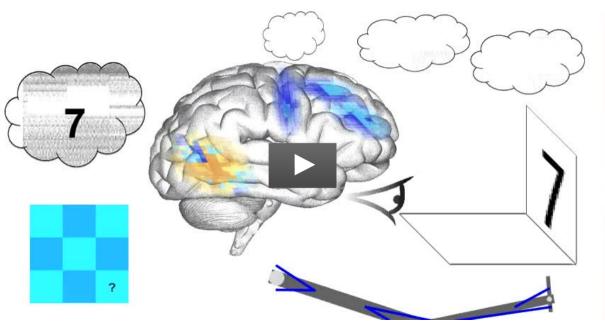

## Raven's Progressive Matrices (II)




<i>3</i>	<i>55</i>	111	44
(1)	(2)	(3)	(4)
444	555	999	33
(5)	(6)	(7)	(8)

#### Representing cells:

C1 = ONE 
$$\circledast$$
 P1,  
C2 = ONE  $\circledast$  P1 + ONE  $\circledast$  P2,  
C3 = ONE  $\circledast$  P1 + ONE  $\circledast$  P2 + ONE  $\circledast$  P3,  
C4 = FOUR,  
C5 = FOUR  $\circledast$  P1 + FOUR  $\circledast$  P2,  
C6 = FOUR  $\circledast$  P1 + FOUR  $\circledast$  P2 + FOUR  $\circledast$  P3,  
C7 = FIVE  $\circledast$  P1,  
C8 = FIVE  $\circledast$  P1 + FIVE  $\circledast$  P2.

# Raven's Progressive Matrices (III)



3	<i>55</i>	111	44
(1)	(2)	(3)	(4)
444	555	999	33
(5)	(6)	(7)	(8)

Extracting the horizontal rule:

$$\begin{split} &\text{T1} = \text{C2} \circledast \text{C1}^{-1} \,, & &\text{T4} = \text{C6} \circledast \text{C5}^{-1} \,, \\ &\text{T2} = \text{C3} \circledast \text{C2}^{-1} \,, & &\text{T5} = \text{C8} \circledast \text{C7}^{-1} \,, \\ &\text{T3} = \text{C5} \circledast \text{C4}^{-1} \,. & &\text{} \end{split}$$

$${\rm T} = \frac{{\rm T1} + {\rm T2} + {\rm T3} + {\rm T4} + {\rm T5}}{5} \, .$$

Making a prediction:

$$\label{eq:c9} \begin{split} \texttt{C9} &= \texttt{C8} \circledast \texttt{T} \\ &\approx \texttt{FIVE} \circledast \texttt{P1} + \texttt{FIVE} \circledast \texttt{P2} + \texttt{FIVE} \circledast \texttt{P3} \,. \end{split}$$

## Jackendoff's Challenges with a VSA

- ► The Binding Problem
- ► The Problem of Two
- ► The Problem of Variables
- Working Memory versus Long-Term Memory

#### Image sources

#### Title slide

Wikimedia.

Bell telephone magazine, 1922, American Telephone and Telegraph Company