

Finding Similar Items in arXiv

Algorithms for Massive Data — Project 1

Master in Data Science for Economics

Mehmet Fatih Çiftaslan — Student ID: 65336A

Abstract

This report describes the implementation of a system for detecting pairs of similar abstracts among scientific papers from the arXiv dataset. Abstracts are encoded as sets of word-level k-shingles, compressed into MinHash signatures, and efficiently paired using Locality-Sensitive Hashing (LSH). Similarity is measured via the Jaccard similarity metric. We evaluate the pipeline on 10,000 Computer Science papers and demonstrate that the proposed LSH-based approach achieves approximately 50x speedup over brute-force comparison while maintaining over 92% recall.

Declaration

I declare that this material, which I now submit for assessment, is entirely my/our own work and has not been taken from the work of others, save and to the extent that such work has been cited and acknowledged within the text of my work, and including any code produced using generative AI systems. I understand that plagiarism, collusion, and copying are grave and serious offences in the university and accept the penalties that would be imposed should I engage in plagiarism, collusion or copying. This assignment, or any part of it, has not been previously submitted by me or any other person for assessment on this or any other course of study.

GitHub repository: <https://github.com/FatihAslan/Finding-Similar-Items-in-arXiv->

Table of Contents

Abstract.....	1
Declaration.....	1
Table of Contents.....	2
1. Dataset and Scope.....	3
1.1 The arXiv Dataset.....	3
1.2 Selected Subset	3
2. Data Organization	3
3. Pre-processing Techniques.....	3
4. Algorithms and Implementation	4
4.1 Shingling.....	4
4.2 Jaccard Similarity	4
4.3 MinHash Signatures	5
4.4 Locality-Sensitive Hashing (LSH)	5
4.5 Candidate Verification.....	5
5. Scalability Analysis.....	5
5.1 Runtime Comparison.....	5
5.2 Stage Breakdown	6
5.3 Recall Analysis	6
6. Experiments.....	6
6.1 Configuration	6
6.2 MinHash Validation.....	7
6.3 LSH Results	7
6.4 S-Curve Analysis	8
7. Discussion and Conclusions	9
7.1 Summary of Results	9
7.2 Effectiveness of the Approach	9
7.3 Scalability	9
7.4 Limitations and Future Work	10
References	10

1. Dataset and Scope

1.1 The arXiv Dataset

The project uses the arXiv metadata dataset published on Kaggle by Cornell University [1]. This dataset contains metadata for over 2.4 million scholarly papers submitted to the arXiv preprint server, stored as a JSON-lines file (arxiv-metadata-oai-snapshot.json, approximately 4 GB).

Each record contains, among other fields, a unique identifier (id), paper title (title), abstract text (abstract), and arXiv category labels (categories).

1.2 Selected Subset

Given the computational constraints of Google Colab, we focus on a subset of the data. Specifically, we apply the following filters:

Category filter: Only papers with at least one Computer Science category (prefix cs.) are retained. This ensures topical coherence — comparing abstracts within a single broad discipline yields more meaningful similarity results than comparing across unrelated fields.

Minimum abstract length: Abstracts shorter than 150 characters are discarded, as they typically correspond to placeholder entries or incomplete submissions.

Withdrawn paper filter: Abstracts containing boilerplate phrases such as "this paper has been withdrawn" are excluded. Without this filter, multiple withdrawn papers share identical short abstracts, producing spurious Jaccard = 1.0 matches.

A global variable `SAMPLE_SIZE` controls the number of documents loaded (set to 10,000 for the experiments reported here). After filtering, the loading process scanned 158,241 papers and retained 10,000 documents, skipping 140 short abstracts and 8 withdrawn papers.

2. Data Organization

The dataset is read incrementally — line by line — from the JSON-lines file, parsing each line with `json.loads()`. This streaming approach avoids loading the entire 4 GB file into memory at once, keeping memory usage proportional to the number of retained documents rather than the full dataset size.

Each retained document is stored as a Python dictionary containing four fields: id, title, abstract, and categories. After preprocessing, a fifth field (`clean_abstract`) is added. This list of dictionaries serves as the primary data structure throughout the pipeline.

All configurable parameters (sample size, shingle type and size, number of hash functions, band/row configuration, similarity threshold) are defined as global constants at the top of the notebook, allowing easy experimentation and reproducibility.

3. Pre-processing Techniques

Scientific abstracts on arXiv frequently contain LaTeX markup that, if left unprocessed, would create artificial differences between otherwise identical content (e.g., α vs. alpha). Our preprocessing pipeline applies the following transformations in order:

- 1. Remove LaTeX inline math:** Expressions enclosed in dollar signs ($\dots$) are replaced by a space.
- 2. Remove LaTeX commands:** Commands such as `\textbf{}`, `\emph{}`, and standalone commands like `\alpha` are removed.
- 3. Remove special characters:** All non-alphanumeric characters are replaced by spaces, retaining only lowercase letters, digits, and spaces.
- 4. Lowercase conversion:** All text is converted to lowercase to ensure case-insensitive matching.
- 5. Whitespace normalization:** Multiple consecutive whitespace characters are collapsed into a single space.

4. Algorithms and Implementation

The pipeline implements the three-stage approach described in Chapter 3 of Mining of Massive Datasets [1]: shingling, MinHash signature computation, and Locality-Sensitive Hashing (LSH).

4.1 Shingling

Each preprocessed abstract is converted into a set of k -shingles. A k -shingle is a contiguous subsequence of k tokens from the text. We use word-level 3-shingles (i.e., every consecutive triple of words), as they capture meaningful multi-word phrases common in scientific writing (e.g., "neural network architecture", "stochastic gradient descent").

Each string shingle is then hashed to a 32-bit unsigned integer using MurmurHash3 (mmh3 library). This reduces memory usage (4 bytes per shingle instead of a variable-length string) and accelerates set operations. Across the 10,000 documents, the resulting shingle sets have a mean size of 131.2 and a median of 125.0, with a range from 11 to 322.

4.2 Jaccard Similarity

The Jaccard similarity between two sets A and B is defined as: $J(A, B) = |A \cap B| / |A \cup B|$. This metric ranges from 0 (completely disjoint) to 1 (identical sets). Computing it exactly for all $C(n, 2)$ pairs would require $O(n^2)$ comparisons, which is infeasible for large n .

4.3 MinHash Signatures

MinHash [2] provides a compact representation that preserves Jaccard similarity in expectation. The key theoretical result is that for a random hash function h : $P(\min(h(A)) = \min(h(B))) = J(A, B)$.

We generate $n = 100$ hash functions of the universal hashing family: $h_i(x) = (a_i \cdot x + b_i) \bmod p$, where $p = 4,294,967,311$ (a prime larger than 2^{32}), and a_i, b_i are random coefficients.

For each document, we compute the signature vector $\text{sig}(d) = [\min h_1(s), \min h_2(s), \dots, \min h_n(s)]$ for all shingles s in the document. The computation is vectorized using NumPy:

for each shingle, all 100 hash values are computed simultaneously via broadcasting, and the element-wise minimum is updated in place.

The resulting signature matrix has shape $10,000 \times 100$. Validation on 200 pairs (mixing LSH candidates and random pairs) yielded a Mean Absolute Error of 0.0189.

4.4 Locality-Sensitive Hashing (LSH)

LSH reduces the search space by identifying candidate pairs — document pairs that are likely to be similar — without examining all $O(n^2)$ possibilities.

We employ the banding technique [1]: the signature vector of length n is partitioned into $b = 20$ bands of $r = 5$ rows each ($b \times r = n$). For each band, the r -dimensional sub-signature is hashed into a bucket. Two documents become a candidate pair if they fall into the same bucket in at least one band.

The probability that two documents with true Jaccard similarity s become candidates is: $P(\text{candidate}) = 1 - (1 - s^r)^b$. This produces an S-shaped curve with an approximate threshold at $t \approx (1/b)^{1/r}$. With our configuration ($b=20, r=5$), $t \approx 0.549$.

4.5 Candidate Verification

Since LSH is a probabilistic method, candidate pairs may include false positives. We therefore compute the exact Jaccard similarity for each candidate pair and retain only those above the threshold $\tau = 0.5$. This step is computationally inexpensive because the number of candidates is orders of magnitude smaller than the total number of pairs (144 vs. $\sim 50,000,000$).

5. Scalability Analysis

A central requirement of the project is that the proposed techniques scale to larger datasets. We measure the runtime of each pipeline stage across different dataset sizes and compare against a brute-force baseline.

5.1 Runtime Comparison

The following table summarizes the results. The brute-force approach was only run for $n \leq 5,000$ due to its $O(n^2)$ complexity.

n	LSH (s)	BF (s)	Speedup	Similar pairs	Recall
500	0.80	2.01	2.5x	3	75.0%
1,000	0.81	9.05	11.2x	16	94.1%
2,000	2.78	34.46	12.4x	28	93.3%
5,000	4.39	217.78	49.6x	48	92.3%
10,000	12.63	—	—	107	—

The brute-force runtime grows quadratically (from 2 s at $n=500$ to 218 s at $n=5,000$), while the LSH pipeline grows roughly linearly. At $n=5,000$, LSH achieves a 49.6x speedup. Extrapolating the brute-force trend, processing 10,000 documents would take approximately 870 s (~15 minutes), whereas LSH completes in under 13 seconds.

5.2 Stage Breakdown

The MinHash signature computation is the dominant stage, as it processes every shingle of every document through 100 hash functions. The LSH stage and the verification stage together account for a small fraction of the total runtime, since LSH performs $O(n \cdot b)$ operations and verification processes only the small set of candidates.

5.3 Recall Analysis

Recall measures what fraction of truly similar pairs (identified by brute-force) are also found by LSH. Our pipeline achieves 92–94% recall for $n \geq 1,000$. The lower recall at $n=500$ (75%) is due to the very small number of similar pairs (4), where missing a single pair substantially impacts the percentage. The missed pairs (false negatives) typically have similarity values near the threshold (~0.5–0.6), where the S-curve probability is intermediate.

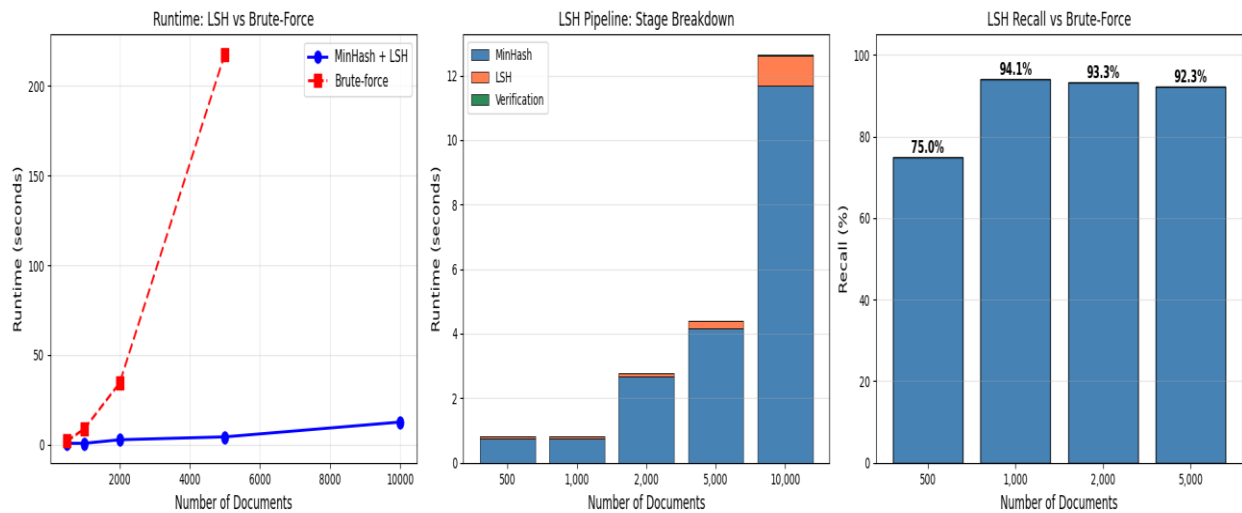


Figure 1: Runtime comparison (left), stage breakdown (center), and recall analysis (right).

6. Experiments

6.1 Configuration

Parameter	Value
Sample size	10,000 documents
Category filter	cs. * (Computer Science)
Shingle type	Word-level, k=3
Hash functions	n=100 (universal hashing family)
LSH bands/rows	b=20, r=5 (threshold ≈ 0.549)
Similarity threshold	$\tau = 0.5$

6.2 MinHash Validation

To verify the correctness of the MinHash implementation, we compared the estimated Jaccard similarity (fraction of matching signature positions) against the exact value for 200 document pairs, sampled from both LSH candidates and random pairs. The resulting scatter plot shows tight alignment with the identity line, with a Mean Absolute Error of 0.0189.

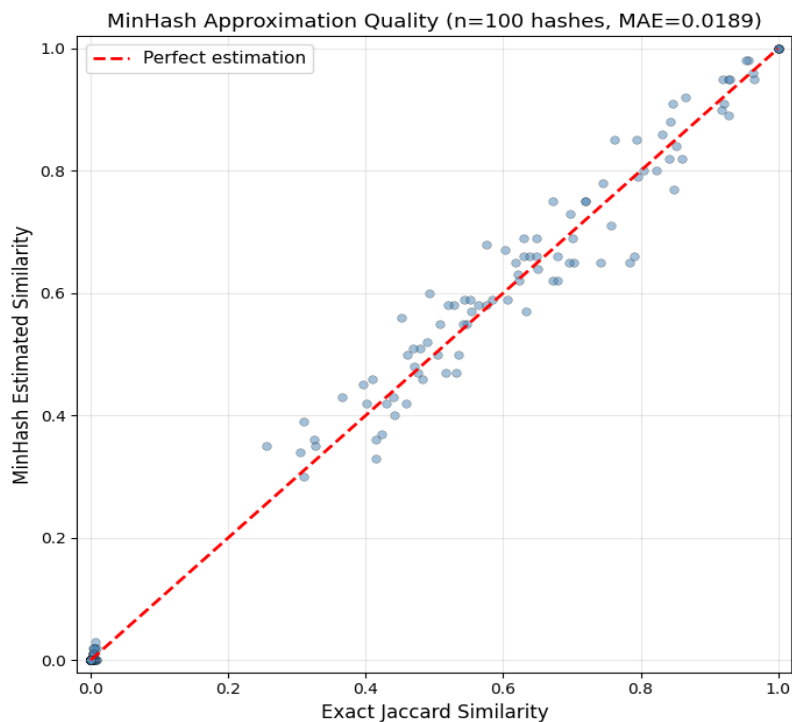


Figure 2: MinHash approximation quality: estimated vs. exact Jaccard similarity.

6.3 LSH Results

From 10,000 documents (~50 million possible pairs), LSH identified 144 candidate pairs — a reduction of 99.9997%. After verification, 107 pairs exceeded the threshold ($\tau = 0.5$), yielding a false positive rate of 25.7%.

The top similar pairs (Jaccard = 1.0) correspond to papers that are revised versions of the same work (published under different arXiv IDs), or closely related publications by the same authors. Among the 107 verified pairs, 96.3% share at least one arXiv category, confirming that the detected similarity is topically meaningful.

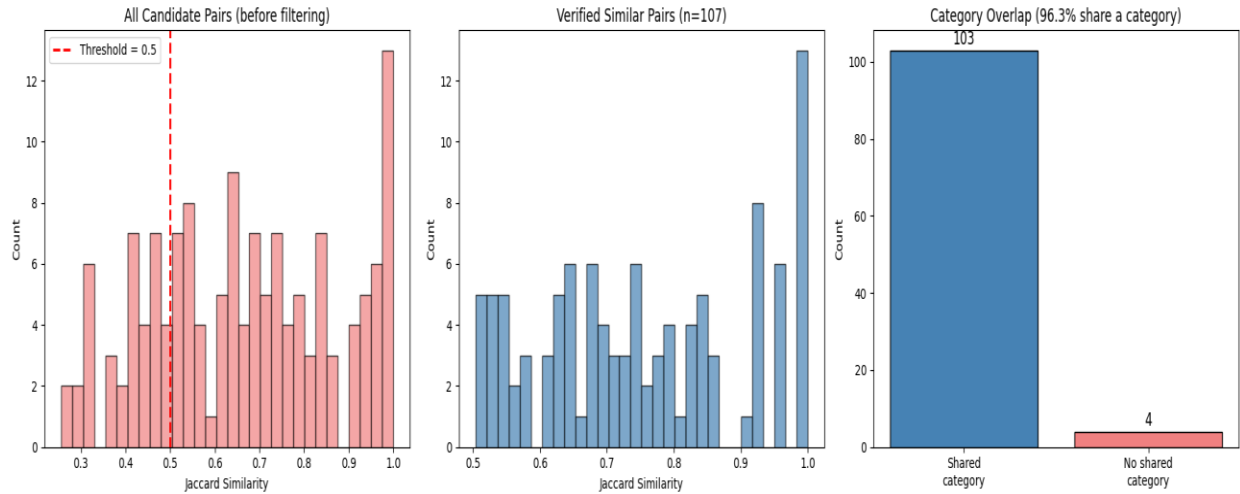


Figure 3: Candidate pair similarities (left), verified pairs (center), and category overlap (right).

6.4 S-Curve Analysis

The following figure shows the theoretical S-curves for different band/row configurations. The current configuration ($b=20, r=5$) provides a threshold of approximately 0.55, offering a balanced trade-off between false positives and false negatives.

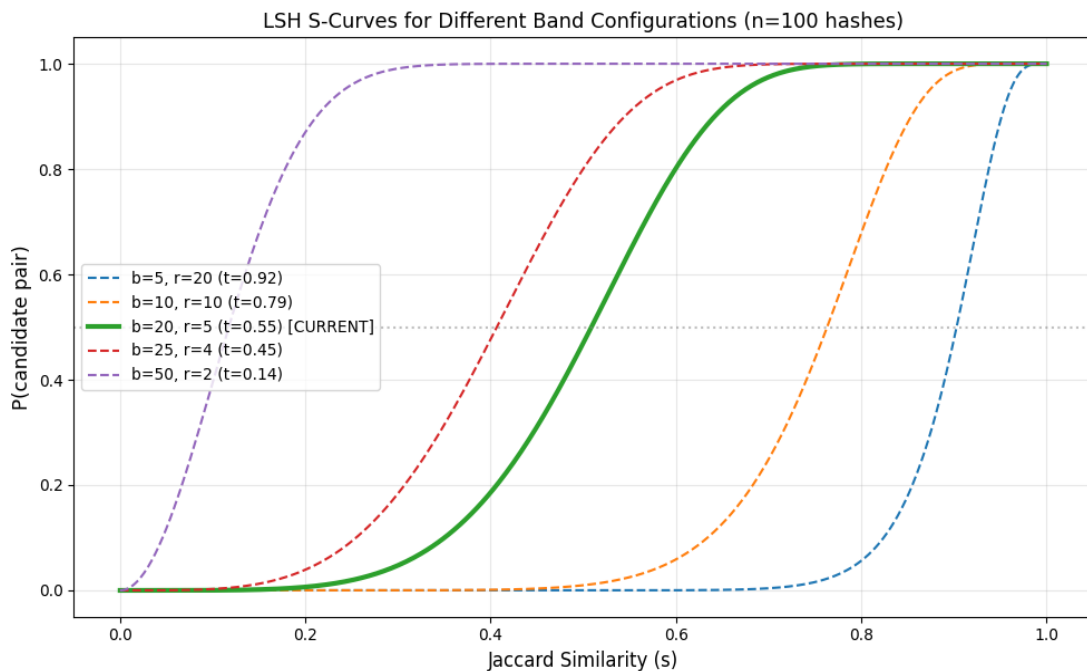


Figure 4: Theoretical S-curves for different band/row configurations with $n=100$ hash functions.

To validate the implementation experimentally, we computed the exact Jaccard similarity for all pairs within a 2,000-document subset via brute-force, and measured the empirical probability of LSH identifying each pair as a candidate.

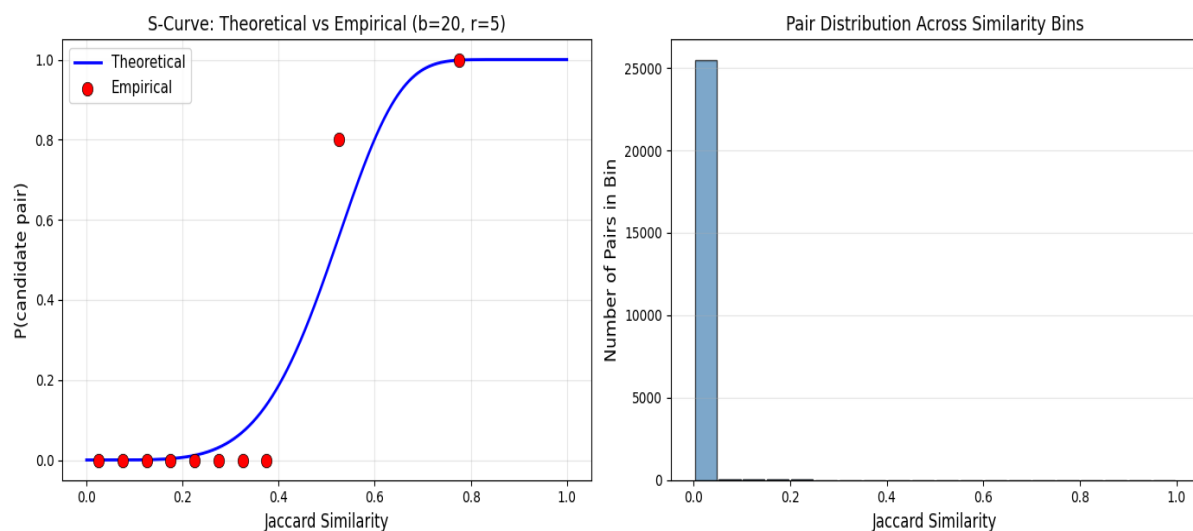


Figure 5: Theoretical vs. empirical S-curve (left) and pair distribution across similarity bins (right).

7. Discussion and Conclusions

7.1 Summary of Results

The pipeline successfully identifies 107 pairs of similar Computer Science abstracts from 10,000 documents, with the top results corresponding to revised versions of the same paper or closely related work by the same authors. The high category overlap (96.3%) indicates that detected similarity is topically coherent.

7.2 Effectiveness of the Approach

The three-stage pipeline (shingling $\rightarrow$ MinHash $\rightarrow$ LSH) as described in [1] proves highly effective for this task. MinHash provides accurate Jaccard approximation (MAE = 0.019) with only 100 hash functions. LSH reduces the comparison space by a factor of $\sim 350,000\times$, making it feasible to process datasets that would be intractable with brute-force. The recall of 92–94% demonstrates that the probabilistic nature of LSH causes only modest information loss.

7.3 Scalability

The experimental results confirm that the LSH pipeline scales approximately linearly with data size, in stark contrast to the quadratic growth of brute-force. At $n=5,000$, the speedup is

already ~50x, and this advantage would grow further with larger datasets. The MinHash computation dominates the runtime, but it is an inherently parallelizable operation — each document's signature can be computed independently.

7.4 Limitations and Future Work

Stopword removal: Filtering common English stopwords before shingling would reduce noise and give more weight to domain-specific vocabulary.

Shingle weighting: Applying TF-IDF weights to shingles could prioritize rare, discriminative terms over frequent generic phrases.

Parameter tuning: Systematic exploration of different k , b , and r values could optimize the precision-recall trade-off for specific use cases.

Full dataset: Extending to the complete 2.4M-paper dataset would require chunked processing or a distributed framework (e.g., Apache Spark).

References

- [1] A. Rajaraman and J. D. Ullman, Mining of Massive Datasets, Cambridge University Press, 2014. Available at: <http://infolab.stanford.edu/~ullman/mmds.html>
- [2] A. Z. Broder, "On the resemblance and containment of documents," Compression and Complexity of Sequences, pp. 21–29, 1997.
- [3] Cornell University, "arXiv Dataset," Kaggle, 2023. <https://www.kaggle.com/datasets/Cornell-University/arxiv>