

# LAPORAN PRAKTIKUM MODUL 6

## ALGORITMA DAN STRUKTUR DATA

Nama : Fatwa Dwi Hidayat

Nim : L200180176

Kelas : G

```
Soal1.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal1.py (3.8.2)
File Edit Format Run Options Window Help

class MhsTIF:
    def __init__(self, nama, NIM, kota, us):
        self.nama = nama
        self.NIM = NIM
        self.kota = kota
        self.uang = us
    def __str__(self):
        s = self.nama + " " + str(self.NIM) + " " + self.kota + " " + str(self.uang)
        return s

m0 = MhsTIF("Aldy", 17, "jakarta", 240000)
m1 = MhsTIF("Fatwa", 11, "bandung", 230000)
m2 = MhsTIF("Fakhar", 12, "Surakarta", 250000)
m3 = MhsTIF("Erdi", 12, "Surakarta", 235000)
m4 = MhsTIF("Hanan", 13, "papua", 240000)
m5 = MhsTIF("Rizki", 99, "kendari", 250000)
m6 = MhsTIF("iqbal", 90, "Riau", 245000)
m7 = MhsTIF("ijul", 67, "padang", 245000)
m8 = MhsTIF("fikri", 45, "Sorong", 245000)
m9 = MhsTIF("wafiq", 00, "sumba", 270000)
m10 = MhsTIF("kevin", 12, "wonogiri", 265000)

Daftar = [m0, m1, m2, m3, m4, m5, m6, m7, m8, m9, m10]

def mergeSort(A):
    #print("Membelah", A)
    if len(A) > 1:
        mid = len(A) // 2
        separuhkiri = A[:mid]
        separuhkanan = A[mid:]

        mergeSort(separuhkiri)
        mergeSort(separuhkanan)

        i = 0; j = 0; k = 0
        while i < len(separuhkiri) and j < len(separuhkanan):
            if separuhkiri[i] < separuhkanan[j]:
                A[k] = separuhkiri[i]
                i = i + 1
            else:
                A[k] = separuhkanan[j]
                j = j + 1
            k = k + 1

        while i < len(separuhkiri):
            A[k] = separuhkiri[i]
            i = i + 1
            k = k + 1

        while j < len(separuhkanan):
            A[k] = separuhkanan[j]
            j = j + 1
            k = k + 1

        #print("Menggabungkan", A)

def quickSort(A, awal, akhir):
    if awal < akhir:
        titikBelah = partisi(A, awal, akhir)
        quickSort(A, awal, titikBelah-1)
        quickSort(A, titikBelah+1, akhir)

def partisi(A, awal, akhir):
    nilaipivot = A[awal]

    penandakiri = awal + 1
    penandakanan = akhir

    selesai = False
    while not selesai:

        while penandakiri <= penandakanan and A[penandakiri] <= nilaipivot:
            penandakiri = penandakiri + 1

        while penandakanan >= penandakiri and A[penandakanan] >= nilaipivot:
            penandakanan = penandakanan - 1

        if penandakanan < penandakiri:
            selesai = True
        else:
            temp = A[penandakiri]
            A[penandakiri] = A[penandakanan]
            A[penandakanan] = temp

    temp = A[awal]
    A[awal] = A[penandakanan]
    A[penandakanan] = temp

    return penandakanan

def convert(arr, obj):
```

1.

Soal1.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal1.py (3.8.2)

File Edit Format Run Options Window Help

penandakanan = penandakanan - 1

```
if penandakanan < penandakiri:
    selesai = True
else:
    temp = A[penandakiri]
    A[penandakiri] = A[penandakanan]
    A[penandakanan] = temp
```

```
temp = A[awal]
A[awal] = A[penandakanan]
A[penandakanan] = temp
```

```
return penandakanan
```

```
def convert(arr, obj):
    hasil=[]
    for x in range (len(arr)):
        for i in range (len(arr)):
            if arr[x] == obj[i].NIM:
                hasil.append(obj[i])
    return hasil
```

```
def printMerge(arr):
    print("hasil merge sort")
    NIM = []
    for i in arr:
        NIM.append(i.NIM)
    mergeSort(NIM)
    for x in convert(NIM, arr):
        print(x.NIM)
```

```
def printQuick(arr):
    print("\nhasil quick sort")
    A = []
    for x in Daftar:
        A.append(x.NIM)

    quickSort(A, 0, len(A)-1)
    for x in convert(A, Daftar):
        print (x.NIM)
```

```
printMerge(Daftar)
printQuick(Daftar)
```

Python 3.8.2 Shell

File Edit Shell Debug Options Window Help

>>>

=== RESTART: D:\Sekolah\INFORMATIKA ALDY\Pr

hasil merge sort

0

11

12

12

12

12

12

12

12

12

12

13

17

45

67

90

99

hasil quick sort

0

11

12

12

12

12

12

12

12

13

17

45



67

90


99

>>> |

2.

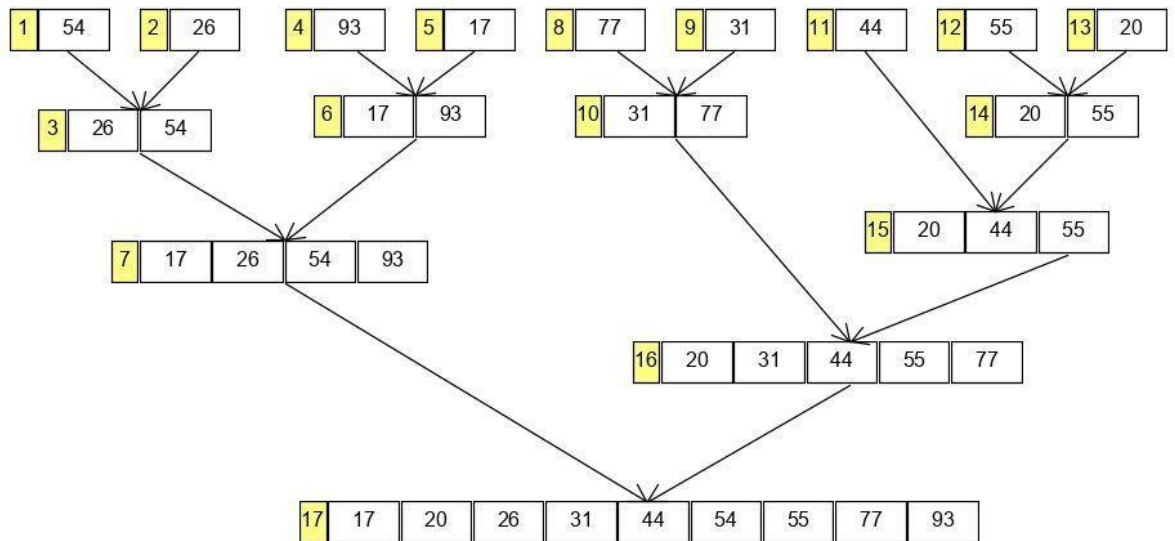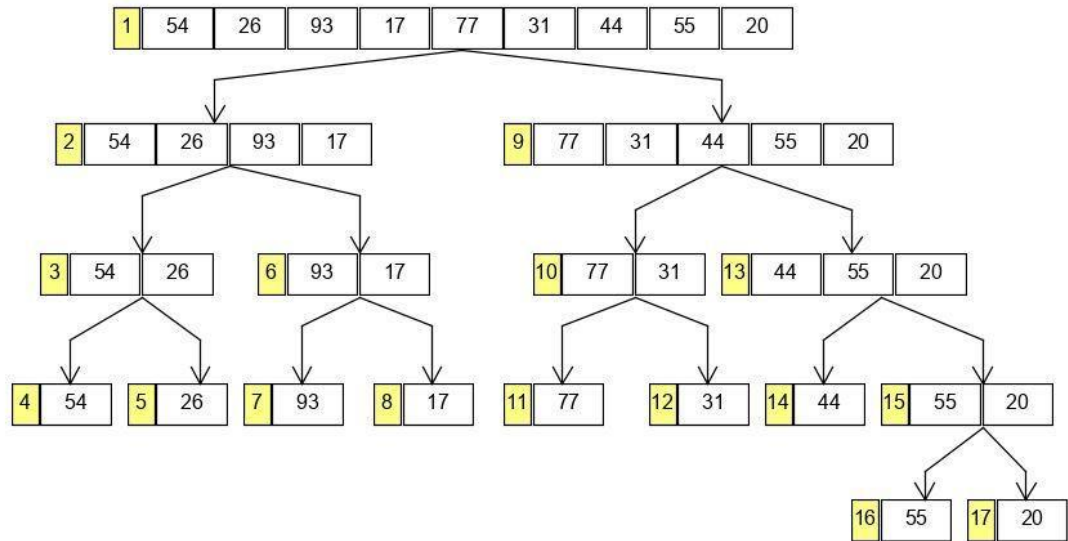

### 3.

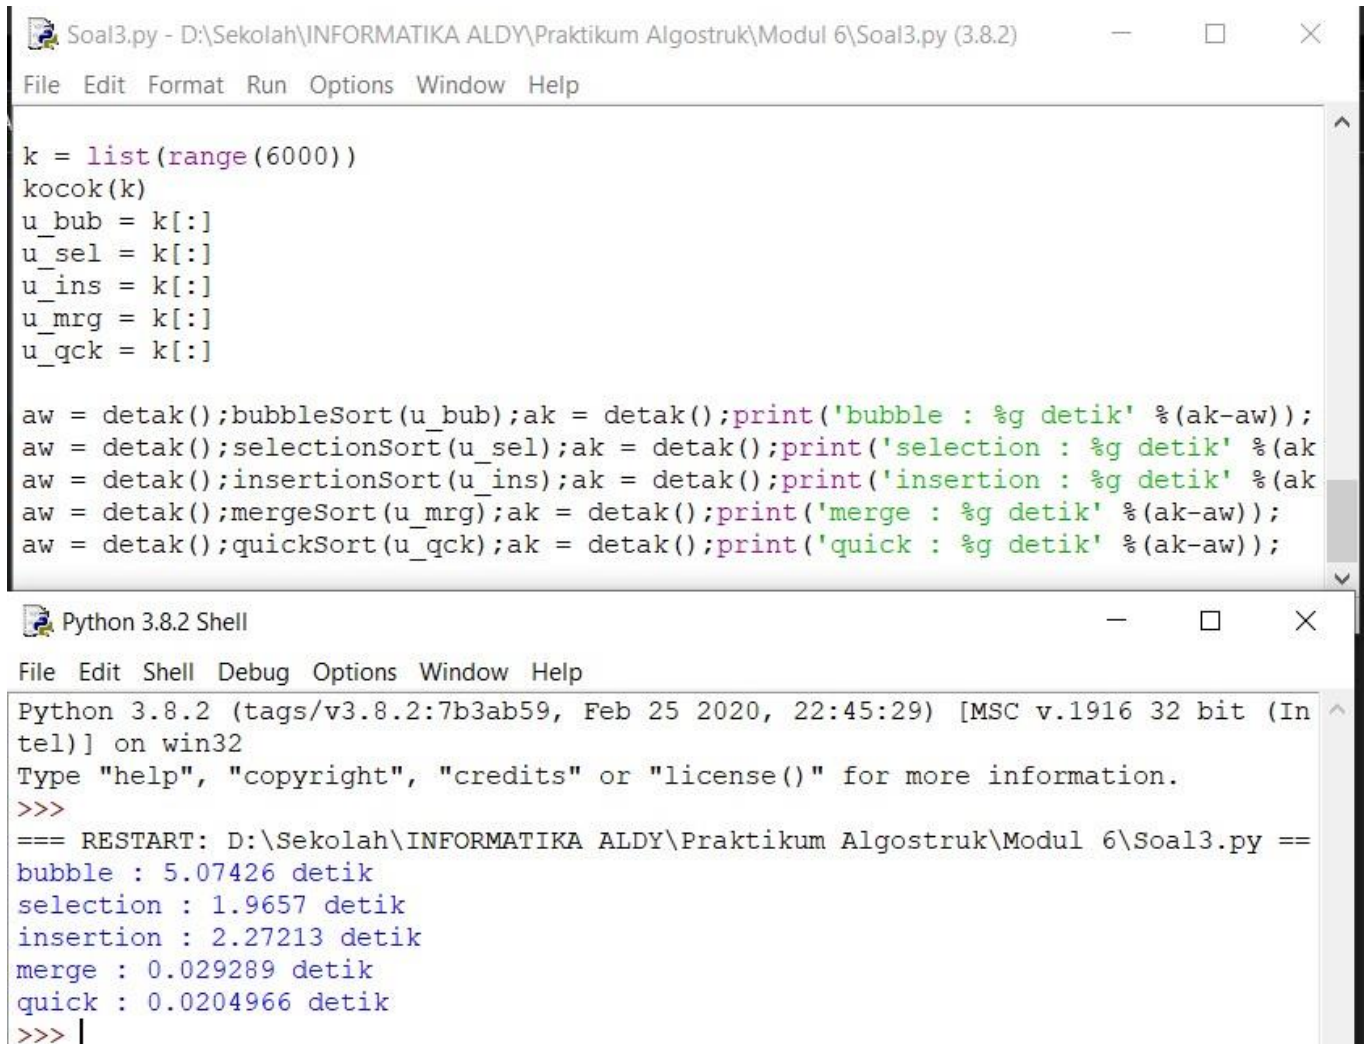

The image shows a screenshot of a Python IDE with two windows. The top window, titled 'Soal3.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal3.py (3.8.2)', contains a Python script. The script generates a list of 6000 random integers, shuffles it, and then times five different sorting algorithms: bubbleSort, selectionSort, insertionSort, mergeSort, and quickSort. The bottom window, titled 'Python 3.8.2 Shell', shows the output of the script, which is the execution time for each algorithm in seconds.

```
Soal3.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal3.py (3.8.2)
File Edit Format Run Options Window Help



k = list(range(6000))
kocok(k)
u_bub = k[:]
u_sel = k[:]
u_ins = k[:]
u_mrg = k[:]
u_qck = k[:]

aw = detak();bubbleSort(u_bub);ak = detak();print('bubble : %g detik' %(ak-aw));
aw = detak();selectionSort(u_sel);ak = detak();print('selection : %g detik' %(ak-aw));
aw = detak();insertionSort(u_ins);ak = detak();print('insertion : %g detik' %(ak-aw));
aw = detak();mergeSort(u_mrg);ak = detak();print('merge : %g detik' %(ak-aw));
aw = detak();quickSort(u_qck);ak = detak();print('quick : %g detik' %(ak-aw));

Python 3.8.2 Shell
File Edit Shell Debug Options Window Help

Python 3.8.2 (tags/v3.8.2:7b3ab59, Feb 25 2020, 22:45:29) [MSC v.1916 32 bit (Intel)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
=== RESTART: D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal3.py ==
bubble : 5.07426 detik
selection : 1.9657 detik
insertion : 2.27213 detik
merge : 0.029289 detik
quick : 0.0204966 detik
>>> |
```

4.

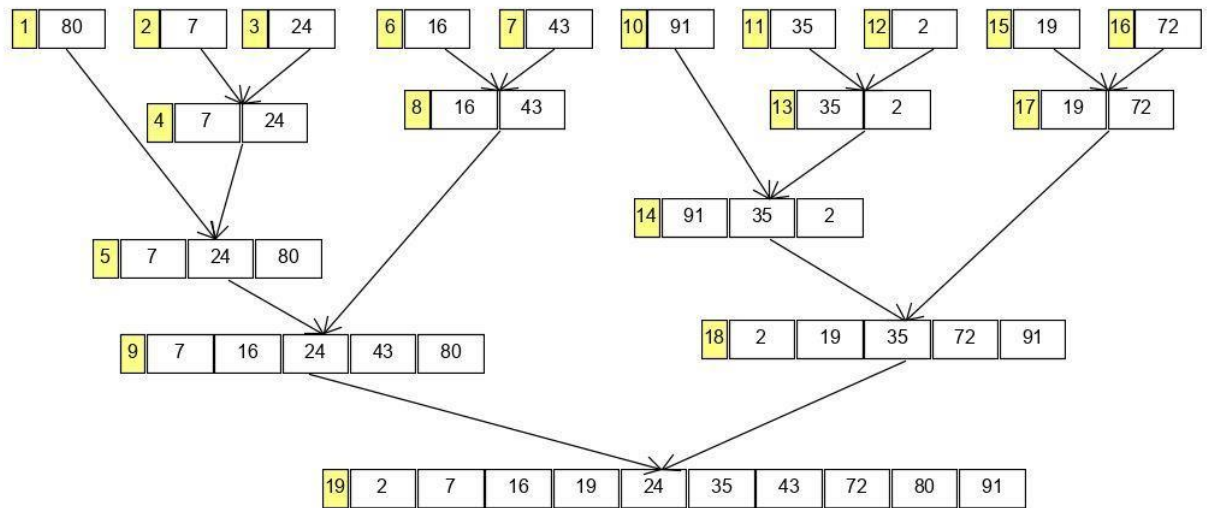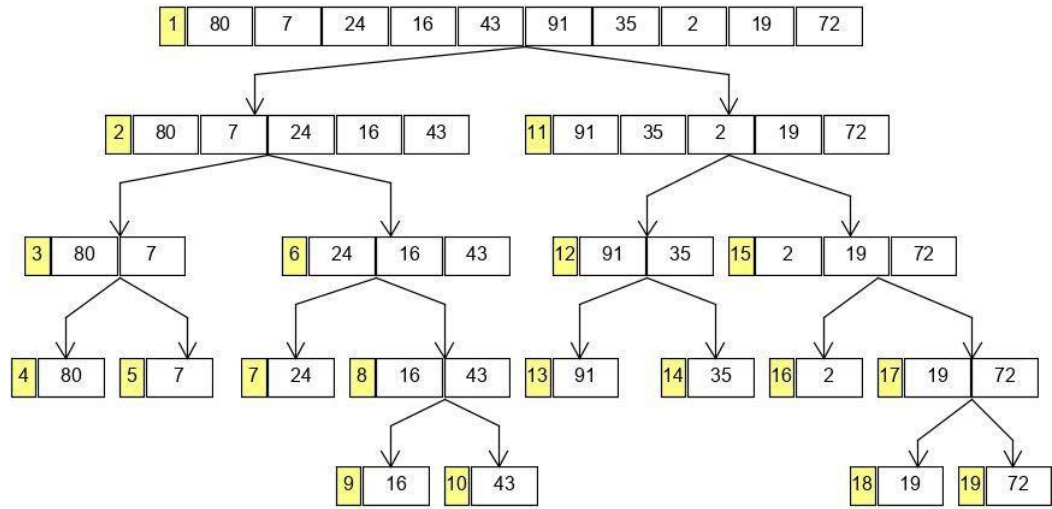



## 5.

Soal5.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal5.py (3.8.2)

File Edit Format Run Options Window Help

```
m9 = MhsTIF(wafiq, 00, sumba, 270000)
m10 = MhsTIF("kevin", 12, "wonogiri", 265000)
```

```
Daftar = [m0, m1, m2, m3, m4, m5, m6, m7, m8, m9, m10]
```

```
def cetak(A):
    for i in A:
        print(i)

def mergeSort2(A, awal, akhir):
    mid = (awal+akhir)//2
    if awal < akhir:
        mergeSort2(A, awal, mid)
        mergeSort2(A, mid+1, akhir)

    a, f, l = 0, awal, mid+1
    tmp = [None] * (akhir - awal + 1)
    while f <= mid and l <= akhir:
        if A[f].ambilUangSaku() < A[l].ambilUangSaku():
            tmp[a] = A[f]
            f += 1
        else:
            tmp[a] = A[l]
            l += 1
        a += 1

    if f <= mid:
        tmp[a:] = A[f:mid+1]

    if l <= akhir:
        tmp[a:] = A[l:akhir+1]

    a = 0
    while awal <= akhir:
        A[awal] = tmp[a]
        awal += 1
        a += 1

def mergeSort(A):
    mergeSort2(A, 0, len(A)-1)

print("Sebelum diurutkan")
cetak(Daftar)
mergeSort(Daftar)
print("\nSetelah diurutkan")
cetak(Daftar)
```

Python 3.8.2 Shell

File Edit Shell Debug Options Window

Python 3.8.2 (tags/v3.8.2:7b3ab:tel)] on win32

Type "help", "copyright", "cred: >>>

=== RESTART: D:\Sekolah\INFORMA

Sebelum diurutkan

Aldy 17 jakarta 240000

Fatwa 11 bandung 230000

Fakhar 12 Surakarta 250000

Erdi 12 Surakarta 235000

Hanan 13 papua 240000

Rizki 99 kendari 250000

iqbal 90 Riau 245000

ijul 67 padang 245000

fikri 45 Sorong 245000

wafiq 0 sumba 270000

kevin 12 wonogiri 265000

Setelah diurutkan

Fatwa 11 bandung 230000

Erdi 12 Surakarta 235000

Hanan 13 papua 240000

Aldy 17 jakarta 240000

fikri 45 Sorong 245000

ijul 67 padang 245000

iqbal 90 Riau 245000

Rizki 99 kendari 250000

Fakhar 12 Surakarta 250000

kevin 12 wonogiri 265000

wafiq 0 sumba 270000

>>> |

Ln: 1 Col: 0

## 6.

Soal6.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal6.py

```
File Edit Format Run Options Window Help
m6 = MhsTIF("iqbal", 90, "Riau", 245000)
m7 = MhsTIF("ijul", 67, "padang", 245000)
m8 = MhsTIF("fikri", 45, "Sorong", 245000)
m9 = MhsTIF("wafiq", 00, "sumba", 270000)
m10 = MhsTIF("kevin", 12, "wonogiri", 265000)

Daftar = [m0, m1, m2, m3, m4, m5, m6, m7, m8, m9, m10]
A = []
for i in Daftar:
    A.append(i.nama)

def cetak():
    for i in A:
        print(i)

def quickSort(arr):
    kurang = []
    pivotList = []
    lebih = []
    if len(arr) <= 1:
        return arr
    else:
        pivot = arr[0]
        for i in arr:
            if i < pivot:
                kurang.append(i)
            elif i > pivot:
                lebih.append(i)
            else:
                pivotList.append(i)
        kurang = quickSort(kurang)
        lebih = quickSort(lebih)
        return kurang + pivotList + lebih

print("Sebelum diurutkan")
cetak()
print("\nSetelah diurutkan")
quickSort(A)
cetak()
```

Python 3.8.2 Shell

```
File Edit Shell Debug Options
Python 3.8.2 (tags/v3.8.2
tel)] on win32
Type "help", "copyright",
>>>
=== RESTART: D:\Sekolah\I
Sebelum diurutkan
Aldy
Fatwa
Fakhar
Erdi
Hanan
Rizki
iqbal
ijul
fikri
wafiq
kevin

Setelah diurutkan
Aldy
Fatwa
Fakhar
Erdi
Hanan
Rizki
iqbal
ijul
fikri
wafiq
kevin
>>> |
```

## 7.

```
Soal7.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal7.py (3.8.2)
File Edit Format Run Options Window Help

k = list(range(6000))
kocok(k)
u_bub = k[:]
u_sel = k[:]
u_ins = k[:]
u_mrg = k[:]
u_qck = k[:]
u_mrgNew = k[:]
u_qckNew = k[:]

aw = detak();bubbleSort(u_bub);ak = detak();print('bubble : %g detik' %(ak-aw));
aw = detak();selectionSort(u_sel);ak = detak();print('selection : %g detik' %(ak-aw));
aw = detak();insertionSort(u_ins);ak = detak();print('insertion : %g detik' %(ak-aw));
aw=detak();mergeSort(u_mrg);ak=detak();print("merge: %g detik" %(ak-aw));
aw=detak();quickSort(u_qck);ak=detak();print("quick: %g detik" %(ak-aw));
aw=detak();mergeSortNew(u_mrgNew);ak=detak();print("merge New: %g detik" %(ak-aw));
aw=detak();quickSortNew(u_qckNew);ak=detak();print("quick New: %g detik" %(ak-aw));

Python 3.8.2 Shell
File Edit Shell Debug Options Window Help
Python 3.8.2 (tags/v3.8.2:7b3ab59, Feb 25 2020, 22:45:29) [MSC v.1916 32 bit (Intel)] on win32
Type "help", "copyright", "credits" or "license()" for more information.
>>>
=== RESTART: D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal7.py ===
bubble : 5.03715 detik
selection : 1.98226 detik
insertion : 2.3317 detik
merge: 0.0312772 detik
quick: 0.0215065 detik
merge New: 0.0439544 detik
quick New: 0.0117114 detik
>>>
```

Ln 11, Col 26



## 8.

Soal8.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal8.py (3.8.2)
File Edit Format Run Options Window Help

```

class Node():
    def __init__(self, data, isi=None):
        self.data = data
        self.isi = isi

def cetak(head):
    curr = head
    while curr is not None:
        try:
            print (curr.data)
            curr = curr.isi
        except:
            pass

a = Node(10)
b = Node(30)
c = Node(50)
d = Node(70)
e = Node(20)
f = Node(40)
g = Node(60)

a.isi = b
b.isi = c
c.isi = d
d.isi = e
e.isi = f
f.isi = g

def mergeSort11(A):
    linked = A
    try:
        daftar = []
        curr = A
        while curr:
            daftar.append(curr.data)
            curr = curr.isi
        A = daftar
    except:
        A = A

    if len(A) > 1:
        mid = len(A) // 2
        separuhkiri = A[:mid]
        separuhkanan = A[mid:]

        mergeSort11(separuhkiri)
        mergeSort11(separuhkanan)

        i = 0; j=0; k=0
        while i < len(separuhkiri) and j < len(separuhkanan):
            if separuhkiri[i] < separuhkanan[j]:
                A[k] = separuhkiri[i]
                i = i + 1
            else:
                A[k] = separuhkanan[j]
                j = j + 1
            k=k+1

        while i < len(separuhkiri):
            A[k] = separuhkiri[i]
            i = i + 1
            k=k+1

        while j < len(separuhkanan):
            A[k] = separuhkanan[j]
            j = j + 1
            k=k+1

    for x in A:
        try:
            linked.data = x
            linked = linked.isi
        except:
            pass

mergeSort11(a)
cetak(a)

```

Soal8.py - D:\Sekolah\INFORMATIKA ALDY\Praktikum Algostruk\Modul 6\Soal8.py (3.8.2)
File Edit Format Run Options Window Help

```

try:
    daftar = []
    curr = A
    while curr:
        daftar.append(curr.data)
        curr = curr.isi
    A = daftar
except:
    A = A

if len(A) > 1:
    mid = len(A) // 2
    separuhkiri = A[:mid]
    separuhkanan = A[mid:]

    mergeSort11(separuhkiri)
    mergeSort11(separuhkanan)

    i = 0; j=0; k=0
    while i < len(separuhkiri) and j < len(separuhkanan):
        if separuhkiri[i] < separuhkanan[j]:
            A[k] = separuhkiri[i]
            i = i + 1
        else:
            A[k] = separuhkanan[j]
            j = j + 1
        k=k+1

    while i < len(separuhkiri):
        A[k] = separuhkiri[i]
        i = i + 1
        k=k+1

    while j < len(separuhkanan):
        A[k] = separuhkanan[j]
        j = j + 1
        k=k+1

    for x in A:
        try:
            linked.data = x
            linked = linked.isi
        except:
            pass

mergeSort11(a)
cetak(a)

```

Python 3.8.2 Shell
File Edit Shell Debug Options Win
Python 3.8.2 (tags/v3.8.2:7k
tel)] on win32
Type "help", "copyright", "c
>>>
=== RESTART: D:\Sekolah\INFC
10
20
30
40
50
60
70
>>>

Ln: 17 Col: 12