

On-Chain Forensic Report: Multi-Victim Wallet-Drainer and Cross-Chain Laundering Campaign

Subject: Drain of victim wallet `0x7eee...ac76` and associated cluster, first surfaced publicly by Eli5DeFi (X/Twitter).

Laundering corridor: BSC / EVM → Solana → Tron, consolidated through centralized-exchange (CEX) infrastructure (KuCoin, HTX; OKX and HitBTC observed peripherally).

Core technique: deposit/withdrawal timing-and-amount correlation ("time analysis") to bridge CEX hot-wallet boundaries.

Classification: Public (portfolio edition); all underlying data is publicly observable on-chain.

Report ID: ELI5DEFI-2026-001

Author: Federico Ferrari

Date of issue: 9 July 2026

Investigation window: on-chain activity observed approximately **19 Apr 2026 - 09 May 2026** (UTC); publicly surfaced by Eli5DeFi on **10 May 2026**.

Contents

- 1. Important notice on confidence and standard of proof
- 2. Executive summary
- 3. Scope, objectives and limitations
- 4. Methodology and tooling
- 5. Subjects and identifiers (quick reference)
- 6. The time-analysis method (de-anonymizing CEX hops)
- **PART I: Drain and First Consolidation**
 - 7. Origin: drain of V1 and entry into the actor cluster
 - 8. Obfuscation via 1inch limit orders: recovering the beneficiary from calldata
- **PART II: Cross-Chain Laundering Through CEX Hot Wallets**
 - 9. HTX hop: BSC deposit → Solana withdrawal
 - 10. KuCoin hop: Solana deposit → Tron withdrawal
- **PART III: Second Victim Cluster and Tron Consolidation**
 - 11. Pivoting back from the consolidation address: additional victims
 - 12. Tron consolidation layer
- **PART IV: Assessment, Red Flags and Recommendations**
 - 13. Findings and overall assessment
 - 14. Indicators / red flags (FATF-aligned framing)

- 15. Open lines of inquiry
- 16. Recommendations and next steps

- **Appendices**

- Appendix A: Full identifier list
- Appendix B: Time-analysis pairings (evidence table)
- Appendix C: Source-capture → figure mapping

1. Important notice on confidence and standard of proof

This document is an intelligence product, not a legal determination. Blockchain analysis establishes the movement of value between addresses. It does not, on its own, establish the real-world identity or intent of the natural or legal persons who control those addresses. Every attribution of an address to an exchange, to a victim, or to the threat actor carries an explicit confidence level and should be read at that level.

Confidence terms are used consistently throughout:

Term	Meaning in this report
Confirmed / fact	Directly observable on a public block explorer or in an attached capture (for example a transaction value, timestamp, or counterparty label shown by the explorer).
High confidence	Inference supported by several mutually reinforcing on-chain indicators, with no competing explanation identified.
Moderate confidence	Inference supported by a recognized pattern (for example size-and-timestamp correlation across a CEX) but with residual ambiguity.
Low confidence / investigative lead	A plausible link not yet corroborated; included to direct further work, not to support a conclusion.

Two conventions govern the figures. Dollar values for victim losses and aggregate flows are deliberately presented rounded (for example $\approx$ \$90k rather than a to-the-dollar figure); the rounding is presentational and does not signal doubt about the underlying observation. A value shown to the cent (for example 27,471.1699 USDT) is transcribed directly from a block-explorer capture and is treated as a confirmed observation of that specific transaction.

Scope and completeness. This is a demonstrative investigative work product, not an exhaustive or court-grade account of the campaign; its purpose and boundaries are set out in §3.5, and open lines of inquiry are collected in §15. Where an intermediate pass-through hop was verified on-chain but adds no analytical value, the hop is described and marked as verified rather than reproduced as a figure, to keep the evidentiary chain concise.

2. Executive summary

Between approximately **19 April and 9 May 2026**, an organized threat actor drained multiple externally-owned wallets and laundered the proceeds through a cross-chain corridor built to break on-chain traceability at centralized-exchange boundaries. One of the drained wallets was `0x7eee...ac76`; its compromise was brought to public attention by the Eli5DeFi account on X on **10 May 2026** (<https://x.com/Eli5defi/status/2053261549750595836>). Eli5DeFi was the first to report the drain publicly, which is not the same as being the first wallet hit.

Reconstructed hop by hop (§7–§12), the laundering methodology follows a repeating pattern:

1. **Drain and first consolidation (BSC/EVM).** Victim funds are swept to actor-controlled addresses and aggregated through several pass-through hops (§7, Fig. 1).
2. **Obfuscation via 1inch order flows.** Value is routed through 1inch limit-order `create` calls (§8, Fig. 2–3) and, on a parallel leg, 1inch `arbitraryCalls` transactions (§11.2, Fig. 9); in both variants the `calldata` encodes the true beneficiary address, which can be recovered by decoding the order fields.
3. **CEX chain-hopping.** Funds enter HTX and KuCoin hot-wallet infrastructure on one chain and leave on another (BSC→Solana, then Solana→Tron), severing the direct on-chain link (§9–§10).
4. **De-anonymization by time analysis.** Because the exchange settles the transfer on its internal ledger, the only bridge across the hot-wallet boundary is correlation of deposit and withdrawal by amount and timestamp. This is the central analytical technique of the investigation (§6).
5. **Final consolidation (Tron/USDT).** Laundered value is gathered on Tron into a small number of USDT consolidation addresses, fed in part back out of HTX and KuCoin (§12).

Tracing back from the Tron consolidation layer and re-applying the same time analysis surfaced additional victims beyond the original `0x7eee...ac76` (§11).

Headline figures (rounded). The consolidation path anchored at the actor's first consolidation address `0x9cc...c665` carries roughly **\$290k** of aggregate throughput (Fig. 1), which the analyst assesses is very likely stolen proceeds in the aggregate. Only the directly observable, unobfuscated transfers are enumerated below as named victims: V1 at $\approx$ \$16k, plus V7–V9 at $\approx$ \$90k, $\approx$ \$25k and $\approx$ \$10k respectively (§7.1). The balance reached the address through further obfuscation paths that were not reconstructed. The separate V2 path adds $\approx$ \$54k (§8), bringing the total attributable to this cluster alone to roughly **\$345k**; the Tron consolidation layer (§12) then shows further large inflows on top of that, so the true campaign figure is materially higher. Individual laundered tranches downstream fall in the **~\$19k–\$57k** range per hop. On the Tron layer, one address received a single inbound transfer of $\approx$ **226,714.93 USDT** and a parallel address $\approx$ **149,741.49 USDT**. No single reconciled, double-count-free campaign total is asserted here (§13, §15).

Key attributions (confidence):

- The KuCoin and HTX deposit and withdrawal legs are *confirmed* against block-explorer labels (HTX Hot Wallet, KuCoin "Kucoin 4", KuCoin Deposit Address).

- The deposit→withdrawal *pairings* across each CEX are *moderate-to-high confidence*, resting on size-and-timestamp correlation (§6, §9–§11).
 - Common control of the actor-side addresses across hops is *moderate confidence* and is the principal item requiring further corroboration (§13, §15).
-

3. Scope, objectives and limitations

3.1 Objectives

- Reconstruct the flow of funds from the originating drain of `0x7eee...ac76` to the point of off-ramp or consolidation.
- Document and formalize the time-analysis methodology used to cross CEX boundaries.
- Identify exchange deposit addresses and consolidation addresses suitable for a Request-for-Information (RFI) to the relevant exchanges and, where appropriate, referral to law enforcement.
- Surface additional victims linked to the same actor cluster.

3.2 In scope

On-chain activity on BNB Smart Chain (BSC), Ethereum, Solana and Tron associated with the addresses listed in §5 and Appendix A (§17), within the observed window (§3.4).

3.3 Out of scope / not attempted

- Identification of the natural or legal persons behind any address.
- Off-chain KYC resolution (only the exchanges can perform this; see RFI recommendations, §16). A portion of value also appears to have transited mixing services (assessed, low-moderate confidence), placing it beyond explorer-only tracing.
- Full recovery of the initial intrusion vector. The available evidence is most consistent with private-key compromise (assessed; see §3.5 and §15) rather than a per-transaction phishing or approval exploit, but the intrusion itself is out of scope and is not forensically confirmed here.

3.4 Limitations

- Victim-loss and aggregate figures are presented rounded (§1); per-transaction values cited to the cent are transcribed from explorer captures.
- **Timestamp basis.** Explorer captures are read as UTC. Where a capture shows a relative age ("52 days ago") alongside an absolute timestamp, the absolute UTC value is used.
- The investigation does not claim to have traced every branch. The actor's graph fans out widely (Fig. 1), and only the legs needed to establish the pattern and reach the consolidation layer were followed to completion.

3.5 Purpose and completeness

This report is a demonstrative investigative work product, prepared on a best-effort basis within a bounded time budget. Its purpose is to evidence methodology and analytical tradecraft, not to stand as a complete or court-grade account of the campaign. Tracing was carried far enough to establish and corroborate the laundering pattern and the principal flows, and was deliberately not pushed to exhaustion. Several branches that transited CEX infrastructure, along with value the analyst assesses likely passed through mixing services, were not fully resolved; further victims or off-ramps beyond those listed may exist. Where a flow was left open, that is stated explicitly.

The assessed initial-compromise vector is private-key compromise: multiple victim wallets are swept across more than one chain (§8). This assessment is held at moderate confidence and sits outside the on-chain scope of the report.

4. Methodology and tooling

Approach. Standard hop-by-hop fund-flow tracing, combined with deposit/withdrawal timing-and-amount correlation at CEX boundaries (formalized in §6) and with calldata decoding of 1inch order flows (limit-order `create` and `arbitraryCalls`) to recover beneficiary addresses (§8, §11.2).

Primary sources. Public block explorers: BscScan (BSC), Etherscan (Ethereum), Solscan (Solana), and Tronscan (Tron), together with an attribution and graph provider (Arkham Intelligence, evidenced by the captured graph views, Fig. 1).

Evidentiary discipline. Every material hop is anchored to (a) a transaction hash or explorer view and (b), where attribution is asserted, the explorer-provided entity label (for example "HTX: Hot Wallet" or "KuCoin: Deposit Address"). Inferences that go beyond what an explorer shows are labelled with the confidence terms in §1.

A note on the USDT-TRON token contract. Several Tron captures show `TR7NHqjeKQxGTCi8q8ZY4pL8otSzgjLj6t` (abbreviated `TR7NHq...Lj6t`) in the asset column. This is the official Tether USDT TRC-20 contract, that is, the *token* rather than a participant address. It is excluded from the address-of-interest list to avoid creating a false node, a distinction worth keeping in mind when reading the Tron-side captures (Fig. 8, 10–11).

5. Subjects and identifiers (quick reference)

For readability, identifiers in the tables of this section are shown in short form (leading and trailing characters, on a single line); the full values are consolidated in Appendix A (§17).

5.1 Victims

#	Address	Basis	Confidence
V1	0x7eee...ac76	Primary drain, per Eli5DeFi; drain tx 0x83e8...f6f6	Confirmed (event), attribution per source

#	Address	Basis	Confidence
V2	0x5c71...9e1f	Already compromised (ETH side drained); actor funded 0.02 BNB (0xf741...03bc) to also sweep the BSC side; see §8	High
V3	0x8016...f978	Linked via bridger 0xbcf1...6089	Moderate (lead)
V4	0x5acb...a508	Linked via bridger 0xbcf1...6089	Moderate (lead)
V5	0xb089...c85e	Linked via bridger 0xbcf1...6089	Moderate (lead)
V6	0x20ef...ee90	Linked via bridger 0xbcf1...6089	Moderate (lead)
V7	0x48ad...5860	Direct transfer to actor consolidation 0x9cc...c665 ; ≈ \$90k drained (§7.1)	High
V8	0x1F5f...F2b0	Direct transfer to actor consolidation 0x9cc...c665 ; ≈ \$25k drained (§7.1)	High
V9	0x0446...a93f	Direct transfer to actor consolidation 0x9cc...c665 ; ≈ \$10k drained (§7.1)	High

5.2 Actor-controlled addresses (EVM)

Only addresses with an evidenced role in the narrative are tabulated below. The intermediate pass-through and fan-out hops on the upper path (0x4ed0... , 0xc450... , 0xa499... , fan-out node 0xDE9d... , secondary node 0x623E...) carry negligible residual balances and are shown in the master graph (Fig. 1) rather than repeated here.

Address	Role (as evidenced)
0x9cc...c665	Actor consolidation address; direct-transfer destination from V1 and V7–V9; anchors a consolidation path carrying ≈ \$290k aggregate throughput (§7.1)
0x364b...8c44	V2 path hop 1
0x0c89...0871	V2 path hop 2
0x817f...979c	V2 path hop 3; 1inch order maker (Fig. 2–3)
0xb3fd...D9C7	Beneficiary recovered from 1inch order receiver field (Fig. 3)
0x02Da...bB20	Second bridging address (paired with the recovered beneficiary); link verified on-chain, supporting capture not reproduced (§8)
0xbcf1...6089	Bridger linking V3–V6
0xE62a...Fa4a	BSC sender in additional-victim leg (0xee34...d4a8)
0x40a0...A152	Sender in captured HTX BNB deposit (Fig. 4); one verified pass-through hop downstream of the §8 bridging addresses (intermediate hop not reproduced)

5.3 Exchange deposit addresses (explorer-labelled)

Only the exchange deposit addresses are listed here; these are the actionable RFI targets. Exchange hot and withdrawal wallets (HTX Hot Wallet, KuCoin Hot Wallet 2, "Kucoin 4", OKX Hot Wallet 8) are exchange-owned infrastructure rather than actor-specific, and appear in the figures where relevant.

Entity	Address	Chain	Source
KuCoin Deposit Address (V1 fan-out)	0x544B...5fFe	EVM	Fig. 1
KuCoin Deposit Address (V1 fan-out)	0x3F5a...02E6	EVM	Fig. 1
KuCoin Deposit Address (V1 fan-out)	0x827C...50d1	EVM	Fig. 1
KuCoin Deposit Address (V1 fan-out)	0xb555...acE3	EVM	Fig. 1
KuCoin Deposit Address (V1 fan-out)	0x5c5B...5bdD	EVM	Fig. 1
KuCoin Deposit Address (V1 fan-out)	0x7a5e...0eAd	EVM	Fig. 1
HitBTC Deposit (V1 fan-out)	0xBaB2...b135	EVM	Fig. 1

The equivalent deposit addresses on the V2 path have not yet been expanded to full form and remain an open item (§15).

5.4 Consolidation / staging layer (Tron, USDT)

Address	Role (as evidenced)	Confidence
TQLXH45...m62m	Terminal consolidation address for the recovered flows (§10–§12)	High (topology verified; intermediate hop not reproduced)
TYZfYaj...ZE84	Recipient of KuCoin withdrawal (Fig. 7)	Confirmed (tx)
TF1KHxD...Rcv4	Staging address, second cluster (Fig. 8); direct transfer into TQLXH45... (§11.1)	High
TRHcAhJ...AmZU	Received ≈226,714.93 USDT (Fig. 10); fed consolidation	Confirmed (tx)
TTMdreb...L3xn	Received ≈149,741.49 USDT (Fig. 11)	Confirmed (tx)
TUdbHz1...bhdA	Pre-consolidation, HTX-fed (Fig. 10)	Confirmed (tx)
TKiPseUe5o...kpBV9Qb	Pre-consolidation, HTX-fed (Fig. 11)	Confirmed (tx)

5.5 Solana addresses

Address	Role	Source
5vC4of...gt8eqH	Recipient of HTX USDT withdrawal (actor Solana account)	Fig. 5
J1XSfoR9...hb1odK	Actor Solana wallet forwarding into the KuCoin deposit	Fig. 6

6. The time-analysis method (de-anonymizing CEX hops)

6.1 The problem

When laundered value enters a centralized exchange, the on-chain trail stops at the exchange's hot wallet. The exchange credits an internal ledger and later pays out from a different hot wallet, often on a different blockchain. No direct on-chain edge links the

deposit to the withdrawal; that link lives inside the exchange's private books. This gap is what the actor exploits by chain-hopping through HTX and KuCoin.

6.2 The technique

Time analysis reconstructs the missing edge probabilistically, by matching a deposit to a withdrawal on three jointly observable properties:

1. **Amount.** The withdrawal value equals the deposit value net of conversion and fees (for example, BNB in against USDT out at the prevailing rate).
2. **Timestamp.** The withdrawal follows the deposit within a short, plausible window (seconds to minutes in the cases observed here).
3. **Asset and destination chain.** Consistent with the actor's known corridor (BSC→Solana→Tron).

A single match is suggestive. A repeating, self-consistent chain of matches across several independent hops (§9–§11) is much harder to write off as coincidence, and lifts the combined inference to moderate-to-high confidence. The output is still a correlation, not proof that the exchange moved those particular coins. It is weakest where the amount is round or the deposit lands in a busy window, and strongest where the amount is distinctive and the timing tight. Each pairing below is rated on its own merits.

6.3 Worked example (the May-01-2026 chain)

Step	Event	Amount (as captured)	Timestamp (UTC)	Δt	Fig.
A	Deposit BNB → HTX Hot Wallet	44.4279 BNB (≈ \$27,340.94)	01 May 2026 14:45:19	n/a	4
B	Withdrawal HTX → Solana (USDT)	27,471.1699 USDT (≈ \$27,471.16)	01 May 2026 14:47:13	+≈2 min	5
C	Deposit Solana → KuCoin (USDT)	27,471.1699 USDT (≈ \$27,471.16)	01 May 2026 15:10:16	+≈23 min	6
D	Withdrawal KuCoin "Kucoin 4" → Tron (USDT)	27,469.5 USDT	01 May 2026 15:13:42	+≈3 min	7

The chain is internally consistent from end to end. The A→B leg (the HTX hop) pairs a BNB deposit worth ≈\$27,340.94 with a 27,471.1699 USDT withdrawal about two minutes later; the small (~\$130) difference is the expected result of the BNB→USDT conversion, a volatile asset priced at deposit against a stablecoin at withdrawal, net of fees. The B→C leg is what joins the two exchanges: the 27,471.1699 USDT that leaves HTX on Solana arrives at the KuCoin deposit leg to the cent, tying the two CEX hops into a single flow rather than two coincidentally similar traces. The C→D leg (the KuCoin hop) then pairs that 27,471.1699 USDT deposit with a 27,469.5 USDT withdrawal on Tron about three minutes later, the ≈1.67 USDT difference matching the KuCoin withdrawal fee. The one join that time analysis cannot observe directly, namely which deposit funded which withdrawal inside each exchange, is exactly what an RFI (§16) would settle.

PART I: DRAIN AND FIRST CONSOLIDATION

7. Origin: drain of V1 and entry into the actor cluster

Confirmed (event). Victim wallet `0x7eee669d684b6096a6ad67e993f7d384ad02ac76` (V1) was drained on **09 May 2026 at 15:55:03 UTC** in transaction `0x83e84825464b53e83e1102a399a779cf6797c38f99191b6cda2387cf6409f6f6`, publicly flagged by Eli5DeFi (source post: <https://x.com/Eli5defi/status/2053261549750595836>). The wallet was emptied of its token holdings, the MEGA token among them, for an estimated $\approx \$16k$.

Confirmed (graph). Value moved by direct transfer to `0x9cc0831db1b224fd675a21ac0d0adda82631c665`, which is itself an actor consolidation address rather than a single-hop relay. Besides V1 it receives direct-transfer drains from several other victims (§7.1); from there, value passes through a series of pass-through hops before fanning out to multiple exchange deposit addresses (Fig. 1).

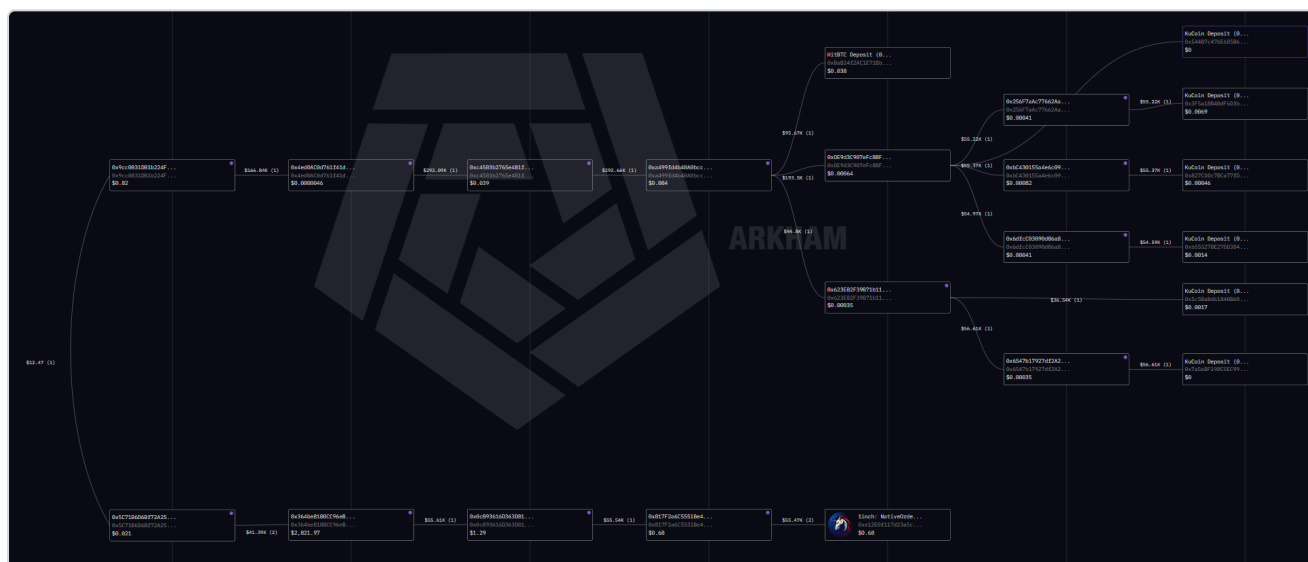


Fig. 1. Master fund-flow graph (Arkham Intelligence). Left: actor entry `0x9cc...c665`. Centre: pass-through hops `0x4ed0...` → `0xc450...` → `0xa499...` → fan-out node `0xDE9d...`. Right: terminal KuCoin deposit addresses (and one HitBTC deposit). Lower row: the V2 chain `0x5c71...` → `0x364b...` → `0x0c89...` → `0x817f...` → 1inch NativeOrder. Edge labels are USD-equivalent throughput; node figures are residual balances. The terminal deposit-address labels are expanded in full in §5.3; remaining truncated intermediaries are tracked in §15.

Observation (high confidence). Edge values on the upper path are large and increase across hops: $\approx \$166.84k$ leaves `0x9cc...c665`, merges with further inflows at the next hop `0x4ed0...`, and continues as $\approx \$292k$ across the following two hops before $\approx \$193.5k$ enters the fan-out node. The step-up from $\approx \$166.84k$ to $\approx \$292k$ confirms that the path aggregates value from more than one source: `0x9cc...c665` is the entry point, but the $\approx \$290k$ aggregate forms at `0x4ed0...`, not at `0x9cc...c665` itself. Edge labels are aggregate USD-equivalent throughput, not victim-specific loss. The analyst's working assessment is that the full $\approx \$290k$ carried by this path is very likely stolen proceeds; even so, only the directly observable, unobfuscated transfers are enumerated as named victims below (§7.1). The balance reached the path through further obfuscation that was not reconstructed within the

report's time budget, and is therefore left unattributed rather than assigned to specific victims.

7.1 Victims feeding the first consolidation address (0x9cc...c665)

In addition to V1, the consolidation address 0x9cc...c665 receives direct-transfer drains from at least three further victim wallets. These directly observable transfers account for roughly \$141k of the ≈\$290k carried by the consolidation path (§7); the dollar figures below are rounded to the nearest thousand (§1):

Victim	Address	Approx. drained	Basis
V1	0x7eee...ac76	≈ \$16k	Direct transfer (drain tx 0x83e8...f6f6)
V7	0x48ad...5860	≈ \$90k	Direct transfer to 0x9cc...c665
V8	0x1F5f...F2b0	≈ \$25k	Direct transfer to 0x9cc...c665
V9	0x0446...a93f	≈ \$10k	Direct transfer to 0x9cc...c665

These are high-confidence victims: direct, unobfuscated transfers into an actor-controlled consolidation address. The dollar amounts are rounded, and the listed wallets are unlikely to be the only inbound victims (see the completeness caveat, §3.5).

Fan-out to CEX deposit addresses (confirmed labels, truncated values). The node 0xDE9d3C907eFc88F... distributes to several KuCoin Deposit addresses and one HitBTC Deposit address, each receiving ≈\$54.6K–\$95.7K (Fig. 1). The deposit addresses are listed in full in §5.3 and Appendix A, ready for an exchange RFI.

8. Obfuscation via 1inch limit orders: recovering the beneficiary from calldata

A distinctive piece of tradecraft appears on the V2 path. By this point victim V2 (0x5c71b6d6bf72a25df3f42b1825438ae97e7a9e1f) was already compromised: its ETH-side assets had been drained, and the actor then funded 0.02 BNB (tx 0xf7418b0a7f22a5eb93278e6198c52a8fa513dc1a265f40964f1c1e90d75203bc) to cover BSC gas and sweep the BSC side as well. The BSC-side funds then moved 0x364b...c44 → 0x0c89...871 → 0x817f2a6c5551be49e7da0609700971595c8d979c (Fig. 1, lower row).

That last address then submitted 1inch limit-order create transactions on Ethereum (hence the Ethereum-mainnet WETH makerAsset below), with BSC as the destination chain into which the resulting value is routed toward the HTX deposit of §9. The order calldata is a tuple of uint256 fields (Fig. 2); decoding the relevant fields from their integer form to addresses reveals the intended beneficiary (Fig. 3):

- makerOrder.maker → 0x817f2a6c5551be49e7da0609700971595c8d979c (the actor address itself), which confirms the decode is internally consistent.
- makerOrder.receiver → 0xb3fd7de3f8242d925e0ea9e1660e395def56d9c7 , the recovered beneficiary address.
- makerOrder.makerAsset → 0xc02aaa39b223fe8d0a0e5c4f27ead9083c756cc2 (WETH).
- makerOrder.takerAsset → 0xda0000d4000015a526378bb6fafc650cea5966f8 .

Function: create((uint256,uint256,uint256,uint256,uint256,uint256,uint256,uint256))

#	Name	Type	Data
1	▼ makerOrder	tuple	
	makerOrder.salt	uint256	33701747983608238428393584543043868874539041549229485244365955561217799330592
	makerOrder.maker	uint256	739295699656402264357258147903913708272906770332
	makerOrder.receiver	uint256	16294699634194619672989392043669836484895030048

Fig. 2. Decoded `create((uint256,...))` input. The `makerOrder` tuple carries `salt`, `maker` and `receiver` as `uint256`, not yet human-readable as addresses.

- `makerOrder.maker` → `0x817f2a6c5551be49e7da0609700971595c8d979c`
- `makerOrder.receiver` → `0xb3fd7de3f8242d925e0ea9e1660e395def56d9c7`
- `makerOrder.makerAsset` → `0xc02aaa39b223fe8d0a0e5c4f27ead9083c756cc2`
- `makerOrder.takerAsset` → `0xda0000d4000015a526378bb6fafc650cea5966f8`

Fig. 3. `maker`, `receiver`, `makerAsset` (WETH) and `takerAsset` recovered as addresses. The `receiver` field exposes beneficiary `0xb3fd7de3...56d9c7`, which is not visible from the transfer graph alone.

Assessment (high confidence on the decode; moderate on intent). Recovering `0xb3fd7de3...56d9c7` from the order `receiver` field is a deterministic decode and is treated as confirmed. Paired with it in the same flow is a second bridging address, `0x02DaadFA6bbD1d99B2D53fDC6Cbe0DeAab8FbB20`; the link was verified on-chain, and the supporting capture is not reproduced in this edition (§1). Here the 1inch limit order functions as an obfuscation layer: the beneficiary is encoded in calldata rather than appearing as a plain transfer counterparty.

PART II: CROSS-CHAIN LAUNDERING THROUGH CEX HOT WALLETS

9. HTX hop: BSC deposit → Solana withdrawal

The two bridging addresses recovered in §8 then deposited to HTX, in two transactions of ≈ \$27k each. The captured deposit (Fig. 4) and the matching withdrawal (Fig. 5) are the first CEX boundary crossed by time analysis (§6.3, steps A-B).

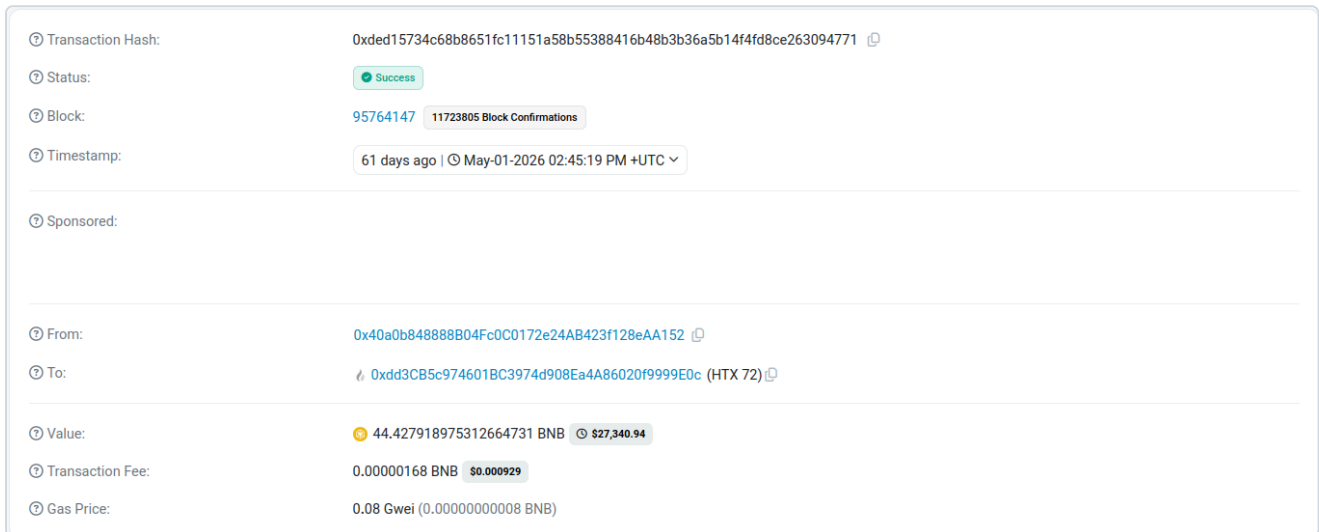


Fig. 4. Deposit into HTX (BSC). Tx `0xded15734...263094771`, 44.4279 BNB (≈ \$27,340.94) to the HTX 72 hot wallet `0xdd3CB5c974601BC3974d908Ea4A86020f9999E0c`, 01 May 2026 14:45:19 UTC. Note: the From-address shown, `0x40a0b848...EAA152`, sits one verified pass-through hop downstream of the §8 bridging addresses; the intermediate hop is not reproduced as a figure (§1).

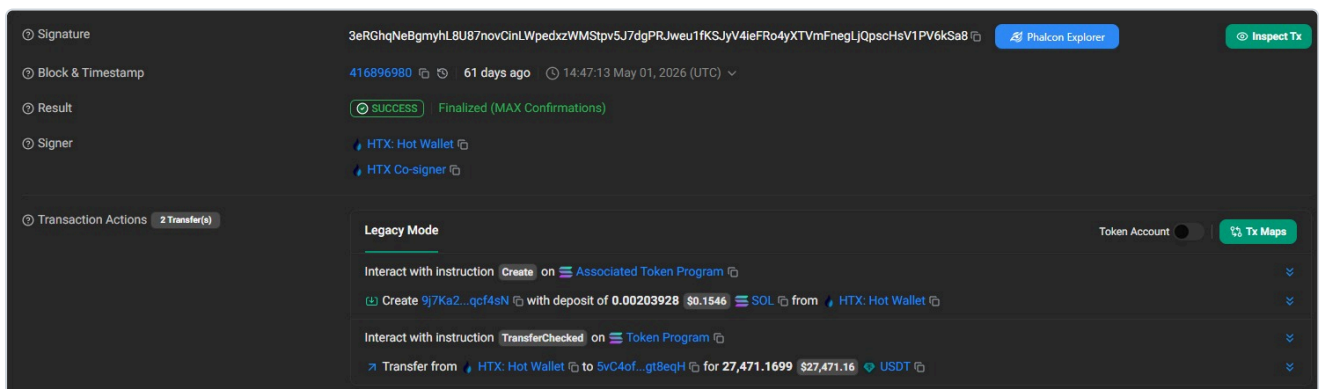


Fig. 5. Withdrawal from HTX (Solana). HTX Hot Wallet (co-signed) transfers 27,471.1699 USDT (≈ \$27,471.16) to the actor's Solana account `5vC4of...gt8eqH`, 01 May 2026 14:47:13 UTC, about 2 min after the Fig. 4 deposit.

Assessment (moderate-high confidence). Direction, exchange labels and timing are *confirmed* from the explorers. The deposit-to-withdrawal pairing is strong: a ≈2-minute gap, the expected BSC→Solana corridor, and a close value match. The residual difference (BNB in ≈\$27.34k against USDT out ≈\$27.47k) is expected and does not weaken the pairing; it reflects the BNB→USDT conversion (a volatile asset valued at deposit against a stablecoin at withdrawal), net of fees. On the attribution side, the captured depositor

reaches HTX one verified pass-through hop downstream of the [\\$8](#) bridging addresses (see the Fig. 4 note).

The withdrawal lands at the actor's Solana account `5vC4of...gt8eqH`, which then forwards the funds one hop on Solana (intermediate transfer not reproduced) to `J1XSfoR9...hb1odK`. That address transfers the same amount (27,471.1699 USDT) into the KuCoin deposit leg ([\\$10](#), Fig. 6). The exact-amount carry-through across the `5vC4of... → J1XSfoR9... → KuCoin` path is what links the HTX hop to the KuCoin hop that follows.

10. KuCoin hop: Solana deposit → Tron withdrawal

The Solana-side funds were then deposited to KuCoin and withdrawn on Tron, the second CEX boundary, again bridged by time analysis ([\\$6.3](#), steps C-D).

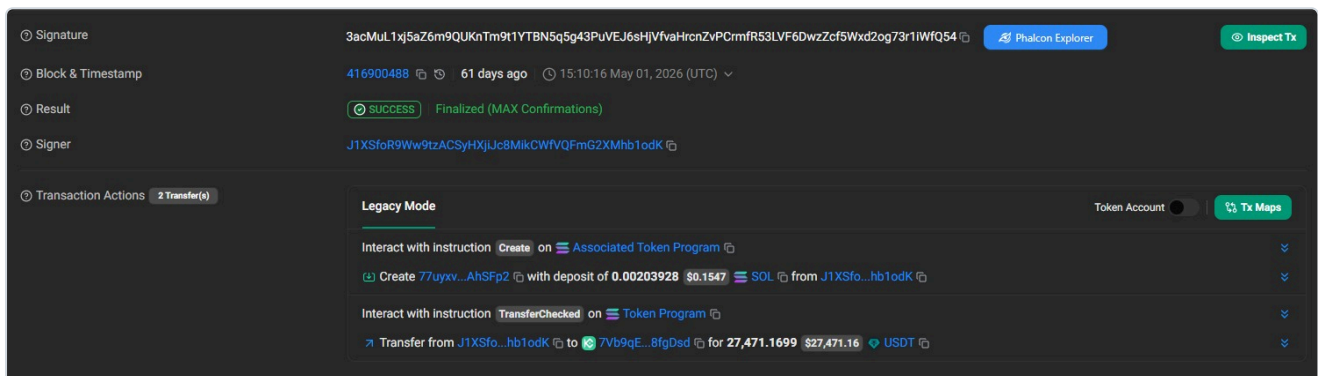


Fig. 6. Deposit into KuCoin (Solana). `J1XSfoR9...hb1odK` → KuCoin Solana hot wallet `7Vb9qE...8fgDsd`, 27,471.1699 USDT ($\approx$ \$27,471.16), 01 May 2026 15:10:16 UTC, the identical amount carried over from the Fig. 5 HTX withdrawal.

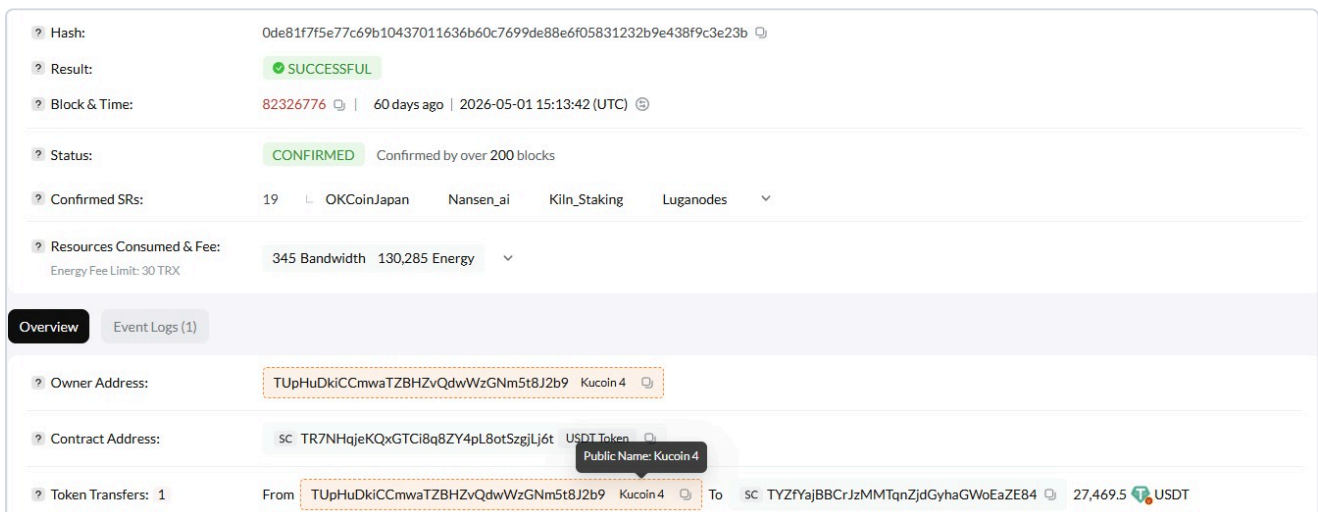


Fig. 7. Withdrawal from KuCoin (Tron). "Kucoin 4" (`TUpHuDkiCCmwaTZBHzvQdwWzGNm5t8J2b9`) → `TYZfYajBBCrJzMMTqnZjdGyhaGwoEaZE84`, 27,469.5 USDT, tx `0de81f7f...9c3e23b`, 01 May 2026 15:13:42 UTC, about 3 min after the Fig. 6 deposit, amounts matching to $\approx$ 1.67 USDT.

Assessment (high confidence on this pairing). The C→D match is among the strongest links in the chain: near-identical amounts ($\Delta \approx 1.67$ USDT, the KuCoin withdrawal fee) over a $\approx$ 3-minute window, with the deposit amount itself carried over unchanged from the HTX withdrawal ([\\$9](#)). That ties the two CEX hops into a single flow. The withdrawal lands at `TYZfYajBBCrJzMMTqnZjdGyhaGwoEaZE84`, from which the funds move on, through one verified

pass-through hop (not reproduced as a figure, [S1](#)), to the Tron consolidation address `TQLXH45i7JboiDVVF2jSGSiTFEfrUVm62m`.

PART III: SECOND VICTIM CLUSTER AND TRON CONSOLIDATION

11. Pivoting back from the consolidation address: additional victims

11.1 Back-trace from the Tron consolidation address

With the May-01 flow resolved forward to the Tron consolidation address

TQLXH45i7JboiDVVF2jSGSiTFEfrUVm62m ([§10](#)), the investigation pivoted and worked the same address backwards: instead of following new value downstream, the consolidation address's earlier inflows were traced in reverse to surface sibling flows. TQLXH45... received a direct transfer from the Tron staging address TF1KHXD9H8VtDcS4cvrQb6d6Di4HdURcv4 .

That staging address in turn shows three USDT inflows (Fig. 8):

1ebe6b... c8a09	82041868	64 days ago	OKX Hot Wallet 8	SC TF1KHXD9H...HdURcv4	+19,106.5	USDT TR7NHq...Lj6t
259c05... 55128	82041862	64 days ago	SC TWy99dtk21J... oJCjG9e	SC TF1KHXD9H...HdURcv4	+20,687.5	USDT TR7NHq...Lj6t
394cad1... d7ff0	82041854	64 days ago	SC TL2xMeL9o... 1hoVYKU	SC TF1KHXD9H...HdURcv4	+22,998.5	USDT TR7NHq...Lj6t

Fig. 8. Tron staging address TF1KHXD9H8VtDcS4cvrQb6d6Di4HdURcv4 receives USDT inflows of +19,106.5 (from OKX Hot Wallet 8), +20,687.5 and +22,998.5. The asset column TR7NHq...Lj6t is the USDT token contract, not a counterparty ([§4](#)).

Applying the same time analysis ([§6](#)) to the +22,998.5 USDT inflow, the leg was reconstructed backwards transaction by transaction; each hop is cited here by its transaction hash rather than by its receiving address: the Tron receive from KuCoin, tx bc2fb3904bacbee8dc0afc57022f18a73bd597fcd7a8faf5ef58e29c5135e870 ; behind it the matching Solana-side deposit into KuCoin, tx signature quhn9ReYT7s8kSiG4RPauX2z3mXuurbKyZn3u5rhYCoBX2W3MxRHFgPfm4XhnggEpxXRYdEneXUXViXknsAQaYw ; and behind that the originating BSC leg, tx 0xee348feff0ea5f2d311df3bbf2dba73ac374c8350be067d3a4963a95c27ed4a8 from sender 0xE62ad78a3CB6adEB8bf8eE3b2d8e3458bCcdFa4a , the origin of the flow. This is the same BSC → Solana → KuCoin → Tron corridor established in [§9–§10](#), executed a second time.

11.2 The bridging address and victims V3–V6

Examining who bridged this leg identifies the bridging address

0xbcf1fc903a704746fea5f31cef0f4b37fbec6089 , which connects to four further victim addresses (V3–V6, [§5.1](#)): 0x8016ffb74eecd79ff6a5f52f2db1bf4da6ff978 , 0x5acb72f0b6dbaf17d98154b9c7f5dda0b827a508 , 0xb08902f0034a7acd320783aa249444143cddc85e , 0x20efcc9aff67324208fbd6a3701a8fd1dcbeee90 .

A parallel instance (dated 21 Apr 2026) again routes value through 1inch, this time via arbitraryCalls transactions in ETH (a variant of the [§8](#) obfuscation primitive), from the same bridging address (Fig. 9), feeding the Tron staging address of [§11.1](#):

2026/04/21 18:27:59 0xda41...bc30	1" create 1inch	-9.0310 ETH (\$21,014.96)	Gas Fee 0.0001 ETH (\$0.26)
2026/04/21 18:24:59 0x84c3...73a0	1" create 1inch	-9.0000 ETH (\$20,942.82)	Gas Fee 0.0001 ETH (\$0.27)
2026/04/21 18:17:47 0x07de...65d2	1" create 1inch	-10.0000 ETH (\$23,269.80)	Gas Fee 0.0002 ETH (\$0.39)

Fig. 9. 1inch `arbitraryCalls` transactions, 21 Apr 2026: -9.0310 ETH ($\approx$ \$21,014.96), -9.0000 ETH ($\approx$ \$20,942.82), -10.0000 ETH ($\approx$ \$23,269.80). Txns `0xda41...bc30`, `0x84c3...73a0`, `0x07de...65d2` (truncated).

Assessment (moderate confidence). The three ETH transaction sizes ($\approx$ \$21.0k / \$20.9k / \$23.3k) correspond by size to the three Tron USDT inflows ($\approx$ \$19.1k / \$20.7k / \$23.0k): the same time-analysis logic across a CEX boundary, with OKX now appearing as a third exchange in the corridor. Two of the three matches are close (within $\approx$ 1-2%); the third (the $\approx$ \$21.0k transaction against the +19,106.5 inflow) is looser at $\approx$ \$1.9k and may reflect price movement or fees.

The equivalent time-analysis legs for the remaining inflows are not restated transfer by transfer: the pattern is identical to the worked example in §6.3, and repeating each pairing would add bulk without analytical value. All recovered flows on this cluster route to the same Tron consolidation address.

12. Tron consolidation layer

The layer above the consolidation address was surveyed, deliberately, without being pushed to exhaustion. Two large Tron consolidation inflows stand out, each aggregated on a pre-consolidation address fed directly out of the HTX hot wallet in mid-five-figure USDT tranches and then swept onward in a single transfer:

ca9617...23225	82242729	58 days ago	SC TUdbHz1VhU...fEvbhdA	TRHcAhJHkyrL6...ocnAmZU	-226,714.93009	USDT TR7NHq...Lj6t
ca9617...23225	82242729	58 days ago	SC TUdbHz1VhU...fEvbhdA	TLntW9Z59LYY5K...a828ird	-2	USDT TR7NHq...Lj6t
257209...60470	82242698	58 days ago	HTX 4	SC TUdbHz1VhU...fEvbhdA	+33,421.54	USDT TR7NHq...Lj6t
14bf86...5e3e2	82242657	58 days ago	HTX 4	SC TUdbHz1VhU...fEvbhdA	+49,623.795243	USDT TR7NHq...Lj6t
916633...15782	82242543	58 days ago	HTX 4	SC TUdbHz1VhU...fEvbhdA	+48,137.049338	USDT TR7NHq...Lj6t
4b1778...c64a6	82242542	58 days ago	HTX 4	SC TUdbHz1VhU...fEvbhdA	+47,375.56766	USDT TR7NHq...Lj6t
3836d1...50bfb	82242538	58 days ago	HTX 4	SC TUdbHz1VhU...fEvbhdA	+48,158.977849	USDT TR7NHq...Lj6t

Fig. 10. Pre-consolidation address `TUdbHz1VhUoHV2w9anFkz3KzKjifEvbhdA`: five HTX 4 USDT inflows (33,421.54 / 49,623.795243 / 48,137.049338 / 47,375.56766 / 48,158.977849) aggregated, then 226,714.93009 USDT swept to `TRHcAhJHkyrL6...ocnAmZU`, with a final 2 USDT transfer to `TLntW9Z...a828ird`. The five inflows sum to 226,716.93009 USDT, exactly the sweep plus the 2 USDT residue: the address is emptied to zero and the captured inflow set is complete.

9ddee3...3027d	81982863	67 days ago	SC TKiPseUe5o... kpBV9Qb	TTMdreb7hhtp8B...7GEL3xn	-149,741.488597	USDT TR7NHq...Lj6t
9ddee3...3027d	81982863	67 days ago	SC TKiPseUe5o... kpBV9Qb	TLntW9Z59LYY5K... a828ird	-2	USDT TR7NHq...Lj6t
a83d3e...5cde1	81982843	67 days ago	HTX 4	SC TKiPseUe5o... kpBV9Qb	+32,651.91	USDT TR7NHq...Lj6t
f5ec4d8...ee6f3	81981822	67 days ago	HTX 4	SC TKiPseUe5o... kpBV9Qb	+37,994.329749	USDT TR7NHq...Lj6t
cb3f0a1...d09d3	81981538	67 days ago	HTX 4	SC TKiPseUe5o... kpBV9Qb	+40,272.013322	USDT TR7NHq...Lj6t
daede97...3fb43	81979773	67 days ago	HTX 4	SC TKiPseUe5o... kpBV9Qb	+38,825.235526	USDT TR7NHq...Lj6t

Fig. 11. Pre-consolidation address `TKiPseUe5o...kpBV9Qb` : four HTX 4 USDT inflows (32,651.91 / 37,994.329749 / 40,272.013322 / 38,825.235526) aggregated, then 149,741.488597 USDT swept to `TTMdreb7hhtp8BVUFzGK4bj8Lrz7GEL3xn` , with the same 2 USDT residue to `TLntW9Z...a828ird` . The four inflows sum to 149,743.488597 USDT, exactly the sweep plus the residue: again a complete, zeroed-out set.

Consolidation inflow (confirmed tx). The consolidation wallet received a direct transfer (Tron tx `0e98dea94bdc12595124f9d18ed95f1d4fc73fda6aa98575cff5744dccef85f`) from `TRHcAhJHkyrL6vyUNDGsHvVXHE9ocnAmZU` , the recipient of the $\approx 226,714.93$ USDT sweep (Fig. 10).

Pattern (high confidence for the pattern; provenance assessed). The structure across Fig. 10–11 is consistent: value cycles through HTX in mid-five-figure USDT tranches, is aggregated on a staging address, and is swept into the consolidation layer, each staging address being emptied to zero with a closing 2 USDT residue transfer to the same third address (`TLntW9Z...a828ird` , Fig. 10–11), most plausibly a fee or residue payment, and not treated as an address of interest. This is a standard layering-then-consolidation sequence. The analyst assesses (low-moderate confidence, consistent with §3.3) that part of the value upstream of these HTX-mediated inflows transited mixing or obfuscation services before reaching the exchange.

Boundary of this trace (explicit). The victims behind these two inflow sets, roughly 226.7k and 149.7k USDT, were **not** enumerated. A preliminary reverse search did not surface additional victim wallets, and, consistent with the bounded scope set out in §3.5, this leg was recorded as an open line of inquiry (§15) rather than pursued to exhaustion. Given the scale of the amounts and the repetition of the campaign pattern, the analyst assesses it is likely that further drained users sit behind these flows; identifying them is the highest-value continuation of this work (§16).

PART IV: ASSESSMENT, RED FLAGS AND RECOMMENDATIONS

13. Findings and overall assessment

1. **A single threat-actor cluster drained multiple EVM wallets.** V1 and V7-V9 reached the first consolidation `0x9cc...c665` by direct transfer ($\approx$ \$141k enumerated within $\approx$ \$290k aggregate inbound; high confidence), V2 arrived by a separate path (high confidence), and V3-V6 plus others remain leads. The proceeds were laundered through a repeatable cross-chain corridor (BSC/EVM $\rightarrow$ Solana $\rightarrow$ Tron). *Confidence: moderate-high for the methodology; common control across all hops is moderate and is the principal item for further corroboration.*
2. **CEX hot wallets serve as cross-chain "mixers".** HTX and KuCoin (with OKX and HitBTC seen peripherally) take a deposit on one chain and pay out on another, defeating naive graph tracing. *Confidence: high (explorer labels confirm the deposit and withdrawal endpoints).*
3. **Time analysis bridges the CEX gaps.** Size-and-timestamp correlation reconstructs the deposit $\rightarrow$ withdrawal joins; the strongest pairing (§10) matches to $\approx$ 1.67 USDT over a three-minute window, and the remainder are moderate to moderate-high. *Confidence: as stated per hop.*
4. **1inch order flows serve as an obfuscation primitive.** Beneficiary addresses are encoded in limit-order `create calldata` (§8), with `arbitraryCalls` used on a parallel leg (§11.2). *Confidence: high (deterministic decode).*
5. **Consolidation occurs on Tron in USDT**, with mid-five-figure tranches aggregated into six-figure sweeps (§12). *Confidence: high for the pattern; the two captured sweeps reconcile internally to the cent (Fig. 10-11). The victims behind these inflows were deliberately not enumerated (§12) and remain an open line of inquiry.*

On a campaign loss total. No single reconciled figure is asserted. The consolidation path anchored at `0x9cc...c665` alone carries $\approx$ \$290k (assessed likely stolen; $\approx$ \$141k of it enumerated by direct transfer, §7.1); the separate V2 path adds $\approx$ \$54k (§8), bringing this cluster to roughly \$345k, and the Tron layer shows two further large consolidation inflows ($\approx$ 226.7k and $\approx$ 149.7k USDT, §12). These figures cannot simply be summed: doing so would double-count across the fan-out (Fig. 1), the CEX hops and the consolidation layer, and the trace is not exhaustive (§3.5). A reconciled campaign total is an explicit open item (§15).

14. Indicators / red flags (FATF-aligned framing)

The following are consistent with recognized money-laundering typologies for virtual assets (FATF red-flag indicators relating to transactions, anonymity and source of funds):

- **Rapid, sequential cross-chain movement** immediately after receipt, with no economic purpose other than obfuscation (chain-hopping BSC $\rightarrow$ Solana $\rightarrow$ Tron).

- **Use of CEX deposit and withdrawal on different chains** to break traceability (HTX, KuCoin).
- **Structuring** of value into repeated mid-five-figure tranches (~\$27k, ~\$37k-\$50k) before consolidation.
- **Calldata-obfuscated beneficiaries** via 1inch limit orders and `arbitraryCalls` (§8, §11.2).
- **Layering through multiple pass-through addresses** with negligible residual balances (Fig. 1).
- **Suspected use of mixing or obfuscation services** for a portion of the value (assessed; not fully resolved within this report's time budget, §3.5).

15. Open lines of inquiry

The items below are investigative continuations and preconditions for external action (exchange RFIs, victim notification, referral). They qualify the *completeness* of the trace, not the findings in §13.

1. **Victims behind the Tron consolidation inflows (§12).** The HTX-fed tranches aggregated on `TUdbHz1...` and `TKiPse...` (~226.7k and ~149.7k USDT) were not traced back to their source victims; a preliminary reverse search surfaced none. Deliberately left open (§3.5); the highest-value continuation of this investigation.
2. **Common control across hops.** Common control of the actor-side addresses across the full corridor is held at moderate confidence (§13). The exchanges' internal ledger and KYC records (§16, RFI) are the most direct route to corroboration.
3. **Reconciled campaign total.** The ~\$290k aggregate (~\$141k enumerated) is evidenced at the first consolidation `0x9cc...c665` alone (§7.1), with ~\$54k more on the V2 path (§8); a reconciled, double-count-free figure across the second cluster and the Tron consolidation layer has not been built.
4. **Identifier expansion for the RFI package.** The V2-path exchange deposit addresses (§5.3), one Tron address still truncated as captured (`TKiPseUe5o...`, §5.4), one Solana account (`5vC4of...`, §5.5) and the Fig. 9 transaction hashes should be expanded to full form so that every identifier in an outgoing RFI is cited in full.
5. **Initial intrusion vector.** Assessed most likely private-key compromise (cross-chain sweeps of the same victim wallets; §8, §3.5); held at moderate confidence and out of on-chain scope. Not forensically confirmed.

16. Recommendations and next steps

1. **Exchange RFIs and law-enforcement referral.** Prepare requests to KuCoin, HTX and OKX keyed to the confirmed deposit and withdrawal txs and timestamps (§6.3, §10, §12) and to the deposit addresses in §5.3. The exchanges hold the internal ledger entries that turn each time-analysis *inference* into a *confirmed* join, and the KYC that can identify the beneficiary.
2. **Victim notification.** For V2-V9, confirm the drains where still unconfirmed and notify the wallet owners.

3. **Complete the identifier expansion** (§15, item 4) so that every address and transaction cited in the RFI package appears in full form.
 4. **Watch-listing.** Add the consolidation and pre-consolidation Tron addresses (§5.4) and the bridger `0xbcf1...6089` to monitoring for further movement and new victims.
 5. **Independent re-derivation.** Have a second analyst reproduce the strongest pairing (§10) and at least one moderate pairing (§9 or §11.2) from primary explorers.
-

APPENDICES

17. Appendix A: Full identifier list

Identifiers confirmed in full are reproduced below without truncation; entries still truncated as captured are noted and tracked in §15.

Victims (full): 0x7eee669d684b6096a6ad67e993f7d384ad02ac76 (V1);

0x5c71b6d6bf72a25df3f42b1825438ae97e7a9e1f (V2); 0x8016ffb74eecd79ff6a5f52f2db1bf4da6ff978 (V3); 0x5acbf72f0b6dbaf17d98154b9c7f5dda0b827a508 (V4);

0xb08902f0034a7acd320783aa249444143cddc85e (V5); 0x20efcc9aff67324208fbd6a3701a8fd1dcbeee90 (V6); 0x48ad22b0114b00d972c9ab51a41558fc5dd65860 (V7, ≈ \$90k);

0x1F5fEB64834647585E201e1bC1A0Ab78751cF2b0 (V8, ≈ \$25k);

0x0446219d289518868e76d08cee846804ae01a93f (V9, ≈ \$10k).

Actor / pass-through (full where known): 0x9cc0831db1b224fd675a21ac0d0adda82631c665 ;

0x364be8180cc96eb43da4973f888ce29cc4fb8c44 ; 0x0c893616d363d81db393314cfdb85a1d54920871 ;

0x817f2a6c5551be49e7da0609700971595c8d979c ; 0xb3fd7de3f8242d925e0ea9e1660e395def56d9c7 ;

0x02DaadFA6bbD1d99B2D53fDC6Cbe0DeAab8FbB20 ; 0xbcf1fc903a704746fea5f31cef0f4b37fbec6089 ;

0xE62ad78a3CB6adEB8bf8eE3b2d8e3458bCcdFa4a ; 0x40a0b848888B04Fc0C0172e24AB423f128eAA152 (*pass-through depositor into HTX, §9*).

Exchange (full where known): KuCoin deposit, V1 fan-out (EVM):

0x544B7c476E60586534992310a60B11230e3C5fFe , 0x3F5a18B40dFbD3b13ceA7bd4c133151BDD5602E6 ,

0x827CDDc7BCa77fD4fc97E2F66bD539493cD550d1 , 0xb555278E27DD3D4FfeCD2b3A032803a829B3acE3 ,

0x5c5BaBd61840B684ce9B11d346ee02748D4b5bdD , 0x7a5eBF198C5EC99e67937689aEC581bB079b0eAd ;

HitBTC deposit, V1 fan-out (EVM) 0xBaB24f2AC1E71Bbcf6336663024E6dD9EEcab135 ; KuCoin

"Kucoin 4" (Tron) TUpHuDKiCCmwaTZBHvzQdwWzGNm5t8J2b9 ; USDT-TRON token contract (excluded as participant) TR7NHqjeKQxGTCi8q8ZY4pL8otSzgJLj6t .

Tron consolidation/staging (full where known): TQLXH45i7JboiDVVF2jSGSiTFEfrUVM62m ;

TYZfYajBBCrJzMMTqnZjdGyhaGwoEaZE84 ; TF1KHXD9H8VtDcS4civrQb6d6Di4HdURcv4 ;

TRHcAhJHkyrL6vyUNDGsHvVXHE9ocnAmZU ; TTMdreb7hhtp8BVUFzGK4bj8Lrz7GEL3xn ;

TUdbHz1VhUoHV2w9anFkz3KzKjifEvhbhdA . *Truncated as captured (§15):* TKiPseUe5o...kpBV9Qb .

Solana (full where known): J1XSfoR9Ww9tzACSyHXjiJc8MikCwfVQFmG2XMhb1odK (actor wallet, HTX→KuCoin leg); 5vc4of...gt8eqH (*truncated as captured: actor Solana account, receiver of the HTX withdrawal, §15*).

Transactions (full where known):

0x83e84825464b53e83e1102a399a779cf6797c38f99191b6cda2387cf6409f6f6 (V1 drain);

0xf7418b0a7f22a5eb93278e6198c52a8fa513dc1a265f40964f1cle90d75203bc (gas to V2);

0xded15734c68b8651fc11151a58b55388416b48b3b36a5b14f4fd8ce263094771 (HTX BNB deposit, Fig. 4);

3eRGhqNeBgmyhL8U87novCinLWpedxzWMStpv5J7dgPRJweu1fKSJyV4ieFRo4yXTVmFnegLjQpscHsV1PV6kSa8

(HTX→Solana USDT withdrawal, May-01 chain, Fig. 5);

3acMuL1xj5aZ6m9QUKnTm9t1YtBN5q5g43PuVEJ6sHjVfvaHrcnZvPCrmfR53LVF6DwzZcf5Wxd2og73r1iWfQ54

(Solana→KuCoin USDT deposit, May-01 chain, Fig. 6);

0de81f7f5e77c69b10437011636b60c7699de88e6f05831232b9e438f9c3e23b (KuCoin Tron withdrawal,

May-01 chain, Fig. 7); 0xee348feff0ea5f2d311df3bbf2dba73ac374c8350be067d3a4963a95c27ed4a8 (BSC, additional leg); quhn9ReYT7s8kSiG4RPauX2z3mXuurbkYzn3u5rhYCoBX2W3MxRHFgPfm4XhnggEpxXRYdEneXUXViXknsAQaYw (Solana, KuCoin deposit leg, second cluster, §11.1); bc2fb3904bacbee8dc0afc57022f18a73bd597fcd7a8faf5ef58e29c5135e870 (Tron receive, additional cluster); 0e98dea94bdc12595124f9d18ed95f1d4fc73fda6aa98575cff5744dccef85f (consolidation inflow).

18. Appendix B: Time-analysis pairings (evidence table)

Pairing	Deposit (chain, amount, UTC)	Withdrawal (chain, amount, UTC)	Δt	Confidence
HTX (§9)	BSC, 44.4279 BNB ≈\$27,341, 01 May 14:45:19	Solana, 27,471.17 USDT ≈\$27,471, 01 May 14:47:13	≈2 min	Moderate-High
KuCoin (§10)	Solana, 27,471.17 USDT, 01 May 15:10:16	Tron, 27,469.5 USDT, 01 May 15:13:42	≈3 min	High
linch→staging (§11.2)	ETH arbitraryCalls ≈\$21.0k/\$20.9k/\$23.3k, 21 Apr	Tron USDT +19,106.5/+20,687.5/+22,998.5	n/a (size match)	Moderate

19. Appendix C: Source-capture → figure mapping

Figure	File (in assets/)	Source capture (in source_captures/)
Fig. 1	fig01_arkham_master_flow.png	src_fig01_arkham_master_flow.png
Fig. 2	fig02_linch_create_calldata.png	src_fig02_linch_create_calldata.png
Fig. 3	fig03_linch_fields_decoded.png	src_fig03_linch_fields_decoded.png
Fig. 4	fig04_htx_bnb_deposit.png	src_fig04_htx_bnb_deposit.png
Fig. 5	fig05_htx_sol_withdrawal.png	src_fig05_htx_sol_withdrawal.jpeg
Fig. 6	fig06_kucoin_sol_deposit.png	src_fig06_kucoin_sol_deposit.jpeg
Fig. 7	fig07_kucoin_tron_withdrawal.png	src_fig07_kucoin_tron_withdrawal.jpeg
Fig. 8	fig08_tron_staging_inflows.png	src_fig08_tron_staging_inflows.png
Fig. 9	fig09_linch_eth_arbitrariycalls.png	src_fig09_linch_eth_arbitrariycalls.png
Fig. 10	fig10_preconsol_tudbhx_htx.png	src_fig10_preconsol_tudbhx_htx.png
Fig. 11	fig11_preconsol_tkipse_htx.png	src_fig11_preconsol_tkipse_htx.png

End of report. This document is investigative work product; open lines of inquiry are collected in §15.