
## EJ17 - Patrón Proxy

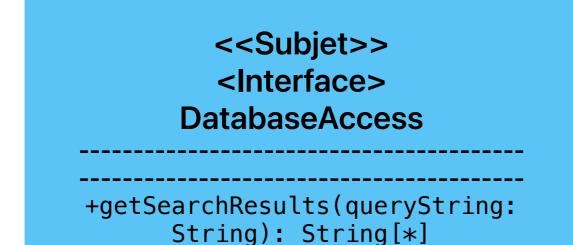

## <<Pre><<Pre>control Control C

-realDataBase: DataBaseRealAccess

-password: Integer
-isLoggedIn: Boolean

+<Create>DataBaseRealAccessProxy(realDataBase: DataBaseRealAccess,

password: Integer)

+getSearchResults(queryString: String): String[\*]
+insertNewRow(rowData: String[\*]): Integer
-logIn(password: Integer)

realDataBase 1

## <<RealSubject>> DataBaseRealAccess

-data: String[\*] //MAP
-currentId: Integer

+<Create>DataBaseRealAccess

+getSearchResults(queryString: String): String[\*] +insertNewRow(rowData: String[\*]): Integer