

# LEADSHEETS

vo.1-beta-2      2014/08/11

congbook (beta version) (CN)

Clemens NIEDERBERGER

<https://github.com/cgnieder/leadsheets/>

[contact@mychemistry.eu](mailto:contact@mychemistry.eu)

## Table of Contents

<b>I. About the Package</b>	<b>2</b>	<b>8. The verse Environment</b>	<b>17</b>
1. License and Requirements	2	8.1. Options . . . . .	18
2. Background	2	<b>9. Placing Chords</b>	<b>19</b>
3. The Structure of the Package	2	9.1. The Commands . . . . .	19
		9.2. Usage . . . . .	19
		9.3. Caveat . . . . .	21
		9.4. Remembering Chords . . . . .	22
<b>II. The musicsymbols Library</b>	<b>4</b>	<b>10. Transposing</b>	<b>24</b>
<b>III. The chordnames Library</b>	<b>6</b>	<b>11. Other verse-like Environments</b>	<b>26</b>
4. The \chordname Command	6	11.1. Available Environments . . . . .	26
5. Options	7	11.2. Own verse-like Environments	27
<b>IV. The songs Library</b>	<b>11</b>	<b>12. Typesetting Bars</b>	<b>29</b>
6. Background	11	<b>13. Templates</b>	<b>30</b>
7. The song Environment	11	13.1. Title Templates . . . . .	30
7.1. A First Example . . . . .	12	13.1.1. Background . . . . .	30
7.2. Using the song Environment .	13	13.1.2. Existing Templates . .	30
7.3. Options . . . . .	13	13.1.3. Own Templates . . . . .	30
7.4. Song Properties . . . . .	14	13.1.4. Examples . . . . .	32
7.5. Special Characters . . . . .	16	13.2. Verse-type Templates . . . . .	35
7.6. Capo Information . . . . .	16	13.2.1. Background . . . . .	35
		13.2.2. Existing Templates . .	35
		13.2.3. Own Templates . . . . .	35
		13.2.4. Examples . . . . .	37

14. Internationalization	40	V. Appendix	42
		A. References	42
		B. Index	42

## Part I.

# About the Package

I like beautiful melodies telling me  
terrible things.

---

*Tom Waits*

### 1. License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the L<sup>A</sup>T<sub>E</sub>X Project Public License (LPPL), version 1.3 or later (<http://www.latex-project.org/lppl.txt>). The software has the status “maintained.”

**LEADSHEETS** requires the bundles l3kernel [The13a] and l3packages [The13b] to be available. It also needs the package translations [Nie13].

### 2. Background

Over the years I repeatedly wanted to typeset simple leadsheets of songs, *i. e.*, song lyrics and the corresponding chords.<sup>1</sup> This is not too hard with standard L<sup>A</sup>T<sub>E</sub>X commands and environments but it is not very convenient... so looking for existing packages is the logical next step and I found two very promising packages: songs [Ham12] and songbook [Rat10]. However, both were note *quite* what I wanted. Just a bit too inflexible in the wrong places, needing tweaking here and there, and so on. On the other hand I had quite some code lying on my hard drive with various attempts of typesetting leadsheets. This package is now the attempt to have a clean, documented and customisable version of my code.<sup>2</sup>

### 3. The Structure of the Package

**LEADSHEETS** is a modular package and consists of several libraries. If you just say

---

1. I also have had the need (or let’s say: wish) to typeset leadsheets in the style of the *The Real Book* – but this is a task where other software than L<sup>A</sup>T<sub>E</sub>X usually is far easier.

2. Plus new things!

### 3. The Structure of the Package

```
1 \usepackage{leadsheets}
```

then *all* libraries are loaded and you have not to think about anything. If you instead use

```
1 \usepackage[minimal]{leadsheets}
```

then *no* libraries are loaded. In this case you have to load the libraries yourself in order to use the package.

`\useleadsheetslibraries{⟨comma list of libraries⟩}`

With this command one or several of **LEADSHEETS**' libraries can be loaded.

`\useleadsheetslibrary{⟨library⟩}`

With this command one of **LEADSHEETS**' libraries can be loaded.

The libraries are divided into two parts: libraries to be loaded by users and auxiliary libraries loaded by other libraries but not to be loaded directly by users.

The user-libraries are the following ones:

**musicsymbols** This library makes the music symbol font provided by MusiX<sub>TEX</sub> available as text font. It is described in part II.

**chordnames** This library defines a few macros for typesetting of chord symbols. It is described in part III. It also loads the **musicsymbols** library.

**songs** This is the main library. It defines everything necessary for the typesetting of the leadsheets. It loads *all other libraries*. This library including all the following libraries is described in part IV.

Those three libraries can also be loaded as a package option. If you say

```
1 \usepackage[musicsymbols]{leadsheets}
```

then *only* the **musicsymbols** library is loaded. Saying

```
1 \usepackage[songs]{leadsheets}
```

is the same as using the package *without* any options. “Without any” also means that neither `musicsymbols`, `chordnames` nor `songs` has been given as class option!

Then there is quite a number of auxiliary libraries which are all needed by the `songs` library:

**properties** This is an auxiliary library not meant to be loaded directly by users. It defines the necessary macros for song properties. See section 7.4 for more details on the concept.

**transposing** This is an auxiliary library not meant to be loaded directly by users. It defines a transposing mechanism for chord symbols. See section 10 for further details.

**chords** This is an auxiliary library not meant to be loaded directly by users. It defines the necessary macros for printing the chords in songs as well as the mechanism of remembering and recalling chord sequences of verses.

**templates** This is an auxiliary library not meant to be loaded directly by users. It defines the necessary macros for `LEADSHEETS`’ template mechanism. See section 13 for details on the concept.

**translations** This is an auxiliary library not meant to be loaded directly by users. It provides a few translations for a number of printed strings. See section 14 for more information.

## Part II.

# The `musicsymbols` Library

Music expresses that which cannot  
be said and on which it is impossi-  
ble to be silent.

---

*Victor Hugo*

The `musicsymbols` library is a very small library that makes the music symbol font provided by `MusiXTEX` available as text font and then uses it to define a number of symbols. This redefines the macros `\sharp`, `\flat` and `\natural`. All defined symbols are listed in table 1.

If you want to use the library standalone then you can say:

```
1 \usepackage[minimal]{leadsheets}
2 \useleadsheetslibraries{musicsymbols}
```

`musicsymbols` defines three further commands, namely `\musix`, `\textmusix` – a font switch and a text font command – and `\musicsymbol`. Those commands are meant for internal use only which is why they’re not explained here.

TABLE 1: Symbols defined by musicsymbols.

Command	Symbol	Command	Symbol
<code>\sharp</code>	$\sharp$	<code>\flat</code>	$\flat$
<code>\doublesharp</code>	$\sharp\sharp$	<code>\doubleflat</code>	$\flat\flat$
<code>\natural</code>	$\natural$		
<code>\trebleclef</code>	$\text{treble clef}$	<code>\bassclef</code>	$\text{bass clef}$
<code>\altoclef</code>	$\text{alto clef}$		
<code>\allabreve</code>	$\text{allabreve}$	<code>\meterC</code>	$\text{C}$
<code>\wholorest</code>	$\text{whole rest}$	<code>\halfrest</code>	$\text{half rest}$
<code>\quarterrest</code>	$\text{quarter rest}$	<code>\eighthrest</code>	$\text{eighth rest}$
<code>\sixteenthrest</code>	$\text{sixteenth rest}$		

musicsymbols also defines a number of macros for denoting bars. Those macros are listed in table 2.

TABLE 2: Bar symbols.

Macro	Symbol	Macro	Symbol
<code>\normalbar</code>	$ $	<code>\leftrepeat</code>	$\text{left repeat}$
<code>\rightrepeat</code>	$\text{right repeat}$	<code>\leftrightrepeat</code>	$\text{leftright repeat}$
<code>\doublebar</code>	$  $	<code>\stopbar</code>	$\text{stop bar}$

## Part III.

# The chordnames Library

I never practice my guitar – from time to time I just open the case and throw in a piece of raw meat.

*Wes Montgomery*

### 4. The `\chordname` Command

`chordnames` provides the command `\chordname{⟨chord⟩}` for convenient typesetting of chords:

```
1 \chordname{Bb7(#9)} \chordname{Bbb6}      Bb7(9) Bbb6 C#7(9) Cx13
2 \chordname{C#7(b9)} \chordname{C##13}
```

`\chordname{⟨chord⟩}`

Typesetting chords. Inside the argument every `#` will be replaced by `#` and every `b` is replaced with `b`. Numerals and parentheses are typeset as superscripts. Everything between parentheses is always a superscript: `\chordname{F#7(#11)}`  $F^{\sharp 7(\sharp 11)}$ .

There are several token lists that are treated specially inside `\chordname`:

- `^` – This token is replaced by `\textsuperscript`.
- `ma` – The symbol for major chords. Per default this is empty. `\chordname{Gma}`  $G$ .
- `mi` – The symbol for minor chords. Per default this is `m`. `\chordname{Gmi}`  $Gm$ .
- `o` – The symbol for diminished chords. Per default this is `\textsuperscript{o}`. `\chordname{Go}`  $G^o$ .
- `+` – The symbol for augmented chords. Per default this is `\textsuperscript{+}`. `\chordname{G+}`  $G^+$ .
- `/o` – The symbol for half diminished chords. Per default this is `\textsuperscript{o}`. `\chordname{G/o}`  $G^o$ .
- `#` – The “sharp” symbol. Per default this is `\sharp`. `\chordname{F#}`  $F^\sharp$ .
- `##` – The “double sharp” symbol. Per default this is `\doublesharp`. `\chordname{F##}`  $F^{\sharp\sharp}$ .
- `b` – The “flat” symbol. Per default this is `\flat`. `\chordname{Eb}`  $E^\flat$ .
- `bb` – The “double flat” symbol. Per default this is `\doubleflat`. `\chordname{Ebb}`  $E^{\flat\flat}$ .

## 5. Options

- b#** – Cancelling flat/sharp combination: this is removed.  
**#b** – Cancelling sharp/flat combination: this is removed.  
**add** – This is superscripted: `\chordname{Gadd9}`  $G^{\text{add}9}$ .  
**sus** – This is superscripted: `\chordname{Gsus4}`  $G^{\text{sus}4}$ .  
**dim** – This is superscripted: `\chordname{Gdim5}`  $G^{\text{dim}5}$ .  
**maj7** – This is superscripted: `\chordname{Gmaj7}`  $G^{\text{maj}7}$ .  
**maj9** – This is superscripted: `\chordname{Gmaj9}`  $G^{\text{maj}9}$ .

How these token lists are treated depends on optional settings:

```
1 \setchordnames{
2   major-seven = $\Delta$ ,
3   major-nine  = $\Delta$\textsuperscript{9}
4 }
5 \chordname{Gmaj7} \chordname{Gmaj9}
6 \chordname{G^6} \chordname{G6}
7 \chordname{G7^#5}
```

---

$G\Delta\ G\Delta^9\ G^6\ G^6\ G^{7\sharp 5}$

If you want to use the library standalone then you can say:

```
1 \usepackage[minimal]{leadsheets}
2 \useleadsheetslibraries{chordnames}
```

This also loads the `musicsymbols` library.

## 5. Options

Options are set with the command

`\setchordnames{⟨options⟩}`

where `⟨options⟩` is a comma separated list of keyval options.

Actually there's a second possibility: options can also be set with the command `\setleadsheets` (see section 7.3) if they're preceded by `chordnames/` (including the slash).

The options allow detailed customization of how chords are printed. It doesn't change the input syntax.

## 5. Options

**format** = {*code*} (initially empty)  
Code inserted before a chord within the same group. Can be used for special formatting of the chords, with **\sffamily**, say.

**sharp** = {*code*} Default: **\sharp**  
The sharp symbol.

**flat** = {*code*} Default: **\flat**  
The flat symbol.

**double-sharp** = {*code*} Default: **\doublesharp**  
The double sharp symbol.

**double-flat** = {*code*} Default: **\doubleflat**  
The double flat symbol.

**aug** = {*code*} Default: +  
The augmented symbol.

**half-dim** = {*code*} Default: **\o{}**  
The half-diminished symbol.

**full-dim** = {*code*} Default: o  
The diminished symbol.

**dim** = {*code*} Default: **\textsuperscript{dim}**  
The token list dim.

**add** = {*code*} Default: **\textsuperscript{add}**  
The token list add.

**sus** = {*code*} Default: **\textsuperscript{sus}**  
The token list sus.

**major** = {*code*} (initially empty)  
The token list ma.

**minor** = {*code*} Default: m  
The token list mi.

**major-seven** = {*code*} Default: **\textsuperscript{maj7}**  
The token list maj7.

**major-nine** = {*code*} Default: **\textsuperscript{maj9}**  
The token list maj9.

There are two further options which concern the different notations of the pitches B and B<sup>b</sup> in German (and a few other European countries) and English.



## 5. Options

`input-notation = literal|german|english`

Default: `literal`

If set to `german` B should be input as H and B flat as B. If set to `american` B should be input as B and B flat as Bb.

`output-notation = literal|german|english`

Default: `literal`

If set to `german` B is output as H and B-flat as B.

Setting one option to a value other than `literal` implicitly sets the other one to `english` except the other option already has been set. This is shown in the example below. Setting on option to `literal` again also sets the other option to `literal`. This also resets the options. Earlier settings are forgotten. What does that mean? Here is an exercise: which options are active at each step and at the end?

```
1. \setchordnames{ input-notation = german }
2. \setchordnames{ output-notation = german , input-notation = english }
3. \setchordnames{ input-notation = german }
4. \setchordnames{ output-notation = english , input-notation = literal }
5. \setchordnames{ output-notation = german }
```

Here's the solution:

1. `input-notation = {german}` and `output-notation = {english}`
2. `input-notation = {english}` and `output-notation = {german}`
3. `input-notation = {german}` and `output-notation = {german}`
4. `input-notation = {literal}` and `output-notation = {literal}`
5. `input-notation = {german}` and `output-notation = {english}`

The following example shows the effects of different input and output notations.

```
1 input and output literal:\par
2 \chordname{Bb} \chordname{B} \chordname{B#}\par
3 \chordname{B} \chordname{H} \chordname{H#}\par
4 \medskip
5
6 \setchordnames{input-notation=german}
7 input German and output English:\par
8 \chordname{Bb} \chordname{B} \chordname{B#}\par
9 \chordname{B} \chordname{H} \chordname{H#}\par
10 \medskip
11
12 \setchordnames{output-notation=german}
```

## 5. Options

```
13 input and output German:\par
14 \chordname{Bb} \chordname{B} \chordname{B#}\par
15 \chordname{B} \chordname{H} \chordname{H#}\par
16
17 \medskip
18 \setchordnames{input-notation=english}
19 input English and output German:\par
20 \chordname{Bb} \chordname{B} \chordname{B#}\par
21 \chordname{B} \chordname{H} \chordname{H#}\par
```

---

input and output literal:

B» B B#

B H H#

input German and output English:

B» B» B

B» B B#

input and output German:

B» B H

B H H#

input English and output German:

B H H#

H H H#

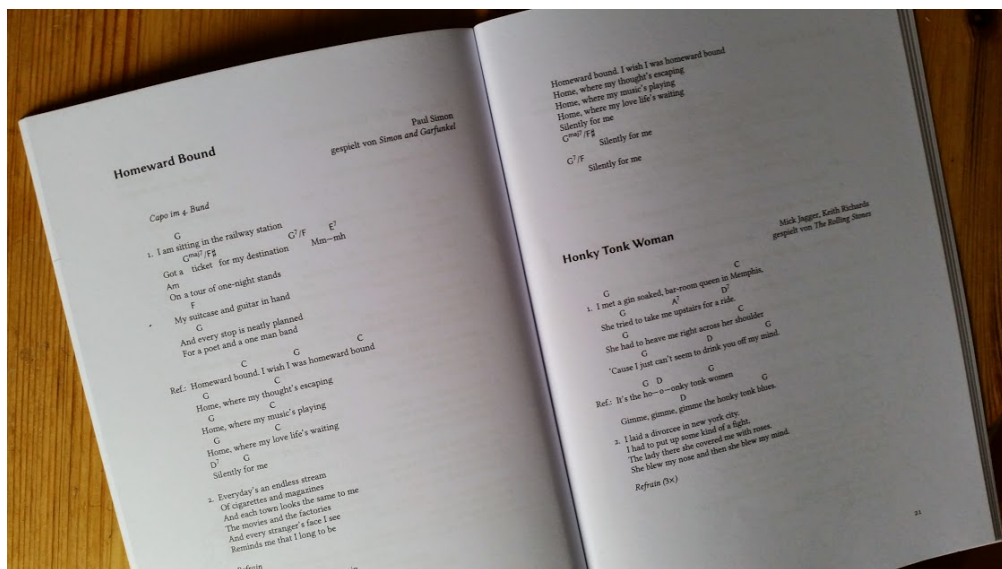


FIGURE 1: Even before officially publishing this bundle I used it for typesetting a small songbook!

## Part IV.

# The songs Library

I don't care about the rules. If I don't break the rules at least ten times every song then I'm not doing my job.

*Jeff Beck*

## 6. Background

The **LEADSHEETS** package allows for easy creation of leadsheets but it also can be used to create complete songbooks. The basic idea is that songs are typeset in the song environment. Each song gets a number of properties (see section 7.4) that determine how the title of the song is typeset. For the typesetting of the titles a template mechanism is used (see section 13.1). Songs can also be tagged. The tags then allow to typeset only songs matching a list of tags that is specified via an option.

## 7. The song Environment

`\begin{song} [ <options> ] { <properties> }`

The main environment used to typeset songs. It has a mandatory argument where the song's

properties are set (cf. section 7.4). It also has an optional argument for setting options specific to the song.

### 7.1. A First Example

First let's take a look at an example:

```

1 \documentclass{article}
2 \usepackage{leadsheets}
3 \begin{document}
4
5 \begin{song}{title=Layla,composer={Eric Clapton and Jim
6   Gordon},tags={clapton,unplugged,r&b}}
7 \begin{verse}
8   What will you do when you get lonely? \\
9   Noone waiting by your side. \\
10  You've been runnin', hidin' much too long. \\
11  You know it's just your foolish pride .
12 \end{verse}
13 \begin{chorus}
14   Layla, got me on my knees. \\
15   Layla, beggin' darlin', please! \\
16   Layla, darlin' won't you ease my worried mind?
17 \end{chorus}
18 \end{song}
19
20 \end{document}

```

#### Layla

What will you do when you get lonely?  
 Noone waiting by your side.  
 You've been runnin', hidin' much too long.  
 You know it's just your foolish pride .

Chorus: Layla, got me on my knees.  
 Layla, beggin' darlin', please!  
 Layla, darlin' won't you ease my worried mind?

Per default the songtitle simply is a `\section*` without any other additions. This is the songtitle template *minimal*, see section 13.1 for more details on those templates and how to

create your own.

## 7.2. Using the song Environment

Inside the song environment a number of additional environments are used to specify the different parts of a song. They all are basically the same kind of environment, namely an `itemize` environment internally where the only `\item` has the name of the environment as option. The verse environment is a little bit different since verses can be numbered. If they are then each usage of verse inside song will step a vers number and print it (as option to the internal `\item`).

`\begin{verse}[\langle options \rangle]`

An environment for specifying the verses of a song.

`\begin{chorus}[\langle options \rangle]`

An environment for specifying the chorus of a song.

This is the same as `\begin{verse}[type=chorus,\langle options \rangle]`.

`\begin{intro}[\langle options \rangle]`

An environment for specifying the intro of a song.

This is the same as `\begin{verse}[type=intro,\langle options \rangle]`.

`\begin{interlude}[\langle options \rangle]`

An environment for specifying an interlude of a song.

This is the same as `\begin{verse}[type=interlude,\langle options \rangle]`.

`\begin{bridge}[\langle bridge \rangle]`

An environment for specifying a bridge of a song.

This is the same as `\begin{verse}[type=bridge,\langle options \rangle]`.

These environments and their options are described in more detail in sections 8 and 11.

## 7.3. Options

The options to the song environment are the same as the general options of `LEADSHEETS`. This means you can set the following options either local to a song or global for the whole document with this command:

`\setleadsheets{\langle options \rangle}`

Setup command for `LEADSHEETS`.

Although I used the word “global” above *all options are local to the current scope!*

`title-template = {\langle template name \rangle}`

Default: `minimal`

The songtitle template, see section 13.1 for details.

**chord-cs** = { $\langle cs \rangle$ } Default: `\chordname`

The command that is used to parse the chords. See section 9 for details.  $\langle cs \rangle$  needs to be a command that takes a mandatory argument.

**song-format** = { $\langle \text{\TeX code} \rangle$ } (initially empty)

$\langle \text{\TeX code} \rangle$  is inserted *before* the song title at the beginning of the song environment.

**text-format** = { $\langle \text{\TeX code} \rangle$ } (initially empty)

$\langle \text{\TeX code} \rangle$  is inserted *after* the song title at the beginning of the song environment.

**print-tags** = { $\langle \text{list of tags} \rangle$ }

A comma separated list of tags. When specified a song will only be printed if it is tagged with at least one of the tags in  $\langle \text{list of tags} \rangle$ .

**obey-lines** = `true`|`false` Default: `false`

An experimental option. Use at your own risk! If set to `true` then inside the verse like environments end-of-lines will be obeyed and start a new line. This comes with a price when using chords, see section 9.3.

**bar-shortcuts** = `true`|`false` Default: `false`

Makes the characters `:` and `|` active inside the song environment. See sections 7.5 and 12 for more details.

## 7.4. Song Properties

Songs can have a number of properties which basically are used in songtitle templates (see section 13.1). One specific property, **tags**, plays a different role, though.

**title** = { $\langle \text{title} \rangle$ }

This is the main title of the song.

**subtitle** = { $\langle \text{subtitle} \rangle$ }

A subtitle.

**short-title** = { $\langle \text{short song title} \rangle$ }

A short title (may be useful in a template that writes the titles in `\sections` for a version to be used in the table of contents).

**sort-title** = { $\langle \text{song title} \rangle$ }

If not set explicitly this property holds the same value as **title**.

**sort-short-title** = { $\langle \text{short song title} \rangle$ }

If not set explicitly this property holds the same value as **short-title**.

**composer** = { $\langle \text{composer} \rangle$ }

The composer of the song. As of now this accepts an arbitrary entry but maybe this will not be supported any more when indexing will be implemented. No promises.

## 7. The song Environment

`sort-composer = {\langle composer \rangle}`

If not set explicitly this property holds the same value as `composer`.

`lyrics = {\langle writer \rangle}`

Whoever wrote the lyrics if different from the composer. As of now this accepts an arbitrary entry but maybe this will not be supported any more when indexing will be implemented. No promises.

`sort-lyrics = {\langle writer \rangle}`

If not set explicitly this property holds the same value as `writer`.

`arr = {\langle arranger \rangle}`

Whoever arranged the song. As of now this accepts an arbitrary entry but maybe this will not be supported any more when indexing will be implemented. No promises.

`sort-arr = {\langle arranger \rangle}`

If not set explicitly this property holds the same value as `arr`.

`band = {\langle band \rangle}`

The band who plays or played the song.

`sort-band = {\langle band \rangle}`

If not set explicitly this property holds the same value as `band`.

`interpret = {\langle interpret \rangle}`

The interpret of the song. As of now this accepts an arbitrary entry but maybe this will not be supported any more when indexing will be implemented. No promises.

`sort-interpret = {\langle interpret \rangle}`

If not set explicitly this property holds the same value as `interpret`.

`genre = {\langle genre \rangle}`

The genre of the song.

`key = {\langle key \rangle}`

The key of the song. This property is used for transposing and must have a specific format then, see section 10.

`capo = {\langle fret \rangle}`

This property is used for transposing and for the `\capo` macro, see sections 7.6 and 10 .

`tempo = {\langle tempo \rangle}`

The tempo of the song.

`tags = {\langle tags \rangle}`

A comma separated list of tags. Those tags play a role for the option `print-tags`. When that option is used a song is only printed if it has at least one of the tags specified in the option.

## 7. The song Environment

There are three more properties, `counter`, `ID` and `height` that cannot be set but are set automatically for each song. The `counter` simply holds the number of the current song starting from 1 for the first song. The `ID` currently always is `song⟨counter⟩` where `⟨counter⟩` is the current `counter` value. The property `height` holds the height of the typeset song in pt. The height is determined by placing the body of the respective song environment in a vertical box and measuring the height and depth of the box. This is done in a measuring phase that can be tested in a songtitle template definition, see section 13.1 for details. *This is important since the property `height` is not available in the measuring phase but only afterwards!*

In principle all properties can get list of entries where items are separated with `_and_`. Of course this doesn't make sense for each property – a song does only have one title. But a song can very well have more than one composer: think of the Beatles where most songs were written by Paul McCartney and John Lennon.<sup>3</sup>

It is possible to define further such properties. For details see section 13.1.3.

### 7.5. Special Characters

Inside the song environment several characters don't have their usual category codes:

- `^` – category code 13 (active). It is a shortcut for the `\chord` command.
- `_` – category code 13 (active). It is a shortcut for the `\writechord` command.
- `|` – category code 13 (active). Used for typesetting bars.
- `:` – category code 13 (active). Used for typesetting bars.
- `#` – category code 12 (other). Used for chord names.

Actually the characters `|` and `:` are *not* changed per default. In order to do that you have to use the option `bar-shortcuts`.

For details on the usage of the characters `|` and `:` see section 12. The usage of chords is explained in section 9.

### 7.6. Capo Information

When you set the `capo` property the macro `\capo` writes

Capo: IV fret

What it writes *exactly* depends on a few settings: the `capo` obviously, which determines the number that is printed. The translations for the “capo” and “fret” strings (see section 14 for details) and the setting of the following option:

`capo-nr-format` = `arabic` | `roman` | `Roman`

Default: `Roman`

The format of the number printed by the `\capo` macro.

---

3. This is not quite true: most songs were mostly written either by Paul or John but legally usually both are the composers.



`capo-nr-cs = {\cs}`

Default: `\@firstofone`

A macro that takes one argument. Can be used to give the printed number a special formatting (like a trailing full stop for example).

## 8. The verse Environment

`\begin{verse}[\langle options \rangle]`

An environment for specifying the verses of a song.

`\begin{verse*}[\langle options \rangle]`

The same as the verse environment but will always be unnumbered regardless of any option settings.

```

1 \documentclass{article}
2 \usepackage{leadsheets}
3 \setleadsheets{verse/numbered=true}
4 \begin{document}
5
6 \begin{song}{title=Foo}
7 \begin{verse}
8   Lorem ipsum dolor sit amet, consetetur sadipscing elitr,\\
9   sed diam nonumy eirmod tempor invidunt ut labore et dolore\\
10  magna aliquyam erat, sed diam voluptua.
11 \end{verse}
12 \begin{verse*}
13   Lorem ipsum dolor sit amet, consetetur sadipscing elitr,\\
14   sed diam nonumy eirmod tempor invidunt ut labore et dolore\\
15   magna aliquyam erat, sed diam voluptua.
16 \end{verse*}
17 \begin{verse}
18   Lorem ipsum dolor sit amet, consetetur sadipscing elitr,\\
19   sed diam nonumy eirmod tempor invidunt ut labore et dolore\\
20   magna aliquyam erat, sed diam voluptua.
21 \end{verse}
22 \end{song}
23
24 \end{document}
```

### Foo

3. Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.

    Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
    sed diam nonumy eirmod tempor invidunt ut labore et dolore  
    magna aliquyam erat, sed diam voluptua.

4. Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.

### 8.1. Options

The verse environment and all related environments have the following option:

`format = {⟨code⟩}` (initially empty)

⟨code⟩ is inserted at the beginning of the environment and can thus be used to add formatting,  
e. g., `format = {\itshape}`.

`label-format = {⟨code⟩}` (initially empty)

The same for the environment labels.

This can be used either locally, *i. e.*, as option to the corresponding environment, or for all environments of the same type using the setup command using the following syntax:

`\setleadsheets{⟨env name⟩/format = ⟨code⟩}`

```
1 \begin{verse}[format=\itshape]
2   Lorem ipsum dolor sit amet, consetetur sadipscing elitr,\
3   sed diam nonumy eirmod tempor invidunt ut labore et dolore\
4   magna aliquyam erat, sed diam voluptua.
5 \end{verse}
```

---

*Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.*

It is also possible so set the formatting for all related environments at once:

`verses-format = {\code}` (initially empty)

Sets the format for all verse like environments.

`verses-label-format = {\code}` (initially empty)

Sets the label format for all verse like environments.

Both options are overwritten if the options for a specific environment are set. That is, if you want all environments to have italic shape except for choruses, then you could do

```
1 \setleadsheets{
2   verses-format = \itshape ,
3   chorus/format =
4 }
```

## 9. Placing Chords

### 9.1. The Commands

Inside the song environment the characters `^` and `_` are active characters.<sup>4</sup> `^` is a shortcut for the command `\chord`, `_` is a shortcut for `\writechord`. Those commands have the following functions:

`\chord*-\{<chord>\}\{<text>\}_`

Places `<chord>` centered above `<text>`. The starred version gobbles the trailing space while the unstarred version does not. Like the star the dash is optional. It sets the option `smash-next-chord` to true. `<text>` may be empty but the trailing space *must* be there. If `<text>` is empty then the chord is place above some horizontal space which can be set with the option `empty-chord-dim`.

`\writechord\{<chord>\}`

This command transforms the chord according to the options `transpose` and `enharmonic` before printing it. This command can/should be used for placing chords inline or for typesetting the `key` property in a template. The command is used by `\chord` for the actual printing.

```
1 Text \chord{E7}text \chord*{B7}lon ger      E7 B7
   text                                     Text text longer text
```

### 9.2. Usage

Note that per default the width of a chord is not ignored:

4. There are more characters with a special function, see section 7.5

## 9. Placing Chords

<pre>1 text \chord{Gbmi7(b5)}text text</pre>	$Gbm^{7(5)}$ text text text
--	--------------------------------

However, there is an option which sets the width of a chord to zero:

`smash-chords = true|false`

Default: false

If set to true the width of the chords set with `\chord` is set to zero.

`smash-next-chord = true|false`

Default: false

If set to true the width of the next chord set with `\chord` is set to zero.

<pre>1 \setleadsheets{smash-next-chord=true} 2 text \chord{Gbmi7(b5)}text text \par 3 text \chord{Gbmi7(b5)}text text \par 4 \setleadsheets{smash-chords=true} 5 text \chord{Gbmi7(b5)}text text \par 6 text \chord{Gbmi7(b5)}text text</pre>	$Gbm^{7(5)}$ text text text $Gbm^{7(5)}$ text text text $Gbm^{7(5)}$ text text text $Gbm^{7(5)}$ text text text
---	--

Before we forget – there are more options:

`empty-chord-dim = {⟨dim⟩}`

Default: 1em

The horizontal space that is inserted if the `⟨text⟩` argument of `\chord` is empty.

`align-chords = {⟨col⟩}`

Default: c

Determines how a chord is aligned with respect to the word it is placed above of. Valid input is any valid tabular column identifier.

While `\chord` is available in the whole document the `^` syntax is – as mentioned before – only available inside of the song environment.

```
1 \documentclass{article}
2 \usepackage{leadsheets}
3 \begin{document}
4
5 \begin{song}{title=Layla,composer={Eric Clapton and Jim
6   Gordon},tags={clapton,unplugged,r&b}}
7 \begin{verse}
8   ^{C#mi7} What will you do when you get ^{G#7}lone ly? \\\
9   ^{C#mi7} Noone ^{C}wai ting ^{D}by your ^{E}side. ^{E7} \\\
10  ^{F#mi} You've been ^{B}run nin', ^{E}hid in' much too ^{A}long. \\\

```

## 9. Placing Chords

```

11 ^{F#mi} You know it's ^{B}just your foolish ^{E}pride .
12 \end{verse}
13 \begin{chorus}
14 ^*{A}Lay ---^{Dmi7}la, \quad ^{Bb} ^{C}got me on my knees. \\
15 Lay^{Dmi7}la, \quad ^{Bb} ^*{C}beg gin' darlin', ^{Dmi7}please, Layla. \\
16 Darlin' won't you ease my worried ^{Dmi7}mind? ^{Bb} ^{C}
17 \end{chorus}
18 \end{song}
19
20 \end{document}

```

# Layla

C#m<sup>7</sup> G#<sup>7</sup>  
What will you do when you get lonely?

C#m<sup>7</sup> C D E E<sup>7</sup>  
Noone waiting by your side.

F#m B E A  
You've been runnin', hidin' much too long.

F#m B E  
You know it's just your foolish pride .

A Dm<sup>7</sup> B> C  
Chorus: Lay—la, got me on my knees.  
Dm<sup>7</sup> B> C Dm<sup>7</sup>  
Layla, beggin' darlin', please, Layla.  
Dm<sup>7</sup> B> C  
Darlin' won't you ease my worried mind?

You've probably noticed: chords are printed with `\chordname` in the default setting. You can change this with the option `chord-cs`. If you do then keep in mind that the input syntax will also change.

### 9.3. Caveat

If you use `obey-lines = {true}` you have to be careful when you place chords. If you place a chord over the last word in a line

1 ^{F#mi} You've been ^\*{B}run nin', ^\*{E}hid in' much too ^{A}long.

then the end of line that is used as the mandatory space argument for `\chord` won't be recognized as an end of line. Even worse: at the end of a verse like environment this may cause non-obvious errors. So in these cases you should always insert an explicit space by one of the following methods:

```

1 ^{F#mi} You've been ^*{B}run nin', ^*{E}hid in' much too ^{A}long. {}
2 ^{F#mi} You've been ^*{B}run nin', ^*{E}hid in' much too ^{A}long. \empty
3 ^{F#mi} You've been ^*{B}run nin', ^*{E}hid in' much too ^{A}long. \relax

```

## 9.4. Remembering Chords

**LEADSHEETS** has the option

**remember-chords** = `true|false`

Default: `false`

If set to `true` the chords in the *first* appearance of a verse like environment are remembered. In the next appearances of said environment the shortcut `^` has changed its meaning and inserts a chord automatically.

Let's take a look at an example to see what this means:

```

1 \definesongtitletemplate{empty}{}
2 \begin{song}[verse/numbered,remember-chords,title-template=empty]{title=foobar}
3 \begin{verse}
4   ^{G}Lorem ipsum ^{C}dolor sit ^{E7}amet, consetetur ^{Bb7(b5)}sadipscing
5 \end{verse}
6 \begin{verse}
7   ^Lorem ipsum ^dolor sit ^amet, consetetur ^sadipscing
8 \end{verse}
9 \end{song}

```

---

1. G                      C                      E<sup>7</sup>                      B<sup>b7(b5)</sup>  
 1. GLorem ipsum Cdolor sit E7amet, consetetur Bb7(b5)sadipscing

2. G                      C                      E<sup>7</sup>                      B<sup>b7(b5)</sup>  
 2. Lorem ipsum dolor sit amet, consetetur sadipscing

In this example the chords used in the first verse environment have been remembered and in the second verse environment the `^` shortcut inserted the corresponding chords in the order they had been specified the first time. It is important when using this that you don't use the `^` shortcut in subsequent environments more often than the first time. It will produce an error otherwise. You can use it less, of course.

The `^` shortcut still has the *the same* syntax as `\chord` with one exception: it lacks the mandatory argument  $\langle chord \rangle$  (since it's obviously not needed). It has the optional `*` and `-`, though, as well as the mandatory space ()!

Each verse like environment (see section 11 for more information) is treated uniquely by this mechanism:

## 9. Placing Chords

```

1 \definesongtitletemplate{empty}{}
2 \begin{song}[verse/numbered,remember-chords,title-template=empty]{title=foobar}
3 \begin{verse}
4   ^{G}Lorem ipsum ^{C}dolor sit ^{E7}amet, consetetur ^{Bb7(b5)}sadipscing
5 \end{verse}
6 \begin{chorus}
7   ^{F}Lorem ipsum ^{Gmi}dolor sit amet, consetetur ^{C7}sadipscing
8 \end{chorus}
9 \begin{verse}
10  ^Lorem ipsum ^dolor sit ^amet, consetetur ^sadipscing
11 \end{verse}
12 \begin{chorus}
13  ^Lorem ipsum ^dolor sit amet, consetetur ^sadipscing
14 \end{chorus}
15 \end{song}

```

---

G
C
E<sup>7</sup>
B<sup>7</sup>(<sup>b5</sup>)  
 1. GLorem ipsum Cdolor sit E7amet, consetetur Bb7(b5)sadipscing

F
Gm
C<sup>7</sup>  
 Chorus: FLorem ipsum Gmidolor sit amet, consetetur C7sadipscing

G
C
E<sup>7</sup>
B<sup>7</sup>(<sup>b5</sup>)  
 2. Lorem ipsum dolor sit amet, consetetur sadipscing

F
Gm
C<sup>7</sup>  
 Chorus: Lorem ipsum dolor sit amet, consetetur sadipscing

This is important: `verse` and `verse*` are treated as two different environments, the same holds for all starred verse like environments! If you want to recall the chords of a different type of environment, then you can use the option `recall-chords`:

```

1 \definesongtitletemplate{empty}{}
2 \begin{song}[verse/numbered,remember-chords,title-template=empty]{title=foobar}
3 \begin{verse}
4   ^{G}Lorem ipsum ^{C}dolor sit ^{E7}amet, consetetur ^{Bb7(b5)}sadipscing
5 \end{verse}
6 \begin{chorus}
7   ^{F}Lorem ipsum ^{Gmi}dolor sit amet, consetetur ^{C7}sadipscing
8 \end{chorus}
9 \begin{verse}
10  ^Lorem ipsum ^dolor sit ^amet, consetetur ^sadipscing

```

```

11 \end{verse}
12 \begin{chorus}[recall-chords=verse]
13   ^Lorem ipsum ^dolor sit amet, consetetur ^sadipscng
14 \end{chorus}
15 \end{song}

```

1. G Lore m ipsum C dolor sit E<sup>7</sup> amet, consetetur B<sup>b7(5)</sup> sadipscng

Chorus: F Lore m ipsum G m idolor sit amet, consetetur C<sup>7</sup> sadipscng

2. G Lore m ipsum C dolor sit E<sup>7</sup> amet, consetetur B<sup>b7(5)</sup> sadipscng

Chorus: G Lore m ipsum C dolor sit E<sup>7</sup> amet, consetetur sadipscng

## 10. Transposing

Provided a song has the property `key` and the key is given as one of the twelve “usual” keys, *i. e.*, one of the keys given in table 3, the chords of a song can be transposed.

`transpose = {⟨number⟩}`

Transposes the chords of a song by `⟨number⟩` of semitones. `⟨number⟩` can be a negative number, then the chords are transposed down.

`enharmonic = sharp|flat`

Suppose you transpose a song in the key of E down a semitone. **LEADSHEETS** will then transpose to the key of E<sup>b</sup>. It always chooses the key whose signature has less accidentals. You can force a variant, though, by using this option. With `enharmonic = {sharp}` **LEADSHEETS** would have chosen D<sup>#</sup> instead of E<sup>b</sup>.

`transpose-capo = true|false`

When this is set to true chords are transposed down on semitone per capo fret.

The transposing mechanism relies on the `chordnames` input syntax which means that if you change `chord-cs` horrible things may happen. *So don't change `chord-cs` and use `transpose` at the same time!*

```

1 \documentclass{article}
2 \usepackage{leadsheets}
3 \begin{document}

```



## 10. Transposing

TABLE 3: Allowed keys for the `key` property.

Key	Input	Key	Input	Key	Input	Key	Input	Key	Input	Key	Input
C	C			C	Cma			Am	Ami		
G	G	F	F	G	Gma	F	Fma	Em	Emi	Dm	Dmi
D	D	B $\flat$	Bb	D	Dma	B $\flat$	Bbma	Bm	Bmi	Gm	Gmi
A	A	E $\flat$	Eb	A	Ama	E $\flat$	Ebma	F $\sharp$ m	F $\sharp$ mi	Cm	Cmi
E	E	A $\flat$	Ab	E	Ema	A $\flat$	Abma	C $\sharp$ m	C $\sharp$ mi	Fm	Fmi
B	B	D $\flat$	Db	B	Bma	D $\flat$	Dbma	G $\sharp$ m	G $\sharp$ mi	F $\flat$ m	Fbmi
F $\sharp$	F $\sharp$	G $\flat$	Gb	F $\sharp$	F $\sharp$ ma	G $\flat$	Gbma	D $\sharp$ m	D $\sharp$ mi	E $\flat$ m	Ebmi

```

4
5 \begin{song}[transpose=2]{
6   title=Layla,
7   composer={Eric Clapton and Jim Gordon},
8   tags={clapton,unplugged,r&b},
9   key = Dmi
10 }
11 \begin{verse}
12   ^{C\sharp mi7} What will you do when you get ^{G\sharp7}lone ly? \\\
13   ^{C\sharp mi7} Noone ^{C}wai ting ^{D}by your ^{E}side. ^{E7} \\\
14   ^{F\sharp mi} You've been ^{B}run nin', ^{E}hid in' much too ^{A}long. \\\
15   ^{F\sharp mi} You know it's ^{B}just your foolish ^{E}pride .
16 \end{verse}
17 \begin{chorus}
18   ^{A}Lay ---^{Dmi7}la, \quad ^{Bb} ^{C}got me on my knees. \\\
19   Lay^{Dmi7}la, \quad ^{Bb} ^{C}beg gin' darlin', ^{Dmi7}please, Layla. \\\
20   Darlin' won't you ease my worried ^{Dmi7}mind? ^{Bb} ^{C}
21 \end{chorus}
22 \end{song}
23
24 \end{document}

```

Layla

D $\sharp$ m<sup>7</sup> What will you do when you get lonely? A $\sharp$ 7  
D $\sharp$ m<sup>7</sup> D E F $\sharp$  F $\sharp$ 7  
Noone waiting by your side.  
G $\sharp$ m C $\sharp$  F $\sharp$  B  
You've been runnin', hidin' much too long.  
G $\sharp$ m C $\sharp$  F $\sharp$   
You know it's just your foolish pride .

B Em<sup>7</sup> C D  
Chorus: Lay—la, got me on my knees.  
Em<sup>7</sup> C D Em<sup>7</sup>  
Layla, beggin' darlin', please, Layla.  
Em<sup>7</sup> C D  
Darlin' won't you ease my worried mind?

## 11. Other verse-like Environments

Songs can have lots of different kinds of parts: verses, choruses, bridges, intros, outros, and so on. Typographically they're all more or less the same, at least for the purpose of this package. This means we'd ideally have environments for all of these parts with a distinct name in order to get a clean source. At the same time these environments should all behave basically the same. This is what the environments described in the following sections are for.

### 11.1. Available Environments

`\begin{chorus}[\langle options \rangle]`

An environment for specifying the chorus of a song.

`\begin{chorus*}[\langle options \rangle]`

The same as chorus but does not display the label.

$$\backslash\text{begin}\{\text{intro}\}[\langle\text{options}\rangle]$$

An environment for specifying the intro of a song.

$$\backslash\textcolor{red}{\text{begin}}\{\text{intro*}\}[\langle\textit{options}\rangle]$$

The same as `intro` but does not display the label.

```
\begin{interlude}[\langle options \rangle]
```

An environment for specifying an interlude of a song.

$$\backslash\text{begin}\{\text{bridge}\}[\langle\text{bridge}\rangle]$$

An environment for specifying a bridge of a song.

$$\backslash\textcolor{red}{\texttt{begin}}\{\texttt{info}\}[\langle\textit{options}\rangle]$$

An environment for specifying arbitrary information. This environment has no label.

`\begin{solo}[\langle options \rangle]`

An environment for specifying a solo to a song.

`\begin{solo*}[\langle options \rangle]`

The same as `solo` but does not display the label.

## 11.2. Own verse-like Environments

All environments mentioned in the previous section were defined with this command:

`\newversetype*{\langle environment name \rangle}[\langle default options \rangle]`

This defines an environment `\langle environment name \rangle`. This environment uses the verse-type template `itemize` (see section 13.2) unless specified differently in the `\langle default options \rangle`. The starred version defines an environment which hides the displayed name. More precisely: the macro `\verselabel` that is used in verse-type template definitions prints nothing in an environment defined with `\newversetype*`.

This also defines a translation string (see section 14) `leadsheets/\langle environment name \rangle` with both an empty translation fallback and English translation unless specified differently with the `name` option.

At last this defines a new counter `\langle environment name \rangle` and sets `\the\langle environment name \rangle` to `\arabic{environment name}`..

As mentioned before in section 8.1 all environments defined this way have the options `format` and `label-format`. They have more options. Here's a complete list:

`format = {\langle code \rangle}` (initially empty)

`\langle code \rangle` is inserted at the beginning of the environment and can thus be used to add formatting, e. g., `format = {\itshape}`.

`label-format = {\langle code \rangle}` (initially empty)

The same for the environment labels.

`after-label = {\langle code \rangle}` Default: :

`\langle code \rangle` is inserted in the label after the label text.

`name = {\langle name \rangle}` (initially empty)

The translation fallback and English translation of the environment. This should only be used with `\newversetype`. Later changes should be made with `\DeclareTranslation` (see section 14).

`template = {\langle template \rangle}` Default: `itemize`

The verse-type template used for the environment, see section 13.2 for details.

`numbered = true|false` Default: `false`

If set to `true` `\verselabel` (used in verse-type template definitions, see section 13.2) adds a number after the name.

`named = true|false` Default: true

If set to `true` `\verselabel` (used in verse-type template definitions, see section 13.2) prints the name of the current environment (as determined by the translation of the corresponding string, see also section 14).

`recall-chords = {⟨environment⟩}`

An option to be used with the `remember-chords` mechanism, see section 9.4 for an example.

There are also a number of general options for setting the defaults of some options for all environments:

`verses-format = {⟨code⟩}` (initially empty)

Sets the format for all verse like environments.

`verses-label-format = {⟨code⟩}` (initially empty)

Sets the label format for all verse like environments.

`verses-after-label = {⟨code⟩}` Default: :

Default `⟨code⟩` that is inserted in the label after the label text of verse like environments.

This options only determine the formatting of an environment if the corresponding options of the environment hasn't been set.

Let's summarize: the label text of these environments is built of three items in the following order:

1. The `⟨code⟩` set with the corresponding `label-format` option.
2. The label text as defined as second argument to `\newversetype` or as declared through the corresponding translation.
3. The `⟨code⟩` set with the corresponding `after-label` option.

```

1 \newversetype{foo}{Foo}
2 \setleadsheets{
3   foo/label-format = \bfseries ,
4   foo/after-label  = ~$\Rightarrow$
5 }
6 \begin{foo}
7   Lorem ipsum dolor sit amet, consetetur sadipscing elitr,\
8   sed diam nonumy eirmod tempor invidunt ut labore et dolore\
9   magna aliquyam erat, sed diam voluptua.
10 \end{foo}

```

---

Foo

⇒ Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore

magna aliquyam erat, sed diam voluptua.

And just to give you some more examples here is how some of the existing environments are defined:

```
1 \newversetype{verse}[ name=Verse, named=false, after-label= ]
2 \newversetype*{verse*}
3 \newversetype{chorus}[ name=Chorus ]
4 \newversetype*{chorus*}
```

## 12. Typesetting Bars

Sometimes it can be useful to typeset the chord scheme of a song. Then one should be able to indicate start and beginnings of bars, maybe indicate repeats and so on. While this is obviously possible with the macros provided by the `musicsymbols` package listed in table 2 it may be more convenient to have a shorter syntax. This is why inside the `song` environment some characters can be made (or are) active (see section 7.5). For the typesetting of bars this are the characters `:` `nor` `|`. Per default they are not active, though. If you want to use the shortcut syntax you have to use the option `bar-shortcuts`. Here's a short example that emulates the behaviour by setting the characters active explicitly:

```
1 \catcode'\:=\active
2 \catcode'\::=\active
3 |: repeat | this |: and | this :| \par
4 | this | part | ends | here || \par
5 | the | song | is over | now |||
```

---

```
||: repeat | this ||: and | this :||
| this | part | ends | here ||
| the | song | is over | now ||
```

All possibly combinations that have a special definition are shown in the example above. The replacements that are done internally are these:

- |     – `\normalbar\space` (the space is there because otherwise it eats following spaces which would be annoying)
- |:   – `\leftrepeat`
- :|   – `\rightrepeat`

`::` - `\leftrighrepeat`

`||` - `\doublebar`

`|||` - `\stopbar`

## 13. Templates

### 13.1. Title Templates

#### 13.1.1. Background

The titles of songs set with the song environment are displayed according to the chosen title template. It is chosen through the option `title-template` which can be set with `\setleadsheets` or as option to a specific song environment. `LEADSHEETS` provides few predefined templates and an easy mechanism to define own templates.

#### 13.1.2. Existing Templates

Currently `LEADSHEETS` provides two templates:

***minimal*** This only typesettes the song title in a `\section*`.

***tabular*** This typesets the song title in a `\section` and prints some song properties in a tabular below it. This template needs the array [MCo8] package loaded.

#### 13.1.3. Own Templates

The principle is pretty straight forward: templates are defined with the following command:

```
\definesongtitletemplate{<name>}{<code>}
```

This defines the template `<name>`.

Inside of `<code>` any code can be used. The idea is that you use the commands presented below to insert song properties where you want them.

First there are two commands related to defining new properties:

```
\definesongproperty{<property>}
```

Defines a new property `<property>`. All existing properties have been defined this way. The command can only be used in the preamble.

```
\copysongproperty{<from>}{<to>}
```

Copies the values of property `<from>` to property `<to>` if property `<to>` has not been set but property `<from>` has been. For example all sort-`<property>` properties have been treated this way so they have the `<property>` value as fallback. The command can only be used in the preamble.

Then there are a number of commands related to retrieving and using the values of properties. All these commands only make sense inside a title template definition (see section 13.1). Some of the commands are expandable which means they can be used in an `\edef` like context, *i. e.*, they are also suitable for writing the property values to the table of contents or other auxiliary files.

\* `\songproperty{⟨property⟩}`

Retrieves property `⟨property⟩`.

`\printsongpropertylist[⟨code⟩]{⟨property⟩}{⟨between two⟩}{⟨between more⟩}{⟨between last two⟩}` Default: `\@firstofone`

Prints a property list `⟨property⟩` separated with `⟨between two⟩` if the list contains only two items and separated with `⟨between more⟩` and `⟨between last two⟩` if the list contains more than two items. `⟨code⟩` is placed directly in front of each item and items are surrounded with braces which means that the last token in `⟨code⟩` may be a macro with a mandatory argument.

`\usesongpropertylist[⟨code⟩]{⟨property⟩}{⟨between⟩}` Default: `\@firstofone`

Like `\printsongpropertylist` but separates items with `⟨between⟩` regardless of the length of the list.

\* `\forsongpropertylist{⟨property⟩}{⟨code⟩}`

Places all items of the property list `⟨property⟩` in the input stream, each item preceded with `⟨code⟩`. Items are surrounded with braces which means that the last token in `⟨code⟩` may be a macro with a mandatory argument.

\* `\ifsongproperty{⟨property⟩}{⟨true⟩}{⟨false⟩}`

Checks if property `⟨property⟩` has been set.

`\ifsongpropertiequal{⟨property 1⟩}{⟨property 2⟩}{⟨true⟩}{⟨false⟩}`

Checks if properties `⟨property 1⟩` and `⟨property 2⟩` have been set to the same value.

`\ifsongmeasuring{⟨true⟩}{⟨false⟩}`

**LEADSHEETS** measures the height of a song body before it typesets it and it can be necessary in a template to know if the measuring phase is active or not. For example the song property `height` should only be used if *not* in the measuring phase: its value gets determined there and is not yet available.

`\expandcode{⟨code⟩}`

Exhaustively expands `⟨code⟩`. Experienced users won't need this. It is essentially

`\begingroup\edef\x{\endgroup⟨code⟩}\x.`

(More precisely it is a wrapper for the `expl3` function `\use:x`.) This means that any `#` needs to be doubled. Inside the argument of this command non-robust macros that should not be expanded need to be prefixed with `\noexpand`.

With the right template definition you can index composers, interpreters, song titles, ... You can write tables of contents for properties such as song titles, and so on, and so on. **LEADSHEETS** does not do this for you and it may require some experience to create templates which do all this.

### 13.1.4. Examples

In order to give you an idea on how to use songtitle templates I'll show you how the existing ones are defined and one new definition.

**The *minimal* template** This is quite short and self-explaining.

```
1 \definesongtitletemplate{minimal}{\section*{\songproperty{title}}}
```

**A custom template** Now let's see an example for a newly defined template. It's nearly as simple as the *minimal* template.

```
1 \documentclass{article}
2 \usepackage{lead sheets}
3 \definesongtitletemplate{custom}{
4   \section{
5     \songproperty{title}
6     \ifsongproperty{composer}
7       { (by \printsongpropertylist{composer}{ \& }, ){ \& }}
8     }
9   }
10 }
11 \setlead sheets{title-template = custom}
12 \begin{document}
13
14 \begin{song}{title=Layla,composer={Eric Clapton and Jim
15   Gordon},tags={clapton,unplugged,r&b}}
16 \begin{verse}
17   What will you do when you get lonely? \\
18   Noone waiting by your side. \\
19   You've been runnin', hidin' much too long. \\
20   You know it's just your foolish pride .
21 \end{verse}
22 \begin{chorus}
23   Layla, got me on my knees. \\
24   Layla, beggin' darlin', please! \\
25   Layla, darlin' won't you ease my worried mind?
26 \end{chorus}
27 \end{song}
28
29 \end{document}
```



## 2 Layla (by Eric Clapton & Jim Gordon)

What will you do when you get lonely?  
 Noone waiting by your side.  
 You've been runnin', hidin' much too long.  
 You know it's just your foolish pride .

Chorus: Layla, got me on my knees.  
 Layla, beggin' darlin', please!  
 Layla, darlin' won't you ease my worried mind?

**The *tabular* template** This one is a lot more advanced and demonstrates various of the available commands.

```

1 \definesongtitletemplate{tabular}{
2   \section{\songproperty{title}}
3   \begingroup\footnotesize
4   \begin{tabular}{
5     @{}
6     >\raggedright\arraybackslashp{.5\linewidth}
7     @{}
8     >\raggedleft\arraybackslashp{.5\linewidth}
9     @{}
10    }
11    \ifsongproperty{interpret}
12      {\GetTranslation{leadsheets/interpret}}
13      {}%
14    \ifsongproperty{composer}
15      {%
16        &
17        \GetTranslation{leadsheets/composer}: %
18        \printsongpropertylist{composer}{ \& }{,~}{ \& }
19        \ifsongproperty{lyrics}
20          {
21            \&
22            \GetTranslation{leadsheets/lyrics}: %
23            \printsongpropertylist{lyrics}{ \& }{,~}{ \& }
24          }
25        {}%
26      }
27      {}%

```

```

28 \ifsongproperty{interpret}{\\}{\ifsongproperty{composer}{\\}{}}%
29 \ifsongproperty{genre}
30   {& Genre:~ \songproperty{genre} \\}
31   {}%
32 \ifsongproperty{tempo}
33   {& Tempo:~ \songproperty{tempo} \\}
34   {}%
35 \ifsongproperty{key}
36   {%
37     & \setchordnames{
38       major = -\GetTranslation{leadsheets/major} ,
39       minor = -\GetTranslation{leadsheets/minor}
40     }%
41     \GetTranslation{leadsheets/key}: %
42     \expandcode{\writechord{\songproperty{key}}} \\%
43   }
44   {}%
45 \end{tabular}
46 \par\endgroup
47 }

```

A song using the *tabular* template:

```

1 \documentclass{article}
2 \usepackage{leadsheets}
3 \usepackage{array}
4 \setleadsheets{title-template = tabular}
5 \begin{document}
6
7 \begin{song}{
8   title = Layla ,
9   composer = {Eric Clapton and Jim Gordon} ,
10  tags = {clapton,unplugged,r&b} ,
11  key = Dmi
12 }
13 \begin{verse}
14   ^{C#mi7} What will you do when you get ^{G#7}lone ly? \\
15   ^{C#mi7} Noone ^{C}wai ting ^{D}by your ^{E}side. ^{E7} \\
16   ^{F#mi} You've been ^{B}run nin', ^{E}hid in' much too ^{A}long. \\
17   ^{F#mi} You know it's ^{B}just your foolish ^{E}pride .
18 \end{verse}
19 \begin{chorus}
20   ^{A}Lay ---^{Dmi7}la, \quad ^{Bb} ^{C}got me on my knees. \\
21   Lay^{Dmi7}la, \quad ^{Bb} ^{C}beg gin' darlin', ^{Dmi7}please, Layla. \\
22   Darlin' won't you ease my worried ^{Dmi7}mind? ^{Bb} ^{C}
23 \end{chorus}

```

```
24 \end{song}
25
26 \end{document}
```

## 2 Layla

Composer: Eric Clapton & Jim Gordon  
Key: D-minor

C#m7 G#7  
What will you do when you get lonely?

C#m7 C D E E7  
Noone waiting by your side.

F#m B E A  
You've been runnin', hidin' much too long.

F#m B E  
You know it's just your foolish pride .

## 13.2. Verse-type Templates

### 13.2.1. Background

Similar to the songtitles also the verse like environments are typeset using templates. Defining them is just as easy as for the song titles.

### 13.2.2. Existing Templates

Currently **LEADSHEETS** provides only one template:

**itemize** Uses an `itemize` environment for typesetting the corresponding environment.

### 13.2.3. Own Templates

Own templates can be defined using these commands:

`\defineversetypetemplate{⟨name⟩}{⟨begin code⟩}{⟨end code⟩}`  
This defines the template `⟨name⟩`.

\verselabel

Used inside `\defineversetypetemplate`. This determines where the label of the environment using the template will be displayed.

\verselabelformat

Used inside `\defineoversettypetemplate`. The format of the current environment as set with the corresponding `format` option.

**\verseafterlabel**

Used inside `\defineversetypetemplate`. The format of the current environment as set with the corresponding `after-label` option.

**\versename**

Used inside `\defineversetypetemplate`. This prints the name of the current environment.

**\versenumber**

Used inside `\defineversetypetemplate`. Expands to the `\the<environment>` command for the current environment.

**\ifversestarred{<true>}{<false>}**

Can be used inside `\defineversetypetemplate` for checking if the current environment was defined by the starred version of `\newversetypetemplate`.

**\ifversenumbered{<true>}{<false>}**

Can be used inside `\defineversetypetemplate` for checking if for the current environment the option `numbered` is true or false.

**\ifversenamed{<true>}{<false>}**

Can be used inside `\defineversetypetemplate` for checking if for the current environment the option `named` is true or false.

**\ifobeylines{<true>}{<false>}**

Checks if for the current song the option `obey-lines` is true or false.

Since with `\defineversetypetemplate` you define a template for an environment it has two argument for code: one for code at the beginning of the environment and one for code at the end. The command `\verselabel` internally uses the conditionals. Its definition is equivalent to the following:

```

1 \newcommand*\verselabel{%
2   \ifversestarred
3     {}
4     {%
5       \verselabelformat
6       \ifversenamed
7         {%
8           \versename
9           \ifversenumbered{ }{}%
10          }
11         {}%
12       \ifversenumbered
13         {\versenumber}
14         {}%
15       \verseafterlabel

```

```

16     }%
17 }

```

### 13.2.4. Examples

In order to give you an idea on how to use verse-type templates I'll show you how the existing ones are defined and a few new definitions.

**The *itemize* template** This is how the *itemize* is defined.

```

1 \makeatletter
2 \defineversetypetemplate{itemize}
3 {%
4   \itemize
5     \@itemdepth=0
6     \ifobeylines
7       {%
8         \setlength{\parskip}{0pt}%
9         \setleadsheets{ obey-lines-parskip = \parsep }%
10      }
11     {%
12       \item[{\verselabel}]%
13     }
14   {\enditemize}
15 \makeatother

```

The most interesting part is probably the `\ifobeylines` part. When the option `obey-lines` is set to true an end of a line inserts a `\par` token. So in order not to get a vertical skip after every line the template sets `\parskip` to zero. With `obey-lines = {true}` an empty line also inserts a `\par` token but it also inserts a vertical space according to the value set with `obey-lines-parskip`. This option can only be set in a verse-type template definition (which is why it isn't documented elsewhere). All verse like environments initialize the length to the current value of `\parskip` before the template code is inserted.

**A *flushleft* template** An example for a template *flushleft* that typesets the label in the margin:

```

1 \defineversetypetemplate{flushleft}
2 {%
3   \noindent\llap{\verselabel\space}%
4   \flushleft

```

```

5   \unskip
6   \vspace*{-\baselineskip}
7   \ifobeylines{\setlength\parskip{0pt}}{\vspace*{-\parskip}}%
8   }
9   {\endflushleft}
10  \begin{chorus}[template=flushleft]
11   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
12   sed diam nonumy eirmod tempor invidunt ut labore et dolore \
13   magna aliquyam erat, sed diam voluptua.
14
15   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
16   sed diam nonumy eirmod tempor invidunt ut labore et dolore \
17   magna aliquyam erat, sed diam voluptua.
18  \end{chorus}

```

---

Chorus: Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.  
Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.

**A *flushright* template** An example for a template *flushright* that typesets the label in the margin:

```

1  \defineversetypetemplate{flushright}
2  {%
3   \noindent\llap{\verselabel\space}%
4   \flushright
5   \unskip
6   \vspace*{-\baselineskip}
7   \ifobeylines{\setlength\parskip{0pt}}{\vspace*{-\parskip}}%
8   }
9   {\endflushright}
10  \begin{chorus}[template=flushright]
11   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
12   sed diam nonumy eirmod tempor invidunt ut labore et dolore \
13   magna aliquyam erat, sed diam voluptua.
14
15   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
16   sed diam nonumy eirmod tempor invidunt ut labore et dolore \
17   magna aliquyam erat, sed diam voluptua.
18  \end{chorus}

```

Chorus:

Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
 sed diam nonumy eirmod tempor invidunt ut labore et dolore  
 magna aliquyam erat, sed diam voluptua.  
 Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
 sed diam nonumy eirmod tempor invidunt ut labore et dolore  
 magna aliquyam erat, sed diam voluptua.

As you can see it's not entirely easy to define a template that suits both songs with and without `obey-lines = {true}`. Personally I would forget about that option and not care about it at all in my templates.

**A framed template** Last but not least an example using the `mdframed` package [Dan13] – just to show you that everything is possible. The example adapts one of the examples of `mdframed`'s manual.

```

1 \defineversetypetemplate{framed}
2   {%
3     \expandcode{%
4       \noexpand\mdframed[
5         \ifversestarred{}{%
6           frametitle={%
7             \noexpand\tikz[baseline=(current bounding box.east),outer sep=0pt]
8             \noexpand\node[anchor=east,rectangle,fill=blue!20]
9             {\noexpand\strut\noexpand\verselabel};
10          }%
11        },
12        roundcorner = 5pt ,
13        linecolor = blue!20 ,
14        linewidth = 2pt,
15        topline = true,
16        frametitleaboveskip = \dimexpr-\ht\strutbox\relax ,
17      ]%
18    }%
19    \ifobeylines{\setlength\parskip{0pt}}{%
20    }
21    {%
22      \endmdframed
23      \addvspace{\baselineskip}%
24    }
25 \begin{chorus}[template=framed]
26   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
27   sed diam nonumy eirmod tempor invidunt ut labore et dolore \
28   magna aliquyam erat, sed diam voluptua.
29
30   Lorem ipsum dolor sit amet, consetetur sadipscing elitr, \
  
```

```

31 sed diam nonumy eirmod tempor invidunt ut labore et dolore \
32 magna aliquyam erat, sed diam voluptua.
33 \end{chorus}

```

**Chorus:**

Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.

    Lorem ipsum dolor sit amet, consetetur sadipscing elitr,  
sed diam nonumy eirmod tempor invidunt ut labore et dolore  
magna aliquyam erat, sed diam voluptua.

## 14. Internationalization

The environments described in sections 8 and 11 as well as a few other words used in **LEADSHEETS** are translated with the help of the translations [Nie13] package. All predefined and available translation strings are listed in table 4. You can change those translations or add translations for other languages with this command:

`\DeclareTranslation{<language>}{<string>}{<translation>}`

The command provided by the translations package for translating strings.

Those translations can be used for example in song title templates (see section 13.1). One of the strings listed in table 4 is a little different: the string `leadsheets/interpret` is declared as

```

1 \DeclareTranslation{English}{leadsheets/interpret}
2 {as interpreted by \printsongpropertylist{interpret}{ \& }{,~}{ \& }}
3 \DeclareTranslation{German}{leadsheets/interpret}
4 {wie von \printsongpropertylist{interpret}{ \& }{,~}{ \& } interpretiert}

```

which means it uses the song property `interpret`. As a consequence it only really can be used inside a song environment. In other cases as for example in table 4 the property part expands to nothing (but the spaces around it are of course there). Also keep in mind that `\printsongpropertylist` is not expandable.



TABLE 4: Predefined translation strings.

String	English	German
leadsheets/major	major	Dur
leadsheets/minor	minor	Moll
leadsheets/chorus	Chorus	Refrain
leadsheets/verse	Verse	Strophe
leadsheets/composer	Composer	Komponist
leadsheets/lyrics	Lyrics	Text
leadsheets/key	Key	Tonart
leadsheets/capo	Capo	Kapo
leadsheets/fret	fret	Bund
leadsheets/interpret	as interpreted by	wie von interpretiert
leadsheets/intro	Intro	Intro
leadsheets/interlude	Interlude	Interlude
leadsheets/bridge	Bridge	Bridge
leadsheets/solo	Solo	Solo

# Part V.

## Appendix

Talking about music is like dancing  
about architecture.

*Thelonious Monk*

### A. References

- [Dan13] Marco DANIEL. mdframed. version 1.9b, July 1, 2013.  
URL: <http://mirror.ctan.org/macros/latex/contrib/mdframed/>.
- [Ham12] Kevin W. HAMLEN. songs. version 2.14, Mar. 17, 2012.  
URL: <http://mirror.ctan.org/macros/latex/contrib/songs/>.
- [MCo8] Frank MITTELBACH and David CARLISLE. array. version 2.4c, Sept. 9, 2008.  
URL: <http://mirror.ctan.org/macros/latex/required/tools/>.
- [Nie13] Clemens NIEDERBERGER. translations. version 1.1a, Sept. 30, 2013.  
URL: <http://mirror.ctan.org/macros/latex/contrib/translations/>.
- [Rat10] Christopher RATH. songbook. version 4.5, Apr. 30, 2010.  
URL: <http://mirror.ctan.org/macros/latex/contrib/songbook/>.
- [The13a] THE L<sup>A</sup>T<sub>E</sub>X3 PROJECT TEAM. l3kernel. version SVN 4582, July 28, 2013.  
URL: <http://mirror.ctan.org/macros/latex/contrib/l3kernel/>.
- [The13b] THE L<sup>A</sup>T<sub>E</sub>X3 PROJECT TEAM. l3packages. version SVN 4582, July 28, 2013.  
URL: <http://mirror.ctan.org/macros/latex/contrib/l3packages/>.
- [Varoo] VARIOUS. *The Real Book. C Edition*. 6th edition. Vol. I.  
Hal Leonard Publishing Corporation, Jan. 1, 2000. ISBN: 978-0634060380.

### B. Index

<b>Symbols</b>	<b>B</b>	chordnames (library) . . . . . 3 f., 6, 24
: (shortcut) . . . . . 14, 16, 29	<b>band</b> . . . . . 15	chords (library) . . . . . 4
_ (shortcut) . . . . . 16, 19	<b>bar-shortcuts</b> . . . . . 14, 16, 29	chorus (environment) . . 12 f., 19, 21,
(shortcut) . . . . . 14, 16, 29	<b>\bassclef</b> . . . . . 5	23–26, 29, 32, 34, 38 ff.
^ (shortcut) . . . . . 16, 19, 22	<b>bridge (environment)</b> . . . . . 13, 26	chorus* (environment) . . . . . 26
<b>A</b>	<b>C</b>	<b>composer</b> . . . . . 14 f.
<b>add</b> . . . . . 8	<b>capo</b> . . . . . 15 f.	<b>\copysongproperty</b> . . . . . 30
<b>after-label</b> . . . . . 27 f., 36	<b>\capo</b> . . . . . 15 f.	<b>counter</b> . . . . . 16
<b>align-chords</b> . . . . . 20	<b>capo-nr-cs</b> . . . . . 17	<b>D</b>
<b>\allabreve</b> . . . . . 5	<b>capo-nr-format</b> . . . . . 16	DANIEL, Marco . . . . . 39
<b>\altoclef</b> . . . . . 5	CARLISLE, David . . . . . 30	<b>\DeclareTranslation</b> . . . . . 27
<b>arr</b> . . . . . 15	<b>\chord</b> . . . . . 16, 19–22	<b>\definesongproperty</b> . . . . . 30
<b>array (package)</b> . . . . . 30	<b>chord-cs</b> . . . . . 14, 21, 24	<b>\definesongtitletemplate</b> . . 22 f.,
<b>aug</b> . . . . . 8	<b>\chordname</b> . . . . . 6 f., 9 f., 21	30, 32 f.

# INDEX

- `\defineversetypetemplate` . 35–39
- `dim` . . . . . 8
- `double-flat` . . . . . 8
- `double-sharp` . . . . . 8
- `\doublebar` . . . . . 5, 30
- `\doubleflat` . . . . . 5 f., 8
- `\doublesharp` . . . . . 5 f., 8
- E**
- `\eighthrest` . . . . . 5
- `empty-chord-dim` . . . . . 19 f.
- `enharmonic` . . . . . 19, 24
- `\expandcode` . . . . . 31, 34, 39
- F**
- `flat` . . . . . 8
- `\flat` . . . . . 4 ff., 8
- `format` . . . . . 8, 18, 27, 35
- `\forsongpropertylist` . . . . . 31
- `full-dim` . . . . . 8
- G**
- `genre` . . . . . 15
- H**
- `half-dim` . . . . . 8
- `\halfrest` . . . . . 5
- HAMLEN, Kevin . . . . . 2
- `height` . . . . . 16, 31
- I**
- `ID` . . . . . 16
- `\ifobeylines` . . . . . 36–39
- `\ifsongmeasuring` . . . . . 31
- `\ifsongpropertiestequal` . . . . . 31
- `\ifsongproperty` . . . . . 31–34
- `\ifversenamed` . . . . . 36
- `\ifversenumbered` . . . . . 36
- `\ifversestarred` . . . . . 36, 39
- `info` (environment) . . . . . 26
- `input-notation` . . . . . 9
- `interlude` (environment) . . . . . 13, 26
- `interpret` . . . . . 15, 40
- `intro` (environment) . . . . . 13, 26
- `intro*` (environment) . . . . . 26
- `itemize` (verse-type template) . 27, 35, 37
- K**
- `key` . . . . . 15, 19, 24 f.
- L**
- `l3kernel` (bundle) . . . . . 2
- `l3packages` (bundle) . . . . . 2
- `label-format` . . . . . 18, 27 f.
- `\leftrepeat` . . . . . 5, 29
- `\leftrightrepeat` . . . . . 5, 30
- LPPL . . . . . 2
- `lyrics` . . . . . 15
- M**
- `major` . . . . . 8
- `major-nine` . . . . . 8
- `major-seven` . . . . . 8
- `mdframed` (package) . . . . . 39
- `\meterC` . . . . . 5
- `minimal` (songtitle template) . 12, 30, 32
- `minor` . . . . . 8
- MITTELBACH, Frank . . . . . 30
- `\musicsymbol` . . . . . 4
- `musicsymbols` (library) . . . 3 ff., 7, 29
- `\musix` . . . . . 4
- N**
- `name` . . . . . 27
- `named` . . . . . 28, 36
- `\natural` . . . . . 4 f.
- `\newversetype` . . . . . 27 ff., 36
- NIEDERBERGER, Clemens . . . . . 2, 40
- `\normalbar` . . . . . 5, 29
- `numbered` . . . . . 27, 36
- O**
- `obey-lines` . . . . . 14, 21, 36 f., 39
- `obey-lines-parskip` . . . . . 37
- `output-notation` . . . . . 9
- P**
- `print-tags` . . . . . 14 f.
- `\printsongpropertylist` . 31 ff., 40
- `properties` (library) . . . . . 4
- Q**
- `\quarterrest` . . . . . 5
- R**
- RATH, Christopher . . . . . 2
- `recall-chords` . . . . . 23, 28
- `remember-chords` . . . . . 22, 28
- `\rightrepeat` . . . . . 5, 29
- S**
- `\section` . . . . . 12, 30
- `\setchordnames` . . . . . 7, 9 f., 34
- `\setleadsheets` 7, 13, 17–20, 28, 30, 32, 34, 37
- `sharp` . . . . . 8
- `\sharp` . . . . . 4 ff., 8
- `short-title` . . . . . 14
- `\sixteenthrest` . . . . . 5
- `smash-chords` . . . . . 20
- `smash-next-chord` . . . . . 19 f.
- `solo` (environment) . . . . . 27
- `solo*` (environment) . . . . . 27
- `song` (environment) . . . . . 11–14, 16 f., 19–25, 29 f., 32, 34 f., 40
- `song-format` . . . . . 14
- `songbook` (package) . . . . . 2
- `\songproperty` . . . . . 31–34
- `songs` (library) . . . . . 3 f.
- `songs` (package) . . . . . 2
- `sort-arr` . . . . . 15
- `sort-band` . . . . . 15
- `sort-composer` . . . . . 15
- `sort-interpret` . . . . . 15
- `sort-lyrics` . . . . . 15
- `sort-short-title` . . . . . 14
- `sort-title` . . . . . 14
- `\stopbar` . . . . . 5, 30
- `subtitle` . . . . . 14
- `sus` . . . . . 8
- T**
- `tabular` (songtitle template) . . 30, 34
- `tags` . . . . . 14 f.
- `template` . . . . . 27
- `templates` (library) . . . . . 4
- `tempo` . . . . . 15
- `text-format` . . . . . 14
- `\textmusix` . . . . . 4
- THE L<sup>A</sup>T<sub>E</sub>X3 PROJECT TEAM . . . . . 2
- The Real Book* . . . . . 2
- `title` . . . . . 14
- `title-template` . . . . . 13, 30
- `translations` (library) . . . . . 4
- `translations` (package) . . . . . 2, 40
- `transpose` . . . . . 19, 24
- `transpose-capo` . . . . . 24
- `transposing` (library) . . . . . 4
- `\trebleclef` . . . . . 5
- U**
- `\useleadsheetslibraries` . . . 3 f., 7
- `\useleadsheetslibrary` . . . . . 3
- `\usesongpropertylist` . . . . . 31
- V**
- `verse` (environment) . . . 12 ff., 17–25, 28 f., 32, 34 f., 37
- `verse*` (environment) . . . . . 17, 23
- `\verseafterlabel` . . . . . 36
- `\verselabel` . . . . . 27 f., 35–39
- `\verselabelformat` . . . . . 35 f.

## INDEX

<code>\versename</code> .....36	<code>verses-label-format</code> .....19, 28	<code>\writechord</code> ..... 16, 19, 34
<code>\versenumber</code> .....36		<code>writer</code> ..... 15
<code>verses-after-label</code> .....28	<b>W</b>	
<code>verses-format</code> ..... 19, 28	<code>\wholerest</code> .....5	