


```

int closeTime=12;
double vat =0.15;
String shopName="tamimi";
bool open=true;
List<Map?> theshop=[
{"name":"apple","price":10," vat":10*vat},
{"name":"banana","price":7," vat":7*vat},
{"name":"water","price":1," vat":1*vat},
null,
{"name":"chocolate","price":15," vat":15*vat},

];

main() {
  print("Welcome to ${shopName} \n we close at ${closeTime}am \n");
  print(theshop);
}

```

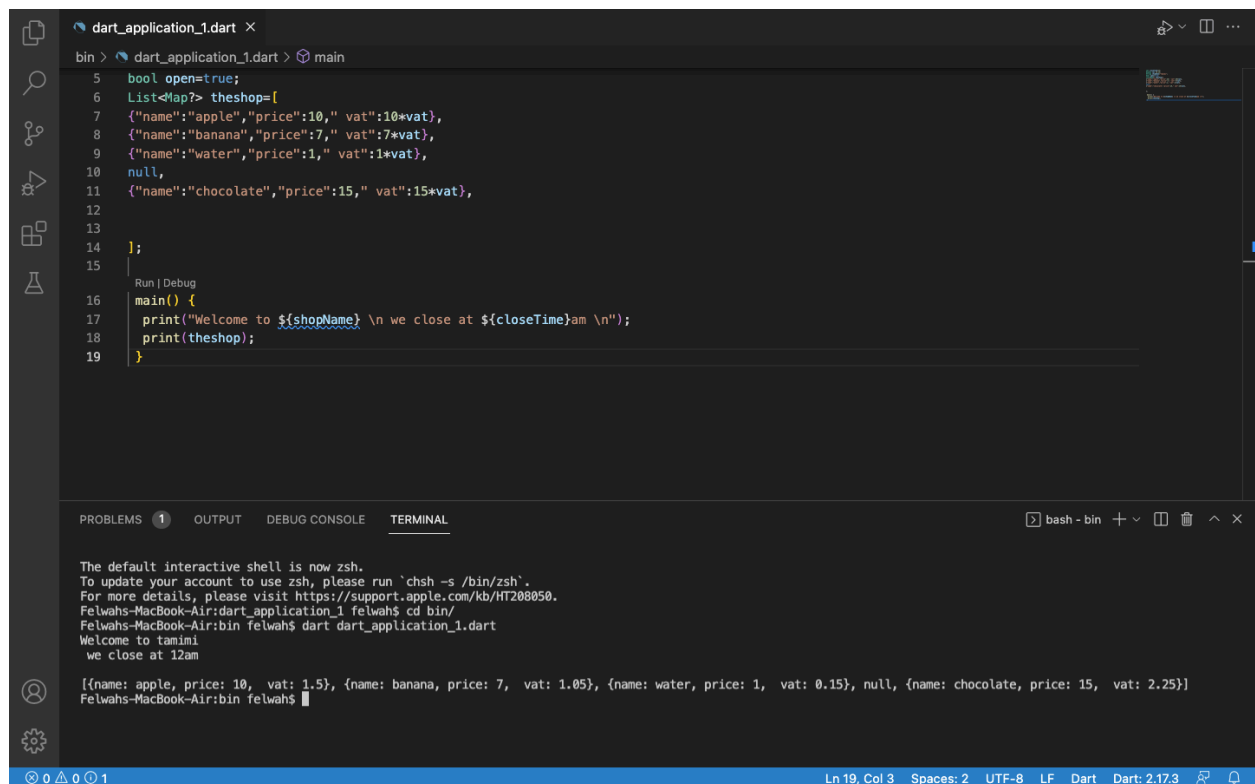

The screenshot shows an IDE with a Dart file named `dart_application_1.dart`. The code is identical to the one in the first block. The IDE's interface includes a sidebar with icons for file explorer, search, and other tools. The main editor area shows the code with line numbers. Below the editor, there is a terminal window titled `bash - bin`. The terminal output shows the execution of the Dart program, displaying the shop name, closing time, and a list of items with their prices and VAT calculations.

```

bin > dart_application_1.dart > main
5  bool open=true;
6  List<Map?> theshop=[
7    {"name":"apple","price":10," vat":10*vat},
8    {"name":"banana","price":7," vat":7*vat},
9    {"name":"water","price":1," vat":1*vat},
10   null,
11   {"name":"chocolate","price":15," vat":15*vat},
12
13 ];
14
15
16  Run | Debug
17  main() {
18    print("Welcome to ${shopName} \n we close at ${closeTime}am \n");
19    print(theshop);
20  }

```

PROBLEMS 1 OUTPUT DEBUG CONSOLE TERMINAL

```

The default interactive shell is now zsh.
To update your account to use zsh, please run `chsh -s /bin/zsh`.
For more details, please visit https://support.apple.com/kb/HT208850.
Felwahs-MacBook-Air:dart_application_1 felwah$ cd bin/
Felwahs-MacBook-Air:bin felwah$ dart dart_application_1.dart
Welcome to tamimi
we close at 12am

[{name: apple, price: 10, vat: 1.5}, {name: banana, price: 7, vat: 1.05}, {name: water, price: 1, vat: 0.15}, null, {name: chocolate, price: 15, vat: 2.25}]
Felwahs-MacBook-Air:bin felwah$

```

Ln 19, Col 3 Spaces: 2 UTF-8 LF Dart Dart: 2.17.3