

iiiiii HEAD	=====	LLLLLLL
dfde67e5c9444d6f6b60f693fefb5377996c9750		

# FCPN – A Fuzzy Continuous Petri Net Modeling and Simulation Tool

Fei Liu, Wujie Sun  
School of Software Engineering,  
South China University of Technology

January 22, 2019

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Petri nets	3
1.2	Continuous Petri nets	3
1.3	Fuzzy logic	4
iiiiiii	HEAD	
1.3.1	Mamdani fuzzy inference	4
1.3.2	Mamdani Fuzzy Inference	5
1.3.3	T-S Fuzzy Inference	7
1.4	Fuzzy continuous Petri nets	7
1.5	Our tool	7
1.6	Features - overview	8
1.6.1	Features for modeling	8
=====		
1.3.1	Mamdani Fuzzy Inference	5
1.3.2	T-S Fuzzy Inference	7
1.4	Fuzzy continuous Petri nets	8
1.5	Our tool	8
1.6	Features - overview	8
1.6.1	Features for modeling	9
llllllll	dfde67e5c9444d6f6b60f693fefb5377996c9750	
1.6.2	Features for simulation	9
<b>2</b>	<b>Modeling</b>	<b>10</b>
2.1	An overview of the main interface	10
2.2	Draw a net	10
2.2.1	Edit a place	11
2.2.2	Edit a transition	11
2.2.3	Edit an arc	12
2.2.4	Use FIS	13
<b>3</b>	<b>Simulation</b>	<b>21</b>
3.1	Run simulation	21
3.2	Show simulation results	21
3.3	Export simulation results	23
3.4	Rich functions	23
<b>4</b>	<b>Examples</b>	<b>25</b>
4.1	1D Diffusion Reaction	25
4.1.1	Introduction	25
4.1.2	Model	25
4.1.3	Simulation result	30
4.2	Enzymatic reaction	33
4.2.1	Introduction	33
4.2.2	Model	33
4.2.3	Simulation result	33
4.3	RKIP pathway	36
4.3.1	Introduction	36
4.3.2	Model	36

4.3.3	Simulation result . . . . .	36
4.4	6-mercaptopurine metabolism . . . . .	40
4.4.1	Introduction . . . . .	40
4.4.2	Model . . . . .	40
4.4.3	Simulation result . . . . .	41

# 1 Introduction

Systems biology [1] aims to study the interactions between the components of a biological system and how these interactions cause the behaviour of the system as a whole. Modelling and simulation plays an essential role in the study of systems biology by employing the data to build mathematical or computational models of a biological system, which help biologists to better understand and predict the system. However, the complexity of biological systems gives rise to a number of modelling challenges, one of which is uncertainty [2]. The uncertainty further constitutes the structural uncertainty and parametric uncertainty for a biological model.

In the deterministic quantitative modeling aspect, continuous Petri nets (CPNs) [3] offer a graphical way to represent systems of ordinary differential equations (ODEs). In a CPN model, places take real-valued tokens to represent the concentration of species, while transitions represent continuous changes of concentrations. However, neither ODEs or CPNs can address the uncertainty modeling issue.

By combining fuzzy inference systems [4, 5] with CPNs, we further obtain fuzzy continuous Petri nets (FCPNs), which achieve the uncertainty modeling capability from fuzzy logic. FCPNs lie in the second category of fuzzy Petri nets, given in [6]. Therefore an FCPN model can be divided into two parts: the certain ODE part and the uncertain fuzzy reasoning part, thus achieving the modeling of a biological system where we have sufficient data for some components but insufficient information for others.

## 1.1 Petri nets

Petri nets [7] provide a formal and graphical representation of systems based on their firm mathematical foundation for the analysis of system properties. Petri nets are one of several mathematical modeling languages for the description of distributed systems. A Petri net is a directed bipartite graph, in which the nodes represent transitions (i.e. events that may occur, represented by bars) and places (i.e. conditions, represented by circles). The directed arcs describe the flow of places to transitions or vice versa. No arc is allowed between two places or two transitions. Each arc has its own weight, and the default value is 1.

Let's take the well-known chemical reaction,  $2H_2 + O_2 \rightarrow 2H_2O$ , as an example [7] to illustrate Petri nets, which is shown in Figure 1. Circles named  $H_2$ ,  $O_2$ , and  $H_2O$  are places, while the square named  $t$  is a transition.  $H_2$  and  $O_2$  are preconditions for  $t$  while  $H_2O$  is the postcondition for  $t$ . The tokens of  $H_2$ ,  $O_2$ , and  $H_2O$  are set to 30, 20, and 0, respectively.

## 1.2 Continuous Petri nets

A continuous Petri net (CPN) [3] is a variant of Petri nets. In a CPN model, the values identified on places are non-negative real values (no longer required to be non-negative integer values), which usually model the concentrations of species. In fact, a CPN offer a graphical representation of a system of ODEs.

Let us continue to use the chemical reaction,  $2H_2 + O_2 \rightarrow 2H_2O$  as an example to illustrate CPNs. The structure of the CPN model is exactly like

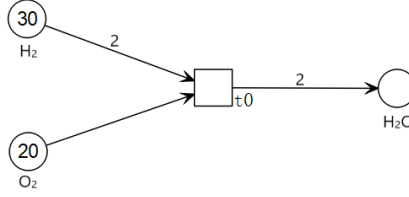


Figure 1: A Petri net example that models the chemical reaction,  $2H_2 + O_2 \rightarrow 2H_2O$ .

the one given in Figure 1. Besides, we associate a kinetic rate, e.g., 0.1, with the transition  $t$  by adopting a mass action law, represented as `MassAction(0.1)`. Here `MassAction()` is a macro that generates the rate function of a transition using its preplaces and taking a parameter as its argument. For example, `MassAction(0.1)` for transition  $t$  generates a rate function,  $0.1 * H_2^2 * O_2$ . The set of ODEs underlying the CPN model given in Figure 1 is shown in Table 1.

Table 1: ODEs of the CPN model given in Figure 1.

Species	ODE
$H_2$	$dH_2/dt = -2 * (0.1 * H_2^2 * O_2)$
$O_2$	$dO_2/dt = -1 * (0.1 * H_2^2 * O_2)$
$H_2O$	$dH_2O/dt = 2 * (0.1 * H_2^2 * O_2)$

### 1.3 Fuzzy logic

Fuzzy logic [4, 5] is a form of many-valued logic in which the truth values of variables may be any real number between 0 and 1. It is employed to handle the concept of partial truth, where the truth value may range between completely true and completely false. By contrast, in Boolean logic, the truth values of variables may only be the integer values 0 or 1. Fuzzy logic is based on the observation that people make decisions based on imprecise and non-numerical information, and fuzzy sets are mathematical means of representing vagueness and imprecise information.

Two widely used fuzzy inference systems are Mamdani and T-S inference systems. In the following, we will briefly introduce these two systems.

#### 1.3.1 Mamdani fuzzy inference

Mamdani fuzzy inference [8] is one of the most commonly used fuzzy inference systems and was among the first control systems built using fuzzy set theory. It expects the output membership functions to be fuzzy sets, which are then defuzzified to obtain crisp output values. The diagram of the Mamdani fuzzy inference system is shown in Figure 2, which involves the following four components: fuzzification, fuzzy rule base, fuzzy inference engine and defuzzification. An example is also given in Figure 3 to illustrate the reasoning process of the Mamdani fuzzy inference system.

### 1.3.2 Mamdani Fuzzy Inference



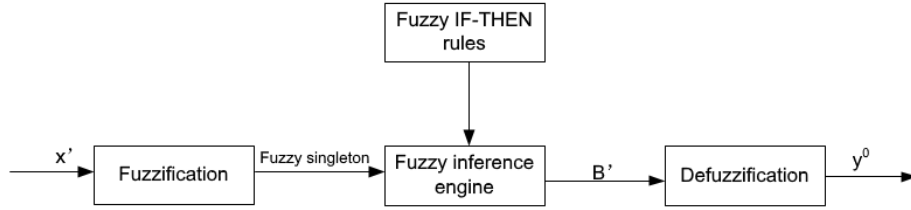


Figure 2: Diagram of the Mamdani fuzzy inference system.

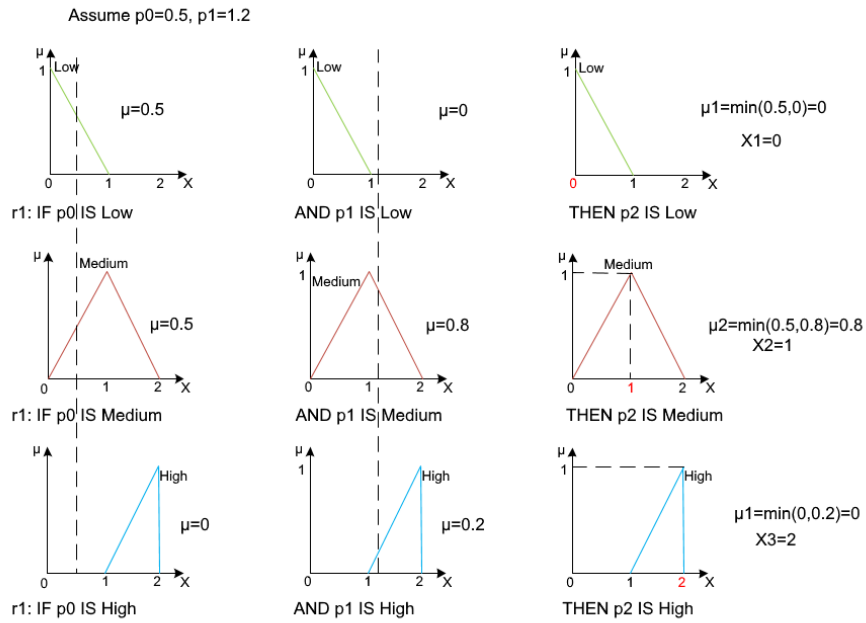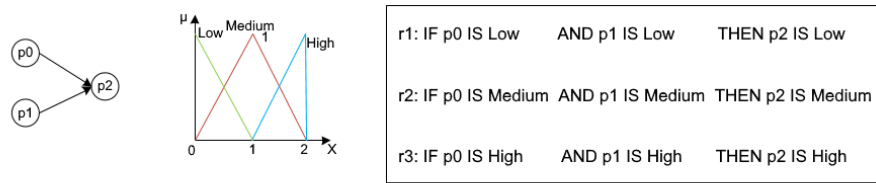

1. Calculate the  $\mu$  of each input in each rule.
  2. Find the minimum  $\mu_n$  of each rule.
  3. Multiply the  $\mu_n$  with  $X_n$ , where  $X_n$  is the value of  $X$  when  $\mu=1$  of rule  $n$ .
  4. Divide the sum of  $\mu_n \cdot X_n$  by the sum of  $\mu_n$ .
- $$\begin{aligned}
 p_2 &= (\mu_1 \cdot X_1 + \mu_2 \cdot X_2 + \mu_3 \cdot X_3) / (\mu_1 + \mu_2 + \mu_3) \\
 &= (0 \cdot 0 + 0.8 \cdot 1 + 0 \cdot 2) / (0 + 0.8 + 0) \\
 &= 1
 \end{aligned}$$

Figure 3: An example of the Mamdani fuzzy inference system.

(1)Fuzzification Fuzzification is used to fuzzify crisp input values into fuzzy values according to predefined membership functions for input variables. For example, for the model given in Figure 3(a), p0 and p1 are inputs while p2 is the output. Three linguistic terms, Low, Medium and High, each taking a triangular fuzzy number, are defined for p0 to p2 (see Figure 3(b)). We assume that the minimum and maximum values of p0, p1 and p2 are 0 and 2, respectively. In the fuzzy membership functions shown in Figure 3(b),  $X$  indicates the value of each input and  $\mu$  indicates the membership grade of the fuzzy set.

(2)Fuzzy rule base The rule base is a collection of fuzzy rules that are defined for a specific application. For example, for the model given in Figure 3(a), we can define the fuzzy rules given in Figure 3(c). A uniform format of the rules is:

$$r^r: \text{IF } x_1 \text{ IS } A_1^r \text{ AND } \dots \text{ AND IF } x_n \text{ IS } A_n^r \text{ THEN } y^r \text{ IS } B'^r.$$

(3)Fuzzy inference engine Fuzzy inference engine is used to execute all applicable rules in the rule base to compute the fuzzy output values. A detailed reasoning example is given in Figure 3(d).

(4)Defuzzification Defuzzification is used to defuzzify the fuzzy output values to get “crisp” output values. See an example in Figure 3(e).



### 1.3.3 T-S Fuzzy Inference

T-S fuzzy inference [9] is also called Sugeno or Takagi-Sugeno-Kang fuzzy inference. This method is similar to the Mamdani one except the difference that the T-S' outputs are either crisp linear expressions or constants rather than fuzzy values. The uniform format of the T-S rules is

$$r^r: \text{IF } x_1 \text{ IS } A_1^r \text{ AND } \dots \text{ AND IF } x_n \text{ IS } A_n^r \text{ THEN } y^r = a_1^r x_1 + \dots + a_n^r x_n + c^r.$$

where  $a_i^r$  is  $i$ th coefficient in  $r$ th rule and  $c^r$  is a constant.

The process of the T-S fuzzy inference system is shown in Figure 4, which involves three components: fuzzification, fuzzy rule base, and fuzzy inference engine. An example is also given in Figure 5 to illustrate the reasoning process of the T-S fuzzy inference system.

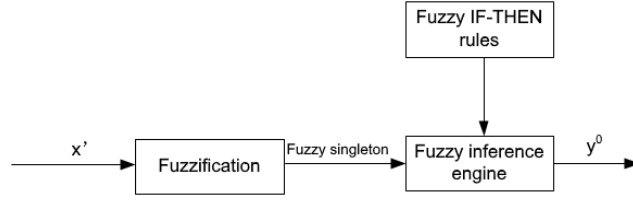


Figure 4: Diagram of the T-S fuzzy inference system.

## 1.4 Fuzzy continuous Petri nets

Adding fuzzy logic to continuous Petri nets gets fuzzy continuous Petri nets [6], which make the Petri nets more powerful. For example, if we want to get the value of  $H_2O$  using fuzzy logic, but ODE no longer works for  $H_2O$ , then the value of  $H_2O$  can be obtained by fuzzy logic.

Please note that when using fuzzy logic in fuzzy continuous Petri nets, the value we obtained is not the value of the variable, but the amount of change within the step. The change value of  $H_2O$  of current time step is obtained by the values of  $H_2$  and  $O_2$  of previous time step.


The result might be a little different from ODE. If the values of  $H_2$  and  $O_2$  are down to 18 and 14, the ODE result of  $H_2O$  is 12, while in fuzzy logic, the result of  $H_2O$  might be 11.8.

## 1.5 Our tool


This software provides modeling and simulation functions of fuzzy continuous Petri nets for researchers in the field of systems biology.

It includes three main functions: continuous Petri net modeling, fuzzy (Mamdani & T-S) modeling, and hybrid simulation. The aim of this software is to give an easy-to-use tool for the construction and simulation of an FCPN model.

We offer the Windows, Linux, and macOS(beta) versions of the software. To use the software, please follow the instruction in [README.md](#) and download the corresponding version of FCPN tool.

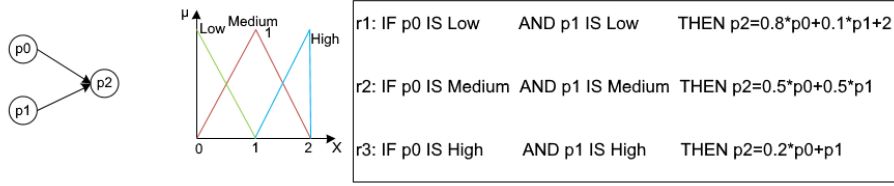

Assume  $p0=0.5$ ,  $p1=1.2$

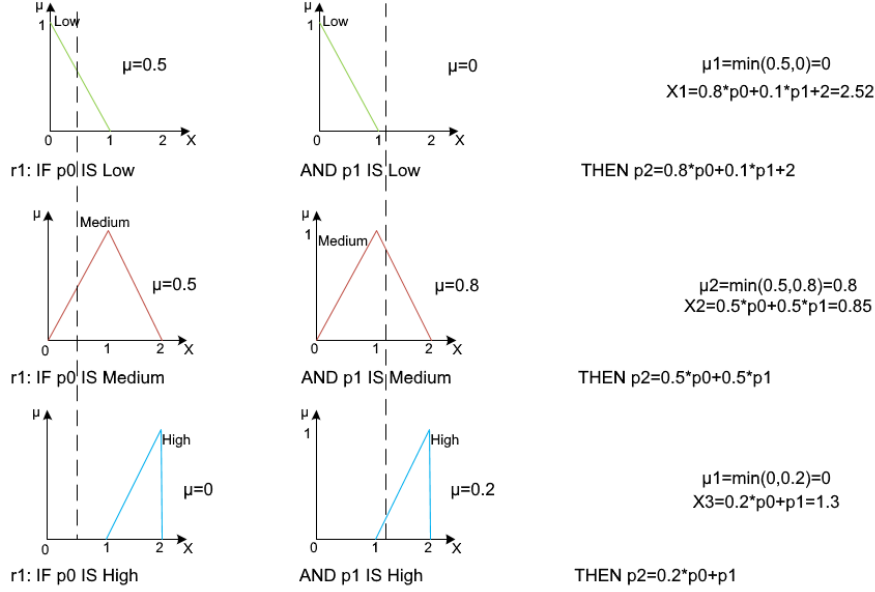

1. Calculate the  $\mu$  of each input in each rule.
  2. Find the minimum  $\mu_n$  of each rule.
  3. Multiply the  $\mu_n$  with  $X_n$ , where  $X_n$  is calculated by the rule  $n$ .
  4. Divide the sum of  $\mu_n * X_n$  by the sum of  $\mu_n$ .
- $$p2 = (\mu_1 * X1 + \mu_2 * X2 + \mu_3 * X3) / (\mu_1 + \mu_2 + \mu_3)$$
- $$= (0 * 2.52 + 0.8 * 0.85 + 0 * 1.3) / (0 + 0.8 + 0)$$
- $$= 0.85$$

Figure 5: An example of the T-S fuzzy inference system.

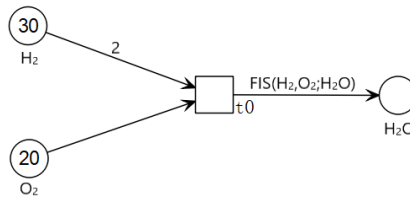


Figure 6: Example of fuzzy continuous Petri nets.

## **1.6 Features - overview**

Before exploring all features in detail in the following sections, we will give a brief overview for the expected features here.

### **1.6.1 Features for modeling**

- Concise and efficient interface design.
- Drawing of the Petri net graph as usual.
- Flexible user-defined functions.
- Multiple fuzzy logic choices.
- Simple and fast fuzzy logic settings.
- Rich shortcut settings, such as undo, redo, save, print, etc.

### **1.6.2 Features for simulation**

- Highly automated simulation process.
- Diversified export of simulation results.
- Custom simulation result drawing.

## 2 Modeling

This section will present a general step-by-step procedure for how to construct an FCPN model. We will take the chemical reaction  $2H_2 + O_2 \rightarrow 2H_2O$  as an example [7] for the illustration of the procedure.

### 2.1 An overview of the main interface

After opening the application, what we should do first is to draw an FCPN. Figure 7 shows the main interface of the software.

The menu bar is on the top and the tool bar is on the left, which facilitates us to create the net conveniently. The tools from top to bottom include “new”, “open”, “save”, “save as”, “print”, “undo”, “redo”, “delete a node”, “normal cursor”, “create a new place”, “create a new transition”, “create a new arc”, and “start simulation”.

The top window is used to draw the net and the bottom window to output a log. The slider on the bottom right can be used to zoom in or zoom out a net.

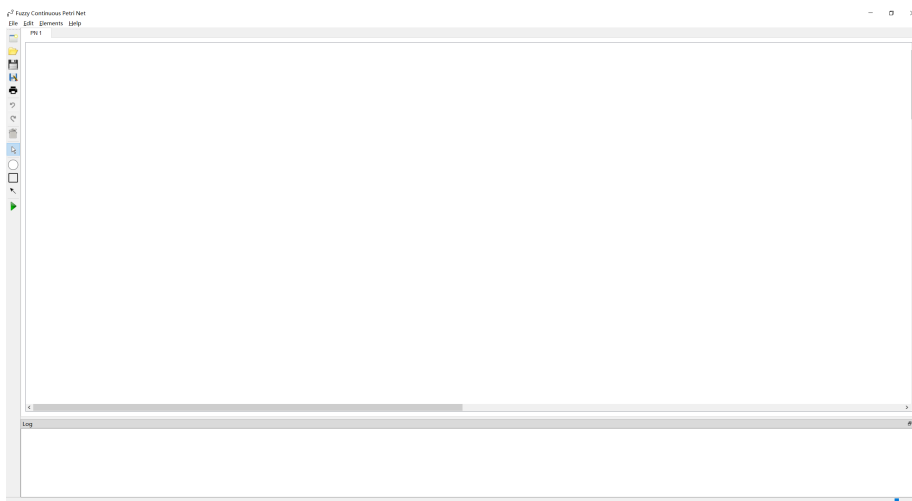


Figure 7: Main interface of the software.

### 2.2 Draw a net

We can draw a net using the following steps taking Figure 8 as an example:

- Left click the place button (the circle on the tool bar).
- Put three places on the palette where you want by clicking the left mouse.
- Left click the transition button (the square on the tool bar).
- Put one transition on the palette where you want by clicking the left mouse.
- Left click the arc button (the arrow on the tool bar).

- Left click a place, press the mouse and hold, move the mouse to a transition, then release the mouse. In this way you can draw an arrow from a place to a transition.
- Repeating these steps, an FCPN can be constructed; see Figure 8.

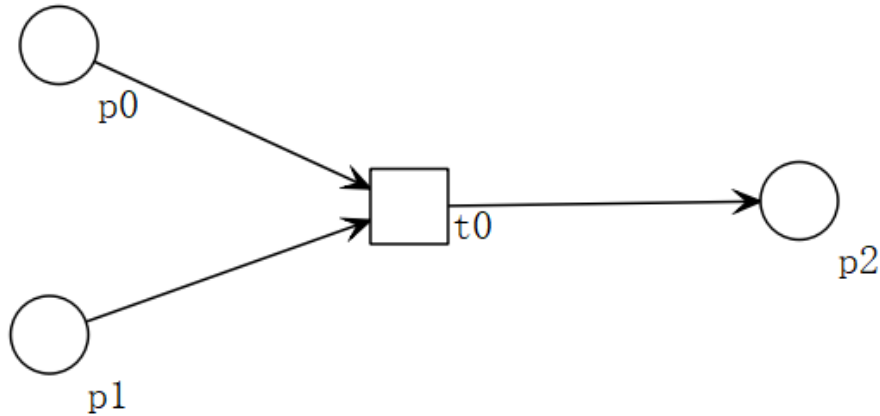


Figure 8: Draw the net.

### 2.2.1 Edit a place

We can edit a place in the following way:

- Double click the place on the palette.
- A window named Place Attributes (Figure 9) will show.
- Change the Name and Marking.
- After editing, left click OK button.

For example, in Figure 8, we change the names of p0, p1, p2 to H2, O2, H2O, respectively, and change the markings of p0, p1, p2 to 30, 20, 0, respectively. Please note that the name of each place should be unique and a marking should be a non-negative real number.

### 2.2.2 Edit a transition

We can edit a transition in the following way:

- Double click the transition on the palette.
- A window named Transition Attributes (Figure 10) will show.
- Change the Name and Function.
- After editing, left click OK button.

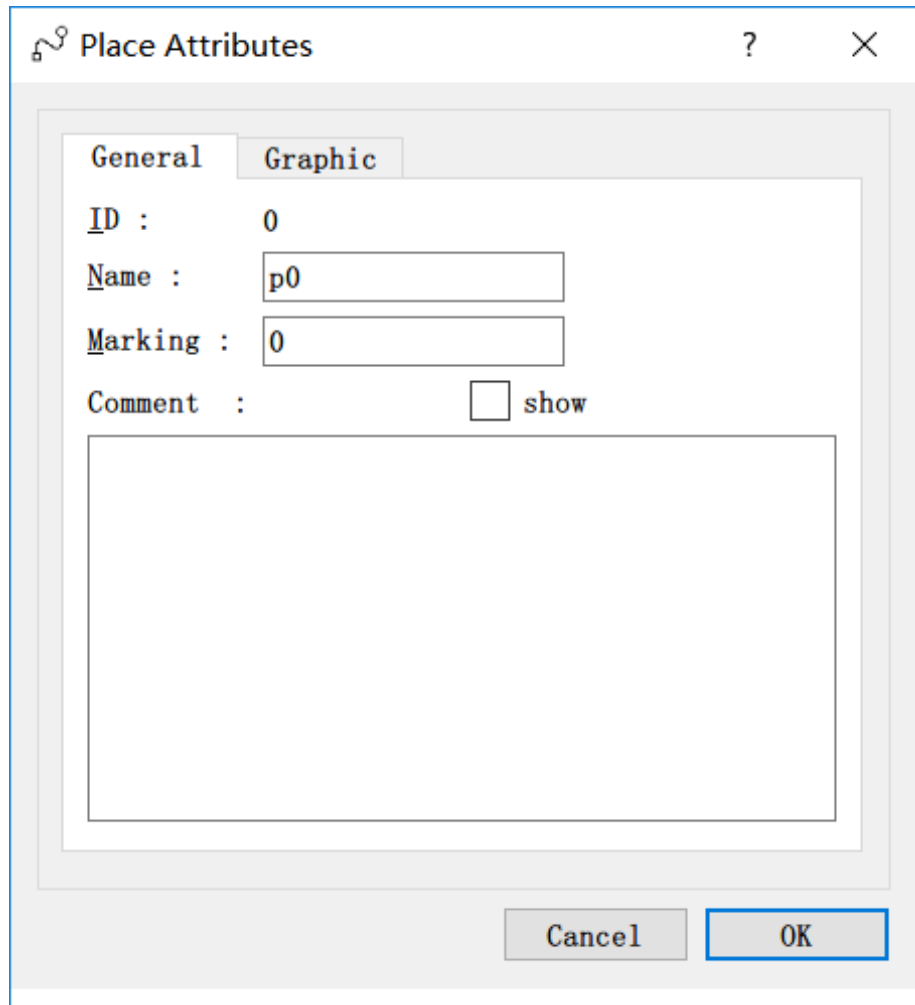


Figure 9: Edit a place.

For example, in Figure 8, we change the function of  $t_0$  from  $\text{MassAction}(1)$  to  $\text{MassAction}(0.1)$ . Please note that the name of each transition should be different and the function should be like “1”, “H2”, “ $\text{MassAction}(0)$ ”, “ $\text{MassAction}(\text{O}_2)$ ”, “ $\text{MassAction}(\text{H}_2+\text{O}_2)$ ”. Remember not to change the “ $\text{MassAction}(1)$ ” to “ $\text{massaction}(1)$ ” or something like that. And do not leave the function empty. Otherwise compile error might occur.

### 2.2.3 Edit an arc

We can edit an arc in the following way:

- Double click the arc on the palette.
- A window named Arc Attributes (Figure 11) will show.
- Change the Expression.

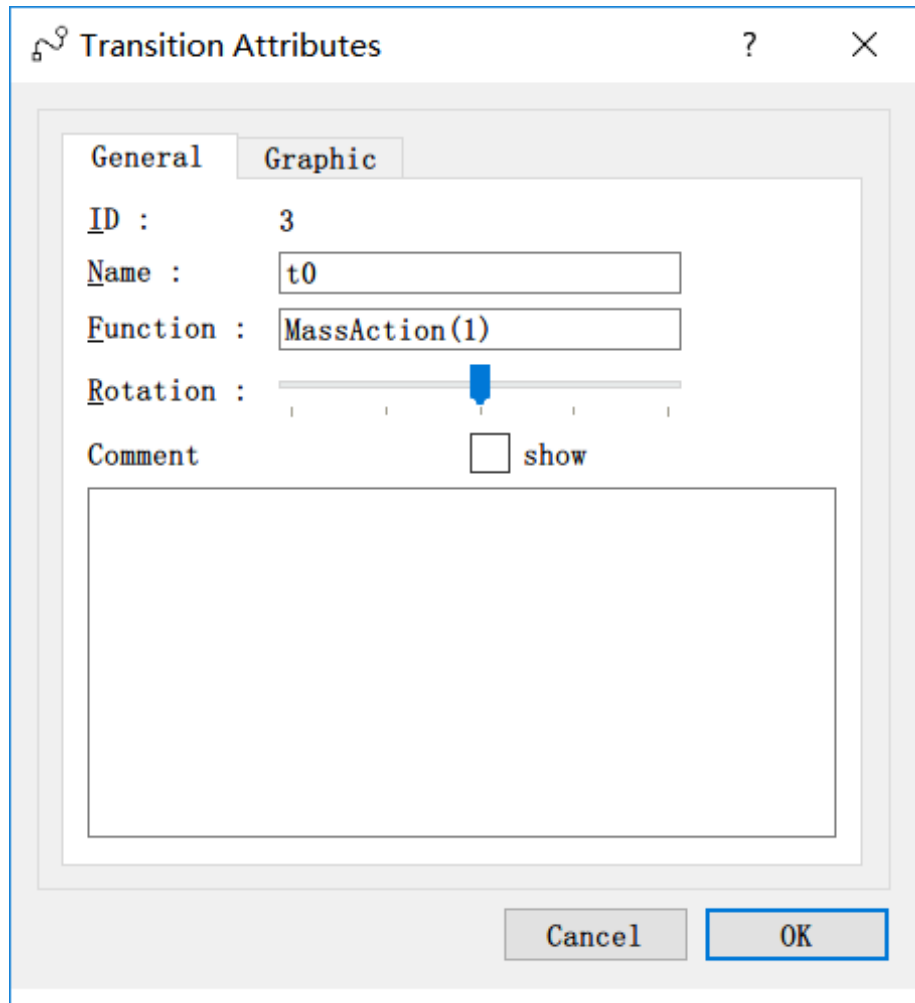


Figure 10: Edit a ransition.

- After editing, left click OK button.

For example, in Figure 8, we change the expression of arc from p0 (H2) to t0 to 2. For the expression of arc from t0 to p2 (H2O), see next step. Please note that the expression should be like "1", "H2" if you don't want use fuzzy logic, and do not leave the expression empty. Otherwise complie error might occur.

#### 2.2.4 Use FIS

FIS is the abbreviation for fuzzy inference system. We provide two kinds of FIS type: Mamdani and T-S. The steps are different between Mamdani and T-S. For example, in Figure 8, here are steps for using Mamdani:

- Double click the arc from t0 to p2 (H2O).

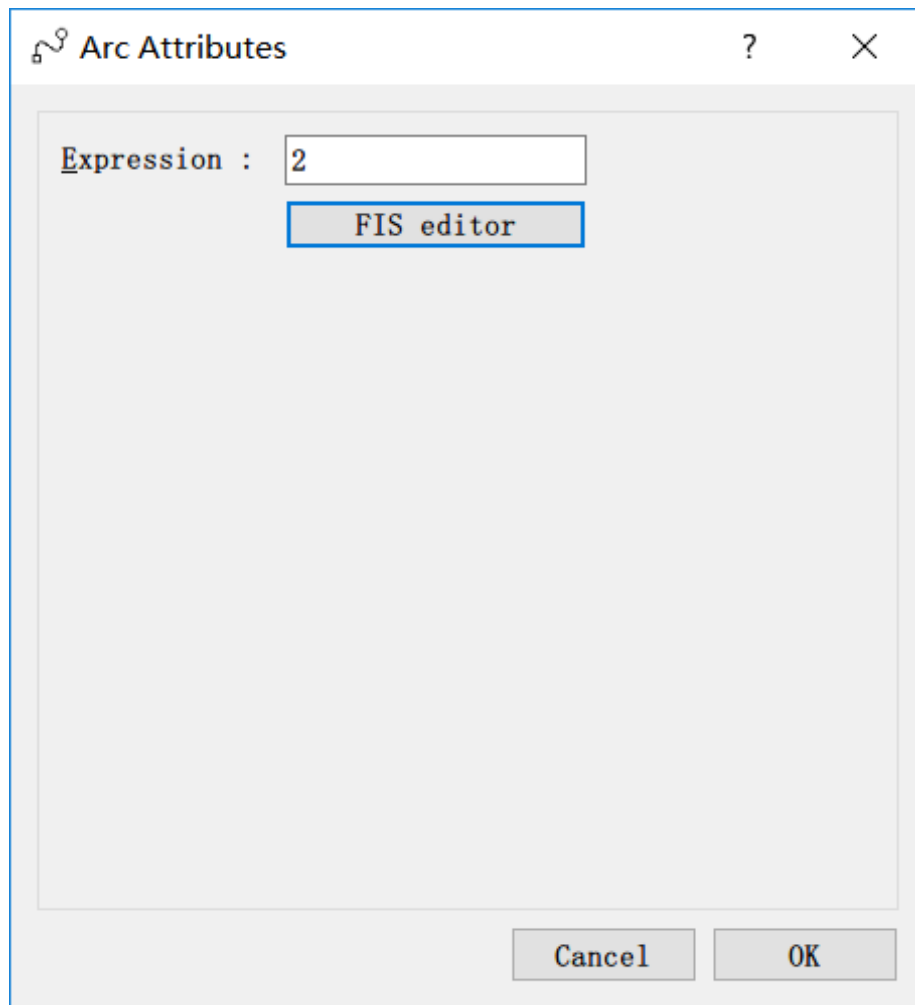


Figure 11: Edit an arc.

- Click the FIS editor button.
- Choose Mamdani as the FIS Type.
- Enter the time step and select the number of input variables.
- Click the Apply button.
- Choose each variable and its type in the table.
- Enter the minimum change and maximum change in one step, which are corresponding to the Range-Min and Range-Max of the table.

Make sure there is only one variable whose type is PN\_OUTPUT, and it should be the variable connected by the arc you choosed. In this example, that's p2 (H2O). The values are shown in Figure 13.





- Click the Apply button and the according label will show.
- For each function, enter the value of left, center and right which means the x values when y is equal to 0, 1, 0, respectively.
- Click the Show Plot button to see whether it is the graph you want.
- Click OK button to save the change and close the window.
- Repeat these steps to edit each variable.

we provide 2, 3, 5, 7 for the user to choose the number of linguistic variables. The values are shown in Figure 14, 15, 16.

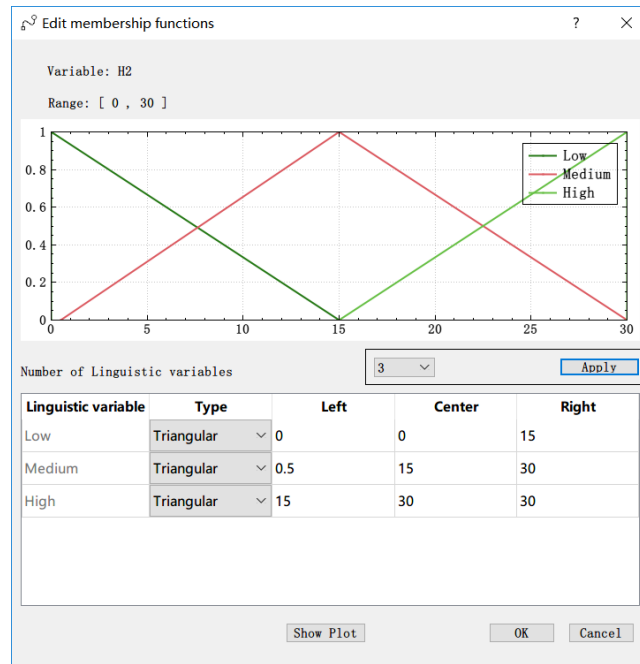


Figure 14: Membership functions of H2.

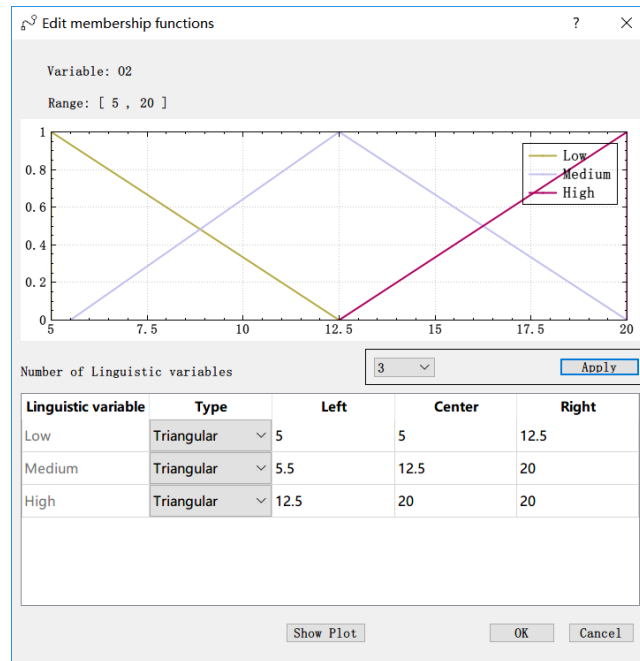


Figure 15: Membership functions of O2.

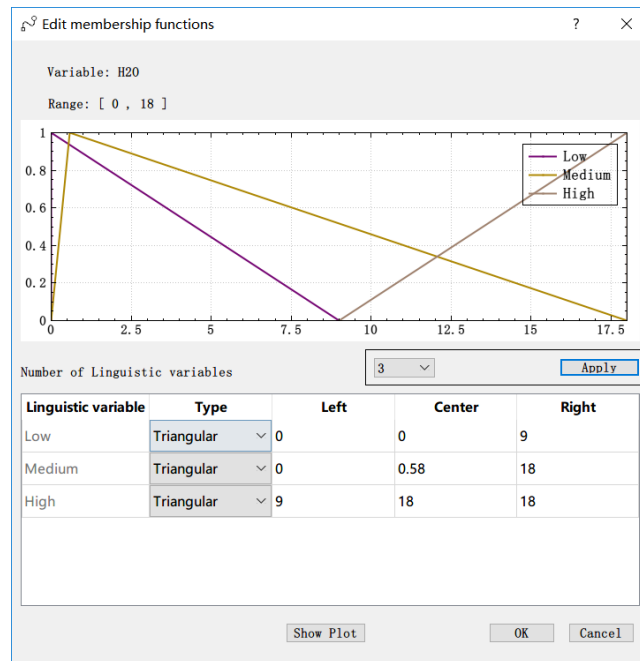


Figure 16: Membership functions of H2O.

Now we should edit rules.

- Click the Edit rules button on the center of bottom.
- Select the items of a rule, and left click Add rule button to add it.
- Repeat the previous step to add rules.
- Click the OK button to save the changes and close the window.

We can select a row and left click Change rule button to change it to the rule you selected in the below. Choosing a row and left clicking the Delete rule button can be used to delete the rule.

Make sure that the meanings of input's linguistic variables and output's linguistic variables are different. For example, as is shown in Figure 17, one of the rules is - IF H2 IS Low AND O2 IS Low Then H2O IS Low. This means that the low values of H2 and O2 will cause low value change of H2O, not meaning that the value of H2O will be low.

The rules are shown in Figure 17.

	IF	Variable	IS	Term	AND	Variable	IS	Term	Then	Variable	IS	Term
1	IF	H2	IS	Low	AND	O2	IS	Low	Then	H2O	IS	Low
2	IF	H2	IS	Medium	AND	O2	IS	Low	Then	H2O	IS	Low
3	IF	H2	IS	High	AND	O2	IS	Low	Then	H2O	IS	Low
4	IF	H2	IS	Low	AND	O2	IS	Medium	Then	H2O	IS	Low
5	IF	H2	IS	Low	AND	O2	IS	High	Then	H2O	IS	Low
6	IF	H2	IS	Medium	AND	O2	IS	Medium	Then	H2O	IS	Medium
7	IF	H2	IS	High	AND	O2	IS	Medium	Then	H2O	IS	Medium
8	IF	H2	IS	Medium	AND	O2	IS	High	Then	H2O	IS	Medium
9	IF	H2	IS	High	AND	O2	IS	High	Then	H2O	IS	High

If H2 is	and O2 is	Then H2O is
Low ▾	Low ▾	Low ▾

Add rule
Change rule
Delete rule
OK
Cancel

Figure 17: Edit rules.

Now left click the OK button of FIS editor and left click the OK button of arc to return to the main interface. The net should be like Figure 18.

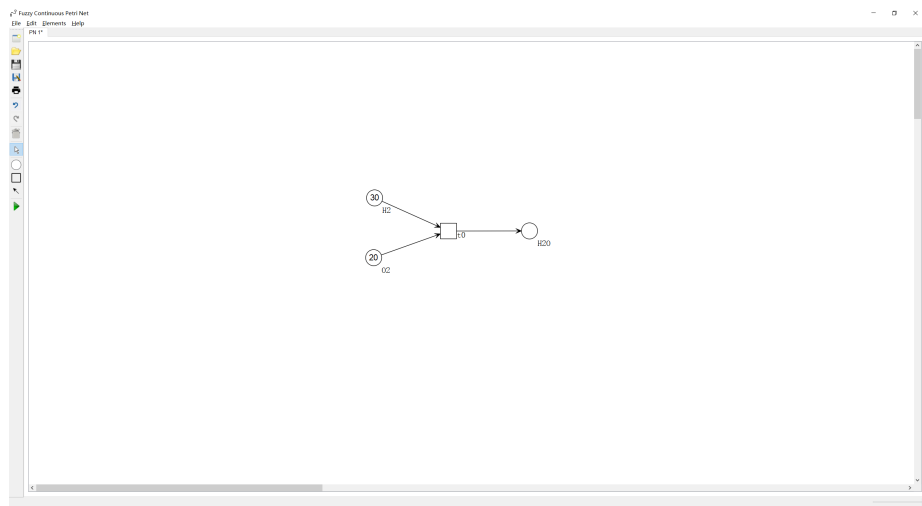


Figure 18: After FIS.

There are some differences between Mamdani and T-S. First, in T-S, when left clicking the Edit button of variable whose type is PN\_OUTPUT, there is no need to edit its membership functions.

Figure 19 shows the 'Edit FIS properties' dialog box. It contains the following fields and values:

- FIS Name: FIS (H2,O2;H2O)
- FIS Type: T-S
- Time Step: 0.005
- Defuzzification: centroid
- Number of input variables: 2

The 'List of variables' table is as follows:

edit	Variable	Type	Range-Min	Range-Max
Edit	H2	PN_INPUT	0	30
Edit	O2	PN_INPUT	5	20
Edit	H2O	PN_OUTPUT	NO NEED	NO NEED

Figure 19: T-S FIS.

Second, when editing rules, the last column should be edited by the user as is shown in Figure 20.

Add rules first and then change the content of last column by double clicking the content of last column of each row and entering the formulas. Then left click OK button to save changes.

Other steps are similar to Mamdani.

Figure 20 shows the 'Edit rules' dialog box. The table contains the following rules:

	IF	Variable	IS	Term	AND	Variable	IS	Term	Then	Variable	IS	Term
1	IF	H2	IS	Low	AND	O2	IS	Low	Then	H2O	IS	0.001*H2^2*O2*0.5
2	IF	H2	IS	Low	AND	O2	IS	High	Then	H2O	IS	0.001*H2^2*O2*0.5
3	IF	H2	IS	High	AND	O2	IS	High	Then	H2O	IS	0.001*H2^2*O2*0.91
4	IF	H2	IS	High	AND	O2	IS	Low	Then	H2O	IS	0.001*H2^2*O2*0.5

Below the table, the summary shows: 'If H2 is Low and O2 is High Then H2O is 0.001\*H2^2\*O2\*0.5'.

Figure 20: Enter rules when using T-S.

### 3 Simulation

After modeling, left click the “start simulation” button on the tool bar to use the simulation function.

#### 3.1 Run simulation

In the simulation shown as Figure 21, the user can first set simulation parameters, then left click the Start Simulation button to start simulation. The settings include:

- Setting interval start.
- Setting interval end.
- Choosing ODE solver.
- Setting time step.
- Choosing to check negative value or not.

Please make sure the time step is smaller than FISs’ step size. Otherwise the result might be incorrect.

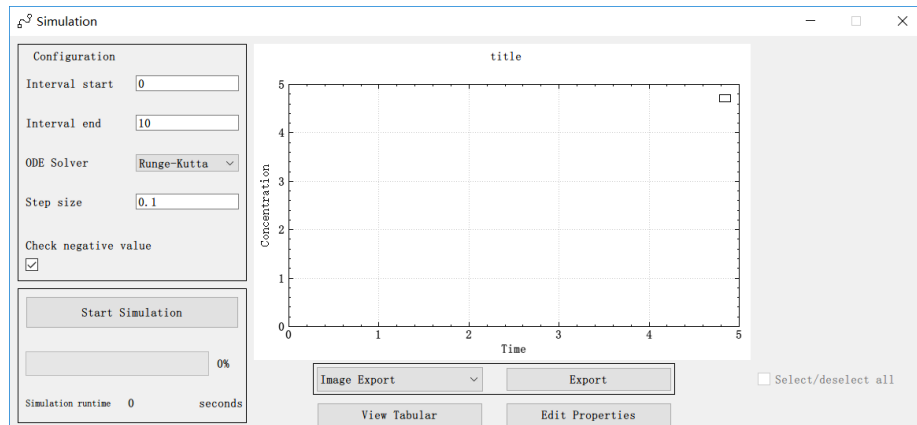


Figure 21: Simulation.

#### 3.2 Show simulation results

During simulation, the progress bar shows the progress. And the time is updated. After simulation, the graph will show. The user can zoom in or zoom out to see the details and check or uncheck the boxes on the right to show or hide the according variables.

To avoid misoperation, after entering the simulation, most of the functions in main interface such like adding items, can not be used. So if you want to be back to main interface, remember to left click “normal cursor” on the left tool bar. Otherwise you will find that most of the functions can’t use.

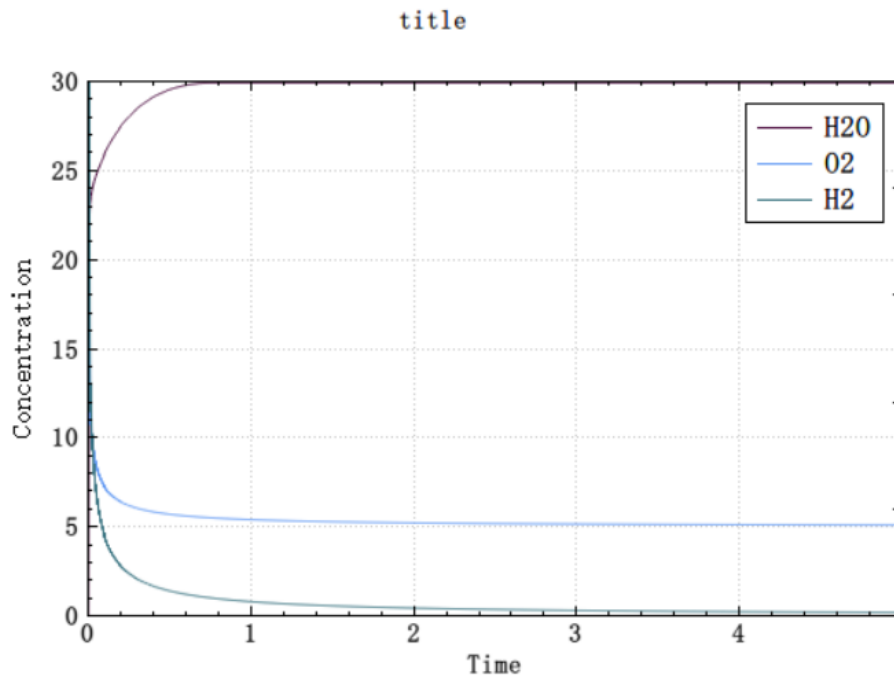


Figure 22: Simulation result (Mamdani).

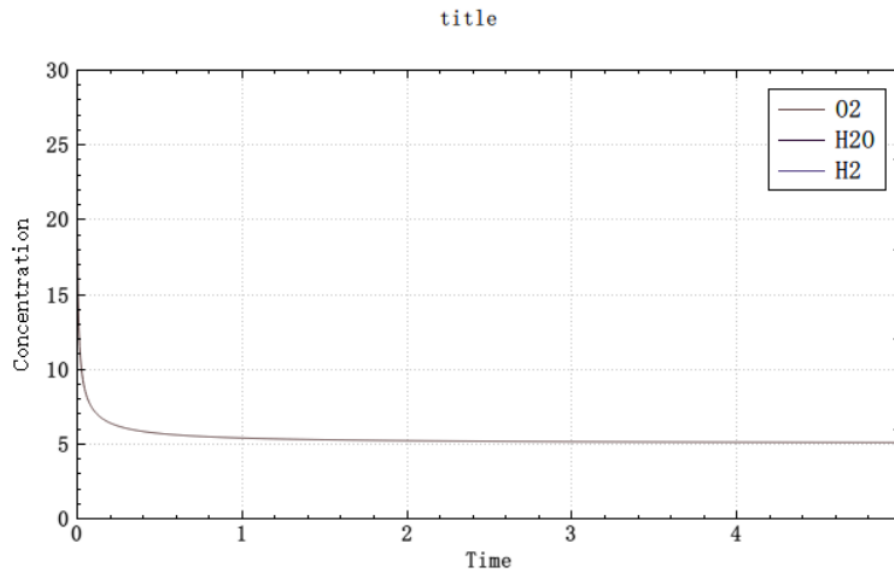


Figure 23: Only show the result of O2.

Actually, the user can choose to use no FIS, Mamdani, T-S, hybrid FIS to run the simulation. Therefore, let's try to use no FIS to run the simulation.



- Close the simulation window.
- Left click “normal cursor”.
- Delete the FIS arc and replace it with a new arc whose expression is 2.
- Start simulation again to see the result.

The result can be a little bit different, but still shows the general trend.

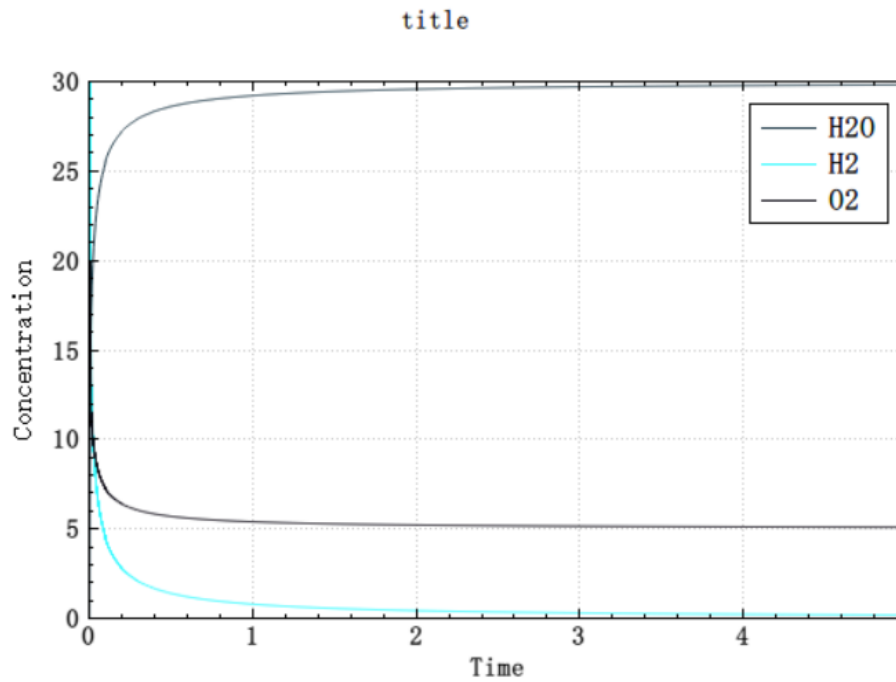


Figure 24: Simulation result (No FIS).

### 3.3 Export simulation results

The user can choose the export method and left click the Export button to export.

### 3.4 Rich functions

Different tools are provided where located at the center of bottom. The user can view the Tabular to see the values of variables by left clicking the View Tabular button or edit properties by left clicking the Edit Properties.

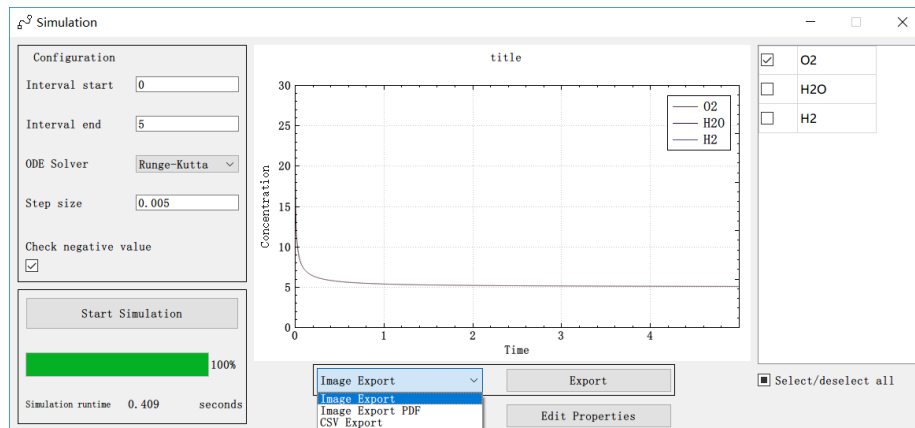


Figure 25: Export result.

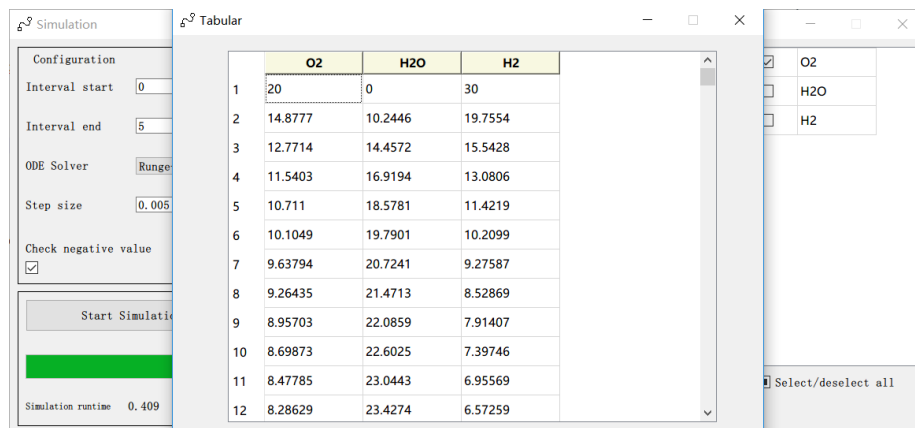


Figure 26: View Tabular.

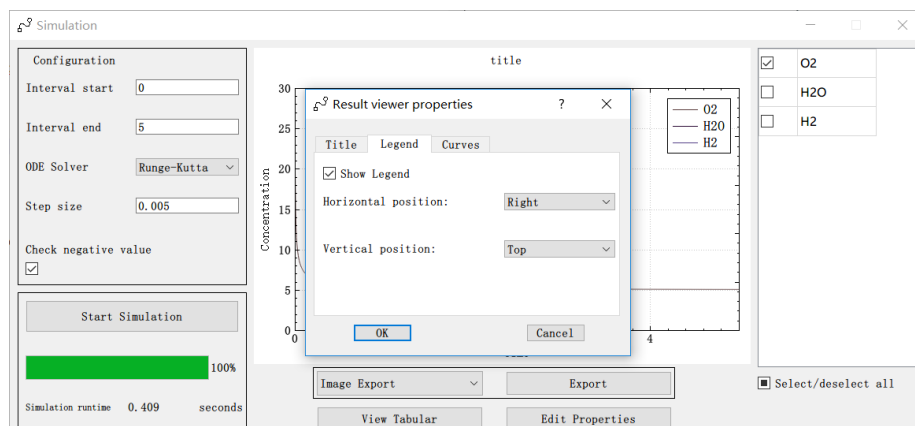


Figure 27: Edit properties.

## 4 Examples

In this section, we will show four examples. And we provide the file of the examples named A.B.C.D where A is the name of the example, and B is the FIS type we used, and C is the interval end and D is the step size. The default interval start is 0.

Open the application and left click the “Open” button on the tool bar or use Cltr+O to open the file. Then you can run the simulation.

### 4.1 1D Diffusion Reaction

#### 4.1.1 Introduction

The first example is one-dimensional (1D) diffusion reaction [10], which describes a species diffusing into one of its neighbour cells in a 1D grid.

#### 4.1.2 Model

The model is shown as Figure 28.

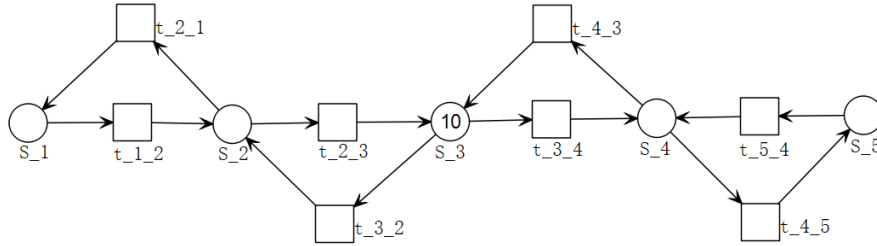


Figure 28: The model of 1D diffusion reaction.

Table 2: Transition functions of 1D Diffusion Reaction.

Transition	Function
t_1_2	MassAction(1)
t_2_1	MassAction(1)
t_2_3	MassAction(1)
t_3_2	MassAction(1)
t_3_4	MassAction(1)
t_4_3	MassAction(1)
t_4_5	MassAction(1)
t_5_4	MassAction(1)



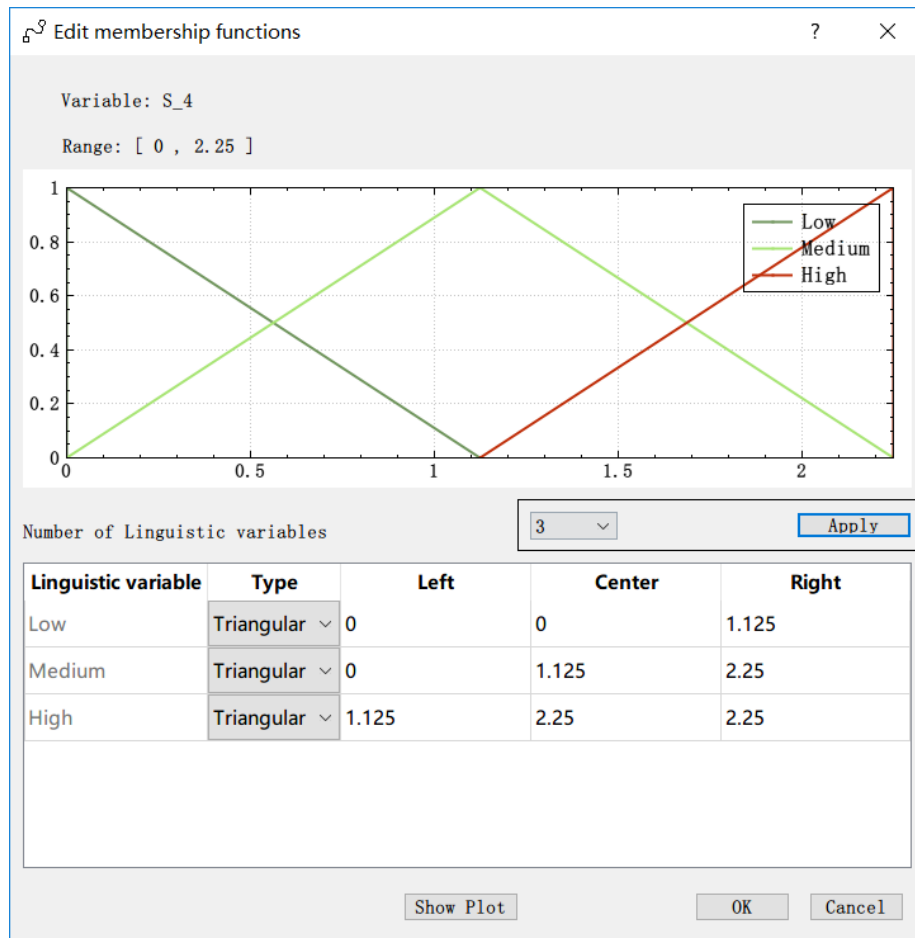


Figure 31: Membership functions of 1D Diffusion Reaction using T-S.

IF	Variable	IS	Term	Then	Variable	IS	Term
1	S_4	IS	Low	Then	S_5	IS	0.1*S_4*1.5
2	S_4	IS	Medium	Then	S_5	IS	0.1*S_4*1.5
3	S_4	IS	High	Then	S_5	IS	0.1*S_4*0.8

IF S\_4 is Low Then S\_5 is 0.1\*S\_4\*1.5

Buttons: Add rule, Change rule, Delete rule, OK, Cancel

Figure 32: Rules of 1D Diffusion Reaction using T-S.

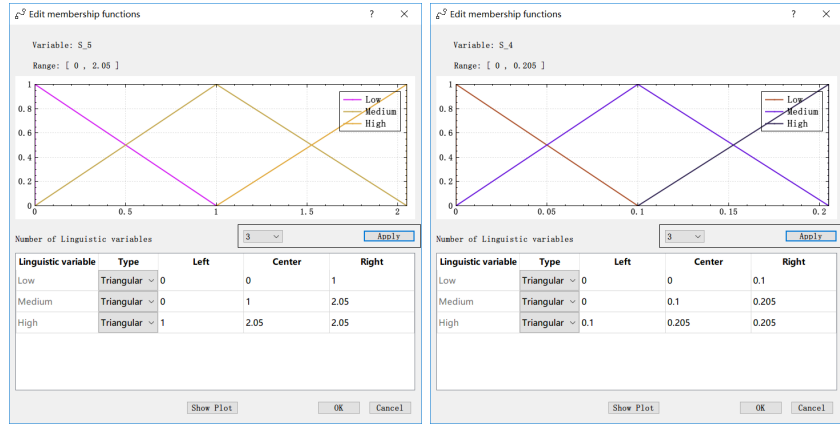


Figure 33: Membership functions of 1D Diffusion Reaction using hybrid FIS (Mamdani).

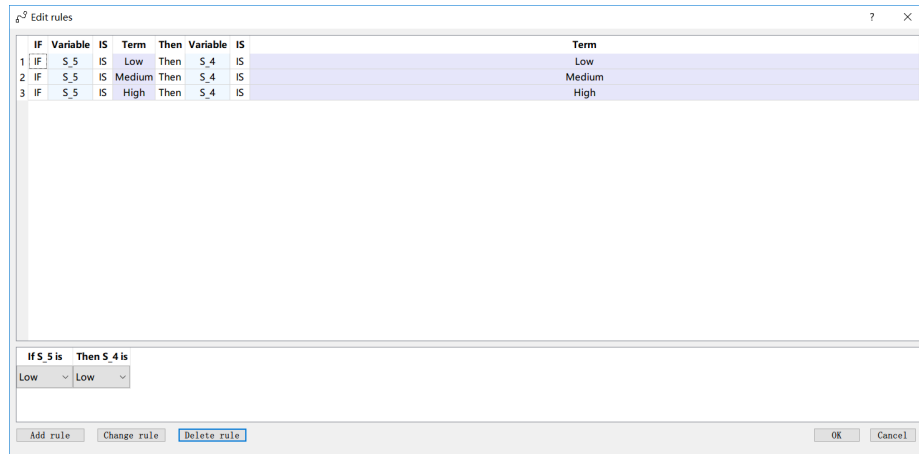


Figure 34: Rules of 1D Diffusion Reaction using hybrid FIS (Mamdani).

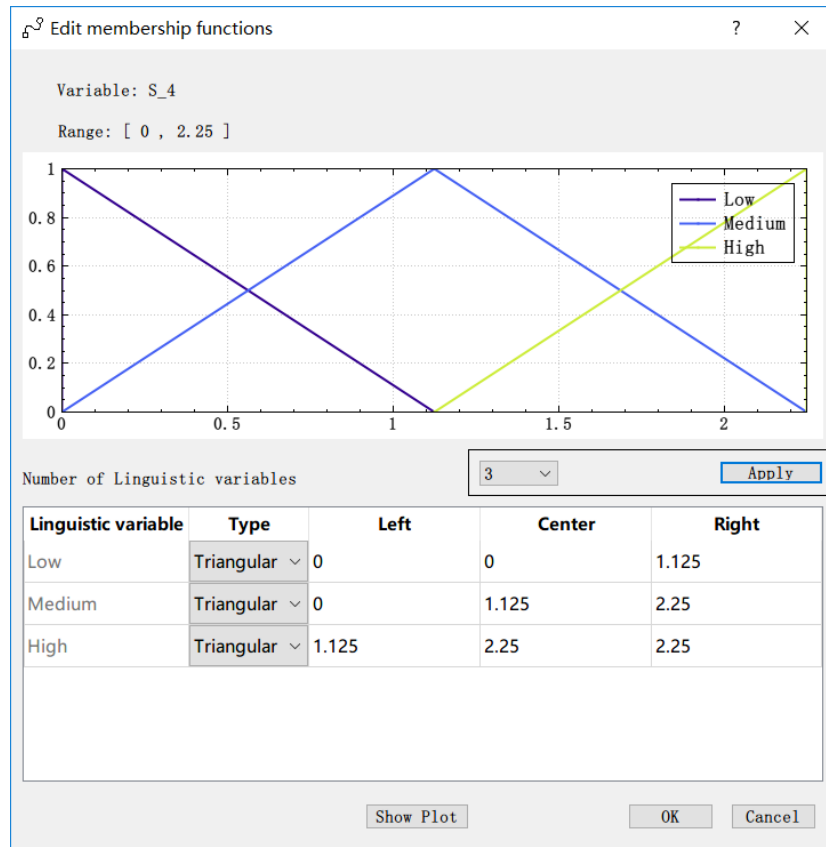


Figure 35: Membership functions of 1D Diffusion Reaction using hybrid FIS (T-S).

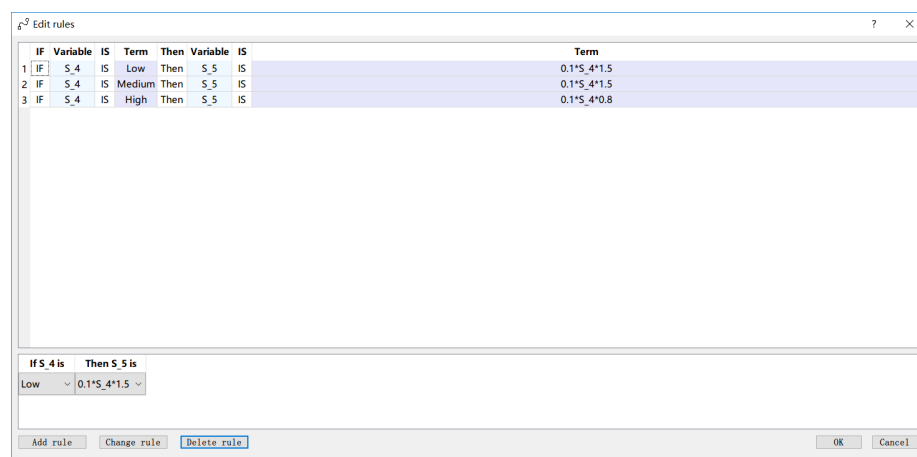


Figure 36: Rules of 1D Diffusion Reaction using hybrid FIS (T-S).

#### 4.1.3 Simulation result

In this example, we use only ODEs, Mamdani, T-S, and hybrid FIS. The result of only ODEs is shown as Figure 37.

When using Mamdani, we choose to change the arc from t\_5\_4 to S\_4 to FIS. The result is shown as Figure 38.

When using T-S, we choose to change the arc from t\_4\_5 to S\_5 to FIS. The result is shown as Figure 39.

When using hybrid FIS, we choose to change the arc from t\_5\_4 to S\_4 to Mamdani and change the arc from t\_4\_5 to S\_5 to T-S. The result is shown as Figure 40.

In method of only ODEs, the value of all variables eventually becomes 2 while in other three methods, the final values of the variables are not 2, but are all very close to 2. And the trends of curves are consistent.

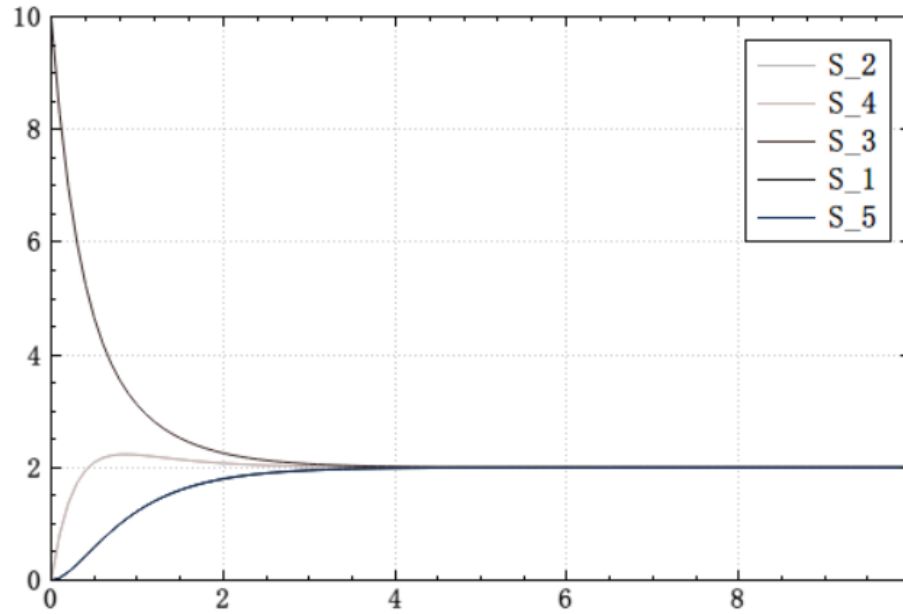


Figure 37: Simulation result of 1D diffusion reaction using only ODEs.



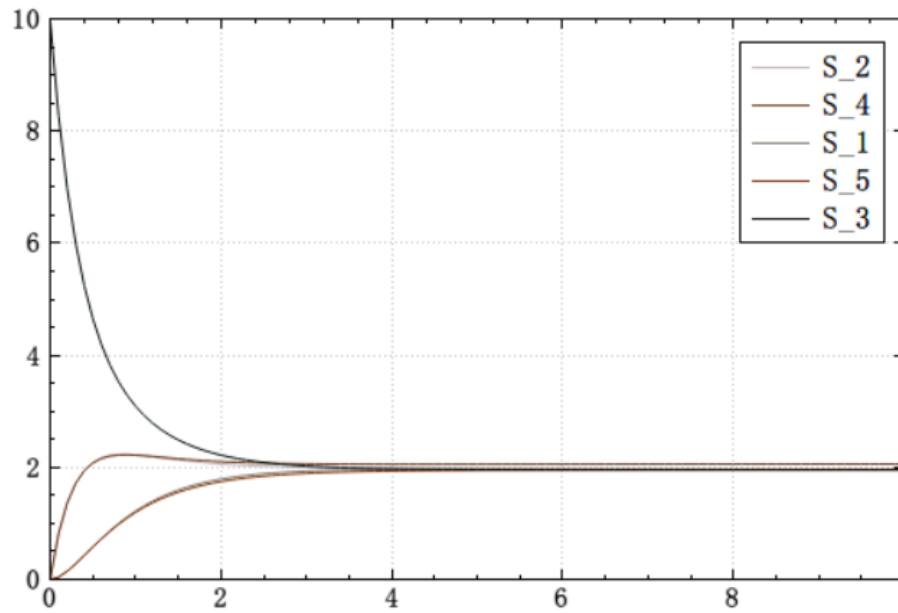


Figure 38: Simulation result of 1D diffusion reaction using Mamdani.

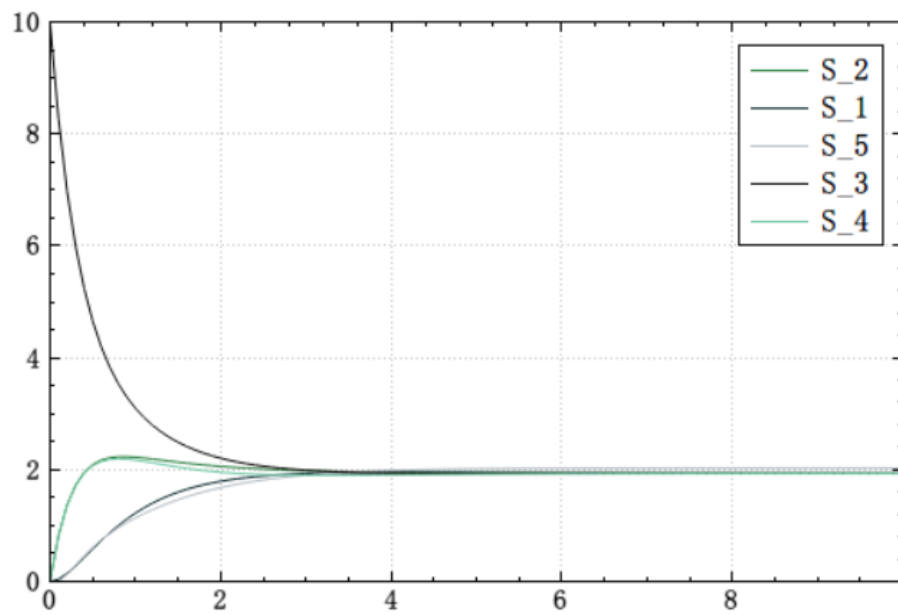


Figure 39: Simulation result of 1D diffusion reaction using T-S.

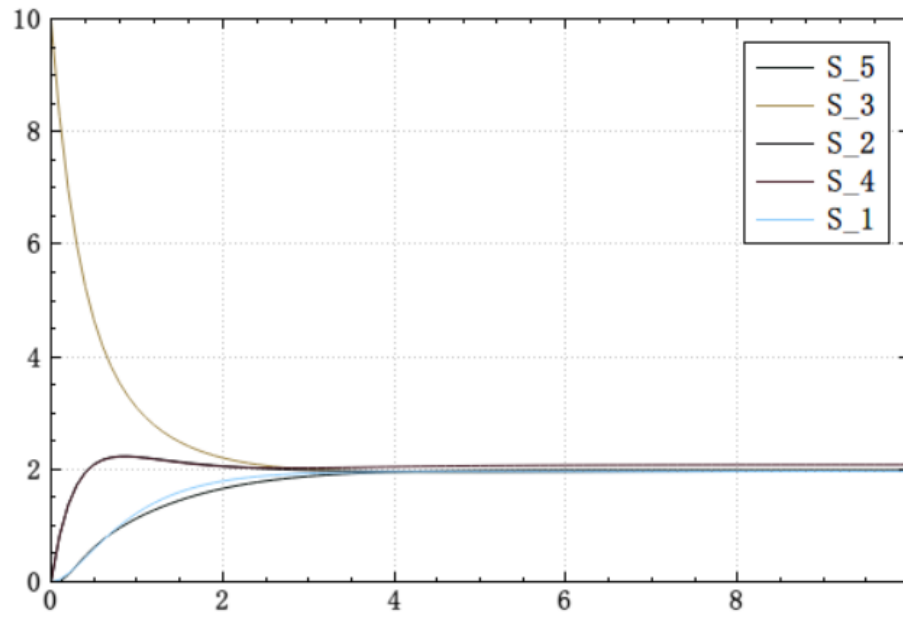


Figure 40: Simulation result of 1D diffusion reaction using hybrid FIS.

## 4.2 Enzymatic reaction

### 4.2.1 Introduction

The second example is enzymatic reaction [11]. Enzymes are macromolecular biological catalysts, which can accelerate chemical reactions. The molecules upon which enzymes may act are called substrates and the enzyme converts the substrates into different molecules, known as products. Almost all metabolic processes in a cell need enzyme catalysis in order to occur at rates fast enough to sustain life. Metabolic pathways depend upon enzymes to catalyze individual steps.

### 4.2.2 Model

The model is shown as Figure 41.

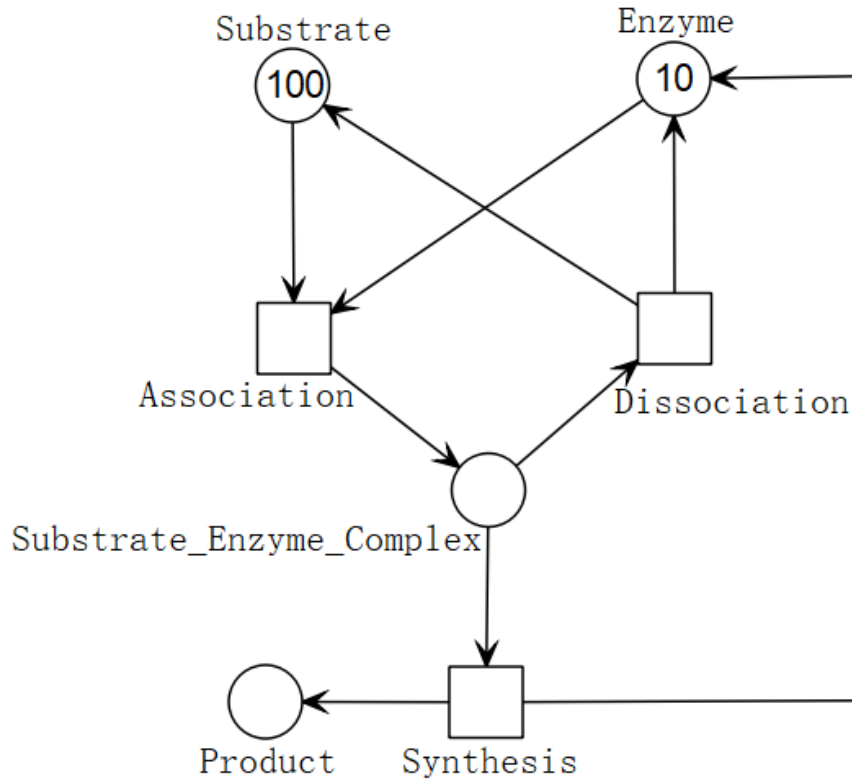


Figure 41: The model of enzymatic reaction.

### 4.2.3 Simulation result

In this example, we use only ODEs and Mamdani. The result of only ODEs is shown as Figure 44.

When using Mamdani, we choose to change the arc from Synthesis to Product to FIS. The result is shown as Figure 45.

Table 3: Transition functions of enzymatic reaction.

Transition	Function
Assoication	MassAction(0.1)
Dissociation	MassAction(0.1)
Synthesis	MassAction(0.1)

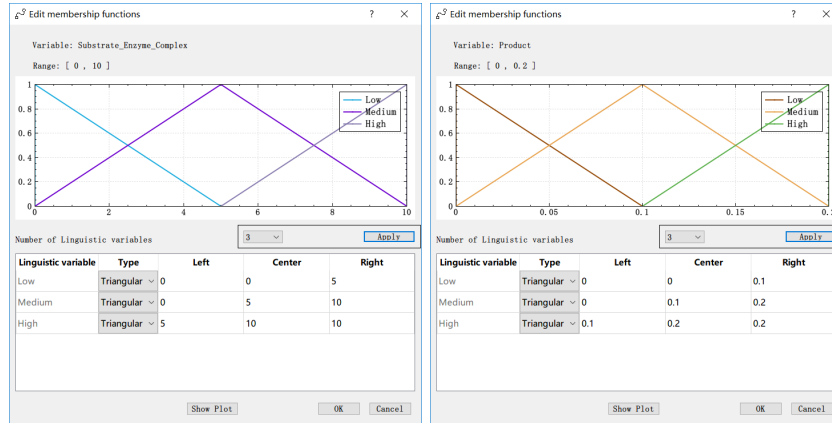


Figure 42: Membership functions of enzymatic reaction using Mamdani.

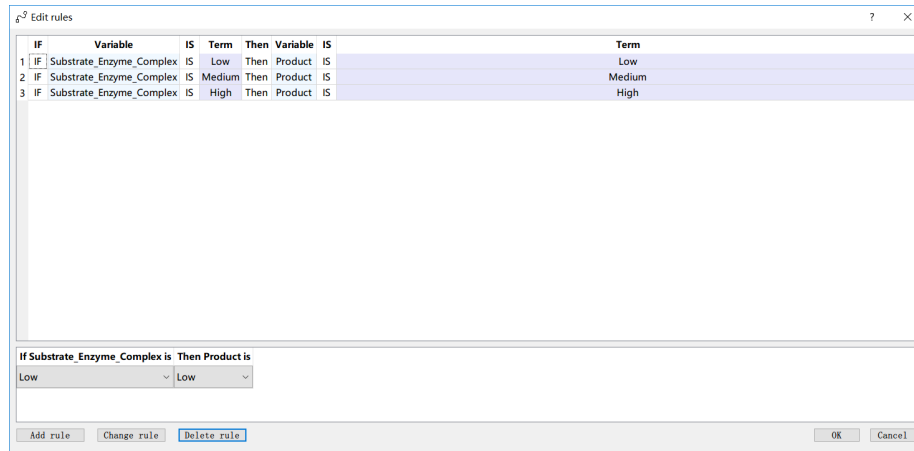


Figure 43: Rules of enzymatic reaction using Mamdani.

As we can see, the results are almost the same.

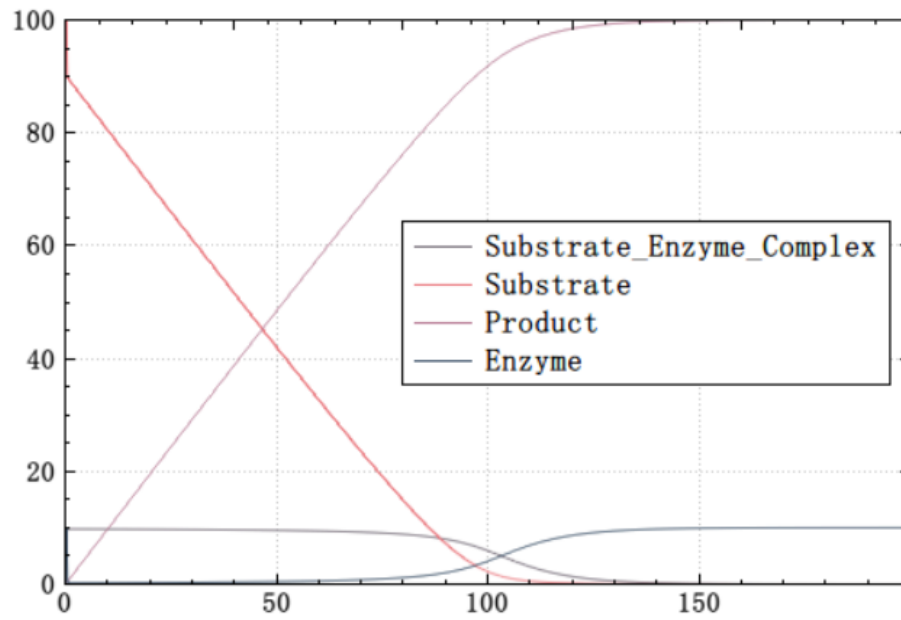


Figure 44: Simulation result of enzymatic reaction using only ODEs.

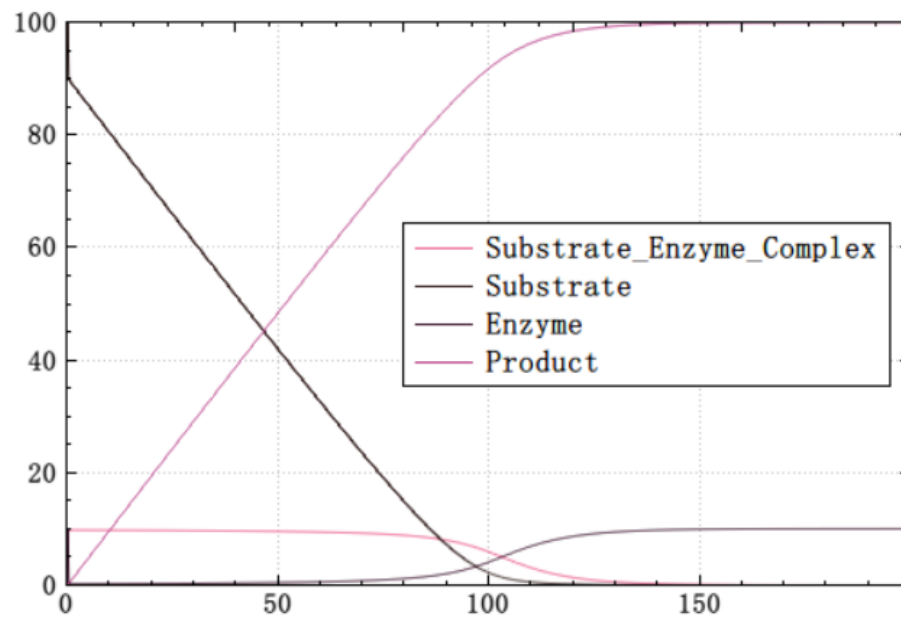


Figure 45: Simulation result of enzymatic reaction using Mamdani.

### 4.3 RKIP pathway

#### 4.3.1 Introduction

The Raf kinase inhibitor protein (RKIP) [12] is a kinase inhibitor protein that regulates many signaling pathways within the cell. RKIP is a member of the phosphatidylethanolamine-binding protein family and has displayed disruptive regulation on the Raf-1-MEK1/2, ERK1/2 and NF-kappaB signalling pathways, by interaction with the Raf-1 kinase.

#### 4.3.2 Model

The model is shown as Figure 46, based on the CPN model given in [13].

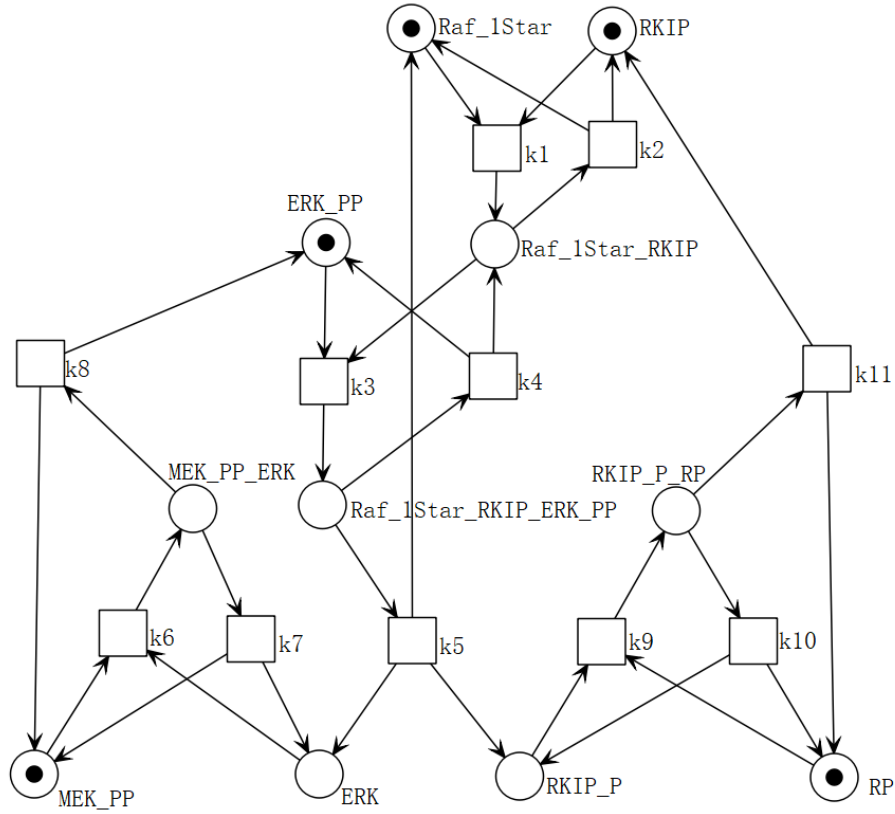


Figure 46: The model of RKIP.

#### 4.3.3 Simulation result

In this example, we use only ODEs and T-S. The result of only ODEs is shown as Figure 49.

When using T-S, we choose to change the arc from k3 to Raf\_1Star\_RKIP\_ERK\_PP to FIS. The result is shown as Figure 50.

Table 4: Transition functions of RKIP.

Transition	Function
k1	MassAction(0.53)
k2	MassAction(0.0072)
k3	MassAction(0.625)
k4	MassAction(0.00245)
k5	MassAction(0.0315)
k6	MassAction(0.6)
k7	MassAction(0.0075)
k8	MassAction(0.071)
k9	MassAction(0.92)
k10	MassAction(0.00122)
k11	MassAction(0.87)

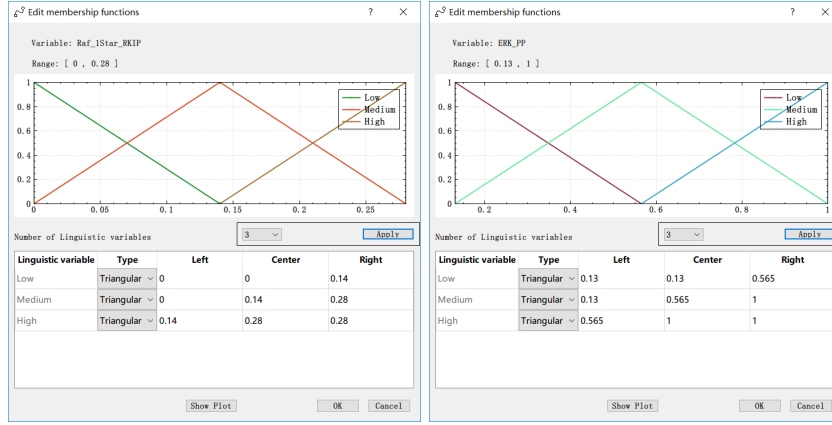


Figure 47: Membership functions of RKIP using T-S.

As we can see, the results are almost consistent. Pay attention to the bold blue curves of Figure 49 and Figure 50. The final result is a little different. But we can adjust the rules to get a better result.

3 Edit rules

1

IF

Variable

IS

Term

AND

Variable

IS

Term

Then

Variable

IS

Term

Raf\_1Star\_RKIP

IS

Low

AND

ERK\_PP

IS

Low

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP}$

2

IF

Raf\_1Star\_RKIP

IS

Medium

AND

ERK\_PP

IS

Low

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP}$

3

IF

Raf\_1Star\_RKIP

IS

High

AND

ERK\_PP

IS

Low

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP}$

4

IF

Raf\_1Star\_RKIP

IS

High

AND

ERK\_PP

IS

Medium

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 1.2$

5

IF

Raf\_1Star\_RKIP

IS

High

AND

ERK\_PP

IS

High

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 1.2$

6

IF

Raf\_1Star\_RKIP

IS

Medium

AND

ERK\_PP

IS

Medium

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 0.9$

7

IF

Raf\_1Star\_RKIP

IS

Medium

AND

ERK\_PP

IS

High

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 0.9$

8

IF

Raf\_1Star\_RKIP

IS

Low

AND

ERK\_PP

IS

High

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 0.8$

9

IF

Raf\_1Star\_RKIP

IS

Low

AND

ERK\_PP

IS

Medium

Then

Raf\_1Star\_RKIP\_ERK\_PP

IS

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP} \cdot 0.8$

If Raf\_1Star\_RKIP is and ERK\_PP is

Then Raf\_1Star\_RKIP\_ERK\_PP is

Low

Low

$0.0625 \cdot \text{Raf\_1Star\_RKIP} \cdot \text{ERK\_PP}$

Add rule

Change rule

Delete rule

OK

Cancel

Figure 48: Rules of RKIP using T-S.

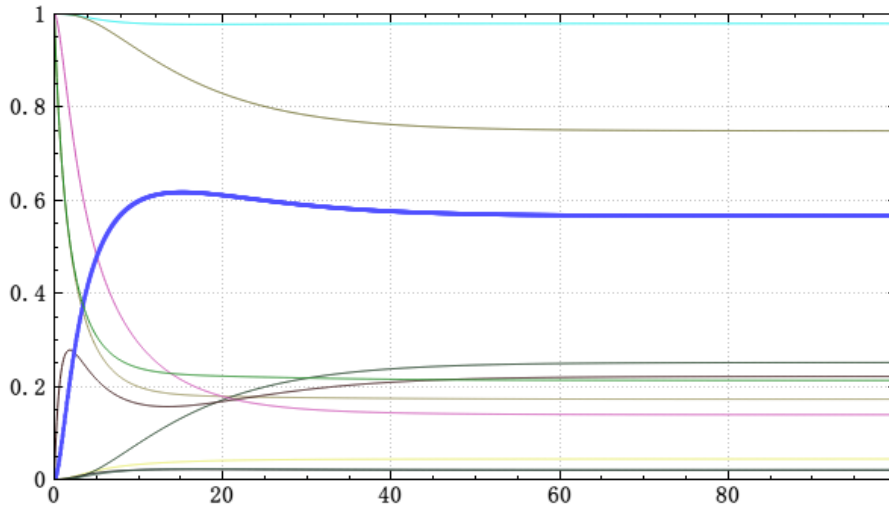


Figure 49: Simulation result of RKIP using only ODEs.



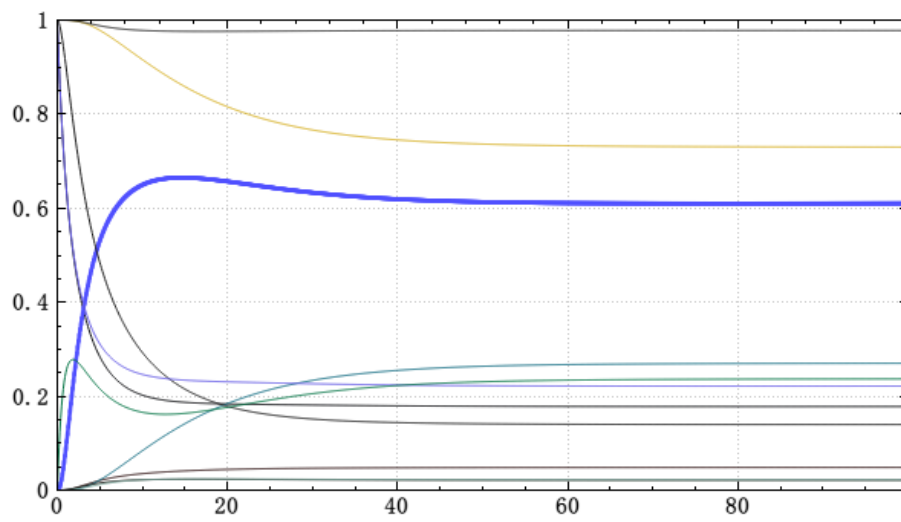


Figure 50: Simulation result of RKIP using T-S.

## 4.4 6-mercaptopurine metabolism

### 4.4.1 Introduction

6-Mercaptopurine (6-MP) is one of the important chemotherapy drugs used for treating acute lymphocytic leukaemia (ALL). According to the model given in [14, 15], we build the FCPN model of the 6-mercaptopurine metabolism.

### 4.4.2 Model

The model is shown as Figure 51.

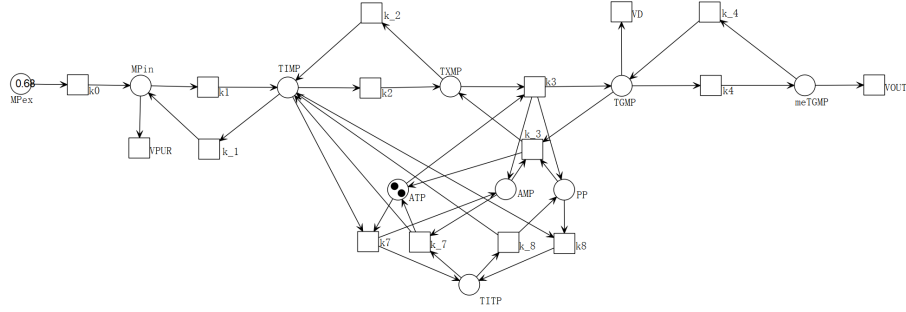


Figure 51: The model of 6-MP metabolism.

Table 5: Transition functions of 6-MP metabolism.

Transition	Function
k0	MassAction(5)
k1	MassAction(10)
k_1	MassAction(0.01)
k2	MassAction(10)
k_2	MassAction(4)
k3	MassAction(5)
k_3	MassAction(0.01)
k4	MassAction(0.00001)
k_4	MassAction(0.1)
k7	MassAction(0.01)
k_7	MassAction(1)
k8	MassAction(0.5)
k_8	MassAction(0.01)
VPUR	MassAction(0.01)
VD	MassAction(0.9)
VOUT	MassAction(0.0001)

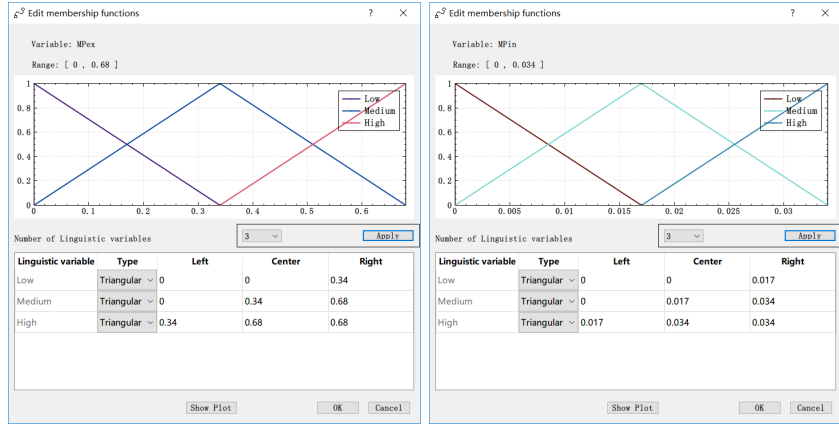


Figure 52: Membership functions of 6-MP metabolism using Mamdani.

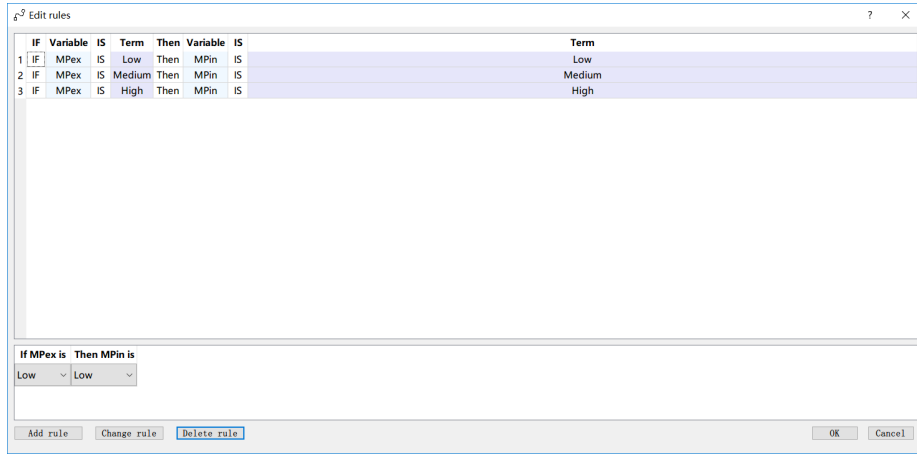


Figure 53: Rules of 6-MP metabolism using Mamdani.

#### 4.4.3 Simulation result

In this example, we use only ODEs, Mamdani, and T-S. The result of only ODEs is shown as Figure 56.

When using Mamdani, we choose to change the arc from  $k_0$  to MPin to FIS. The result is shown as Figure 57.

When using T-S, we choose to change the arc from  $k_0$  to MPin to FIS. The result is shown as Figure 58.

As we can see, the results are almost the same.

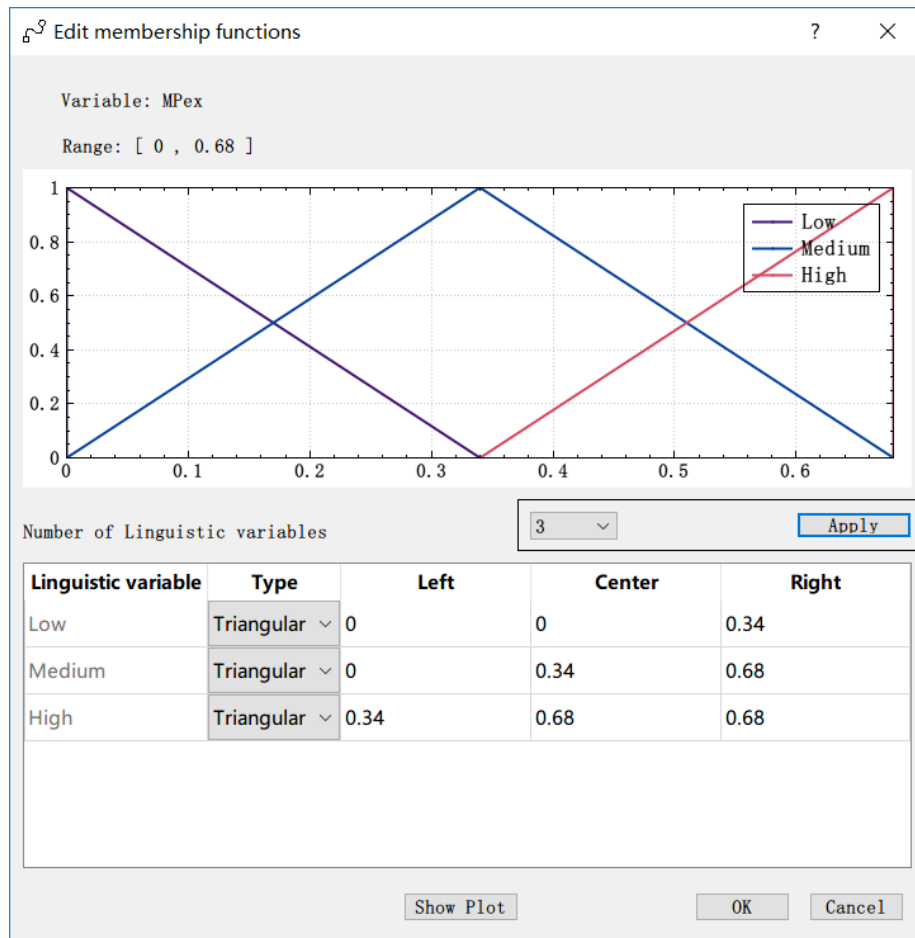


Figure 54: Membership functions of 6-MP metabolism using T-S.

?

✕

5 Edit rules

	IF	Variable	IS	Term	Then	Variable	IS	Term
1	IF	MPex	IS	Low	Then	MPin	IS	0.05*MPex
2	IF	MPex	IS	Medium	Then	MPin	IS	0.045*MPex
3	IF	MPex	IS	High	Then	MPin	IS	0.055*MPex

IF MPex is

Then MPin is

Low

0.05\*MPex

Add rule

Change rule

Delete rule

OK

Cancel

Figure 55: Rules of 6-MP metabolism using T-S.

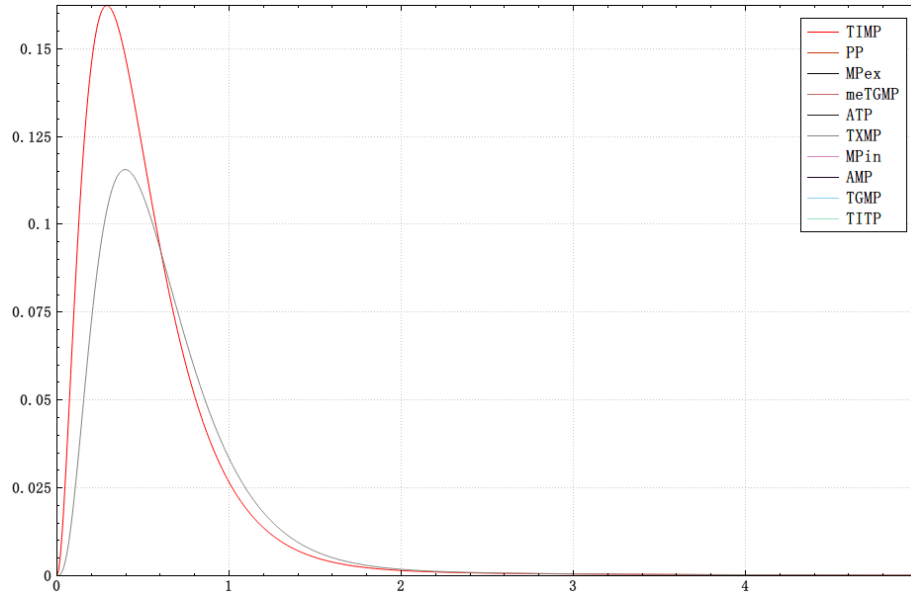


Figure 56: Simulation result of 6-MP metabolism using only ODEs.

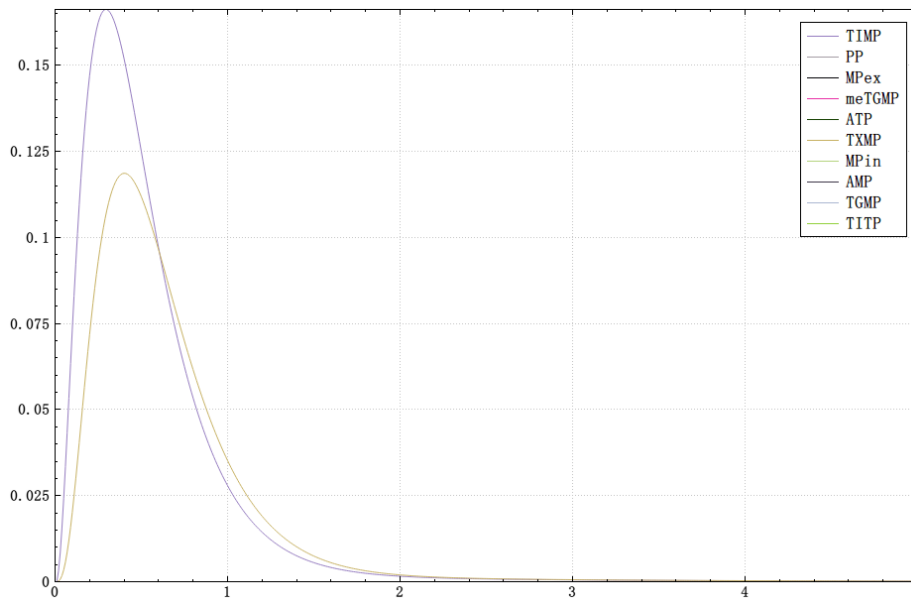


Figure 57: Simulation result of 6-MP metabolism using Mamdani.

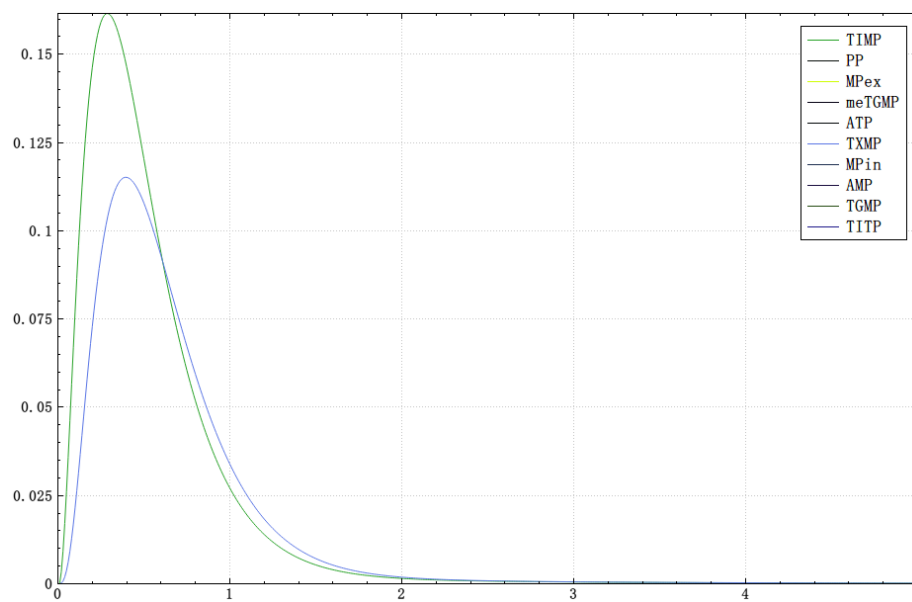


Figure 58: Simulation result of 6-MP metabolism using T-S.

## References

- [1] H Kitano. Systems biology: A brief overview. *Science*, 295(5560):1662–1664, 2002.
- [2] JL Gouzé, A Rapaport, and MZ Hadj-Sadok. Interval observers for uncertain biological systems. *Ecological Modelling*, 133(1):45 – 56, 2000.
- [3] M Heiner R Breitling, D Gilbert and R Orton. A structured approach for the engineering of biochemical network models, illustrated for signalling pathways. *Briefings in Bioinformatics*, 9(5):404–421, 2008.
- [4] LA Zadeh. Fuzzy sets. *Inform. and Control*, (8):338–353, 1965.
- [5] PP Wang, D Ruan, and EE Kerre. *Fuzzy Logic*. Springer-Verlag, Berlin Heidelberg, 2007.
- [6] F Liu, M Heiner, and D Gilbert. Fuzzy Petri nets for modelling of uncertain biological systems. *Briefings in Bioinformatics*, 2018. accepted for publication:16 November 2018, published: 27 December 2018.
- [7] T Murata. Petri nets: Properties, analysis and applications. *Proceedings of the IEEE*, 77(4):541–580, 1989.
- [8] E. H. Mamdani. Application of fuzzy algorithms for control of simple dynamic plant. *Proceedings of the Institution of Electrical Engineers*, 121(12):1585–1588, December 1974.
- [9] T. Takagi and M. Sugeno. Fuzzy identification of systems and its applications to modeling and control. *IEEE Transactions on Systems, Man, and Cybernetics*, SMC-15(1):116–132, Jan 1985.
- [10] F Liu, MA Blätke, M Heiner, and M Yang. Modelling and simulating reactionCdiffusion systems using coloured Petri nets. *Computers in Biology and Medicine*, 53:297–308, October 2014. online July 2014.
- [11] MA Blätke, M Heiner, and W Marwan. Tutorial - Petri Nets in Systems Biology. Technical report, Otto von Guericke University Magdeburg, Magdeburg Centre for Systems Biology, August 2011.
- [12] Cho Kwang-Hyun, Shin Sung-Young, Kim Hyun-Woo, Olaf Wolkenhauer, Brian McFerran, and Walter Kolch. Mathematical modeling of the influence of rkip on the erk signaling pathway. In Corrado Priami, editor, *Computational Methods in Systems Biology*, pages 127–141, Berlin, Heidelberg, 2003. Springer Berlin Heidelberg.
- [13] D. Gilbert and M. Heiner. From Petri nets to differential equations - an integrative approach for biochemical network analysis. In *Proc. ICATPN 2006*, pages 181–200. LNCS 4024, Springer, 2006. This paper is a short version of Techn. Report I-04/2005, BTU Cottbus, [GH05].
- [14] Anastasia I Lavrova, Eugene B Postnikov, Andrey Yu Zyubin, and Svetlana V Babak. Ordinary differential equations and boolean networks in application to modelling of 6-mercaptopurine metabolism. *Royal Society open science*, 4(4):160872, 2017.

- [15] Anastasia I Lavrova, Eugene B Postnikov, Andrey Yu Zyubin, and Svetlana V Babak. Ode and random boolean networks in application to modelling of 6-mercaptopurine metabolism. *arXiv preprint arXiv:1611.00054*, 2016.