


# SYNTAX OF A FUNCTION

```
Return_type name_of_function (parameter_type name_of_parameter,  
parameter_type name_of_parameter, ...)  
{  
    Set of statements;  
}
```

# WHY DIFFERENT FILES?

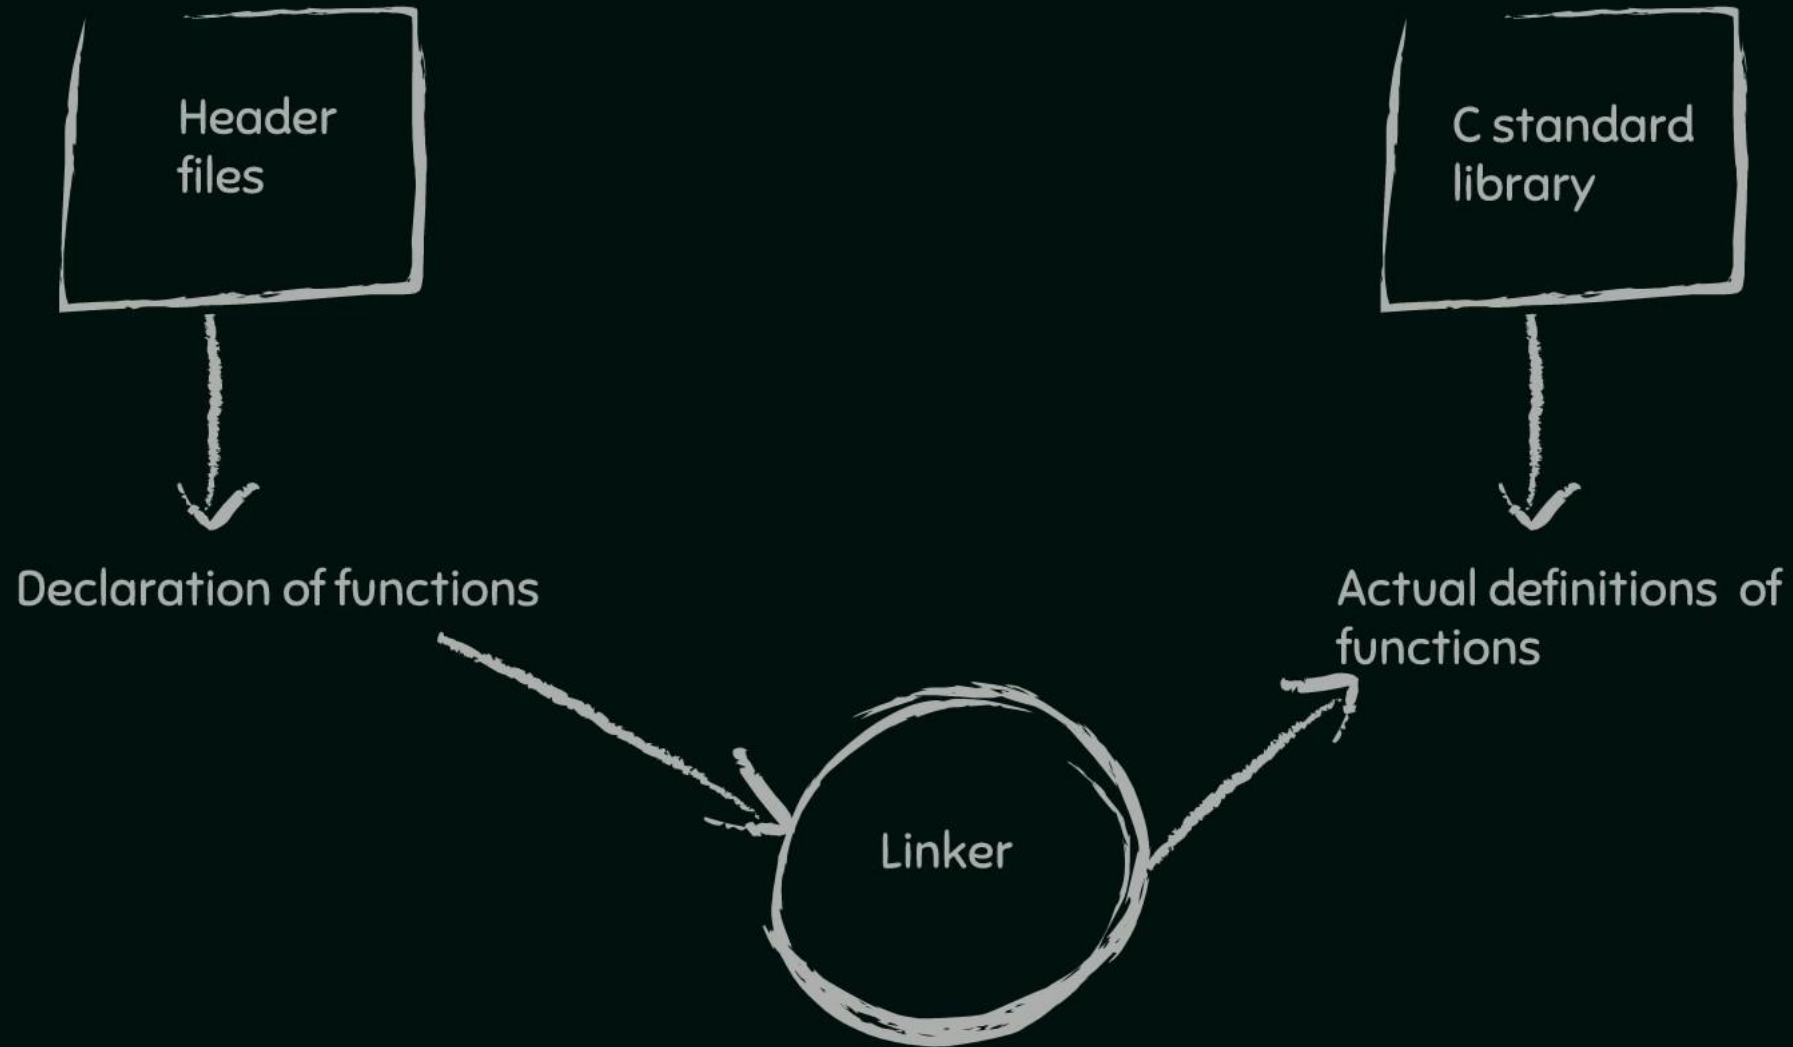

# QUICK EXERCISE

**Task #1:** Install codeblocks

**Task #2:** make following changes to the code one by one:

1. Comment out the `#include <stdio.h>`
2. Remove the semicolon after `printf`
3. Remove `int` return type from `main`
4. Instead of `0` in `return` write any integer value you want
5. Replace `0` with some character. Characters are usually written with single quotes. For example you may write `return 'a'`.
6. Remove semicolon `;` after `return`