

DJANGO PASOS

TAREA 0

```
PS C:\Users\fernando\Desktop\Intento4>
pip install pipenv
Requirement already satisfied: pipenv in
c:\users\fernando\appdata\local\progr
ams\python\python313\lib\site-packages
(2025.0.4)
Requirement already satisfied: certifi
in c:\users\fernando\appdata\local\prog
rams\python\python313\lib\site-packages
(from pipenv) (2025.8.3)
Requirement already satisfied: packagin
g>=22 in c:\users\fernando\appdata\loca
l\programs\python\python313\lib\site-packages (from pipenv) (25.0
)
Requirement already satisfied: setuptools>=67 in c:\users\fernand
o\appdata\local\programs\python\python313\lib\site-packages (from
pipenv) (80.9.0)
Requirement already satisfied: virtualenv>=20.24.2 in c:\users\fe
rnando\appdata\local\programs\python\python313\lib\site-packages
(from pipenv) (20.34.0)
Requirement already satisfied: distlib<1,>=0.3.7 in c:\users\fern
ando\appdata\local\programs\python\python313\lib\site-packages (f
rom virtualenv>=20.24.2->pipenv) (0.4.0)
Requirement already satisfied: filelock<4,>=3.12.2 in c:\users\fe
rnando\appdata\local\programs\python\python313\lib\site-packages
Requirement already satisfied: platformdirs<5,>=3.9.1 in c:\users
\fernando\appdata\local\programs\python\python313\lib\site-packag
es (from virtualenv>=20.24.2->pipenv) (4.4.0)
PS C:\Users\fernando\Desktop\Intento4>pipenv install
Creating a virtualenv for this project
Pipfile: C:\Users\fernando\Desktop\Intento4\Pipfile
Using
C:/Users/fernando/AppData/Local/Programs/Python/Python313/python.
[====] Creating virtual environment...created virtual environment
CPython3.13.2.final.0-64 in 9056ms
```

```

[====] Creating virtual environment...created virtual environment
CPython3.13.2.final.0-64 in 9056ms
creator
CPython3Windows(dest=C:\Users\fernando\.virtualenvs\Intento4-Y828
x9IG, clear=False, no_vcs_ignore=False, global=False)
seeder FromAppData(download=False, pip=bundle, via=copy,
app_data_dir=C:\Users\fernando\AppData\Local\pypa\virtualenv)
added seed packages: pip==25.2
activators
BashActivator,BatchActivator,FishActivator,NushellActivator,Power
ShellActivator,PythonActivator

Successfully created virtual environment!
Virtualenv location: C:\Users\fernando\.virtualenvs\Intento4-Y828
x9IG
Creating a Pipfile for this project...
Pipfile.lock not found, creating...
Locking dependencies...
Locking dependencies...
Updated Pipfile.lock
(494d5b4f482f0ef471f49afe28f00ec1a2ff75da2ce65060d8cabaeb3da2f100
Updated Pipfile.lock
(494d5b4f482f0ef471f49afe28f00ec1a2ff75da2ce65060d8cabaeb3da2f100
(494d5b4f482f0ef471f49afe28f00ec1a2ff75da2ce65060d8cabaeb3da2f100
)!)

```

 Pipfile
 Pipfile.lock

TAREA1:

Installing dependencies from Pipfile.lock (a2f100)...

PS C:\Users\fernando\Desktop\Intento4> **pipenv** shell

Launching subshell in virtual environment...

Windows PowerShell

Copyright (C) Microsoft Corporation. Todos los derechos reservados.
s.

Prueba la nueva tecnología PowerShell multiplataforma <https://aka.ms/pscore6>

PS C:\Users\fernando\Desktop\Intento4> **pip** install django

Collecting django

Using cached django-5.2.6-py3-none-any.whl.metadata (4.1 kB)

Collecting asgiref>=3.8.1 (from django)

Downloading asgiref-3.9.2-py3-none-any.whl.metadata (9.3 kB)

Collecting sqlparse>=0.3.1 (from django)

Using cached sqlparse-0.5.3-py3-none-any.whl.metadata (3.9 kB)

Collecting tzdata (from django)

Using cached tzdata-2025.2-py2.py3-none-any.whl.metadata (1.4 kB)

Using cached django-5.2.6-py3-none-any.whl (8.3 MB)

Downloading asgiref-3.9.2-py3-none-any.whl (23 kB)

Using cached sqlparse-0.5.3-py3-none-any.whl (44 kB)

Using cached tzdata-2025.2-py2.py3-none-any.whl (347 kB)

Installing collected packages: tzdata, sqlparse, asgiref, django

Successfully installed asgiref-3.9.2 django-5.2.6 sqlparse-0.5.3 tzdata-2025.2

PS C:\Users\fernando\Desktop\Intento4> □

 __test__.py

 __test__.py 1 X


 __test__.py

```
1 import django
2 print(django.get_version())
3
```

ModuleNotFoundError: No module named 'django'

```
PS C:\Users\fernando\Desktop\Intento4> pip install django
Requirement already satisfied: django in c:\users\fernando\virtualenvs\intentto4-y82bx9ig\lib\site-packages (5.2.6)
Requirement already satisfied: asgiref>=3.8.1 in c:\users\fernando\virtualenvs\intentto4-y82bx9ig\lib\site-packages (from django) (3.9.2)
Requirement already satisfied: sqlparse>=0.3.1 in c:\users\fernando\virtualenvs\intentto4-y82bx9ig\lib\site-packages (from django) (0.5.3)
Requirement already satisfied: tzdata in c:\users\fernando\virtualenvs\intentto4-y82bx9ig\lib\site-packages (from django) (2025.2)
PS C:\Users\fernando\Desktop\Intento4> python __test__.py
5.2.6
PS C:\Users\fernando\Desktop\Intento4> 
```

```
PS C:\Users\fernando\Desktop\Intento4> django-admin startproject prueba .
```

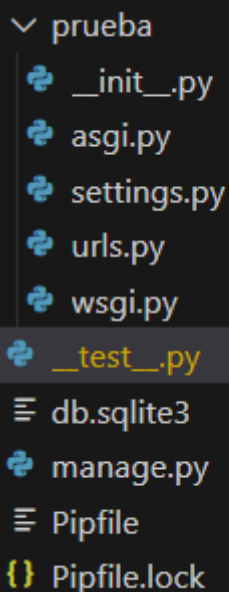


- ▼ prueba
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - __test__.py** 1
 - db.sqlite3
 - manage.py
 - Pipfile
 - Pipfile.lock

<http://127.0.0.1:8000/>

```
PS C:\Users\fernando\Desktop\Intento4> python manage.py migrate
Operations to perform:
  Apply all migrations: admin, auth, contenttypes, sessions
Running migrations:
  Applying contenttypes.0001_initial... OK
  Applying auth.0001_initial... OK
  Applying admin.0001_initial... OK
  Applying admin.0002_logentry_remove_auto_add... OK
  Applying admin.0003_logentry_add_action_flag_choices... OK
  Applying contenttypes.0002_remove_content_type_name... OK
  Applying auth.0002_alter_permission_name_max_length... OK
  Applying auth.0003_alter_user_email_max_length... OK
  Applying auth.0004_alter_user_username_opts... OK
  Applying auth.0005_alter_user_last_login_null... OK
  Applying auth.0006_require_contenttypes_0002... OK
  Applying auth.0007_alter_validators_add_error_messages... OK
  Applying auth.0008_alter_user_username_max_length... OK
  Applying auth.0009_alter_user_last_name_max_length... OK
  Applying auth.0010_alter_group_name_max_length... OK
  Applying auth.0011_update_proxy_permissions... OK
  Applying auth.0012_alter_user_first_name_max_length... OK
  Applying sessions.0001_initial... OK
PS C:\Users\fernando\Desktop\Intento4> █
```


<http://127.0.0.1:8000/>

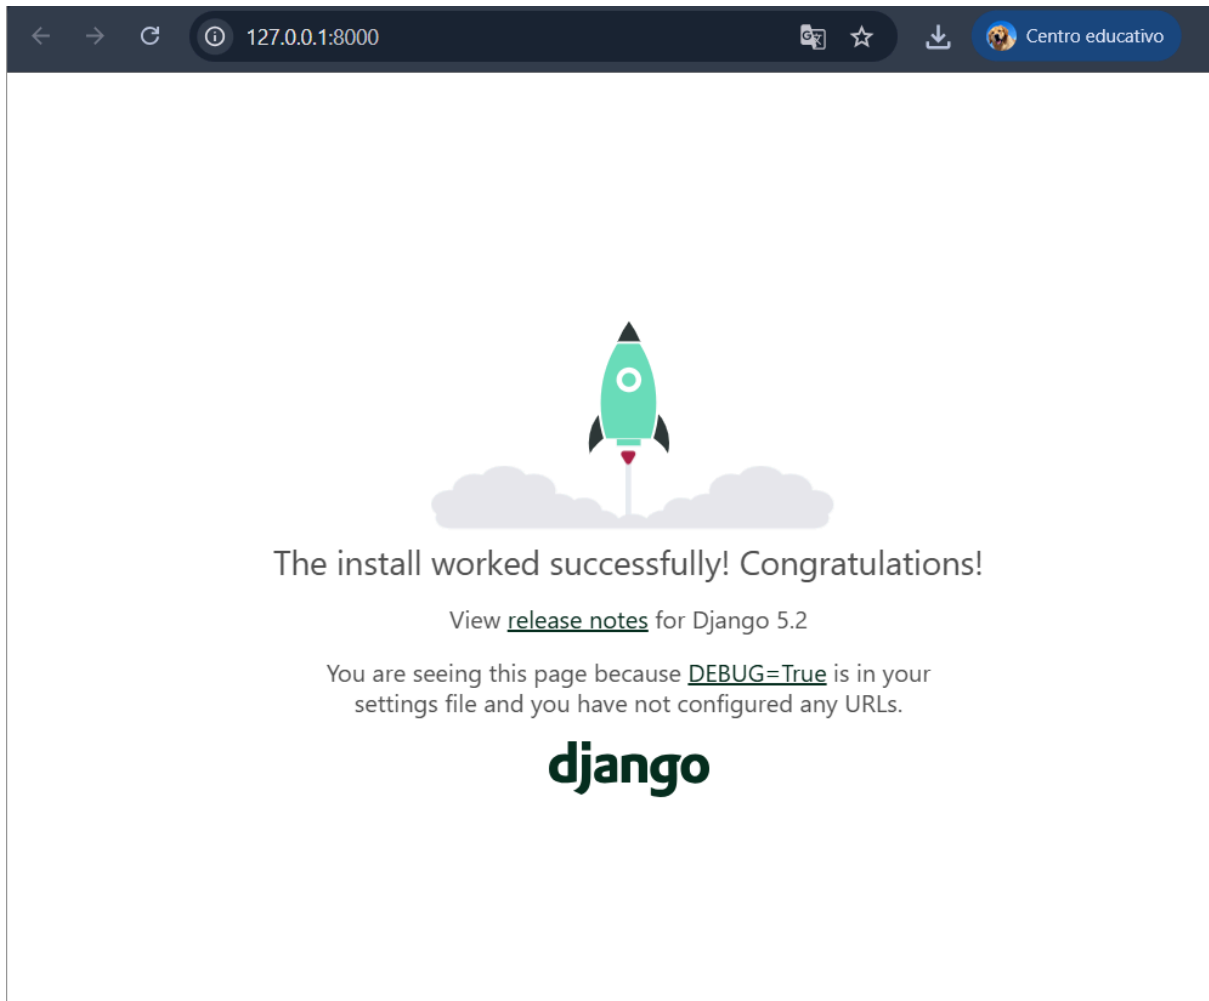

Crear views:

```
prueba > views.py > ...
1  from django.http import HttpResponse
2
3  def homepage(request):
4      return HttpResponse("Hello World!")
5
```

Editar URLs:

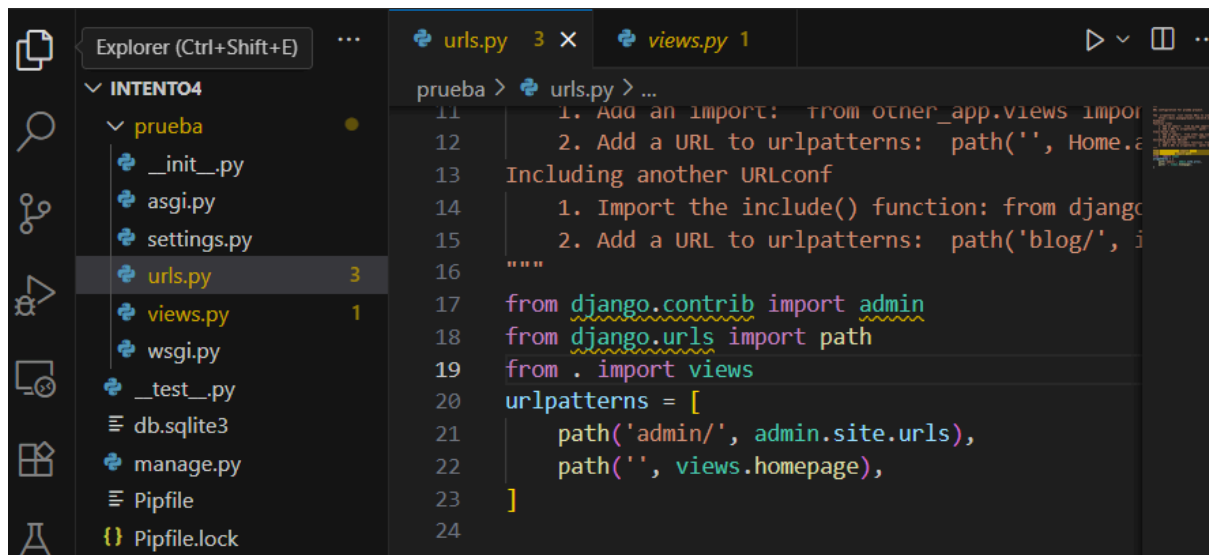

Reinicio server:

```
PS C:\Users\fernando\Desktop\Intento4> python manage.py runserver
Watching for file changes with StatReloader
Performing system checks...



System check identified no issues (0 silenced).
September 24, 2025 - 11:49:45
Django version 5.2.6, using settings 'prueba.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/5.2/howto/deployment/
[24/Sep/2025 11:49:58] "GET / HTTP/1.1" 200 12
```

Testeo:



Dentro de Pruebas crear lo siguiente:

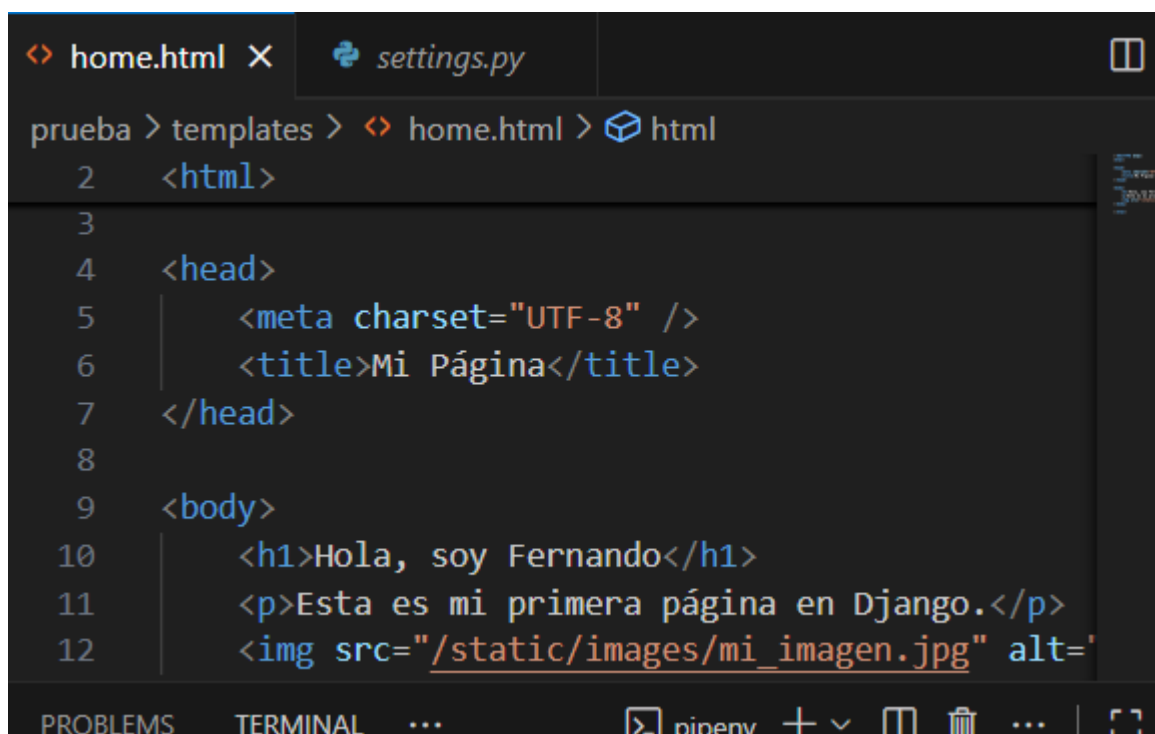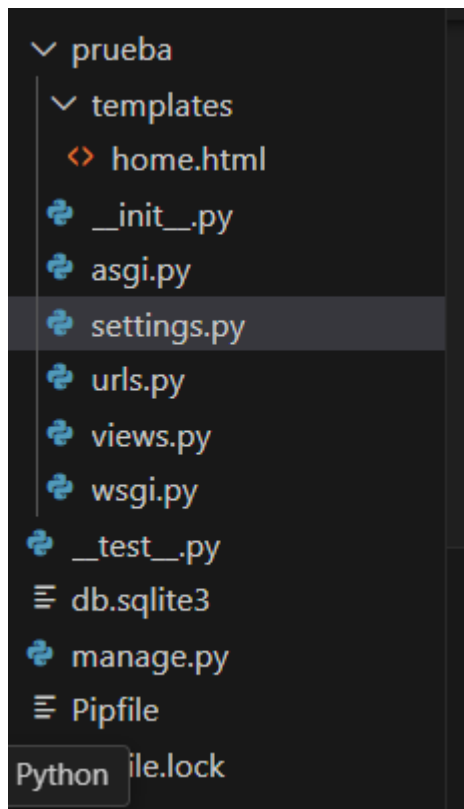

Modificar settings:


```

10 https://docs.djangoproject.com/en/5.2/ref/settings/
11 """
12
13 from pathlib import Path
14 import os
15
16 # Build paths inside the project like this: BASE_DIR / 'subdir'.
17 BASE_DIR = Path(__file__).resolve().parent.parent
18
19


```

```

TEMPLATES = [
    {
        'BACKEND': 'django.template.backends.django.DjangoTemplates',
        'DIRS': [os.path.join(BASE_DIR, 'prueba', 'templates')],
        'APP_DIRS': True,
        'OPTIONS': {
            'context_processors': [
                'django.template.context_processors.debug',
                'django.template.context_processors.request',
                'django.contrib.auth.context_processors.auth',
                'django.contrib.messages.context_processors.messages',
            ],
        },
    ],
]

```

Modificar views:

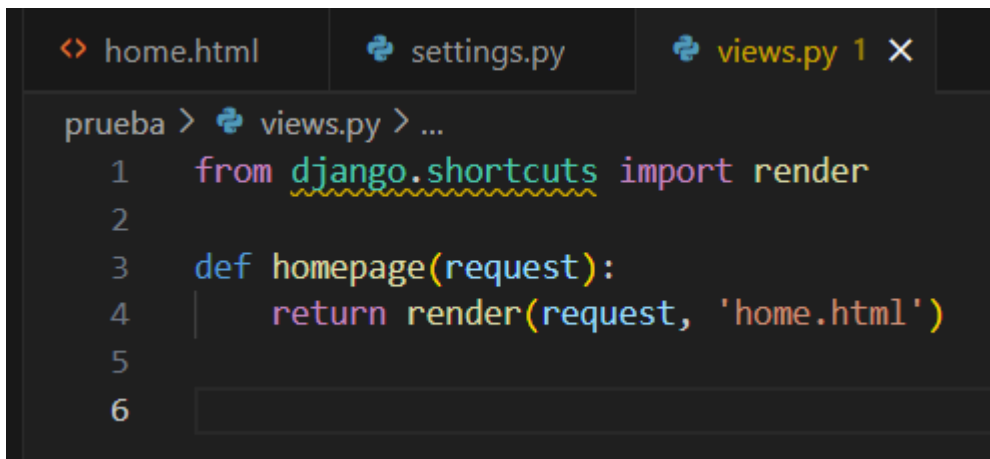


```

prueba > views.py > ...
1  from django.shortcuts import render
2
3  def homepage(request):
4      return render(request, 'home.html')
5
6

```

Comprobar despues de reiniciar Server poniendo <http://127.0.0.1:8000/> :

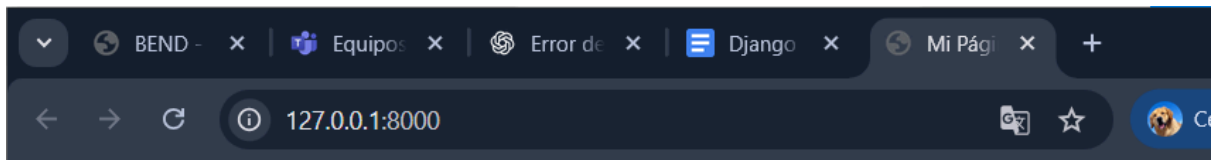


Hola, soy Fernando

Esta es mi primera página en Django.

 Mi imagen

Implementar los diferentes estilos o lenguajes:

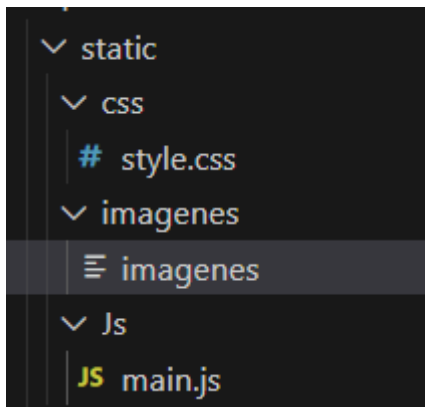

Implementar en HTML el CSS/JS e IMagen o básicamente implementar la carpeta static:
HTML:

```
<> home.html X lol.jfif # style.css JS main.js
prueba > templates > <> home.html > html > body
1  !DOCTYPE html>
2  % load static %}
3  html>
4
5  head>
6      <meta charset="UTF-8">
7      <title>Mi Página de Inicio</title>
8      <link rel="stylesheet" href="{% static 'css/sty
9      <script src="{% static 'js/main.js' %}"></scrip
10 /head>
11
12 body>
13     <h1>Hola, soy Fernando</h1>
14     <p>Bienvenido a mi primera página con Django.</
15     
17
18 /html>
```

CSS:

```
prueba > static > css > # style.css > body
1  body {
2      font-family: "Times New Roman", Times, serif;
3      background-color: #9bb9c4;
4      text-align: center;
5  }
6  h1 {
7      color: #64646a;
8  }
9
```

JS:

```
prueba > static > Js > JS main.js
1  console.log("APRUEBAME");
2  alert("Apruebame");
3
```

Configuraciones finales:

Steings:

```
STATIC_URL = '/static/'
STATICFILES_DIRS = [os.path.join(BASE_DIR, 'prueba', 'static')]

TEMPLATES = [
    {
        'BACKEND': 'django.template.backends.django.DjangoTemplates',
        'DIRS': [os.path.join(BASE_DIR, 'prueba', 'templates')],
        'APP_DIRS': True,
        'OPTIONS': {
            'context_processors': [
                'django.template.context_processors.debug',
                'django.template.context_processors.request',
                'django.contrib.auth.context_processors.auth',
                'django.contrib.messages.context_processors.messages',
            ],
        },
    },
]
```

URLS:

```
prueba >  urls.py > ...
14     1. Import the include() function: from django.
15     2. Add a URL to urlpatterns: path('blog/', in
16     """
17     from django.contrib import admin
18     from django.urls import path
19     from . import views
20     urlpatterns = [
21         path('admin/', admin.site.urls),
22         path('', views.homepage),
23     ]
24
```

Views:

```
from django.shortcuts import render

def homepage(request):
    return render(request, 'home.html')
```


WEB:




DJANGO T2:

Crear la app de Blog y archivos para este con el comando de abajo:


```
type manage.py help for usage.  
PS C:\Users\fernando\Desktop\Intento4> python manage.py startapp  
log  
PS C:\Users\fernando\Desktop\Intento4> 
```

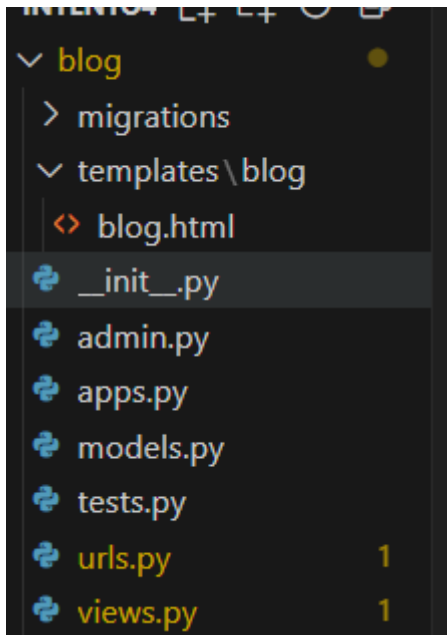

Editar settings en prueba:

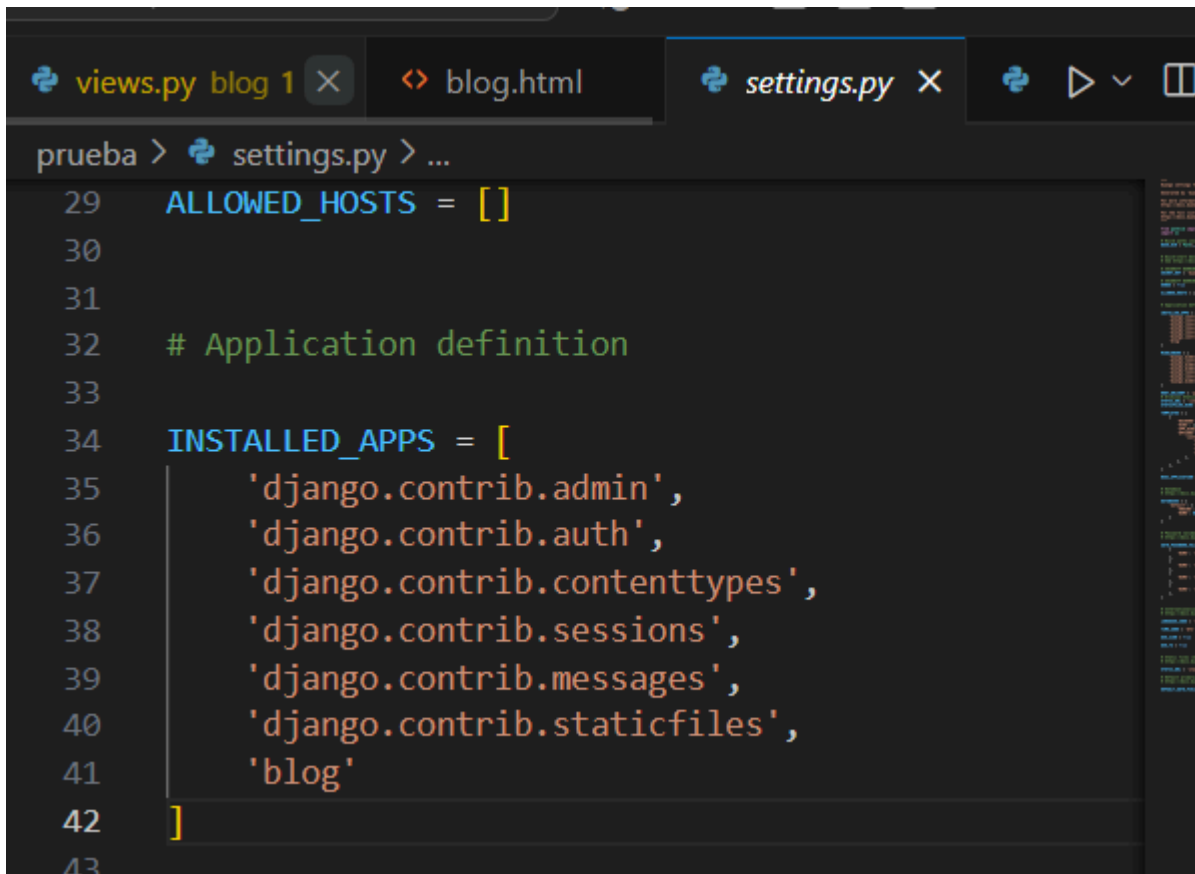

Crear Archivos y html :

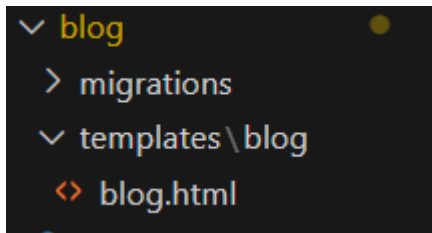

```
blog > templates > blog > blog.html
1  <!DOCTYPE html>
2  <html>
3
4  <head>
5      <title>Mi Blog</title>
6  </head>
7
8  <body>
9      <h1>Bienvenido a mi blog</h1>
10     <p>Apruebame ._. ? _ ?</p>
11
12 </body>
13
14 </html>
```

Crear y editar views:


```
blog > views.py
1  from django.shortcuts import render
2
3  def blogpage(request):
4      return render(request, 'blog/blog.html')
5
```

Crear y editar URL:

```
blog 1 | <> blog.html x | settings.py | urls.py 1 x | ▶ v | □ | ..
blog > | urls.py > ...
1  from django.urls import path
2  from . import views # importa las vistas de esta a
3
4  urlpatterns = [
5  |     path('', views.blogpage, name='blog'), # esto
6  | ]
```


<http://127.0.0.1:8000/blog/> comprobar q funcione:

Foto final:

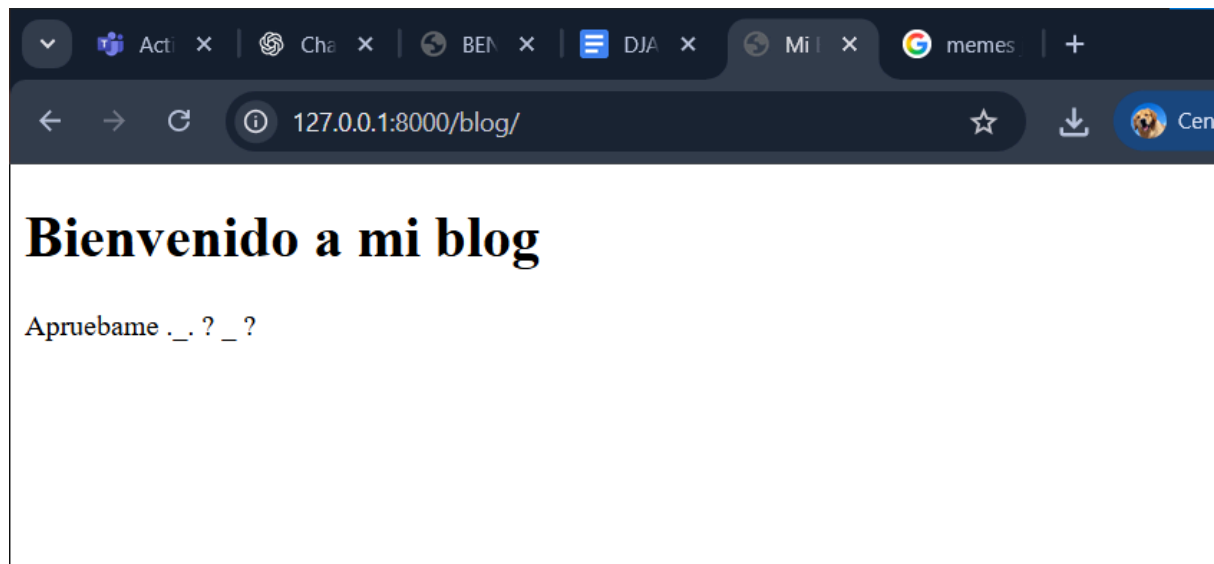

TAREA 3 DJANGO:

Primero al instalar tailwind se crea la siguiente carpeta:

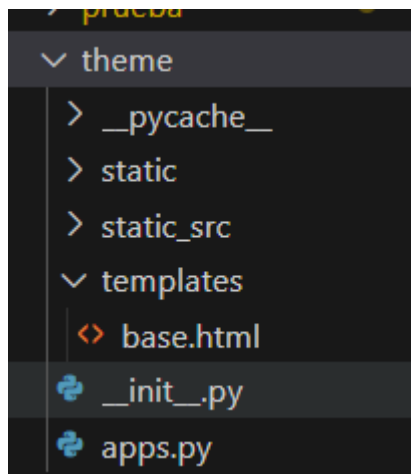

y se le añade el templates con el html que será la base de los otros html.

Luego configuraremos settings añadiendo lo siguiente:

```
from pathlib import Path
import os

# Build paths inside the project like this: BASE_DIR / 'subdir'.
BASE_DIR = Path(__file__).resolve().parent.parent
```

```
INSTALLED_APPS = [
    'django.contrib.admin',
    'django.contrib.auth',
    'django.contrib.contenttypes',
    'django.contrib.sessions',
    'django.contrib.messages',
    'django.contrib.staticfiles',
    # Apps propias
    'blog',
    # Apps o cosas Tailwind
    'tailwind',
    'django_browser_reload',
    'theme',
]
```

```
MIDDLEWARE = [
    'django.middleware.security.SecurityMiddleware',
    'django.contrib.sessions.middleware.SessionMiddleware',
    'django.middleware.common.CommonMiddleware',
    'django.middleware.csrf.CsrfViewMiddleware',
    'django.contrib.auth.middleware.AuthenticationMiddleware',
    'django.contrib.messages.middleware.MessageMiddleware',
    'django.middleware.clickjacking.XFrameOptionsMiddleware',
    #Tailwind
    'django_browser_reload.middleware.BrowserReloadMiddleware',
]
```

```

TAILWIND_APP_NAME = 'theme'
NPM_BIN_PATH = r"C:\Program Files\nodejs\npm.cmd"

```

```

ROOT_URLCONF = 'prueba.urls'
# Archivos Staticos:
STATIC_URL = 'prueba/static/'
STATICFILES_DIRS = [BASE_DIR / 'prueba' / 'static']

TEMPLATES = [
    {
        'BACKEND': 'django.template.backends.django.DjangoTemplates',
        'DIRS': [
            os.path.join(BASE_DIR, 'prueba', 'templates'),
            os.path.join(BASE_DIR, 'theme'),
        ],
        'APP_DIRS': True,
        'OPTIONS': {
            'context_processors': [
                'django.template.context_processors.debug',
                'django.template.context_processors.request',
                'django.contrib.auth.context_processors.auth',
                'django.contrib.messages.context_processors.messages',
            ],
        },
    ],
]

```

Posteriormente modificaremos los html hasta q quede algo asi:

El home que es:

```

home.html x  blog.html  settings.py  views.py 1  urls.py 1
prueba > templates > home.html > ...
1  <!DOCTYPE html>
2  {% extends "base.html" %}
3  {% load static %}
4
5  {% block title %}Home{% endblock title %}
6
7  {% block content %}
8  <h1 class="text-6xl font-bold text-center mb-4">Hola, soy Fernando</h1>
9  <p class="text-center text-gray-800 dark:text-gray-300 mb-6">Bienvenido</p>
10 
11 {% endblock content %}

```

El blog:

```
home.html  blog.html  settings.py  views.py 1  urls.py
og > templates > blog > blog.html > div.flex.justify-center.space-x-4 > button.bg-yellow-
1  <!DOCTYPE html>
2  {% extends "base.html" %}
3  {% load static %}
4
5  {% block title %}
6  Blog
7  {% endblock title %}
8
9  {% block content %}
10 <h1 class="text-5xl font-bold text-center mb-4">Mi Blog</h1>
11 <p class="text-center text-gray-800 dark:text-gray-300 mb-6">Conten
12 <div class="flex justify-center space-x-4">
13   <button class="bg-green-500 text-white px-4 py-2 rounded hover:b
14   <button class="bg-yellow-500 text-white px-4 py-2 rounded hover:
15   <button class="bg-red-500 text-white px-4 py-2 rounded hover:
16 </div>
17 {% endblock content %}
```

Y por ultimo el Base q es el q se encarga de conectar estos dos y mantener la estructura html:

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>
    {% block title %}
    Mi Web
    {% endblock %}
  </title>
  {% load static %}
  <link href="{% static 'css/style.css' %}" rel="stylesheet">
</head>
<body class="bg-gray-100 dark:bg-gray-900 text-gray-800 dark:text-gray-200">
  <nav class="bg-blue-500 dark:bg-blue-800 p-4">
    <a href="{% url 'home' %}" class="text-white px-3 py-2 rounded">Home</a>
    <a href="{% url 'blog' %}" class="text-white px-3 py-2 rounded">Blog</a>
  </nav>
  <main class="p-8">
    {% block content %}
    De esta asombrosa Web ._.
    {% endblock content %}
  </main>
</body>
</html>
```

Los views y los urls quedaron asi:

```
settings.py  views.py 1 x  urls.py prueba 3  ▶ ▢ ...
prueba > views.py > home
1  from django.shortcuts import render
2
3
4  def basepage(request):
5      return render(request, 'base.html')
6
7  def blogpage(request):
8
9      return render(request, 'blog/blog.html')
10 def home(request):
11     return render(request, 'home.html')
```

```
settings.py  views.py 1  urls.py prueba 3 x  ▶ ▢ ...
prueba > urls.py > ...
1  from django.contrib import admin
2  from django.urls import path, include
3  from prueba import views # vistas del proyecto
4
5  urlpatterns = [
6
7      path("__reload__/", include("django_browser_
8      path('admin/', admin.site.urls),
9      path('', views.home, name='home'), #
10     path('blog/', include('blog.urls')), #
11 ]
12
```


Iniciar el server con

```
[01/Oct/2025 16:40:56] GET /blog/ HTTP/1.1 200 1420
PS C:\Users\fernando\Desktop\asignatura Nacho> python manage.py
runserver
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
October 01, 2025 - 16:40:57
Django version 4.2.24, using settings 'prueba.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.
```

y poner el enlace <http://127.0.0.1:8000>

y las páginas quedan así:

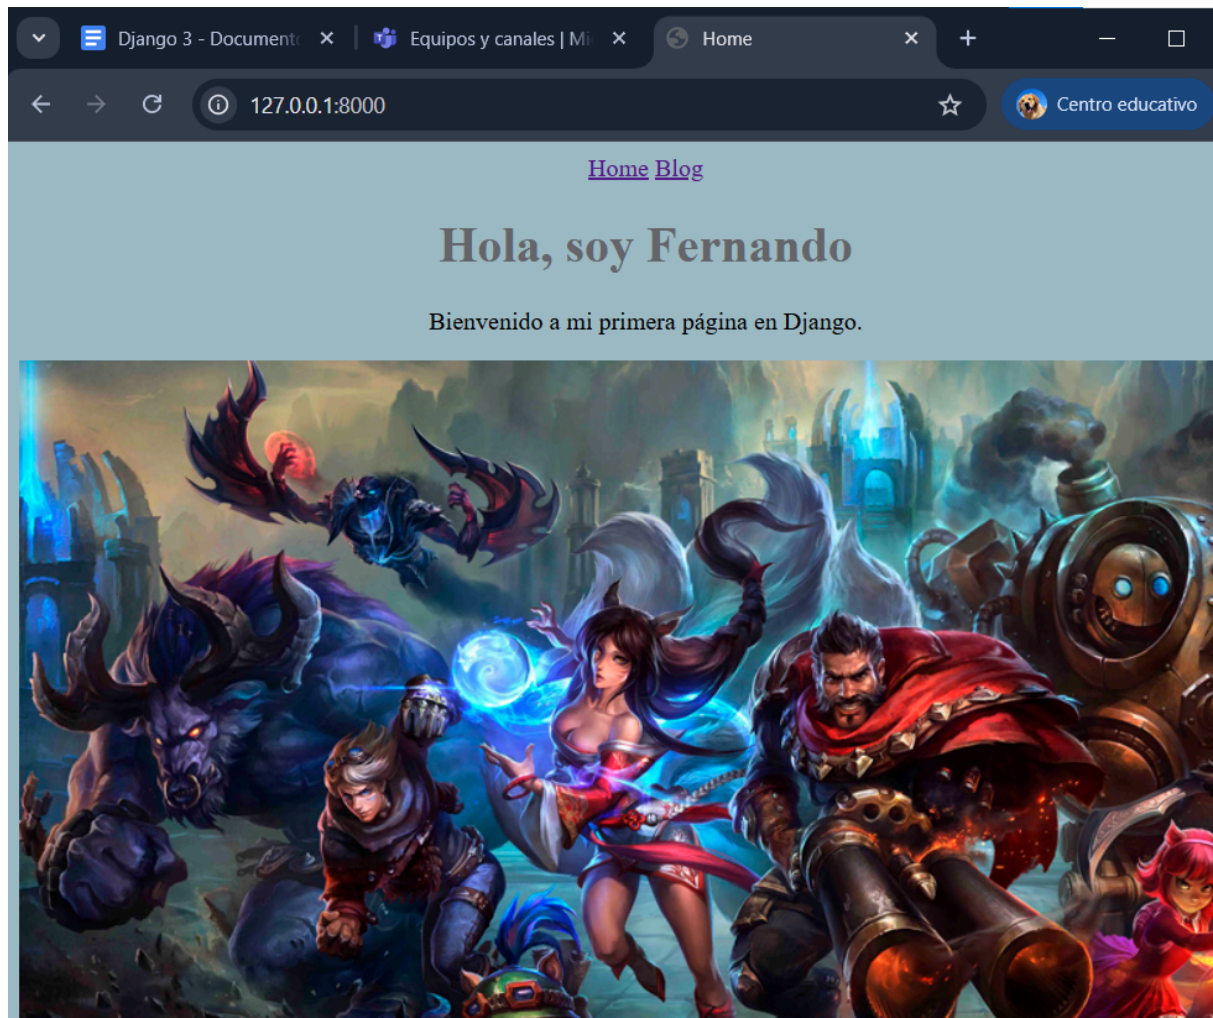

DJANGO 4

Crear Clases en [models.py](#) de blog o app::

```
models.py X
blog > models.py > ...
1  from django.db import models
2
3  class Person(models.Model):
4      name = models.CharField(max_length=50)
5      birth = models.DateField()
6      slug = models.SlugField()
7
8      def __str__(self):
9          return self.name
10
11
12
```

Añadir otra clase relacionada con esta:

```
models.py X
blog > models.py > ...
1  from django.db import models
2
3  class Person(models.Model):
4      name = models.CharField(max_length=50)
5      birth = models.DateField()
6      slug = models.SlugField()
7
8      def __str__(self):
9          return self.name
10
11  class Dni(models.Model):
12      dni = models.CharField(max_length=9)
13
14      def __str__(self):
15          return self.numbers
16
17
18
```

DJANGO 4

Hacer makemigrate y migration y crear un superusuario:


```
Cancelled.
PS C:\Users\fernando\Desktop\Asignatura Nacho> python manage.py makemigrations

It is impossible to change a nullable field 'dni' on dni to non-nullable without providing a default. This is because the database needs something to populate existing rows.
Please select a fix:
  1) Provide a one-off default now (will be set on all existing rows with a null value for this column)
  2) Ignore for now. Existing rows that contain NULL values will have to be handled manually, for example with a RunPython or RunSQL operation.
  3) Quit and manually define a default value in models.py.
Select an option: 1
Please enter the default value as valid Python.
The datetime and django.utils.timezone modules are available, so it is possible to provide e.g. timezone.now as a value.
Type 'exit' to exit this prompt
>>> 1234567Q
SyntaxError: invalid decimal literal (<string>, line 1)
>>> ana
NameError: name 'ana' is not defined
>>> Ana
NameError: name 'Ana' is not defined
>>> 2
Migrations for 'blog':
  blog\migrations\0002_remove_dni_nie_remove_dni_passport_alter_dni_dni_and_more.py
    - Remove field nie from dni
    - Remove field passport from dni
    ~ Alter field dni on dni
    ~ Alter field person on dni
```

```
PS C:\Users\fernando\Desktop\Asignatura Nacho> python manage.py migrate
Operations to perform:
  Apply all migrations: admin, auth, blog, contenttypes, sessions
Running migrations:
  Applying blog.0002_remove_dni_nie_remove_dni_passport_alter_dni_dni_and_more... OK
PS C:\Users\fernando\Desktop\Asignatura Nacho> python manage.py createsuperuser
Username: fer
Error: That username is already taken.
Username: ana
Email address: ana@gmail.com
Password:
Password (again):
This password is too short. It must contain at least 8 characters.
This password is too common.
This password is entirely numeric.
Bypass password validation and create user anyway? [y/N]: y
Superuser created successfully.
PS C:\Users\fernando\Desktop\Asignatura Nacho> 
```



DJANGO 4

nuestro [admin.py](#) de blog se habra cambiado con estos parametros:

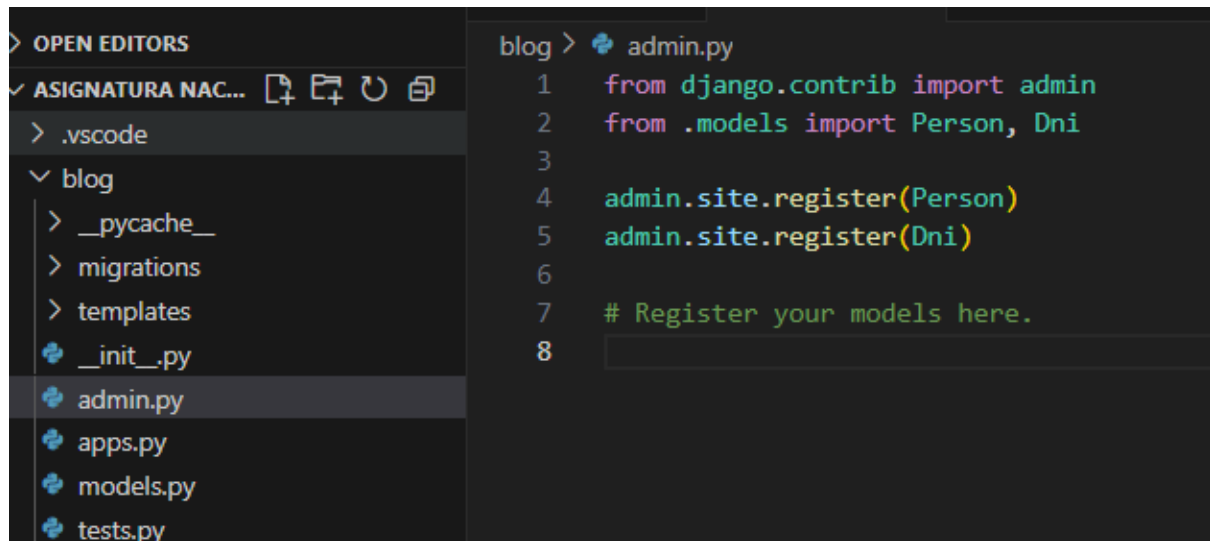

```
blog > admin.py
1  from django.contrib import admin
2  from .models import Person, Dni
3
4  admin.site.register(Person)
5  admin.site.register(Dni)
6
7  # Register your models here.
8
```

ahora al poner <http://127.0.0.1:8000/admin/> este enlace te llevara a la pestaña de login del super usuario y te dejara crear gente:

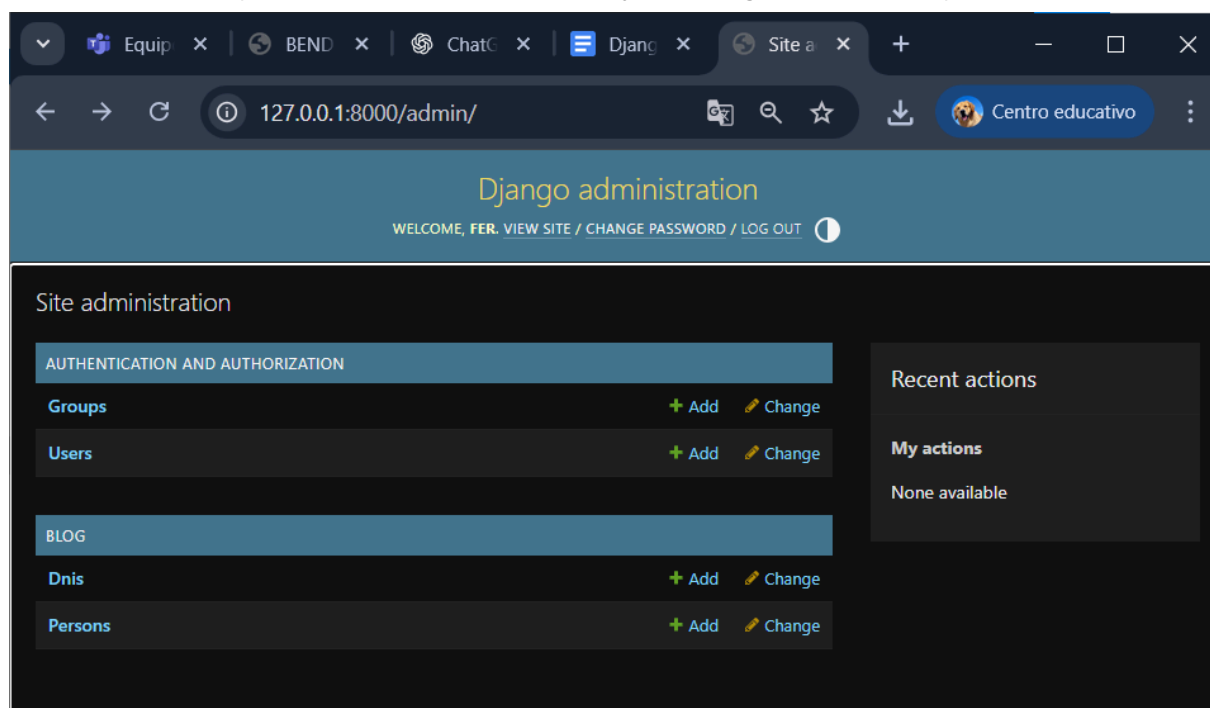

DJANGO 4

Django administration

WELCOME, FER. [VIEW SITE](#) / [CHANGE PASSWORD](#) / [LOG OUT](#) 

Home > Blog > Dnis > Add dni

Start typing to filter...

AUTHENTICATION AND AUTHORIZATION

Groups

+ Add

Users

+ Add

BLOG

Dnis

+ Add

Persons

+ Add

«

Add dni

Please correct the error below.

Dni:

333333333Q

This field is required.

Person:

Yasuo

✎

+

👁

SAVE

Save and add another

Save and continue editing


DJANGO 4

CAMBIAR EL HTML:

```
py prueba | views.py blog | urls.py | base.html | blog.html X | personas.ht
og > templates > blog > <> blog.html > ul > li
1 <!DOCTYPE html>
2 {% extends "base.html" %}
3 {% load static %}
4
5 {% block title %}
6 Blog
7 {% endblock title%}
8
9 {% block content %}
10 <h1 class="text-5xl font-bold text-center mb-4">Mi Blog</h1>
11 <p class="text-center text-gray-800 dark:text-gray-300 mb-6">Contenido de la página
12 <div class="flex justify-center space-x-4">
13     <button class="bg-green-500 text-white px-4 py-2 rounded hover:bg-green-600 tra
14     <button class="bg-yellow-500 text-white px-4 py-2 rounded hover:bg-yellow-600 t
15     <button class="bg-red-500 text-white px-4 py-2 rounded hover:bg-red-600 transi
16 </div>
17
18 <h2 class="mt-6 text-2xl font-semibold">Últimas personas añadidas:</h2>
19 <ul>
20     {% for person in visitas %}
21     <li>{{ person.name }} - {{ person.birth }}</li>
22     {% empty %}
23     <li>No hay personas todavía.</li>
24     {% endfor %}
25 </ul>
26 S
27 {% endblock content %}
```

DJANGO 4

RESULTADO:

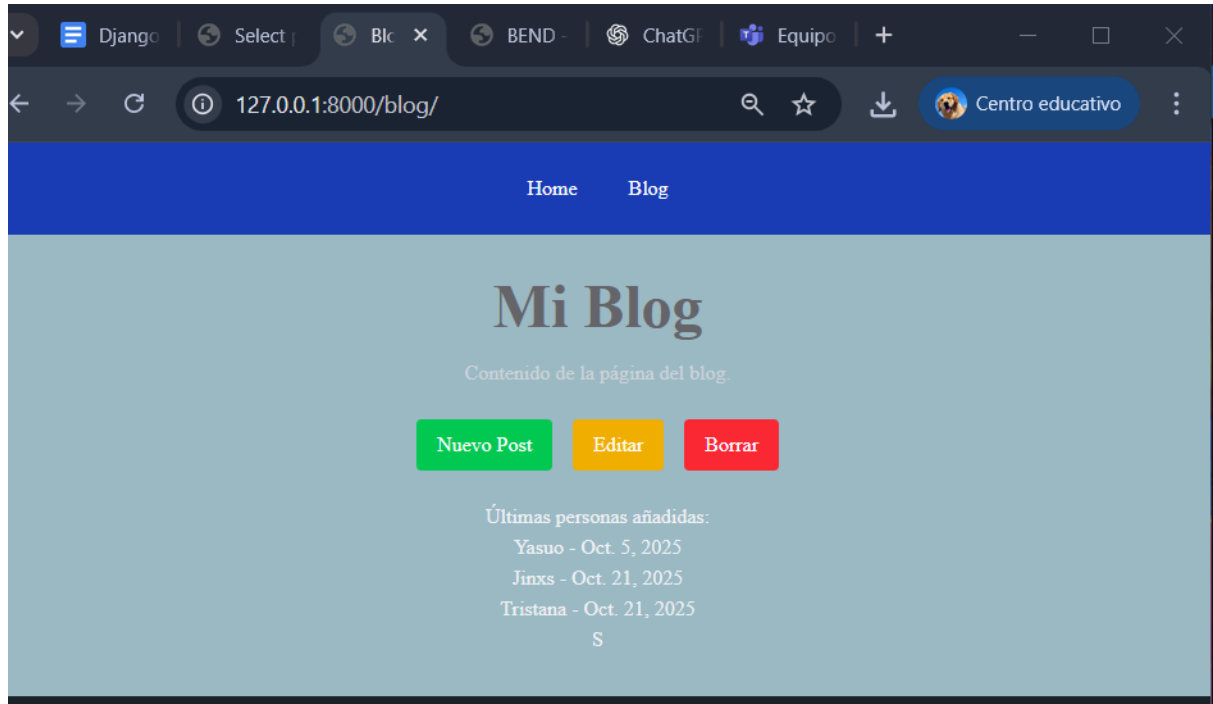

DJANGO 5

1. en [urls.py](#) de blog dar nombre a la app

```
urls.py X views.py blog models.py admin.py views.py prueba personas.html
blog > urls.py > ...
2 from . import views
3
4 app_name = 'usuarios'
5
6 urlpatterns = [
7     path('', views.blogpage, name='blogpage'), # Página del blog
8     path('<slug:slug>', views.personasLista, name="personasLista"), # Lista de personas
9 ]
10
```

2. En models de blog crear las clases:

```
urls.py views.py blog models.py X admin.py views.py pru
blog > models.py > ...
1 from django.db import models
2
3 class Person(models.Model):
4     name = models.CharField(max_length=100)
5     birth = models.DateField()
6     slug = models.SlugField(unique=True)
7
8     def __str__(self):
9         return self.name
10
11 class Dni(models.Model):
12     dni = models.CharField(max_length=10)
13     person = models.ForeignKey(Person, on_delete=models.CASCADE, )
14
15     def __str__(self):
16         return self.dni
17
18
19
```

3. Modificar el [admin.py](#) de blog:

```
urls.py models.py admin.py X views.py
blog > admin.py
1 from django.contrib import admin
2 from .models import Person, Dni
3 # Auto llenar el campo slug basado en el campo name
4
5 admin.site.register(Person),
6 admin.site.register(Dni),
7 # Register your models here.
8
```

DJANGO 5

4. Crear un nuevo html donde se vayan a mostrar las personas:

```
urls.py  models.py  admin.py  views.py  personas.html X  blog.html

blog > templates > blog > personas.html > div.mb-6 > p.mb-4
1  <!DOCTYPE html>
2  {% extends "base.html" %}
3  {% load static %}
4  {% block content %}
5  <div class="mb-6">
6
7      <h1 class="text-3xl font-bold mb-6">{{ personas.name }}</h1>
8      <p class="mb-4">Fecha de nacimiento:{{ personas.birth }}</p>
9
10     <button class="text-blue-500 hover:underline">
11         <a href="{% url 'usuarios:blogpage' %}"
12             class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-600 transi
13         </button>
14 </div>
15 {% endblock %}
```


5. Modificar las views.py:

```
urls.py  models.py X  admin.py  views.py X  personas.html  blog.html

blog > views.py > personasLista
1  from django.shortcuts import render ,get_object_or_404
2  from .models import Person
3
4  def blogpage(request):
5      visitas = Person.objects.order_by('-id')[:10] # Inmportar las ultimas 10 persona
6      return render(request, 'blog/blog.html', {'visitas': visitas}) # Pasar las perso
7
8  def personasLista(request, slug):
9      person = get_object_or_404(Person, slug=slug)
10     return render(request, 'blog/personas.html', {'personas': person})
```


DJANGO 6

1. Modificar settings y añadir media:

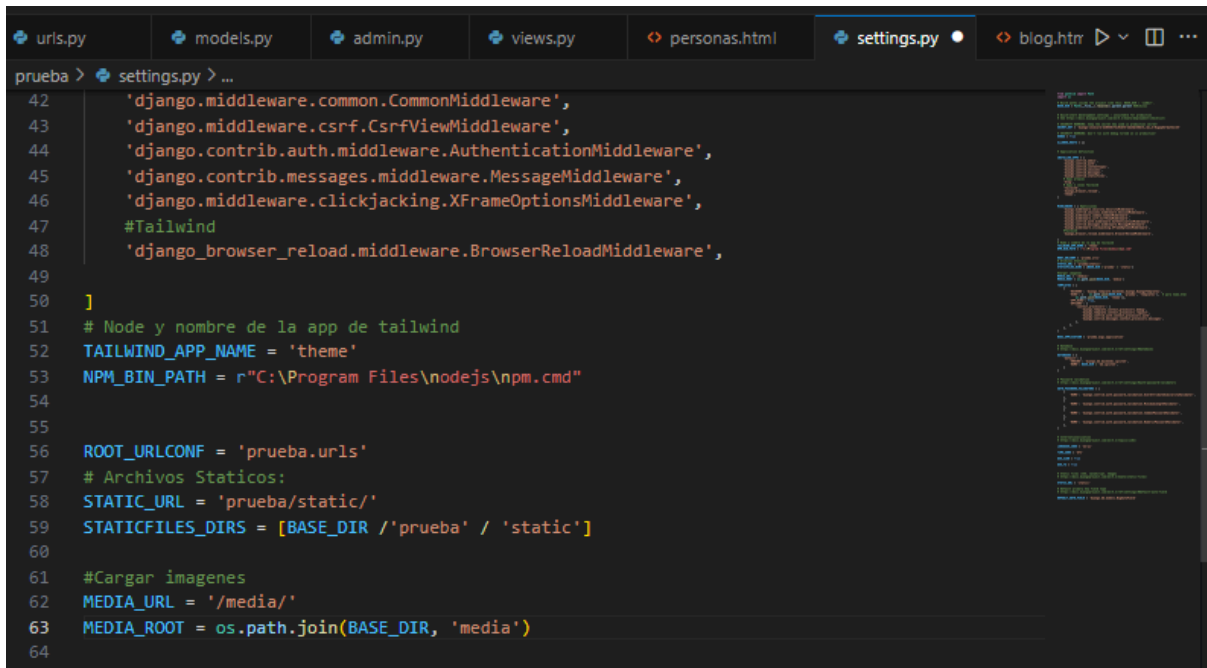

```
42 'django.middleware.common.CommonMiddleware',
43 'django.middleware.csrf.CsrfViewMiddleware',
44 'django.contrib.auth.middleware.AuthenticationMiddleware',
45 'django.contrib.messages.middleware.MessageMiddleware',
46 'django.middleware.clickjacking.XFrameOptionsMiddleware',
47 #Tailwind
48 'django_browser_reload.middleware.BrowserReloadMiddleware',
49
50 ]
51 # Node y nombre de la app de tailwind
52 TAILWIND_APP_NAME = 'theme'
53 NPM_BIN_PATH = r"C:\Program Files\nodejs\npm.cmd"
54
55
56 ROOT_URLCONF = 'prueba.urls'
57 # Archivos Staticos:
58 STATIC_URL = 'prueba/static/'
59 STATICFILES_DIRS = [BASE_DIR / 'prueba' / 'static']
60
61 #Cargar imagenes
62 MEDIA_URL = '/media/'
63 MEDIA_ROOT = os.path.join(BASE_DIR, 'media')
64
```

2. Modificar urls:

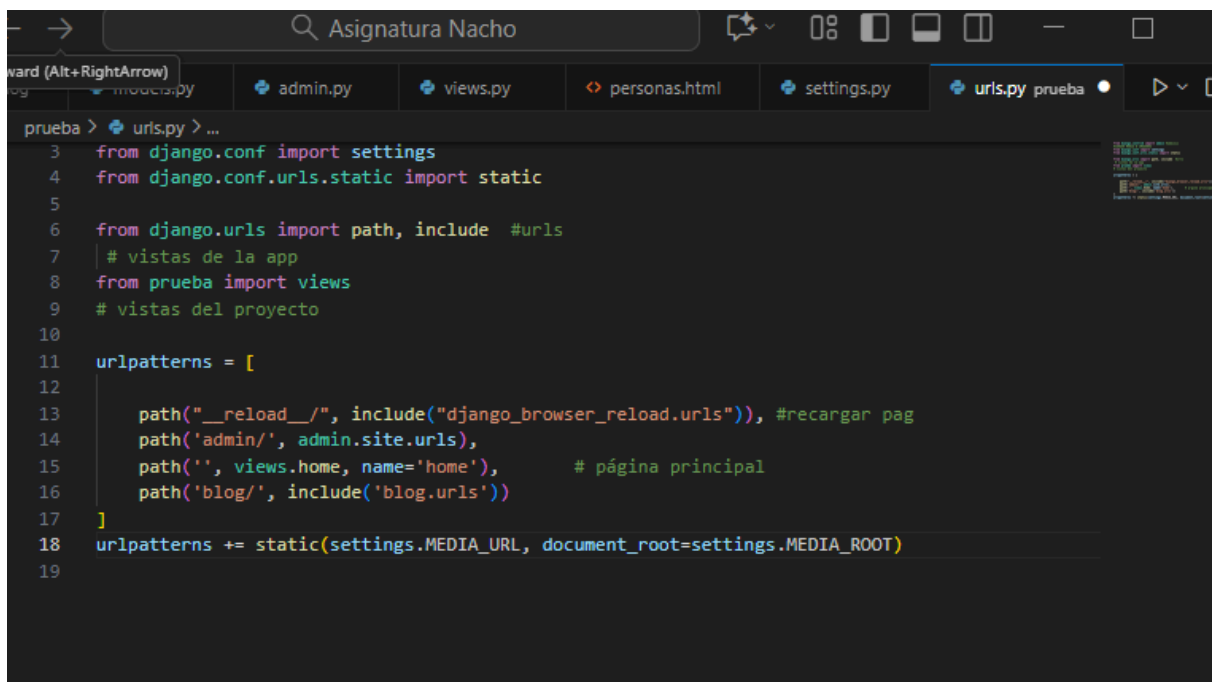

```
3 from django.conf import settings
4 from django.conf.urls.static import static
5
6 from django.urls import path, include #urls
7 # vistas de la app
8 from prueba import views
9 # vistas del proyecto
10
11 urlpatterns = [
12
13     path("__reload__/", include("django_browser_reload.urls")), #recargar pag
14     path('admin/', admin.site.urls),
15     path('', views.home, name='home'), # página principal
16     path('blog/', include('blog.urls'))
17 ]
18 urlpatterns += static(settings.MEDIA_URL, document_root=settings.MEDIA_ROOT)
19
```

DJANGO 6

3. añadir a la clase Person de models el propic de la imagen:

```
models.py | blog | models.py | admin.py | views.py | personas.html | settings.py |
g > models.py > ...
1 from django.db import models
2
3 class Person(models.Model):
4     name = models.CharField(max_length=100)
5     birth = models.DateField()
6     slug = models.SlugField(unique=True)
7     propic = models.ImageField(upload_to='profile_pics/', null=True, blank=True)
8
9     def __str__(self):
10         return self.name
11
12 class Dni(models.Model):
13     dni = models.CharField(max_length=10)
14     person = models.ForeignKey(Person, on_delete=models.CASCADE, )
15
16     def __str__(self):
17         return self.dni
18
19
```

4. Instalar Pillow y hacer migraciones:

```
PS C:\Users\fernando\Desktop\Asignatura Nacho> python -m pip install Pillow
Collecting Pillow
  Downloading pillow-12.0.0-cp313-cp313-win_amd64.whl.metadata (9.0 kB)
  Downloading pillow-12.0.0-cp313-cp313-win_amd64.whl (7.0 MB)
    7.0/7.0 MB 29.3 MB/s 0:00:00
Installing collected packages: Pillow
Successfully installed Pillow-12.0.0
PS C:\Users\fernando\Desktop\Asignatura Nacho>
```


```
Successfully installed Pillow-12.0.0
PS C:\Users\fernando\Desktop\Asignatura Nacho> Python manage.py makemigrations
Migrations for 'blog':
  blog\migrations\0005_user.py
  + Create model User
PS C:\Users\fernando\Desktop\Asignatura Nacho> Python manage.py migrate
Operations to perform:
  Apply all migrations: admin, auth, blog, contenttypes, sessions
Running migrations:
  Applying blog.0005_user... OK
PS C:\Users\fernando\Desktop\Asignatura Nacho>
```


DJANGO 6

5. Cambiar html

```
... urls.py blog models.py admin.py views.py personas.html settings.py ...
More Actions... templates > blog > personas.html
1 <!DOCTYPE html>
2 {% extends "base.html" %} {% load static %} {%block content %}
3 <div class="mb-6" class="flex items-center justify-center">
4   <h1 class="text-3xl font-bold mb-6">{{personas.name }}</h1>
5   {% if personas.propic %}
6   
11   {% else %}
12   
18   {% endif %}
19
20   <p class="mb-4">Fecha de nacimiento:{{ personas.birth }}</p>
21
22   <button class="text-blue-500 hover:underline">
23     <a
24       href="{% url 'usuarios:blogpage' %}"
25       class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-600"
26     >Volver</a>
27   </button>
28 </div>
29 {% endblock content %}
30
31
```

6. RESULTADO:

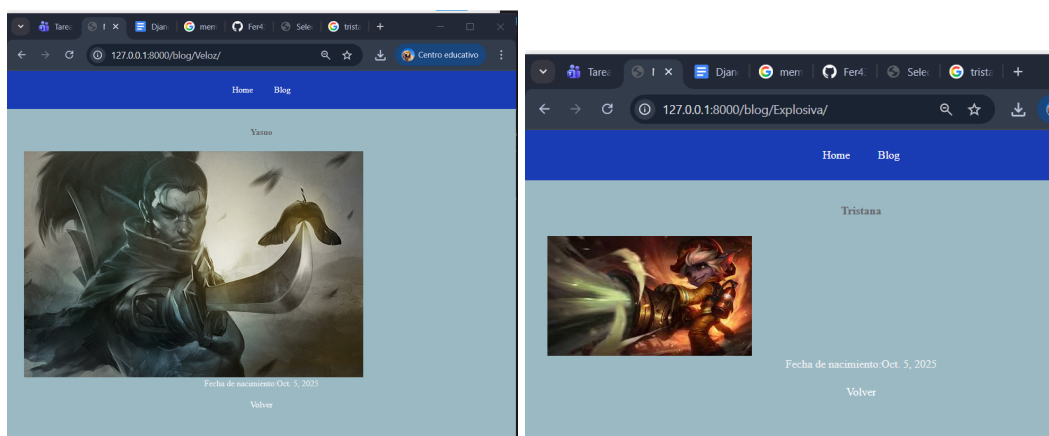

DJANGO 8

Añadir al views q hemos editado en el ejercicio anterior el del formulario o users las pestañas de login:

```
views.py > logout_user
from django.shortcuts import render, redirect
from django.contrib.auth.forms import UserCreationForm , AuthenticationForm
from django.contrib.auth import login, logout

#Registro Usuario
def register_view(request):
    if request.method == 'POST':
        form = UserCreationForm(request.POST)
        if form.is_valid():
            user = form.save()
            login(request, user)
            return redirect("home") # redirige a la página de inicio
    else:
        form = UserCreationForm()
    return render(request, 'users/register.html', {'form': form})

#Login Usuarios
def login_view(request):
    if request.method == 'POST':
        form = AuthenticationForm(data=request.POST)
        if form.is_valid():
            user = form.get_user()
            login(request, user)
            return redirect("home") # redirige a la página de inicio
    else:
        form = AuthenticationForm()
    return render(request, 'users/login.html', {'form': form})

#Logout Usuario
def logout_user(request):
    if request.method == 'POST':
        logout(request)
        return redirect("home") # redirige a la página de inicio
```

DJANGO 8

Crear el html de login:

```
login.html X
users > templates > users > login.html
1  {% extends "base.html" %} {% block content %}
2  <h1>Login</h1>
3  <form method="post">
4      {% csrf_token %} {{ form.as_p }}
5      <button type="submit">Iniciar Sesión</button>
6  </form>
7  <a
8      href="{% url 'home' %}"
9      class="text-white px-3 py-2 rounded hover:bg-blue-700 dark
10     >Volver</a>
11  >
12  </button>
13  {% endblock %}
14
```

DJANGO 8

Modificar el base.html 👍 añadiendo los dos botones q hemos creado en el views los cuales son el de registro, login y logout:

```
base.html x
theme > templates > base.html
2 <html lang="en">
3 </head>
4
5
6
7
8
9
10 <body class="bg-gray-100 dark:bg-gray-900 text-gray-900 dark:text-gray-100">
11 <nav class="bg-blue-500 dark:bg-blue-800 p-4 flex justify-center">
12 <a
13     href="{% url 'home' %}"
14     class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-900"
15 >Home</a>
16
17 <a
18     href="{% url 'blog:blogpage' %}"
19     class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-900"
20 >Blog</a>
21
22 <a
23     href="{% url 'users:register' %}"
24     class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-900"
25 >Register</a>
26
27 <a
28     href="{% url 'users:login' %}"
29     class="text-white px-3 py-2 rounded hover:bg-blue-700 dark:hover:bg-blue-900"
30 >Login</a>
31
32 {% if user.is_authenticated %}
33 <form action="{% url 'users:logout' %}" method="post">
34     {% csrf_token %}
35     <button type="submit">Logout</button>
36 </form>
37 {% endif %}
38 </nav>
39
40 <main class="p-8">
41     {% block content %} De esta asombrosa Web ._. {% endblock content %}
42 </main>
43 </body>
44 </html>
45
```

DJANGO 8

Modificar el urls de users para que muestre los enlaces:

```
urls.py  X
users > urls.py > ...
1  from django.urls import path
2  from . import views
3
4  app_name = 'users ' # <-- Esto define el namespace que usas en
5
6  urlpatterns = [
7      path('register/', views.register_view, name='register'),
8      path('login/', views.login_view, name='login'),
9      path('logout/', views.logout_user, name='logout'),
10     # otras URLs si las hay
11 ]
12
```

1. Paso:
2. Crear Login.Html:
3. Cambiar urls:
4. Añadir o cambiar en views:
- 5.

DJANGO 7

1. Crear la app Users.

```
PS C:\Users\fernando\Desktop\Asignatura Nacho> python manage.py startapp users
PS C:\Users\fernando\Desktop\Asignatura Nacho> |
```

2. Modificar el views:

```
views.py X  urls.py users  urls.py prueba  settings.py  <> register.hi ▶
users > views.py > register_view
1  from django.shortcuts import render, redirect
2  from django.contrib.auth.forms import UserCreationForm
3
4  def register_view(request):
5      if request.method == 'POST':
6          form = UserCreationForm(request.POST)
7          if form.is_valid():
8              form.save()
9              return redirect("users:home") # redirige a la página de in
10     else:
11         form = UserCreationForm()
12     return render(request, 'users/register.html', {'form': form})
```

3. Crear el html:

```
views.py  urls.py users  urls.py prueba  settings.py  <> register.html ● □
users > templates > users > <> register.html
1  <!DOCTYPE html>
2  <html lang="es">
3      <head>
4          <meta charset="UTF-8" />
5          <title>Registro de Usuario</title>
6      </head>
7      <body>
8          <h1>Formulario de Registro</h1>
9          <form method="post">
10             {% csrf_token %} {{ form }}
11             <button type="submit">Enviar</button>
12         </form>
13     </body>
14 </html>
15
```

DJANGO 7

4. meter la app en setings:

```
# Application definition

INSTALLED_APPS = [
    'django.contrib.admin',
    'django.contrib.auth',
    'django.contrib.contenttypes',
    'django.contrib.sessions',
    'django.contrib.messages',
    'django.contrib.staticfiles',
    # Apps propias
    'blog',
    # Apps o cosas Tailwind
    'tailwind',
    'django_browser_reload',
    'theme',
    'users',
]
```

- ## 5. Poner users en Urls de proyecto (Prueba)

```

1 from django.conf.urls.static import static
2
3 from django.urls import path, include #urls
4 # vistas de la app
5 from prueba import views
6 # vistas del proyecto
7
8 urlpatterns = [
9
10     path("__reload__/", include("django_browser_reload.urls")), #recarga
11     path('admin/', admin.site.urls),
12     path('', views.home, name='home'), # página principal
13     path('blog/', include('blog.urls')), # URLs de la app blog
14     path('users/', include('users.urls')), # URLs de la app users
15 ]
16
17 urlpatterns += static(settings.MEDIA_URL, document_root=settings.MEDIA_
18
19
20

```

- ## 6. Y cambiar Urls users:


DJANGO 7

```
rs > ✎ urls.py > ...
1  from django.urls import path
2  from . import views
3
4  app_name = 'usuarios' # <-- Esto define el namespace que usas en tu hr
5
6  urlpatterns = [
7      path('register/', views.register_view, name='register'),
8      # otras URLs si las hay
9  ]
10
```


DJANGO 9

Crear una nueva app:

```
not be used as an app name! Please try another name!
PS C:\Users\fernando\Desktop\Asignatura Nacho> python manage.py startapp products
PS C:\Users\fernando\Desktop\Asignatura Nacho> 
```

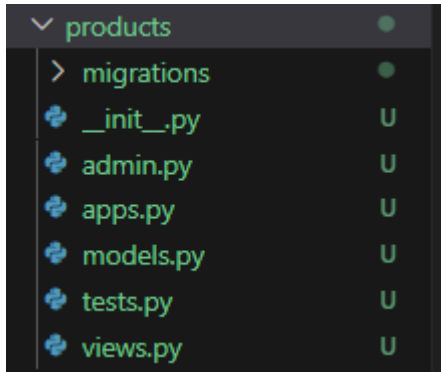

Añadir la app al settings:

```
settings.py M X
proyecto > settings.py > ...
14
15 # SECURITY WARNING: don't run with d
16 DEBUG = True
17
18 ALLOWED_HOSTS = []
19
20
21 # Application definition
22
23 INSTALLED_APPS = [
24     'django.contrib.admin',
25     'django.contrib.auth',
26     'django.contrib.contenttypes',
27     'django.contrib.sessions',
28     'django.contrib.messages',
29     'django.contrib.staticfiles',
30     # Apps propias
31     'blog',
32     # Apps o cosas Tailwind
33     'tailwind',
34     'django_browser_reload',
35     'theme',
36     'users',
37     'products',
38 ]
39
```

DJANGO 9

Modificar sus [models.py](#) 👍:


```
products > models.py > Product > __str__
1  from django.db import models
2  from django.contrib.auth.models import User
3
4  class Product(models.Model):
5      name = models.CharField(max_length=100)
6      price = models.FloatField()
7      description = models.TextField()
8      category = models.CharField(max_length=3, choices=CASAS)
9      user = models.ForeignKey(User, on_delete=models.CASCADE)
10     date_published = models.DateTimeField(auto_now_add=True)
11
12     def __str__(self):
13         return f"{self.name}, by {self.user}"
14     # Create your models here.
15
```

Crear y editar [forms.py](#) 👍

```
products > forms.py > UploadProduct > Meta
1  from django import forms
2  from .models import Product
3
4  class UploadProduct(forms.ModelForm):
5      class Meta:
6          model = Product
7          fields = ['name', 'price', 'description', 'category']
```

DJANGO 9

Modificar sus views:

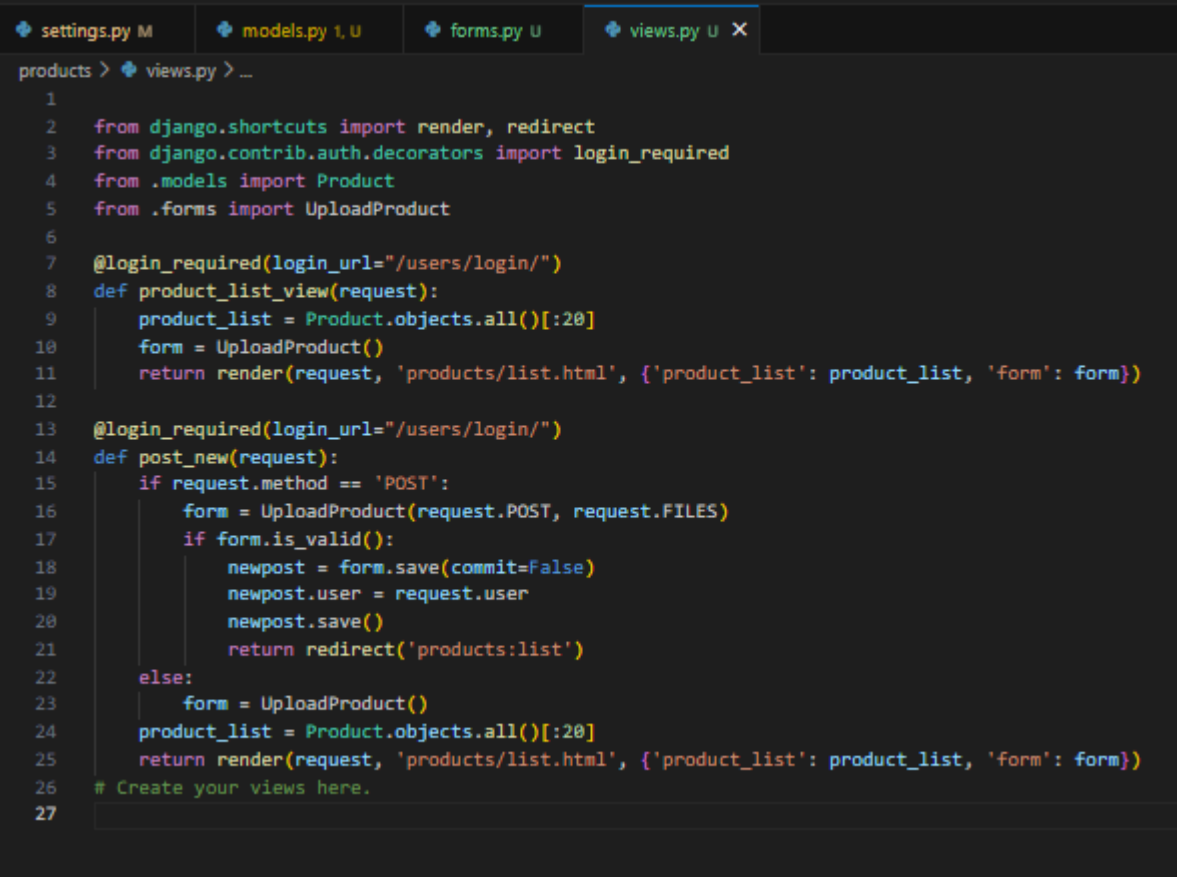


The image shows a code editor with four tabs: settings.py M, models.py 1, U, forms.py U, and views.py U X. The active tab is views.py U X. The code in the editor is as follows:


```
products > views.py > ...
1
2 from django.shortcuts import render, redirect
3 from django.contrib.auth.decorators import login_required
4 from .models import Product
5 from .forms import UploadProduct
6
7 @login_required(login_url="/users/login/")
8 def product_list_view(request):
9     product_list = Product.objects.all()[:20]
10    form = UploadProduct()
11    return render(request, 'products/list.html', {'product_list': product_list, 'form': form})
12
13 @login_required(login_url="/users/login/")
14 def post_new(request):
15     if request.method == 'POST':
16         form = UploadProduct(request.POST, request.FILES)
17         if form.is_valid():
18             newpost = form.save(commit=False)
19             newpost.user = request.user
20             newpost.save()
21             return redirect('products:list')
22     else:
23         form = UploadProduct()
24         product_list = Product.objects.all()[:20]
25         return render(request, 'products/list.html', {'product_list': product_list, 'form': form})
26 # Create your views here.
27
```

DJANGO 9

Modificar tanto urls de products como de proyecto:

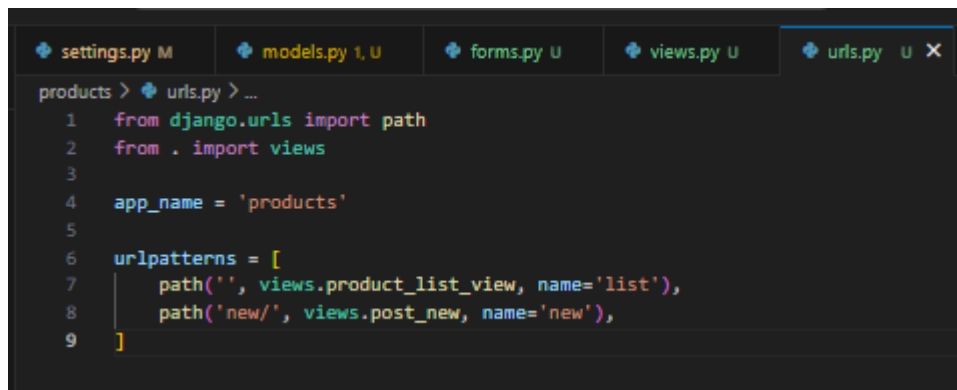

```
products > urls.py > ...
1  from django.urls import path
2  from . import views
3
4  app_name = 'products'
5
6  urlpatterns = [
7      path('', views.product_list_view, name='list'),
8      path('new/', views.post_new, name='new'),
9  ]
```

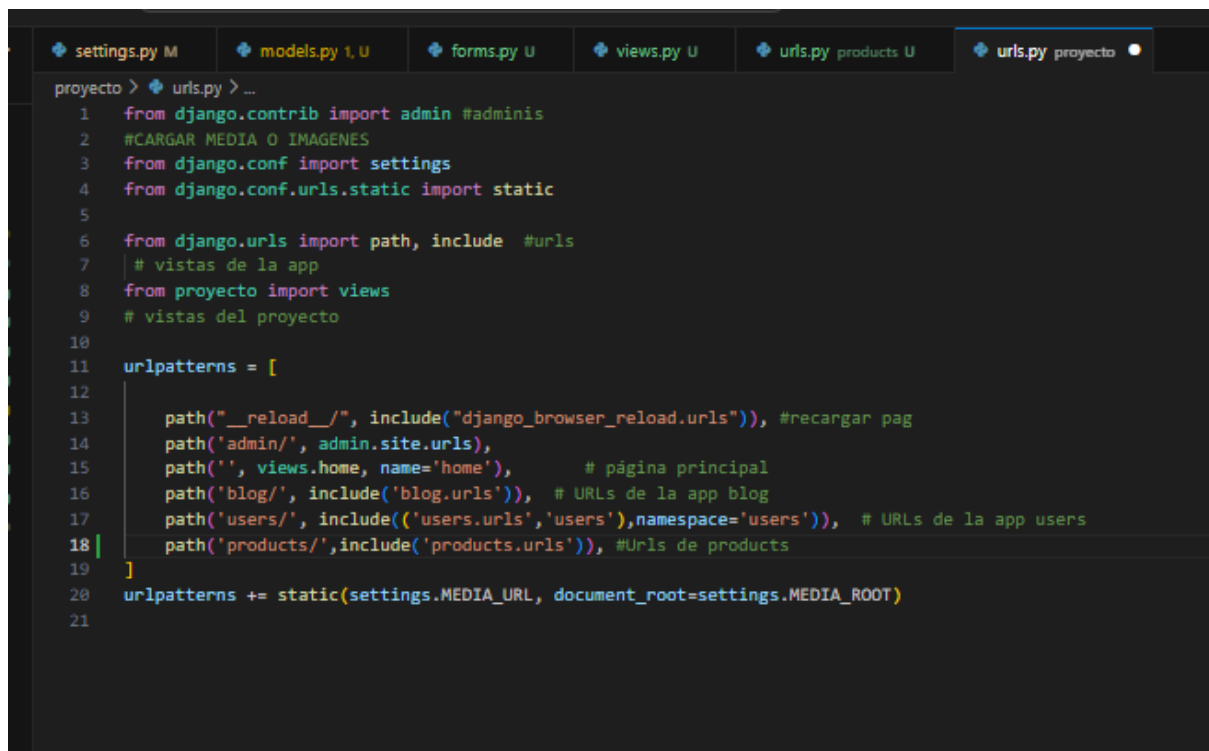

```
proyecto > urls.py > ...
1  from django.contrib import admin #adminis
2  #CARGAR MEDIA O IMAGENES
3  from django.conf import settings
4  from django.conf.urls.static import static
5
6  from django.urls import path, include #urls
7  # vistas de la app
8  from proyecto import views
9  # vistas del proyecto
10
11  urlpatterns = [
12
13      path("__reload__/", include("django_browser_reload.urls")), #recargar pag
14      path('admin/', admin.site.urls),
15      path('', views.home, name='home'), # página principal
16      path('blog/', include('blog.urls')), # URLs de la app blog
17      path('users/', include(('users.urls','users'),namespace='users')), # URLs de la app users
18      path('products/',include('products.urls')), #Urls de products
19  ]
20  urlpatterns += static(settings.MEDIA_URL, document_root=settings.MEDIA_ROOT)
21
```

Crear el html de products q en este caso es lista de productos:

DJANGO 9

```
models.py 1, U  forms.py U  views.py U  urls.py products U  urls.py proyecto M  list.html U X
products > templates > list.html
1  <!DOCTYPE html>
2  {% extends "base.html" %} {% block content %}
3
4  <h1 class="text-5xl font-bold text-center mb-4">Productos</h1>
5
6  <div class="product-list">
7      {% for product in product_list %}
8          <div>
9              <h2>{{ product.name }} - {{ product.category }}</h2>
10             <p>{{ product.description }}</p>
11             <p>Precio: ${{ product.price }}</p>
12             <p>Publicado por: {{ product.user.username }}</p>
13         </div>
14         {% empty %}
15             <p>No hay productos aún.</p>
16         {% endfor %}
17     </div>
18
19     <h2>Agregar nuevo producto</h2>
20     <form
21         action="{% url 'products:new' %}"
22         method="post"
23         enctype="multipart/form-data"
24     >
25         {% csrf_token %} {{ form }}
26         <button type="submit">Publicar producto</button>
27     </form>
28
29     {% endblock %}
30
```