


البوابة التعليمية الإلكترونية لجامعة ا


The default username and password for MyS are


Select one:


- a. There is no need for a username and pa
- b. user: mysql and password is mysql
- oc. user: mysql and password is empty
- od. user: root and password: root
- e. user: root and password is empty


Clear my choice

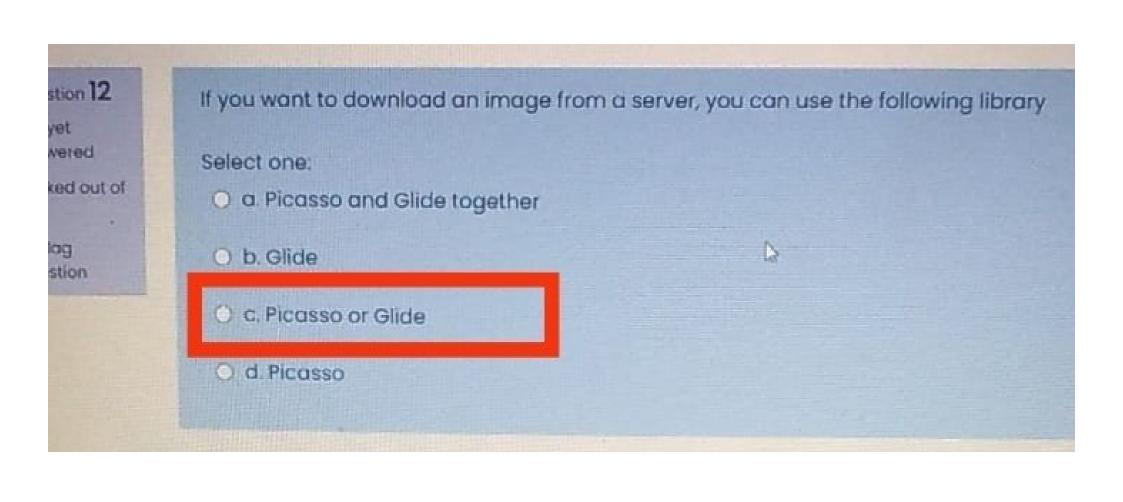


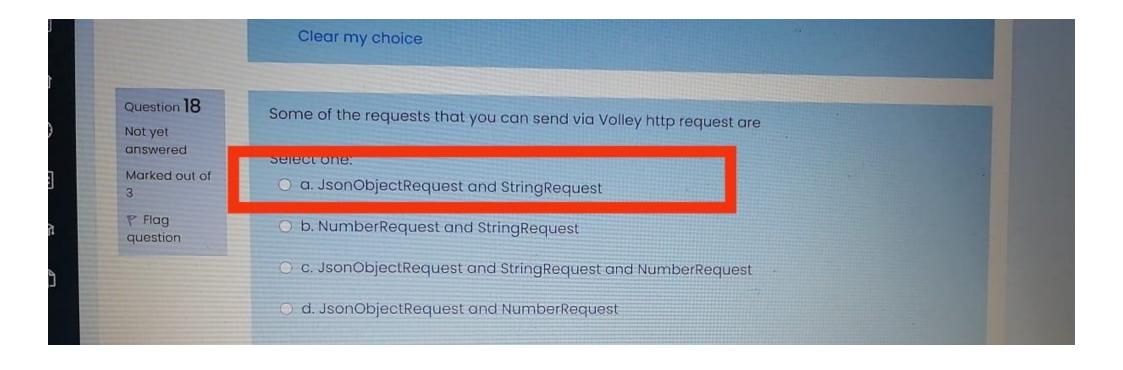

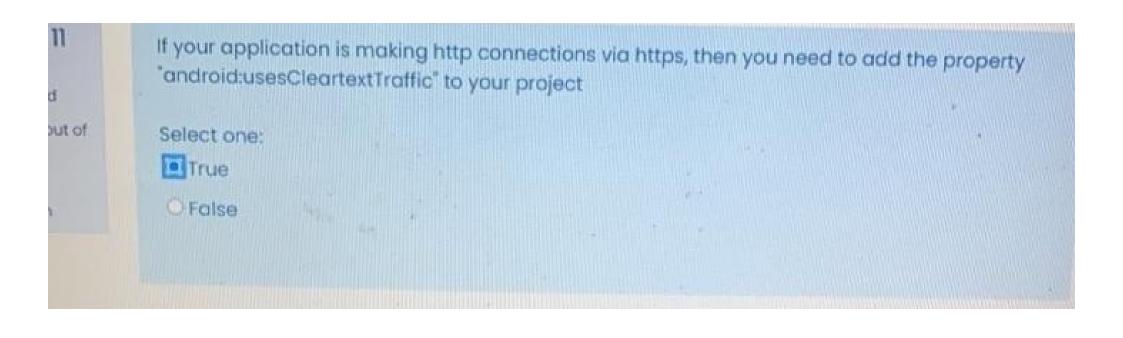

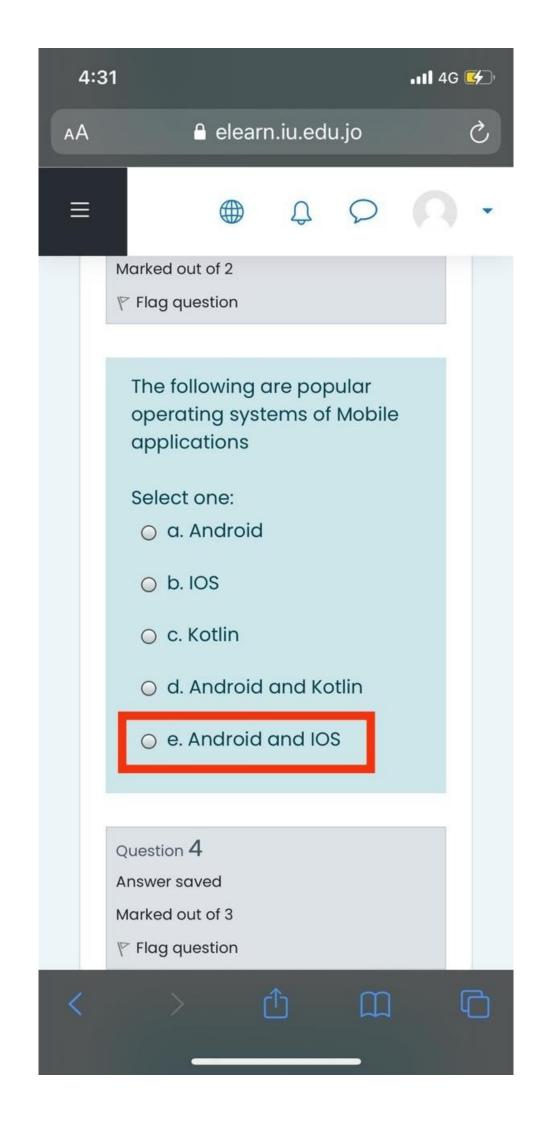

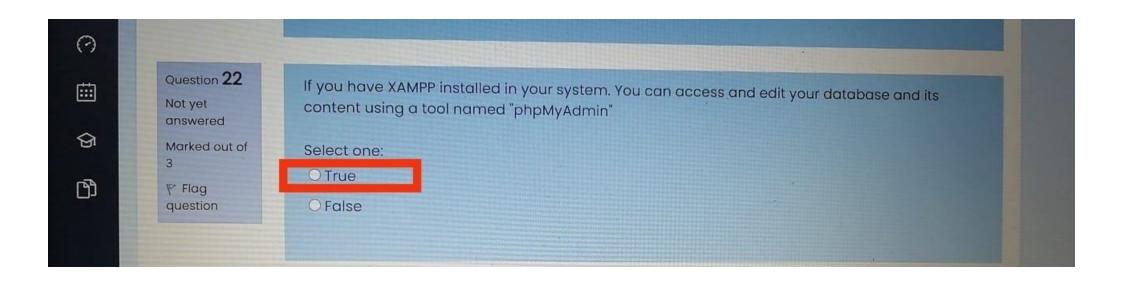

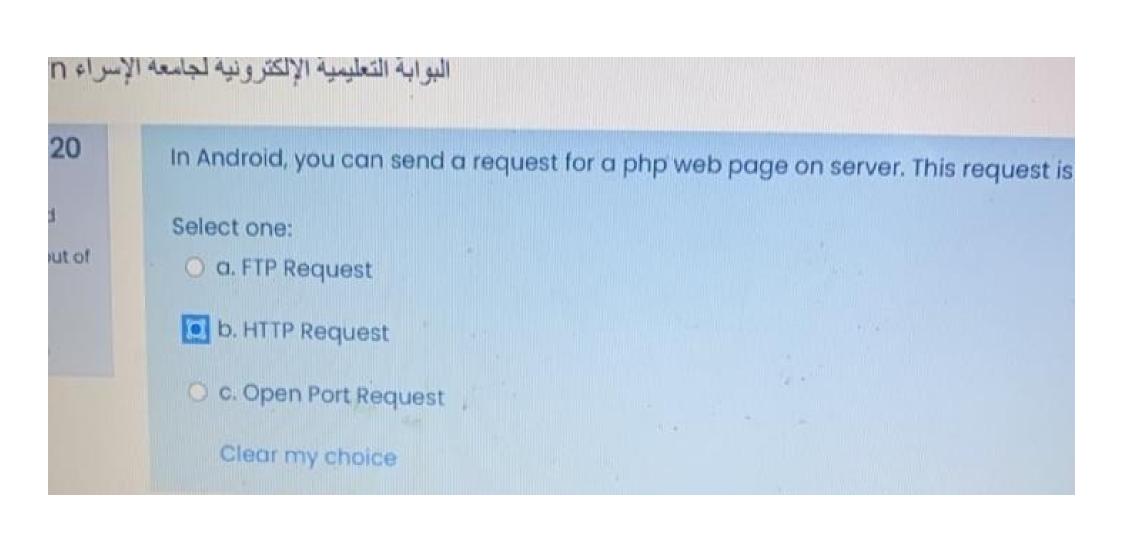


البوابة التعليمية الإلكترونيه لجامعه ا


Data exchanged between client and server can be formatted as

Select one:


- o. XML
- b. XML or JSON
- O C. JSON
- Od. None of the above


Clear my choice

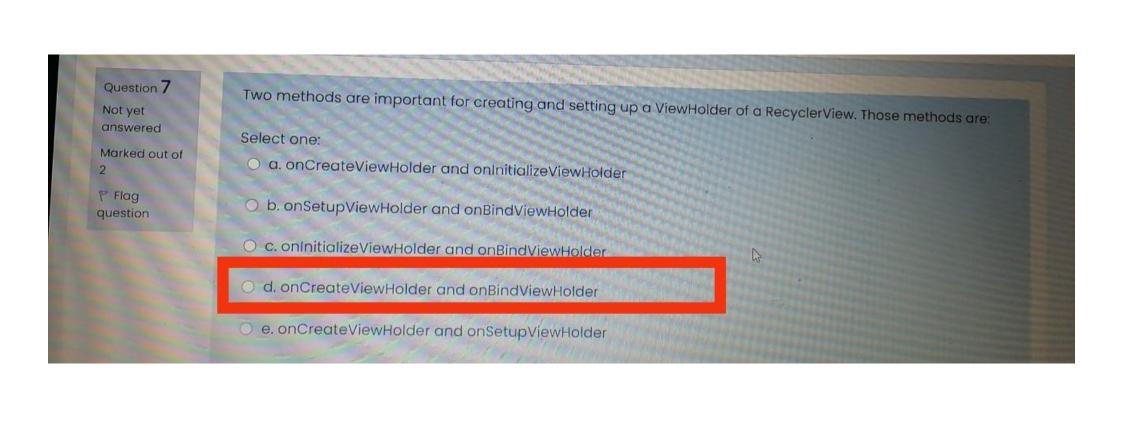


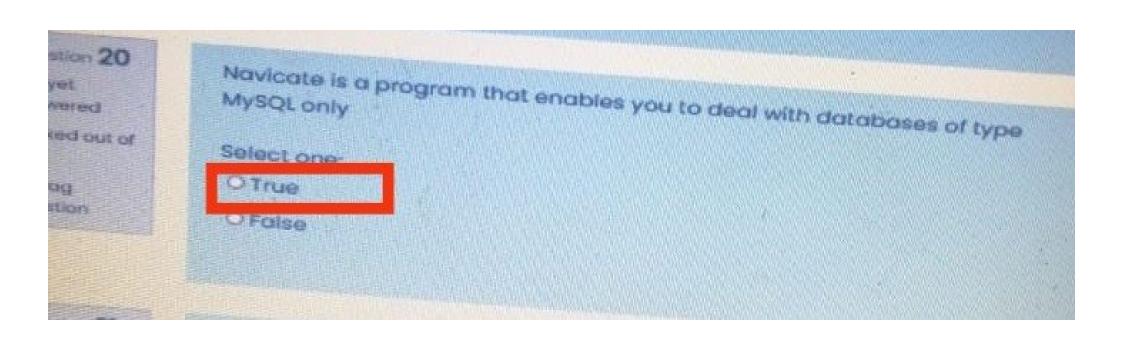


19 Suppose you have XAMPP installed in your system. Also, suppose you have a project that deals with a remote MySQL database. For your project to work, the services that should be running are: out of Select one: a. UDP Server and MySQL 6 b. Apache C. MySQL d. Apache and UDP Server e. MySQL and Apache Clear my choice

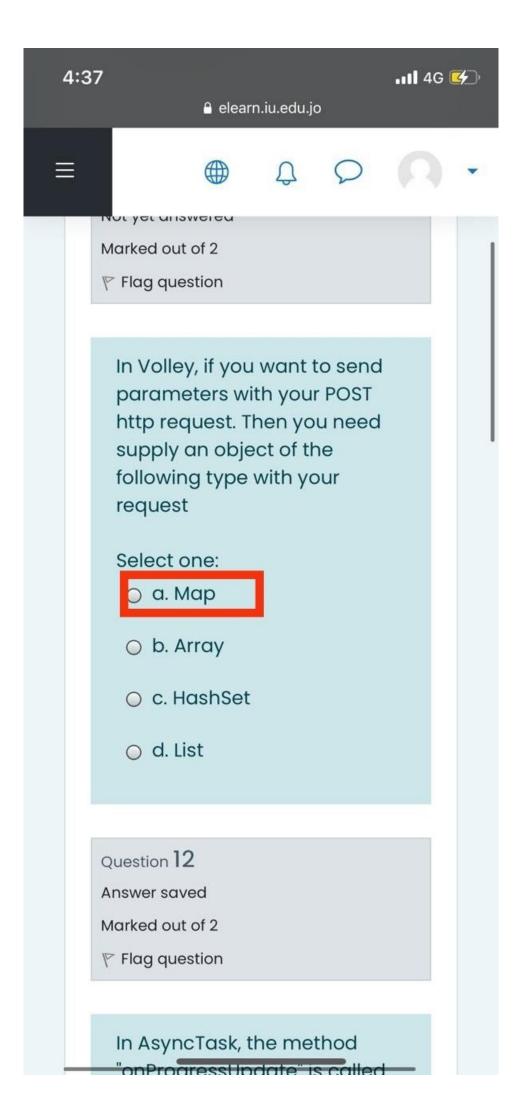


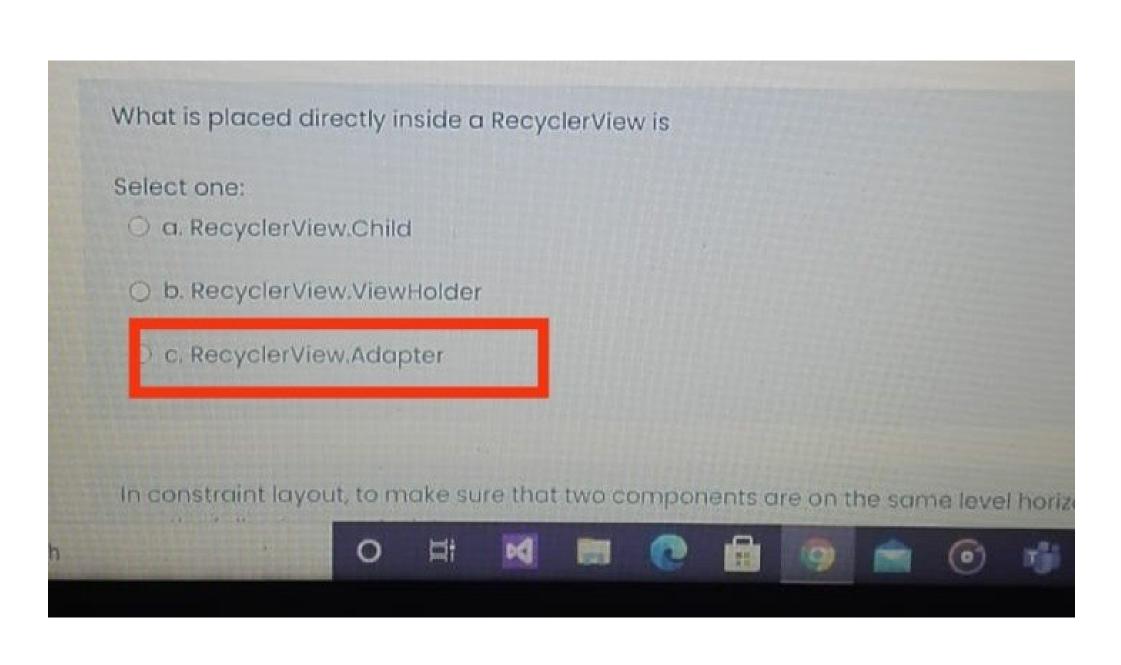

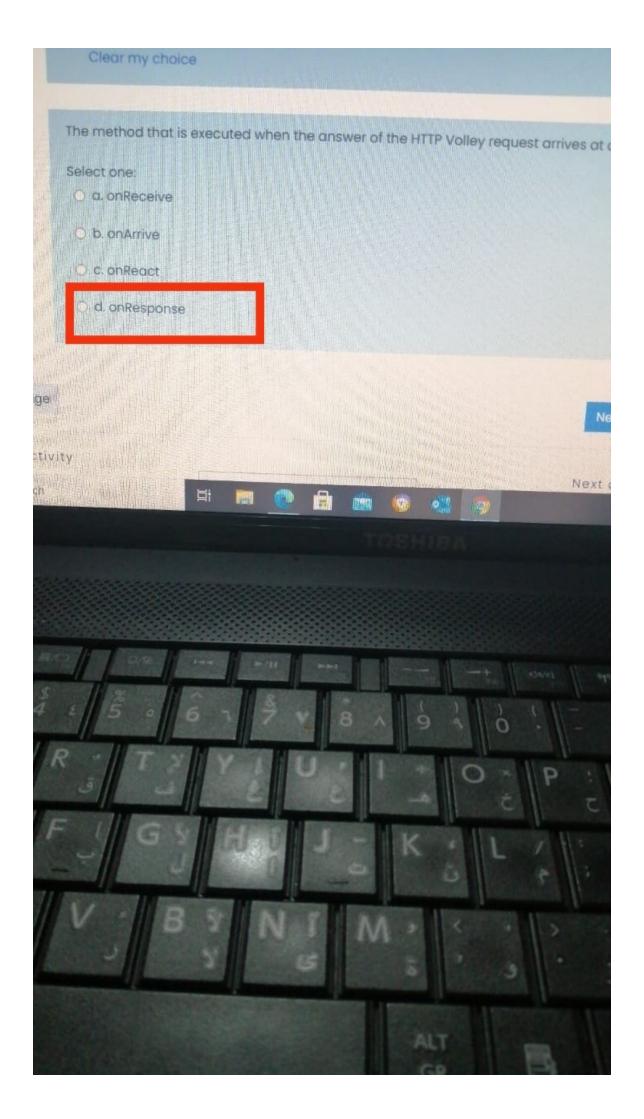

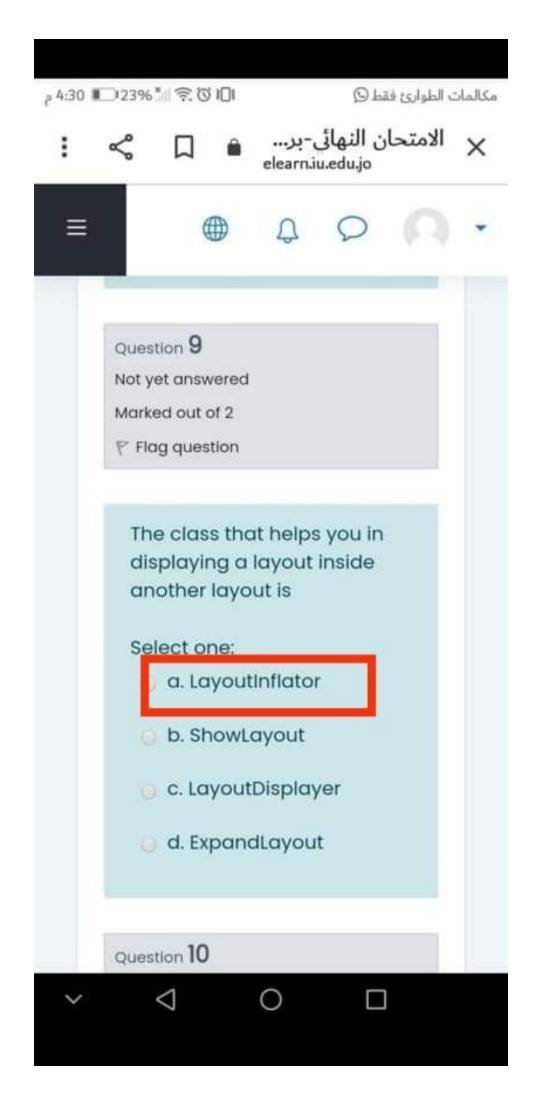

البوابة التعليمية الإلكترونية لجامعة الإسراء ISRA iLearn

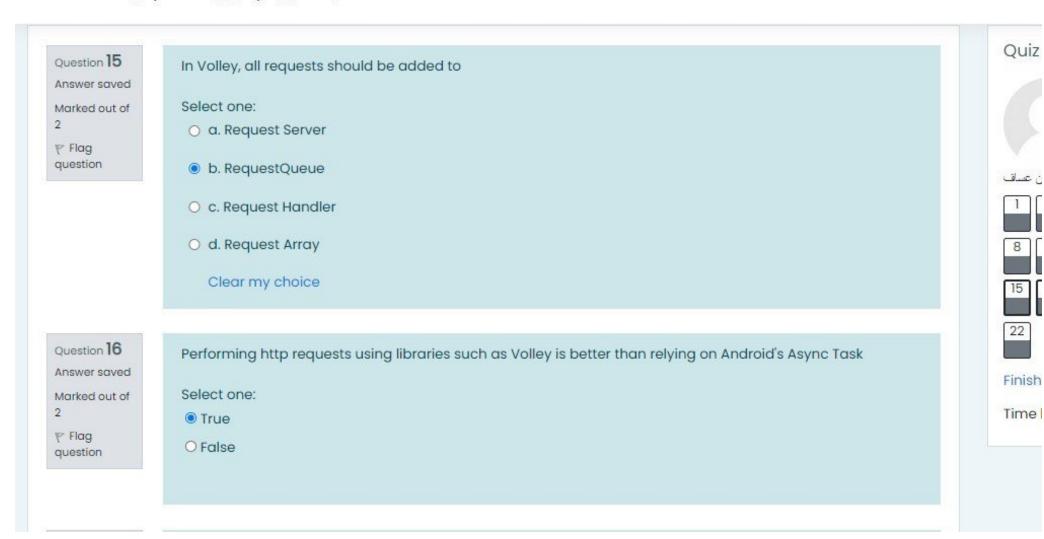

on 8 t ered d out of

g

Think of the following scenario. You have a Vertical Linear Layout which contains several 3 linear layouts. For some reason, only the component that exist in the first inner linear layout appear on the activity. How can you fix that?

Select one:

- a. By setting the height of the 3 inner linear layouts to match constraint
- O b. By setting the width of the 3 inner linear layouts to wrap content
- O c. By setting the height of the 3 inner linear layouts to wrap content
- d. By setting the width of the 3 inner linear layouts to match parent
- o e. By setting the height of the 3 inner linear layouts to match parent