

## Chapter 2: Intro to Relational Model

Database System Concepts, 7<sup>th</sup> Ed.  
©Silberschatz, Korth and Sudarshan  
See [www.db-book.com](http://www.db-book.com) for conditions on re-use

## Relation Schema and Instance

- $A_1, A_2, \dots, A_n$  are *attributes*
- $R = (A_1, A_2, \dots, A_n)$  is a *relation schema*

Example:

$instructor = (ID, name, dept\_name, salary)$

- A relation instance  $r$  defined over schema  $R$  is denoted by  $r(R)$ .
- The current values a relation are specified by a table
- An element  $t$  of relation  $r$  is called a *tuple* and is represented by a row in a table

ID	name	dept_name	salary
10101	Srinivasan	Comp. Sci.	65000
12121	Wu	Finance	90000
15151	Mozart	Music	40000
22222	Einstein	Physics	95000
32343	El Said	History	60000
33456	Gold	Physics	87000
45565	Katz	Comp. Sci.	75000
58583	Califleri	History	62000
76766	Crick	Biology	72000
83821	Brandt	Comp. Sci.	92000
98345	Kim	Elec. Eng.	80000

## Database Schema

- Database schema -- is the logical structure of the database.
- Database instance -- is a *snapshot* of the data in the database *at a given instant in time*.

Example:

- schema:  $instructor (ID, name, dept\_name, salary)$
- Instance:

ID	name	dept_name	salary
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califleri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000

## Outline

- Structure of Relational Databases
- Database Schema
- Keys
- Schema Diagrams
- Relational Query Languages
- The Relational Algebra

## Attributes

- The set of allowed values for each attribute is called the **domain** of the attribute
- Attribute values are (normally) required to be **atomic**; that is, indivisible
- The special value **null** is a member of every domain. Indicated that the value is "unknown"
- The null value causes complications in the definition of many operations

```
create table instructor (  
  ID          char(5),  
  name        varchar(20),  
  dept_name   varchar(20),  
  salary      numeric(8,2)  
);  
              |  
              domain
```

## Keys

- Let  $K \subseteq R$
- $K$  is a **superkey** of  $R$  if values for  $K$  are sufficient to identify a unique tuple of each possible relation  $r(R)$ 
  - Example:  $\{ID\}$  and  $\{ID, name\}$  are both superkeys of  $instructor$ .
- Superkey  $K$  is a **candidate key** if  $K$  is minimal  
Example:  $\{ID\}$  is a candidate key for  $instructor$
- One of the candidate keys is selected to be the **primary key**.
  - Which one?
- Foreign key constraint:** Value in one relation must appear in another
  - Referencing relation
  - Referenced relation
  - Example:  $dept\_name$  in  $instructor$  is a foreign key from  $instructor$  referencing  $department$

## Example of a *Instructor* Relation

ID	name	dept_name	salary
10101	Srinivasan	Comp. Sci.	65000
12121	Wu	Finance	90000
15151	Mozart	Music	40000
22222	Einstein	Physics	95000
32343	El Said	History	60000
33456	Gold	Physics	87000
45565	Katz	Comp. Sci.	75000
58583	Califleri	History	62000
76543	Singh	Finance	80000
76766	Crick	Biology	72000
83821	Brandt	Comp. Sci.	92000
98345	Kim	Elec. Eng.	80000

## Relations are Unordered

- Order of tuples is irrelevant (tuples may be stored in an arbitrary order)
- Example:  $instructor$  relation with unordered tuples

ID	name	dept_name	salary
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califleri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000

## Foreign key

- Foreign key:** Value in one relation is the key in another relation
  - Referencing relation
  - Referenced relation
  - Example:  $dept\_name$  in  $instructor$  is a foreign key from  $instructor$  referencing  $department$

ID	name	dept_name	salary
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califleri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000


(a) The  $instructor$  table

dept_name	building	budget
Comp. Sci.	Taylor	100000
Biology	Watson	90000
Elec. Eng.	Taylor	85000
Music	Packard	80000
Finance	Painter	120000
History	Painter	50000
Physics	Watson	70000

(b) The  $department$  table

Referencing

Referenced

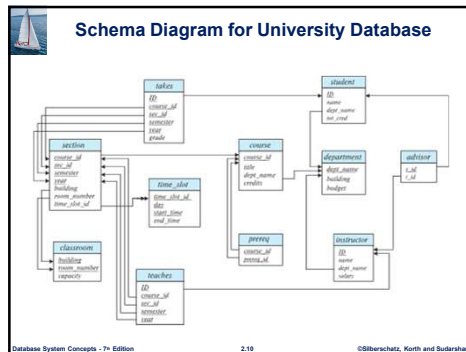

### Select Operation

- The **select** operation selects tuples that satisfy a given predicate.
- Notation:  $\sigma_p(r)$
- $p$  is called the **selection predicate**
- Example: select those tuples of the *instructor* relation where the instructor is in the "Physics" department.
  - Query

$$\sigma_{dept\_name=Physics}(instructor)$$

- **Result**

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
22222	Einstein	Physics	95000
33456	Gold	Physics	87000

### Project Operation Example

- Example: eliminate the *dept\_name* attribute of *instructor*
- Query:

 $\Pi_{ID, name, salary}(instructor)$ 

<i>id</i>	<i>name</i>	<i>salary</i>
10101	Srinivasan	65000
12121	Wu	90000
15151	Mozart	40000
22222	Einstein	95000
32343	El Said	60000
33456	Gold	87000
45565	Katz	75000
58583	Califleri	62000
76543	Singh	80000
76766	Crick	72000
83821	Brandt	92000
98345	Kim	80000

## Relational Query Languages

- Procedural versus non-procedural, or declarative
- "Pure" languages:
  - Relational algebra
  - Tuple relational calculus
  - Domain relational calculus
- The above 3 pure languages are equivalent in computing power
- We will concentrate in this chapter on relational algebra
  - Not Turing-machine equivalent
  - Consists of 6 basic operations

### Select Operation (Cont.)

- We allow comparisons using
  - $=, <, >, \geq, \leq$
 in the selection predicate.
- We can combine several predicates into a larger predicate by using the connectives:
  - $\wedge$  (and),  $\vee$  (or),  $\neg$  (not)
- Example: Find the instructors in Physics with a salary greater \$90,000, we write:
  - $\sigma_{dept\_name='Physics' \wedge salary > 90,000}(instructor)$
- The select predicate may include comparisons between two attributes.
  - Example, find all departments whose name is the same as their building name:
    - $\sigma_{dept\_name=building}(department)$

## Composition of Relational Operations

- The result of a relational-algebra operation is relation and therefore of relational-algebra operations can be composed together into a **relational-algebra expression**.
- Consider the query -- Find the names of all instructors in the Physics department.

$$\Pi_{name}(\sigma_{dept\_name = \text{"Physics"} - (instructor)})$$

- Instead of giving the name of a relation as the argument of the projection operation, we give an expression that evaluates to a relation.

## Relational Algebra

- A procedural language consisting of a set of operations that take one or two relations as input and produce a new relation as their result.
- Six basic operators
  - select:  $\sigma$
  - project:  $\Pi$
  - union:  $\cup$
  - set difference:  $-$
  - Cartesian product:  $\times$
  - rename:  $\rho$

## Project Operation

- A unary operation that returns its argument relation, with certain attributes left out.
- Notation:
 
$$\Pi_{A_1, A_2, A_3, \dots, A_k}(r)$$
 where  $A_1, A_2, \dots, A_k$  are attribute names and  $r$  is a relation name.
- The result is defined as the relation of  $k$  columns obtained by erasing the columns that are not listed
- Duplicate rows removed from result, since relations are sets

### Cartesian-Product Operation

- The Cartesian-product operation (denoted by  $\times$ ) allows us to combine information from any two relations.
- Example: the Cartesian product of the relations *instructor* and *teaches* is written as:
  - instructor*  $\times$  *teaches*
- We construct a tuple of the result out of each possible pair of tuples: one from the *instructor* relation and one from the *teaches* relation (see next slide).
- Since the *instructor ID* appears in both relations we distinguish between these attribute by attaching to the attribute the name of the relation from which the attribute originally came.
  - *instructor.ID*
  - *teaches.ID*

### The instructor X teaches table

instructor ID	name	dept name	salary	teacher ID	course ID	sec ID	semester	year
10101	Srinivasan	Comp. Sci.	65000	10101	CS-101	1	Fall	2017
10101	Srinivasan	Comp. Sci.	65000	10101	CS-315	1	Spring	2018
10101	Srinivasan	Comp. Sci.	65000	10101	CS-347	1	Fall	2017
10101	Srinivasan	Comp. Sci.	65000	12121	FIN-201	1	Spring	2018
10101	Srinivasan	Comp. Sci.	65000	15151	MU-199	1	Spring	2018
10101	Srinivasan	Comp. Sci.	65000	22222	PHY-101	1	Fall	2017
12121	Wu	Finance	90000	10101	CS-101	1	Fall	2017
12121	Wu	Finance	90000	10101	CS-315	1	Spring	2018
12121	Wu	Finance	90000	10101	CS-347	1	Fall	2017
12121	Wu	Finance	90000	12121	FIN-201	1	Spring	2018
12121	Wu	Finance	90000	15151	MU-199	1	Spring	2018
12121	Wu	Finance	90000	22222	PHY-101	1	Fall	2017
15151	Mozart	Music	40000	10101	CS-101	1	Fall	2017
15151	Mozart	Music	40000	10101	CS-315	1	Spring	2018
15151	Mozart	Music	40000	10101	CS-347	1	Fall	2017
15151	Mozart	Music	40000	12121	FIN-201	1	Spring	2018
15151	Mozart	Music	40000	15151	MU-199	1	Spring	2018
15151	Mozart	Music	40000	22222	PHY-101	1	Fall	2017
22222	Einstein	Physics	95000	10101	CS-101	1	Fall	2017
22222	Einstein	Physics	95000	10101	CS-315	1	Spring	2018
22222	Einstein	Physics	95000	10101	CS-347	1	Fall	2017
22222	Einstein	Physics	95000	12121	FIN-201	1	Spring	2018
22222	Einstein	Physics	95000	15151	MU-199	1	Spring	2018
22222	Einstein	Physics	95000	22222	PHY-101	1	Fall	2017

### Join Operation (Cont.)

- The **Join** operation allows us to combine a select operation and a Cartesian-Product operation into a single operation.
- Consider relations  $r(R)$  and  $s(S)$
- Let "theta" be a predicate on attributes in the schema  $R \cup \text{union } S$ . The join operation  $r \bowtie_{\theta} s$  is defined as follows:  

$$r \bowtie_{\theta} s = \sigma_{\theta}(r \times s)$$
- Thus  

$$\sigma_{\text{instructor.id} = \text{teaches.id}}(\text{instructor} \times \text{teaches})$$
- Can equivalently be written as  

$$\text{instructor} \bowtie_{\text{instructor.id} = \text{teaches.id}} \text{teaches.}$$

### Set-Intersection Operation

- The set-intersection operation allows us to find tuples that are in both the input relations.
- Notation:  $r \cap s$
- Assume:
  - $r, s$  have the same arity
  - attributes of  $r$  and  $s$  are compatible
- Example: Find the set of all courses taught in both the Fall 2017 and the Spring 2018 semesters.  

$$\Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Fall"} \wedge \text{year} = 2017}(\text{section})) \cap \Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Spring"} \wedge \text{year} = 2018}(\text{section}))$$
- Result

course ID
CS-101

### Join Operation

- The Cartesian-Product  $\text{instructor} \times \text{teaches}$  associates every tuple of instructor with every tuple of teaches.
  - Most of the resulting rows have information about instructors who did NOT teach a particular course.
- To get only those tuples of "instructor X teaches" that pertain to instructors and the courses that they taught, we write:  

$$\sigma_{\text{instructor.id} = \text{teaches.id}}(\text{instructor} \times \text{teaches})$$
- We get only those tuples of "instructor X teaches" that pertain to instructors and the courses that they taught.
- The result of this expression, shown in the next slide

### Union Operation

- The union operation allows us to combine two relations
- Notation:  $r \cup s$
- For  $r \cup s$  to be valid.
  - $r, s$  must have the same arity (same number of attributes)
  - The attribute domains must be compatible (example: 2nd column of  $r$  deals with the same type of values as does the 2nd column of  $s$ )
- Example: to find all courses taught in the Fall 2017 semester, or in the Spring 2018 semester, or in both  

$$\Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Fall"} \wedge \text{year} = 2017}(\text{section})) \cup \Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Spring"} \wedge \text{year} = 2018}(\text{section}))$$

### Set Difference Operation

- The set-difference operation allows us to find tuples that are in one relation but are not in another.
- Notation  $r - s$
- Set differences must be taken between compatible relations.
  - $r$  and  $s$  must have the same arity
  - attribute domains of  $r$  and  $s$  must be compatible
- Example: to find all courses taught in the Fall 2017 semester, but not in the Spring 2018 semester  

$$\Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Fall"} \wedge \text{year} = 2017}(\text{section})) - \Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Spring"} \wedge \text{year} = 2018}(\text{section}))$$

course ID
CS-347
PHY-101

### Join Operation (Cont.)

The table corresponding to:  

$$\sigma_{\text{instructor.id} = \text{teaches.id}}(\text{instructor} \times \text{teaches})$$

instructor ID	name	dept name	salary	teacher ID	course ID	sec ID	semester	year
10101	Srinivasan	Comp. Sci.	65000	10101	CS-101	1	Fall	2017
10101	Srinivasan	Comp. Sci.	65000	10101	CS-315	1	Spring	2018
10101	Srinivasan	Comp. Sci.	65000	10101	CS-347	1	Fall	2017
12121	Wu	Finance	90000	12121	FIN-201	1	Spring	2018
15151	Mozart	Music	40000	15151	MU-199	1	Spring	2018
22222	Einstein	Physics	95000	22222	PHY-101	1	Fall	2017
32343	El Said	History	60000	32343	HIS-351	1	Spring	2018
45565	Katz	Comp. Sci.	75000	45565	CS-101	1	Spring	2018
45565	Katz	Comp. Sci.	75000	45565	CS-319	1	Spring	2018
76766	Crick	Biology	72000	76766	BIO-101	1	Summer	2017
76766	Crick	Biology	72000	76766	BIO-301	1	Summer	2018
83821	Brandt	Comp. Sci.	92000	83821	CS-190	1	Spring	2017
83821	Brandt	Comp. Sci.	92000	83821	CS-190	2	Spring	2017
83821	Brandt	Comp. Sci.	92000	83821	CS-319	2	Spring	2018
98345	Kim	Elec. Eng.	80000	98345	EE-181	1	Spring	2017

### Union Operation (Cont.)

Result of:  

$$\Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Fall"} \wedge \text{year} = 2017}(\text{section})) \cup \Pi_{\text{course.id}}(\sigma_{\text{semester} = \text{"Spring"} \wedge \text{year} = 2018}(\text{section}))$$

course ID
CS-101
CS-315
CS-319
CS-347
FIN-201
HIS-351
MU-199
PHY-101

### The Assignment Operation

- It is convenient at times to write a relational-algebra expression by assigning parts of it to temporary relation variables.
- The assignment operation is denoted by  $\leftarrow$  and works like assignment in a programming language.
- Example: Find all instructor in the "Physics" and Music department.  

$$\text{Physics} \leftarrow \sigma_{\text{dept\_name} = \text{"Physics"}}(\text{instructor})$$

$$\text{Music} \leftarrow \sigma_{\text{dept\_name} = \text{"Music"}}(\text{instructor})$$

$$\text{Physics} \cup \text{Music}$$
- With the assignment operation, a query can be written as a sequential program consisting of a series of assignments followed by an expression whose value is displayed as the result of the query.



## The Rename Operation

- The results of relational-algebra expressions do not have a name that we can use to refer to them. The rename operator,  $\rho$ , is provided for that purpose
- The expression:
 
$$\rho_x(E)$$
 returns the result of expression  $E$  under the name  $x$
- Another form of the rename operation:
 
$$\rho_{X(A1, A2, \dots, A_n)}(E)$$



## End of Chapter 2



## Equivalent Queries

- There is more than one way to write a query in relational algebra.
- Example: Find information about courses taught by instructors in the Physics department with salary greater than 90,000
- Query 1
 
$$\sigma_{dept\_name='Physics' \wedge salary > 90,000}(instructor)$$
- Query 2
 
$$\sigma_{dept\_name='Physics'}(\sigma_{salary > 90,000}(instructor))$$
- The two queries are not identical; they are, however, equivalent -- they give the same result on any database.



## Equivalent Queries

- There is more than one way to write a query in relational algebra.
- Example: Find information about courses taught by instructors in the Physics department
- Query 1
 
$$\sigma_{dept\_name='Physics'}(instructor \bowtie instructor.ID = teaches.ID \wedge teaches)$$
- Query 2
 
$$(\sigma_{dept\_name='Physics'}(instructor)) \bowtie instructor.ID = teaches.ID \wedge teaches$$
- The two queries are not identical; they are, however, equivalent -- they give the same result on any database.