Tugas React JS Lanjutan #3 – Fitur Registrasi Pengguna

Nama: Fernando Adidya Marulitua Bong
Kampus: Universitas Bhayangkara Jakarta Raya

GitHub Repository:

Hasil tampilan Registrasi Form:

Tampilan Jika mendaftar dalam keadaan form kosong:

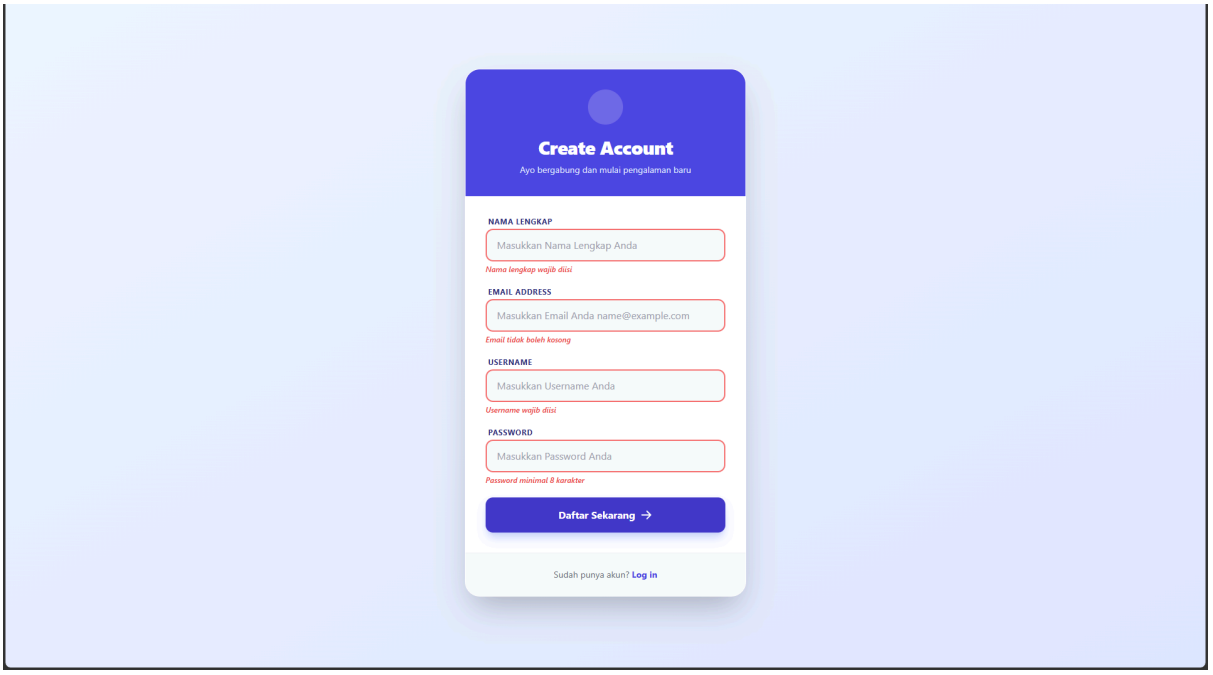

Tampilan riwayat yang muncul (bekas pendaftaran sebelumnya:

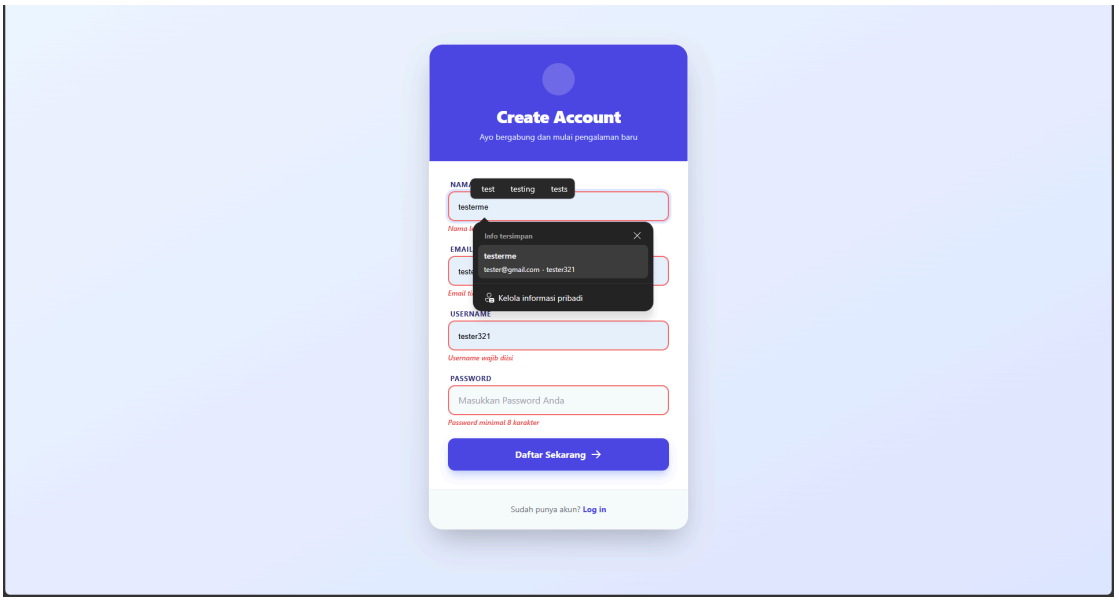

Tampilan setelah form di isi (siap klik tombol daftar sekarang)
dan fitur show/hide password berfungsi:

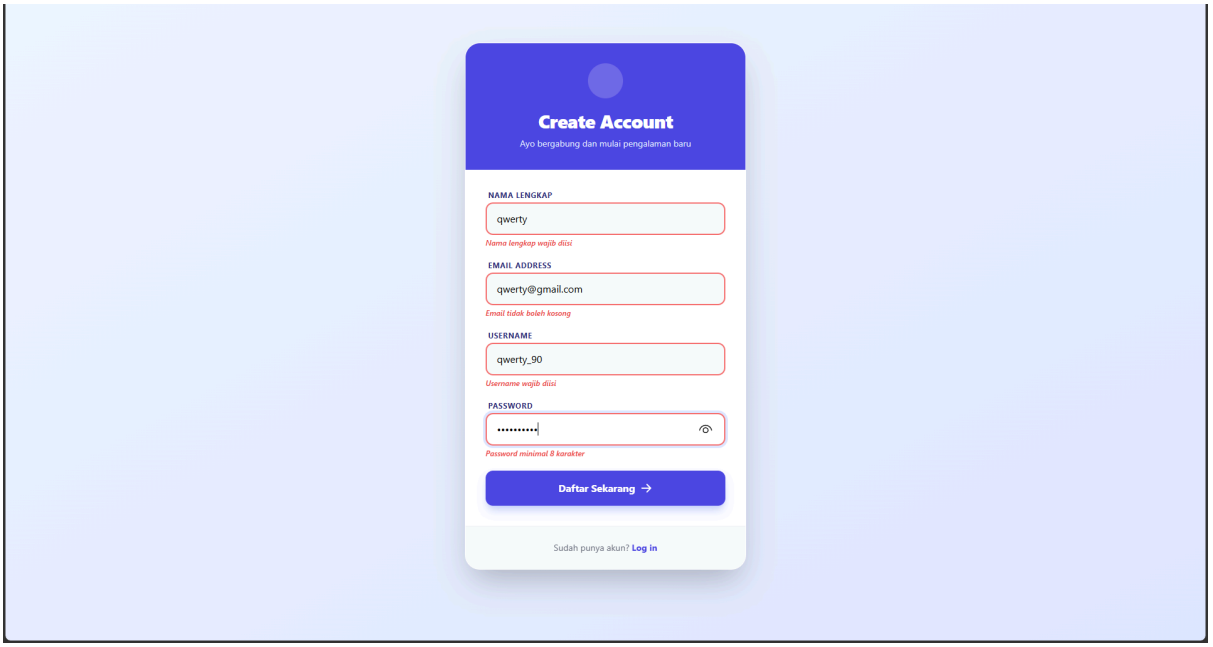

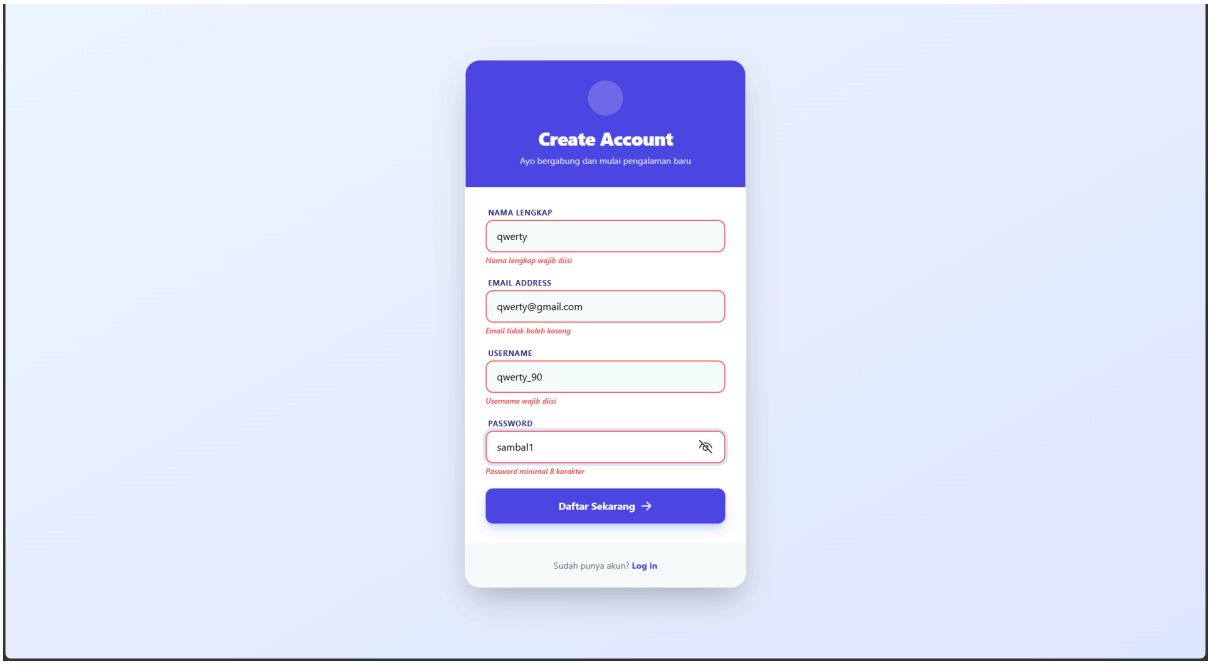

tampilan setelah klik tombol Daftar Sekarang (berupa notifikasi pop up):

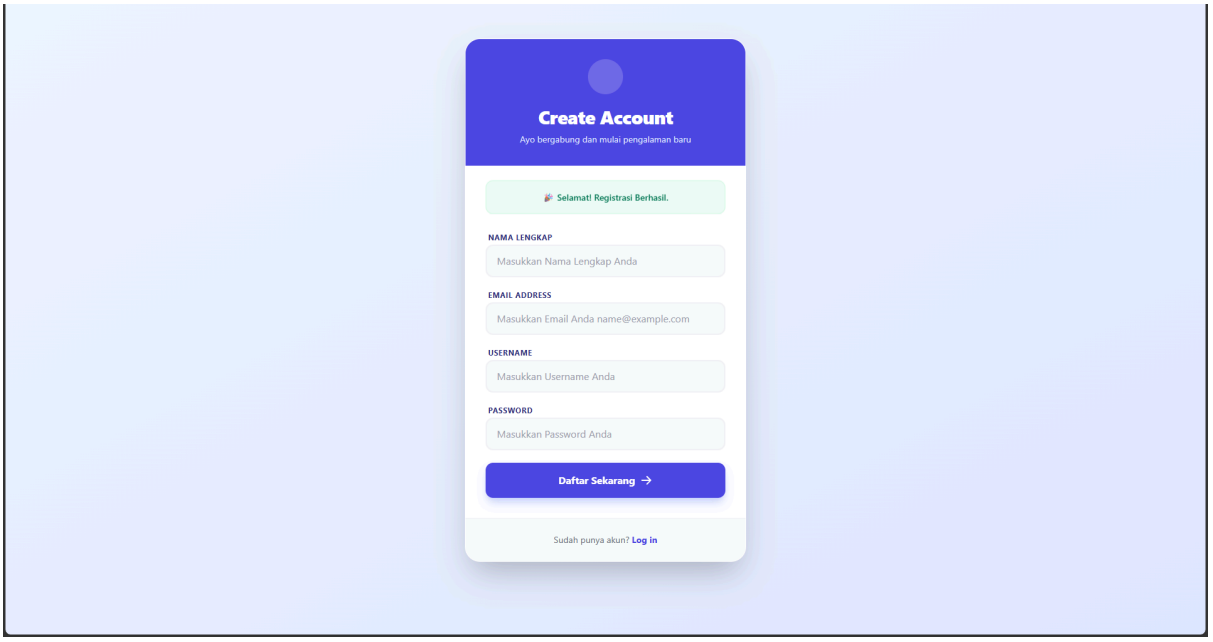

Source Code yang digunakan:

1. src/App.js

```
import React, { useState } from 'react';

const App = () => {
  const [formData, setFormData] = useState({
    fullName: '',
    email: '',
    username: '',
    password: ''
  });
  const [errors, setErrors] = useState({});
  const [isSuccess, setIsSuccess] = useState(false);

  const validate = () => {
    let newErrors = {};
    if (!formData.fullName.trim()) newErrors.fullName = "Nama lengkap
wajib diisi";
    if (!formData.username.trim()) newErrors.username = "Username wajib
diisi";
    if (formData.password.length < 8) newErrors.password = "Password
minimal 8 karakter";

    const emailRegex = /^[^\s@]+@[^\s@]+\.[^\s@]+$/;
    if (!formData.email) {
      newErrors.email = "Email tidak boleh kosong";
    } else if (!emailRegex.test(formData.email)) {
      newErrors.email = "Format email tidak valid";
    }

    setErrors(newErrors);
    return Object.keys(newErrors).length === 0;
  };

  const handleSubmit = (e) => {
    e.preventDefault();
    if (validate()) {
      setIsSuccess(true);
      console.log("Data Terkirim:", formData);
```

```
      setFormData({ fullName: '', email: '', username: '', password: ''
});
      setTimeout(() => setIsSuccess(false), 5000);
    }
  };

  return (
    <div className="min-h-screen flex items-center justify-center
bg-gradient-to-br from-blue-50 to-indigo-100 p-4">
      <div className="w-full max-w-md bg-white rounded-3xl shadow-2xl
overflow-hidden border border-white/20">

        {/* Header Section */}
        <div className="bg-indigo-600 p-8 text-center">
          <div className="inline-block p-3 bg-white/20 rounded-full
mb-3">
            <svg xmlns="http://www.w3.org/2000/svg" className="h-8 w-8
text-white" fill="none" viewBox="0 0 24 24" stroke="currentColor">
              <path strokeLinecap="round" strokeLinejoin="round"
strokeWidth={2} d="Style18 9v3m0 0v3m0-3h3m-3 0H9m12 0a9 9 0 11-18 0 9
9 0 0118 0z" />
            </svg>
          </div>
          <h2 className="text-white text-3xl font-extrabold
tracking-tight">Create Account</h2>
          <p className="text-indigo-100 mt-2 text-sm">Ayo bergabung dan
mulai pengalaman baru</p>
        </div>

        {/* Form Section */}
        <form onSubmit={handleSubmit} className="p-8 space-y-5">
          {isSuccess && (
            <div className="p-4 bg-emerald-50 text-emerald-700
rounded-xl text-sm font-semibold text-center border border-emerald-100
animate-bounce">
              🎉 Selamat! Registrasi Berhasil.
            </div>
          )}

          {/* Input Nama */}
          <div className="group">
            <label className="block text-xs font-bold text-indigo-900
uppercase tracking-wider mb-1 ml-1">Nama Lengkap</label>
```

```
            <input
              type="text"
              className={`w-full px-4 py-3 rounded-xl border-2
bg-gray-50 transition-all duration-300 focus:bg-white focus:ring-4
focus:ring-indigo-100 outline-none ${errors.fullName ? 'border-red-400'
: 'border-gray-100 focus:border-indigo-500'}`}
              value={formData.fullName}
              onChange={(e) => setFormData({...formData, fullName:
e.target.value})}
              placeholder="Masukkan Nama Lengkap Anda"
            />
            {errors.fullName && <p className="text-red-500 text-xs mt-1
font-medium italic">{errors.fullName}</p>}
          </div>

          {/* Input Email */}
          <div className="group">
            <label className="block text-xs font-bold text-indigo-900
uppercase tracking-wider mb-1 ml-1">Email Address</label>
            <input
              type="email"
              className={`w-full px-4 py-3 rounded-xl border-2
bg-gray-50 transition-all duration-300 focus:bg-white focus:ring-4
focus:ring-indigo-100 outline-none ${errors.email ? 'border-red-400' :
'border-gray-100 focus:border-indigo-500'}`}
              value={formData.email}
              onChange={(e) => setFormData({...formData, email:
e.target.value})}
              placeholder="Masukkan Email Anda name@example.com"
            />
            {errors.email && <p className="text-red-500 text-xs mt-1
font-medium italic">{errors.email}</p>}
          </div>

          {/* Input Username */}
          <div className="group">
            <label className="block text-xs font-bold text-indigo-900
uppercase tracking-wider mb-1 ml-1">Username</label>
            <input
              type="text"
              className={`w-full px-4 py-3 rounded-xl border-2
bg-gray-50 transition-all duration-300 focus:bg-white focus:ring-4
```

```
focus:ring-indigo-100 outline-none ${errors.username ? 'border-red-400'
: 'border-gray-100 focus:border-indigo-500'}`}
              value={formData.username}
              onChange={(e) => setFormData({...formData, username:
e.target.value})}
              placeholder="Masukkan Username Anda"
            />
            {errors.username && <p className="text-red-500 text-xs mt-1
font-medium italic">{errors.username}</p>}
          </div>

          {/* Input Password */}
          <div className="group">
            <label className="block text-xs font-bold text-indigo-900
uppercase tracking-wider mb-1 ml-1">Password</label>
            <input
              type="password"
              className={`w-full px-4 py-3 rounded-xl border-2
bg-gray-50 transition-all duration-300 focus:bg-white focus:ring-4
focus:ring-indigo-100 outline-none ${errors.password ? 'border-red-400'
: 'border-gray-100 focus:border-indigo-500'}`}
              value={formData.password}
              onChange={(e) => setFormData({...formData, password:
e.target.value})}
              placeholder="Masukkan Password Anda"
            />
            {errors.password && <p className="text-red-500 text-xs mt-1
font-medium italic">{errors.password}</p>}
          </div>

          {/* Button Submit */}
          <button
            type="submit"
            className="w-full bg-indigo-600 hover:bg-indigo-700
text-white font-bold py-4 rounded-xl transition-all duration-300
shadow-lg shadow-indigo-200 active:scale-[0.98] transform flex
items-center justify-center space-x-2"
          >
            <span>Daftar Sekarang</span>
            <svg xmlns="http://www.w3.org/2000/svg" className="h-5 w-5"
viewBox="0 0 20 20" fill="currentColor">
```

```
              <path fillRule="evenodd" d="M10.293 3.293a1 1 0 011.414
0l6 6a1 1 0 010 1.414l-6 6a1 1 0 01-1.414-1.414L14.586 11H3a1 1 0
110-2h11.586l-4.293-4.293a1 1 0 010-1.414z" clipRule="evenodd" />
            </svg>
          </button>
        </form>

        <div className="p-6 bg-gray-50 border-t border-gray-100
text-center">
          <p className="text-sm text-gray-500">Sudah punya akun? <span
className="text-indigo-600 font-bold cursor-pointer
hover:underline">Log in</span></p>
        </div>
      </div>
    </div>
  );
};

export default App;
```

2. src/index.js

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import './index.css';
import App from './App';

const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

3. src/index.css

```
@tailwind base;
@tailwind components;
@tailwind utilities;
```

4. tailwind.config.js

```
/** @type {import('tailwindcss').Config} */
module.exports = {
  content: [
    "./src/**/*.{js,jsx,ts,tsx}",
    "./public/index.html",
  ],
  theme: {
    extend: {},
  },
  plugins: [],
}
```

5. public/index.html

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="utf-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1"
/>
    <title>Tugas Registrasi - Fernando</title>
  </head>
  <body>
    <div id="root"></div>
  </body>
</html>
```