


# PARCIAL 1

ANDREINA GOMEZ

Andreina Gómez

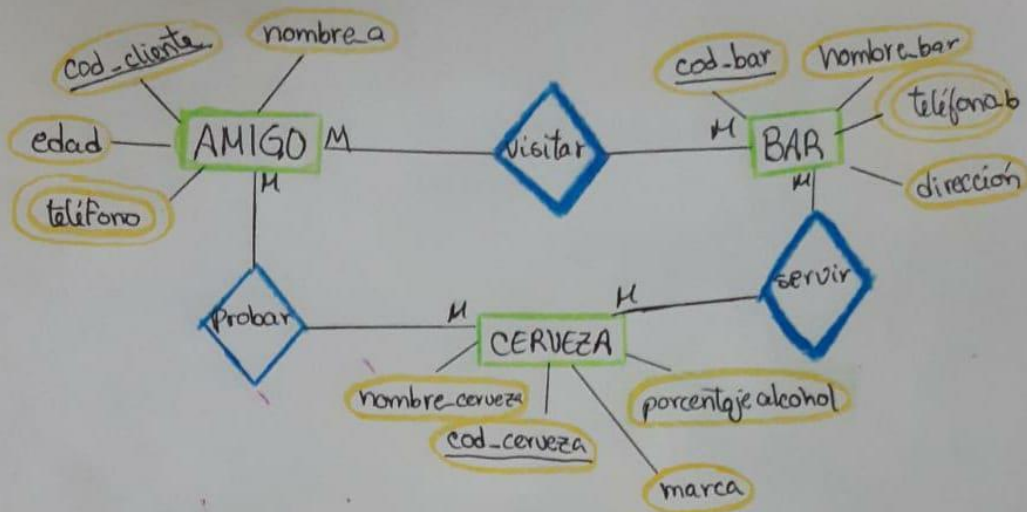

	AMIGO	
PK	cod_cliente	N
	nombre_a	N
	edad	N
	telefono	N

	Bar	
PK	cod_bar	N
	telefono_b	N
	nombre_bar	N
	direccion	N

	Cerveza	
PK	cod_cerveza	N
	nombre_cerveza	N
	marca	N
	porcentaje_alcohol	N

	AMIGO-BAR	
PK <sub>1</sub>	cod_cliente	N
PK <sub>2</sub>	cod_bar	N

	AMIGO-Cerveza	
PK <sub>1</sub>	cod_cliente	N
PK <sub>2</sub>	cod_cerveza	N

	Bar_cerveza	
PK <sub>1</sub>	cod_bar	N
PK <sub>2</sub>	cod_cerveza	N

```
C:\Users\Andreina Gomez>sqlplus sys as sysdba;

SQL*Plus: Release 11.2.0.2.0 Production on MiÚ Sep 16 12:38:34 2020

Copyright (c) 1982, 2014, Oracle. All rights reserved.

Enter password:

Connected to:
Oracle Database 11g Express Edition Release 11.2.0.2.0 - 64bit Production

SQL> create user parcial1 identified by parcial1;

User created.

SQL> Grant connect to parcial1;

Grant succeeded.

SQL> Grant resource to parcial1;

Grant succeeded.

SQL> disc;
Disconnected from Oracle Database 11g Express Edition Release 11.2.0.2.0 - 64bit Production
SQL> conn parcial1;
Enter password:
Connected.
```

## CREACIÓN DE TABLAS

```
SQL> create table AMIGO(
  2  cod_amigo number primary key,
  3  nombre_a varchar2(25),
  4  edad number,
  5  telefono varchar2(12));

Table created.

SQL> create table BAR(
  2  cod_bar varchar2(6) primary key,
  3  nombre_bar varchar2(25),
  4  telefono_b varchar2(12),
  5  direccion varchar2(100));

Table created.

SQL> create table CERVEZA(
  2  cod_cerveza varchar2(6) primary key,
  3  nombre_cerveza varchar2(25),
  4  marca varchar2(20),
  5  porcentajealcohol number);

Table created.
```

```
SQL> create table AMIGO_BAR(  
  2  cod_amigo number,  
  3  constraint c_amigo foreign key(cod_amigo) references AMIGO (cod_amigo),  
  4  cod_bar varchar2(6),  
  5  constraint c_bar foreign key(cod_bar) references BAR (cod_bar));
```

Table created.

```
SQL> create table AMIGO_CERVEZA(  
  2  cod_amigo number,  
  3  constraint c2_amigo foreign key(cod_amigo)references AMIGO(cod_amigo),  
  4  cod_cerveza varchar2(25),  
  5  constraint c_cerveza foreign key(cod_cerveza) references CERVEZA(cod_cerveza));
```

Table created.

```
SQL> create table BAR_CERVEZA(  
  2  cod_bar varchar2(6),  
  3  constraint c3_bar foreign key(cod_bar)references BAR(cod_bar),  
  4  cod_cerveza varchar2(25),  
  5  constraint c2_cerveza foreign key(cod_cerveza) references CERVEZA(cod_cerveza));
```

Table created.