



w2

p1

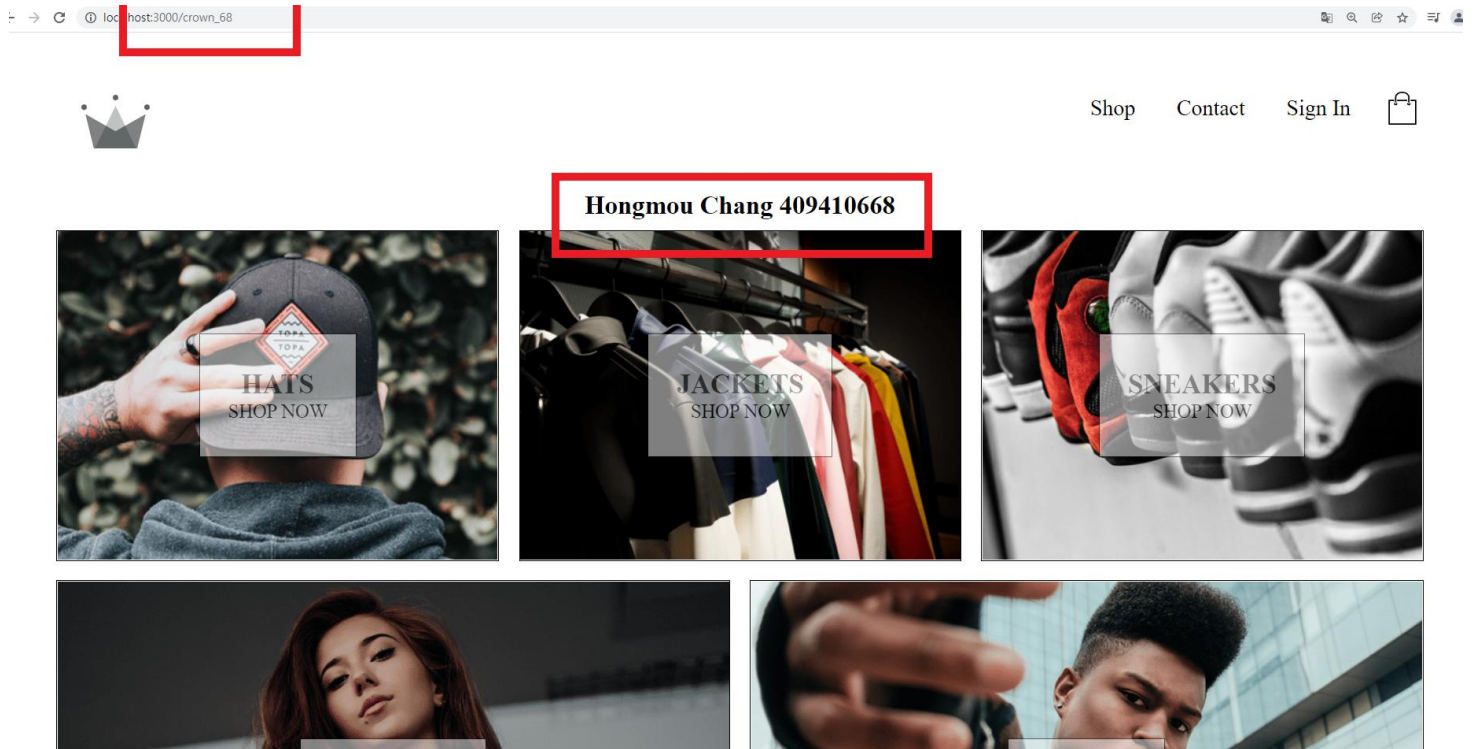

p2

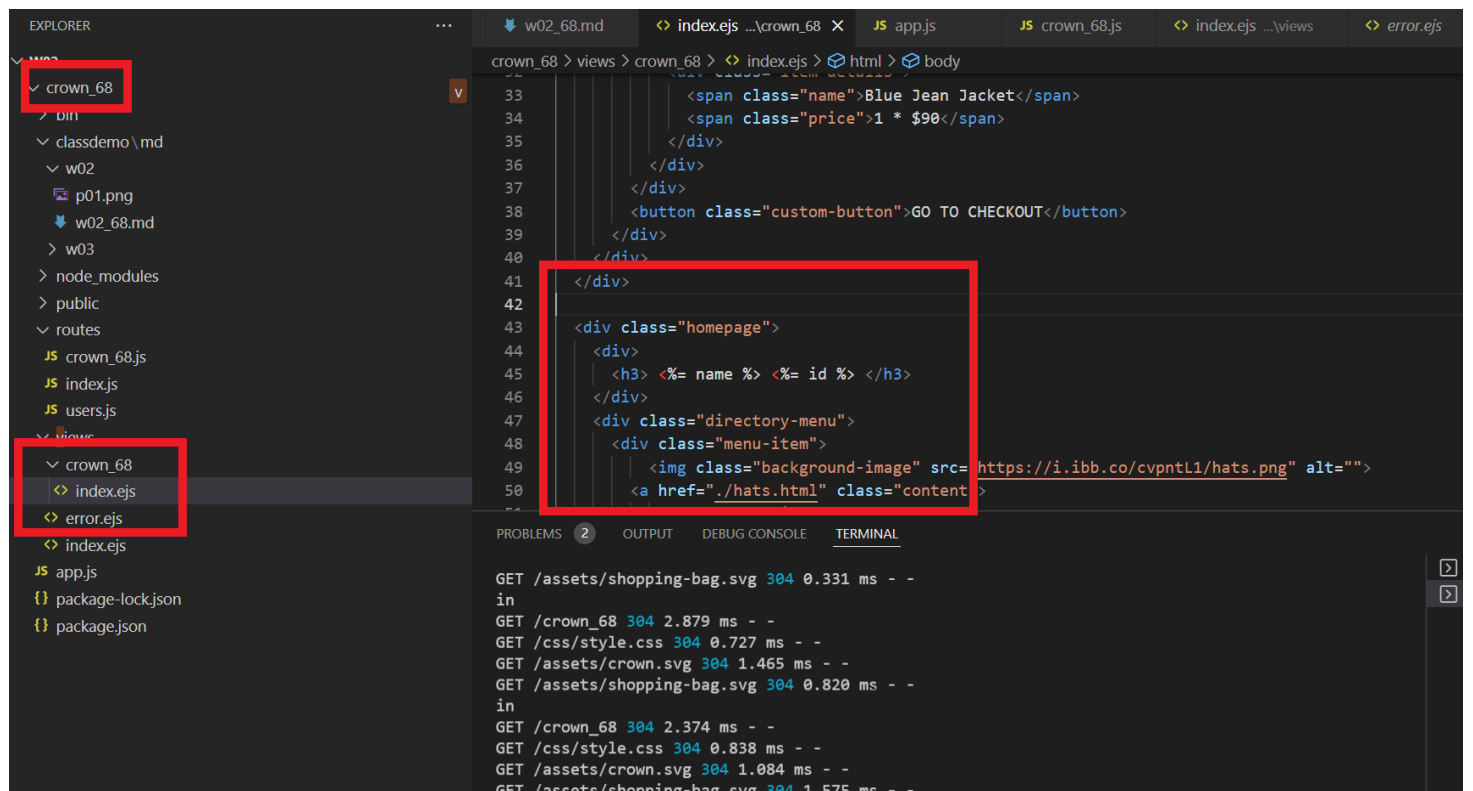

w3

p1

The image shows a GitHub repository page for `Fettmen / 1102-db2-68` and a VS Code editor window. The GitHub page displays the repository's file structure, including `bin`, `classdemo/md/w02`, `public`, `routes`, `views`, `.gitignore`, `app.js`, `package-lock.json`, and `package.json`. The VS Code editor shows the `app.js` file with the following code:

```
1 var createError = require('http-errors');
2 var express = require('express');
3 var path = require('path');
4 var cookieParser = require('cookie-parser');
5 var logger = require('morgan');
6
7 var indexRouter = require('./routes/index');
8 var usersRouter = require('./routes/users');
9
10 const crown_68_Router = require('./routes/crown_68');
11
12 var app = express();
13
14 // view engine setup
15 app.set('views', path.join(__dirname, 'views'));
16 app.set('view engine', 'ejs');
17
18 app.use(logger('dev'));
19 app.use(express.json());
20 app.use(express.urlencoded({ extended: false }));
21 app.use(cookieParser());
22 app.use(express.static(path.join(__dirname, 'public')));
23
24 app.use('/', indexRouter);
25 app.use('/users', usersRouter);
26 app.use('/crown_68', crown_68_Router);
27
28 // catch 404 and forward to error handler
29 app.use(function(req, res, next) {
30   next(createError(404));
31 });
32
33 // error handler
34 app.use(function(err, req, res, next) {
35   // set locals, only providing error in development
36   res.locals.message = err.message;
```

The terminal window in VS Code shows the following output:

```
remote: Resolving deltas: 100% (7/7), done.
To https://github.com/Fettmen/1102-db2-68.git
branch 'main' set up to track 'origin/main'.
User@E213-24 MINGW64 /d:/C/1102-db-68 (main)
$ git push -u origin main
Everything up-to-date
branch 'main' set up to track 'origin/main'.
User@E213-24 MINGW64 /d:/C/1102-db-68 (main)
$
```