

Akademia Górniczo-Hutnicza im. Stanisława Staszica w Krakowie

Wydział Inżynierii Metali i Informatyki Przemysłowej

# **Sprawozdanie z Laboratorium:**

## **Programowanie w OpenGL z użyciem shader'ów, Texturowanie**

Przedmiot: Wizualizacja Danych

Kierunek: Inżynieria Obliczeniowa

Autor: Filip Rak

Prowadzący ćwiczenia: dr inż. Marynowski Przemysław

Data: 28 października 2024

Numer lekcji: 4

Grupa laboratoryjna: 4

## Cel Ćwiczenia

Zapoznanie z funkcjami realizującymi wczytywanie tekstur oraz mechanizmami nakładania tekstur na wielokąty.

## Przebieg Ćwiczenia

Realizowanym zadaniem było nałożenie tekstury na wcześniej zdefiniowany sześcián.

W celu realizacji zadania podjęte zostały następujące kroki:

- Załączona do projektu została biblioteka `stb_image.h`.
- Zostały dodane stałe opisujące ilość koordynatów przypadających na teksturę, offset informacji o teksturze oraz zaktualizowana została ilość danych na wierzchołkach z 6 do 8.
- Dodane zostały stałe opisujące ścieżki do wykorzystywanych zasobów.
- Zmodyfikowane zostały kody shaderów aby silnik graficzny mógł współpracować z płaską teksturą 2D.
- Do tablicy wierzchołków sześciánu zostały dodane informacje na temat koordynatów tekstury.
- Dodano funkcjonalność przekazującą teksturę do programu shadera.
- Dodane zostało wczytywanie, ustawianie parametrów oraz inicjalizowanie tekstury.

Poniżej znajdują się fragmenty kodu ilustrujące zmiany

```
#define STB_IMAGE_IMPLEMENTATION
#include "stb_image.h"

// (...)

const int DATA_PER_VERT = 8;
const int OFFSET_TO_TEX = 6;
const int TEX_COORDS = 2;

// (...)

const std::string ASSETS_PATH = "assets/";
const std::string TEXTURES_PATH = ASSETS_PATH + "textures/";
```

*Zmiany w kontekście globalnym.*

```
const GLchar* vertex_source = R"glsl(
in vec2 in_tex_coord;    // Input texture coord
out vec2 tex_coord;      // Input texture coord

void main()
{
    // Pass the texture coord
    tex_coord = in_tex_coord;
}
)glsl";

const GLchar* fragment_source = R"glsl(
uniform sampler2D texture1;
in vec2 tex_coord;    // Texture coord received from vertex shader
out vec4 outColor;    // Output color to the framebuffer

void main()
{
    outColor = texture(texture1, tex_coord);
}
)glsl";
```

*Zmiany w shaderach (tylko dodane linijki)*

```

// Create texture
unsigned int texture1; // ID
glGenTextures(1, &texture1); // Generation
glBindTexture(GL_TEXTURE_2D, texture1); // Binding

// Setting texture parameters
// Wrap-around
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_S, GL_REPEAT); // X axis
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_T, GL_REPEAT); // Y axis

// Filtering
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MIN_FILTER, GL_LINEAR); // When texture is downsized
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MAG_FILTER, GL_LINEAR); // When texture is magnified

int texture_width, texture_height, texture_channels;

// Flip image on y-axis on load
stbi_set_flip_vertically_on_load(true);


// Load the texture
std::string file_path = TEXTURES_PATH + "obanma.jpeg";
unsigned char* data = stbi_load(file_path.c_str(), &texture_width, &texture_height,
&texture_channels, STBI_rgb);
if (data)
{
    glTexImage2D(GL_TEXTURE_2D, 0, GL_RGB, texture_width, texture_height, 0, GL_RGB,
GL_UNSIGNED_BYTE, data);
    glGenerateMipmap(GL_TEXTURE_2D);
}
else
    std::cout << "Failed to load texture!\n";

stbi_image_free(data);

```

*Ustawianie parametrów tekstury i jej ładowanie z zewnętrznego pliku.*

Efekt końcowy nałożenia tekstury

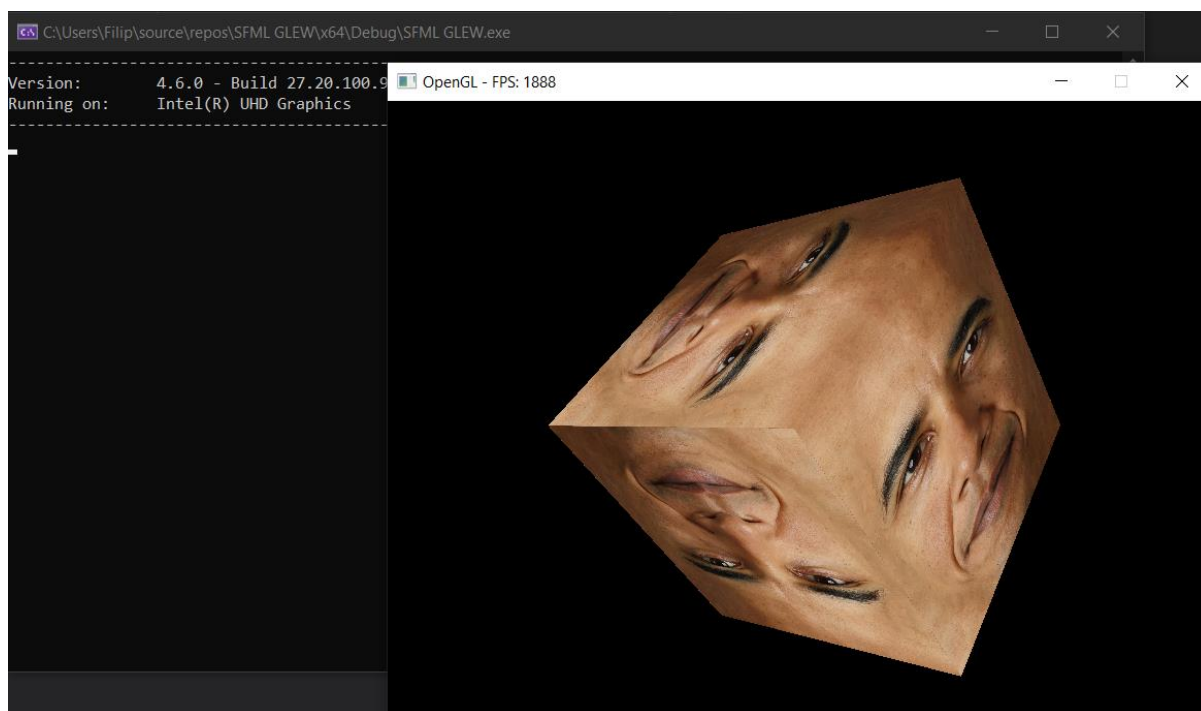

## Pełny kod źródłowy:

```
// Headers for OpenGL and SFML
// #include "stdafx.h" // This line might be needed in some IDEs

#pragma once
#include <GL/glew.h>
#include <SFML/Window.hpp>
#include <SFML/System/Time.hpp>
#include <glm.hpp>
#include <gtc/matrix_transform.hpp>
#include <gtc/type_ptr.hpp>
#include <iostream>
#include <time.h>
#include <string.h>
#include <cmath>

#define STB_IMAGE_IMPLEMENTATION
#include "stb_image.h"

// Constants
// -----

// Flags
const bool enable_keyboard_movement = true;
const bool enable_mouse_movement = true;
const bool enable_vert_manip = false;
const bool enable_primitive_manip = true;

// Primitives
const int primitives_num = 10;
const GLenum primitives[primitives_num] =
{
    GL_POINTS,          // 0
    GL_LINES,           // 1
    GL_LINE_LOOP,       // 2
    GL_LINE_STRIP,      // 3
    GL_TRIANGLES,       // 4
    GL_TRIANGLE_STRIP,   // 5
    GL_TRIANGLE_FAN,     // 6
    GL_QUADS,           // 7
    GL_QUAD_STRIP,      // 8
    GL_POLYGON           // 9
};

const std::string primitives_names[primitives_num] =
{
    "GL_POINTS",        // 0
    "GL_LINES",         // 1
    "GL_LINE_LOOP",     // 2
    "GL_LINE_STRIP",    // 3
    "GL_TRIANGLES",     // 4
    "GL_TRIANGLE_STRIP", // 5
    "GL_TRIANGLE_FAN",  // 6
    "GL_QUADS",         // 7
    "GL_QUAD_STRIP",    // 8
    "GL_POLYGON",       // 9
};

const int DATA_PER_VERT = 8;
const int OFFSET_TO_TEX = 6;
```

```

const int TEX_COORDS = 2;
const double PI = 3.14159265358979323846;
const float WINDOW_WIDTH = 800.0;
const float WINDOW_HEIGHT = 600.0;
const int MIN_VERTS = 1;
const int MAX_VERTS = 36;

// Camera
const float MAX_CAMERA_PITCH = 89;
const float MIN_CAMERA_PITCH = -89;
const float MAX_CAMERA_YAW = 360;
const float MIN_CAMERA_YAW = 0;

// Strings
const std::string WINDOW_TITLE = "OpenGL";
const std::string SEPARATOR = std::string(45, '-') + "\n";

// File paths
const std::string ASSETS_PATH = "assets/";
const std::string TEXTURES_PATH = ASSETS_PATH + "textures/";

// Shaders
// -----

// Vertex shader takes care of positioning on the screen
const GLchar* vertex_source = R"glsl(
#version 150 core

in vec3 position; // Input vertex position
in vec3 color;     // Input vertex color
in vec2 in_tex_coord; // Input texture coord
out vec2 tex_coord; // Input texture coord
out vec3 Color;    // Output color passed to the fragment shader

// Set outside the shader
uniform mat4 model_matrix; // Model
uniform mat4 view_matrix;  // View (camera)
uniform mat4 proj_matrix;  // Projection

void main()
{
    // Pass the color to the fragment shader
    Color = color;

    // Pass the texture coord
    tex_coord = in_tex_coord;

    // Set the position of the vertex
    gl_Position = proj_matrix * view_matrix * model_matrix * vec4(position, 1.0);
}
)glsl";

// Fragment shader's job is to figure out area between surfaces
const GLchar* fragment_source = R"glsl(
#version 150 core
uniform sampler2D texture1;
in vec3 Color; // Color received from the vertex shader
in vec2 tex_coord; // Texture coord received from vertex shader
out vec4 outColor; // Output color to the framebuffer

void main()
{
    // outColor = vec4(Color, 1.0); // Set the fragment color with full opacity

```

```

    outColor = texture(texture1, tex_coord);
    // outColor = tex_color;
    // outColor = vec4(1.0, 0.0, 0.0, 1.0); // Full red
    // outColor = vec4(tex_coord, 0.0, 1.0); // Map u, v to red and green
}
)glsl";

```

```

// Shapes
GLfloat cube_vertices[] =
{
    // Front
    // x, y, z   r, g, b   u,v
    -0.5f, -0.5f, -0.5f,    0.0f, 0.0f, 0.0f,    0.0f, 0.0f,
    0.5f, -0.5f, -0.5f,    1.0f, 0.0f, 0.0f,    1.0f, 0.0f,
    0.5f, 0.5f, -0.5f,     1.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    0.5f, 0.5f, -0.5f,     1.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, 0.5f, -0.5f,    0.0f, 1.0f, 0.0f,    0.0f, 1.0f,
    -0.5f, -0.5f, -0.5f,    0.0f, 0.0f, 0.0f,    0.0f, 0.0f,

    // Rear
    -0.5f, -0.5f, 0.5f,     0.0f, 0.0f, 0.0f,    0.0f, 0.0f,
    0.5f, -0.5f, 0.5f,     1.0f, 0.0f, 0.0f,    1.0f, 0.0f,
    0.5f, 0.5f, 0.5f,      1.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    0.5f, 0.5f, 0.5f,      1.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, 0.5f, 0.5f,     0.0f, 1.0f, 0.0f,    0.0f, 1.0f,
    -0.5f, -0.5f, 0.5f,    0.0f, 0.0f, 0.0f,    0.0f, 0.0f,

    // Left
    -0.5f, 0.5f, 0.5f,      1.0f, 0.0f, 0.0f,    0.0f, 0.0f,
    -0.5f, 0.5f, -0.5f,     1.0f, 1.0f, 0.0f,    1.0f, 0.0f,
    -0.5f, -0.5f, -0.5f,    0.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, -0.5f, -0.5f,    0.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, -0.5f, 0.5f,     0.0f, 0.0f, 0.0f,    0.0f, 1.0f,
    -0.5f, 0.5f, 0.5f,      1.0f, 0.0f, 0.0f,    0.0f, 0.0f,

    // Right
    0.5f, 0.5f, 0.5f,       1.0f, 0.0f, 0.0f,    0.0f, 0.0f,
    0.5f, 0.5f, -0.5f,      1.0f, 1.0f, 0.0f,    1.0f, 0.0f,
    0.5f, -0.5f, -0.5f,     0.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    0.5f, -0.5f, -0.5f,     0.0f, 1.0f, 0.0f,    1.0f, 1.0f,
    0.5f, -0.5f, 0.5f,      0.0f, 0.0f, 0.0f,    0.0f, 1.0f,
    0.5f, 0.5f, 0.5f,       1.0f, 0.0f, 0.0f,    0.0f, 0.0f,

    // Bottom
    -0.5f, -0.5f, -0.5f,    0.0f, 1.0f, 0.0f,    0.0f, 0.0f,
    0.5f, -0.5f, -0.5f,     1.0f, 1.0f, 0.0f,    1.0f, 0.0f,
    0.5f, -0.5f, 0.5f,      1.0f, 0.0f, 0.0f,    1.0f, 1.0f,
    0.5f, -0.5f, 0.5f,      1.0f, 0.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, -0.5f, 0.5f,     0.0f, 0.0f, 0.0f,    0.0f, 1.0f,
    -0.5f, -0.5f, -0.5f,    0.0f, 1.0f, 0.0f,    0.0f, 0.0f,

    // Top
    -0.5f, 0.5f, -0.5f,     0.0f, 1.0f, 0.0f,    0.0f, 0.0f,
    0.5f, 0.5f, -0.5f,      1.0f, 1.0f, 0.0f,    1.0f, 0.0f,
    0.5f, 0.5f, 0.5f,       1.0f, 0.0f, 0.0f,    1.0f, 1.0f,
    0.5f, 0.5f, 0.5f,       1.0f, 0.0f, 0.0f,    1.0f, 1.0f,
    -0.5f, 0.5f, 0.5f,      0.0f, 0.0f, 0.0f,    0.0f, 1.0f,
    -0.5f, 0.5f, -0.5f,     0.0f, 1.0f, 0.0f,    0.0f, 0.0f
};

// Main loop functions
// -----

```

```

void find_polygon_verts(GLfloat* vertices, int vert_num, float radius)
{
    // Starting angle and change of angles between every vert
    float start_angle = 0.0f;
    float angle_step = 2.0f * PI / vert_num;

    for (int i = 0; i < vert_num; i++)
    {
        // Angle of the current vert
        float angle = start_angle + i * angle_step;

        // Vertice coordinates
        vertices[i * DATA_PER_VERT] = radius * cos(angle); // X
        vertices[i * DATA_PER_VERT + 1] = radius * sin(angle); // Y
        vertices[i * DATA_PER_VERT + 2] = (float)rand() / RAND_MAX; // Z

        // Colors
        vertices[i * DATA_PER_VERT + 3] = (float)rand() / RAND_MAX; // R
        vertices[i * DATA_PER_VERT + 4] = (float)rand() / RAND_MAX; // G
        vertices[i * DATA_PER_VERT + 5] = (float)rand() / RAND_MAX; // B
    }
}

int mouse_to_verts(float mouse_pos_y)
{
    // Normalize the mouse Y position (0 at the top, 1 at the bottom)
    float normalized_mouse_y = mouse_pos_y / WINDOW_HEIGHT;

    // Invert the Y position so it progresses from bottom (0) to top (1)
    float top_down_mouse_y = 1.0f - normalized_mouse_y;

    // Calculate the number of vertices based on the mouse position within the defined vertex range
    float vertex_range = MAX_VERTS - MIN_VERTS;
    float vertex_adj = vertex_range * top_down_mouse_y;

    // Set the vertex count by adjusting based on the mouse position
    int new_vert_num = (int)(MIN_VERTS + vertex_adj);

    return new_vert_num;
}

GLfloat* update_vertices(GLfloat* vertices, int vert_num, GLuint vbo)
{
    // Reallocate memory for the new number of vertices
    delete[] vertices;
    vertices = new GLfloat[vert_num * DATA_PER_VERT];

    // Update vertices based on the new vertex count
    find_polygon_verts(vertices, vert_num, 1.0f);

    // Upload the updated vertex data to the GPU
    glBindBuffer(GL_ARRAY_BUFFER, vbo);
    glBufferData(GL_ARRAY_BUFFER, vert_num * DATA_PER_VERT * sizeof(GLfloat), vertices, GL_DYNAMIC_DRAW);

    return vertices;
}

void update_view_matrix(GLuint shader_program, const glm::vec3& camera_pos, glm::vec3& camera_front, const glm::vec3& camera_up, float camera_yaw, float camera_pitch)
{
    // Get camera front based on yaw and pitch
    glm::vec3 new_front;
    new_front.x = cos(glm::radians(camera_yaw)) * cos(glm::radians(camera_pitch));

```



```

new_front.y = sin(glm::radians(camera_pitch));
new_front.z = sin(glm::radians(camera_yaw)) * cos(glm::radians(camera_pitch));

// Update camera front and normalize it
camera_front = glm::normalize(new_front);

// Update the view matrix
glm::mat4 view_matrix = glm::lookAt(camera_pos, camera_pos + camera_front, camera_up);
GLint uni_view = glGetUniformLocation(shader_program, "view_matrix");
glUniformMatrix4fv(uni_view, 1, GL_FALSE, glm::value_ptr(view_matrix));
}

void main_loop(sf::Window& window, GLuint shader_program, GLuint vao, GLuint vbo, int vert_num, GLfloat*
vertices)
{
    bool running = true;
    GLenum used_primitive = GL_TRIANGLES;

    // Camera
    glm::vec3 camera_pos = glm::vec3(0.0f, 0.0f, 3.0f);
    glm::vec3 camera_front = glm::vec3(0.0f, 0.0f, -1.0f);
    glm::vec3 camera_up = glm::vec3(0.0f, 1.0f, 0.0f);
    float camera_yaw = 270;
    float camera_pitch = 0;
    float camera_speed = 3;
    float camera_rotation_speed = 200;
    bool camera_pos_changed = false;    // Remove for damping implementation

    // Mouse
    double mouse_sensitivity = 0.05;

    // Delta time
    sf::Clock delta_clock;
    float delta_time = 0;
    float update_interval = 0.2;    // Timer for FPS update
    float time_accumulator = 0;    // Time passed since last FPS update
    int frame_count = 0;

    while (running)
    {
        // Update delta time
        delta_time = delta_clock.restart().asSeconds();

        // Accumulate time and count frames
        time_accumulator += delta_time;
        frame_count++;

        // Set the window title to current FPS
        if (time_accumulator >= update_interval)
        {
            // Get FPS from average time passed since last update
            int FPS = round(frame_count / time_accumulator);
            window.setTitle(WINDOW_TITLE + " - FPS: " + std::to_string(FPS));

            // Reset for next FPS update
            time_accumulator = 0;
            frame_count = 0;
        }

        sf::Event window_event;
        while (window.pollEvent(window_event))
        {
            switch (window_event.type)

```

```

{
case sf::Event::Closed:
    running = false;
    break;

case sf::Event::KeyPressed:
    // Exit condition
    if (window_event.key.code == sf::Keyboard::Escape)
    {
        running = false;
    }

    // Vertice number manipulation
    if (enable_vert_manip)
    {
        if (window_event.key.code == sf::Keyboard::Up)
        {
            int new_vert_num = vert_num + 1;
            if (new_vert_num > MAX_VERTS)
                new_vert_num = MAX_VERTS;

            // Avoid unnecessary updates
            if (new_vert_num == vert_num)
                break;

            // Update vert number
            vert_num = new_vert_num;
            std::cout << "Vertices: " << vert_num << "\n";

            // Update the display
            vertices = update_vertices(vertices, vert_num, vbo);
        }

        if (window_event.key.code == sf::Keyboard::Down)
        {
            int new_vert_num = vert_num - 1;
            if (new_vert_num < MIN_VERTS)
                new_vert_num = MIN_VERTS;

            // Avoid unnecessary updates
            if (new_vert_num == vert_num)
                break;

            // Update vert number
            vert_num = new_vert_num;
            std::cout << "Vertices: " << vert_num << "\n";

            // Update the display
            vertices = update_vertices(vertices, vert_num, vbo);
        }
    }

    if (enable_primitive_manip)
    {
        // Primitive manipulation
        if (window_event.key.code >= sf::Keyboard::Num0 && window_event.key.code <=
sf::Keyboard::Num9)
        {
            // Save numerical key as an integer
            int pressed_number = window_event.key.code - sf::Keyboard::Num0;
            used_primitive = primitives[pressed_number % primitives_num];
            std::cout << "Set primitive: " << primitives_names[used_primitive % primitives_num]
"\n";

```

```

    }
}

break;
case sf::Event::MouseMoved:

    if (enable_vert_manip)
    {
        // Convert mouse pos to vertices
        int new_vert_num = mouse_to_verts(window_event.mouseMove.y);
        if (new_vert_num == vert_num) // Avoid updates if unnecessary
            break;

        // Update vert number
        vert_num = new_vert_num;
        std::cout << "Vertices: " << vert_num << "\n";

        // Update the display
        vertices = update_vertices(vertices, vert_num, vbo);
    }

    if (enable_mouse_movement)
    {
        // Get the current mouse position and calculate the offset from the center
        sf::Vector2i center_pos(window.getSize().x / 2, window.getSize().y / 2);
        sf::Vector2i local_pos = sf::Mouse::getPosition(window);
        double x_offset = local_pos.x - center_pos.x;
        double y_offset = local_pos.y - center_pos.y;

        // Apply the offset to yaw and pitch
        camera_yaw += x_offset * mouse_sensitivity;
        camera_pitch -= y_offset * mouse_sensitivity;

        // Clamp pitch to prevent flipping
        if (camera_pitch > MAX_CAMERA_PITCH) camera_pitch = MAX_CAMERA_PITCH;
        else if (camera_pitch < MIN_CAMERA_PITCH) camera_pitch = MIN_CAMERA_PITCH;

        // Normalize yaw
        if (camera_yaw >= MAX_CAMERA_YAW) camera_yaw -= MAX_CAMERA_YAW;
        else if (camera_yaw < MIN_CAMERA_YAW) camera_yaw += MIN_CAMERA_YAW;

        // Set the flag to update view matrix
        camera_pos_changed = true;

        // Reset mouse position to the center of the window
        sf::Mouse::setPosition(center_pos, window);
    }

    break;
}

if (enable_keyboard_movement)
{
    std::string input = "";

    // Check camera movement keys in real-time
    if (sf::Keyboard::isKeyPressed(sf::Keyboard::W)) // Forward
    {
        camera_pos += camera_speed * delta_time * camera_front;
        camera_pos_changed = true;
        input += "W";
    }
}

```

```

    if (sf::Keyboard::isKeyPressed(sf::Keyboard::S))    // Backwards
    {
        camera_pos -= camera_speed * delta_time * camera_front;
        camera_pos_changed = true;
        input += "S";
    }

    if (sf::Keyboard::isKeyPressed(sf::Keyboard::A))    // Move left
    {
        camera_pos -= glm::normalize(glm::cross(camera_front, camera_up)) * camera_speed * delta_time;
        camera_pos_changed = true;
        input += "A";
    }

    if (sf::Keyboard::isKeyPressed(sf::Keyboard::D))    // Move right
    {
        camera_pos += glm::normalize(glm::cross(camera_front, camera_up)) * camera_speed * delta_time;
        camera_pos_changed = true;
        input += "D";
    }

    if (sf::Keyboard::isKeyPressed(sf::Keyboard::Q))    // Rotation left
    {
        camera_yaw -= camera_rotation_speed * delta_time;
        camera_pos_changed = true;
        input += "Q";
    }

    if (sf::Keyboard::isKeyPressed(sf::Keyboard::E))    // Rotation right
    {
        camera_yaw += camera_rotation_speed * delta_time;
        camera_pos_changed = true;
        input += "E";
    }

    // if (input.size() > 0)
    //     std::cout << "Input: " << input << "\n";
}

if (camera_pos_changed)
{
    update_view_matrix(shader_program, camera_pos, camera_front, camera_up, camera_yaw, camera_pitch);
    camera_pos_changed = false;
}

// Clear the screen to black
glClearColor(0.0f, 0.0f, 0.0f, 1.0f);
glClear(GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT);

// Draw the shape
glDrawArrays(used_primitive, 0, vert_num);

// Swap the front and back buffers
window.display();
}
}

// Validation functions
// -----
bool shader_compiled(GLuint shader, bool console_dump = true, std::string name_identifier = "")
{
    // Check for compilation error

```

```

GLint success;
glGetShaderiv(shader, GL_COMPILE_STATUS, &success);

if (!success && console_dump)
{
    // Get error log length
    GLint log_length;
    glGetShaderiv(shader, GL_INFO_LOG_LENGTH, &log_length);

    // Allocate space for error message
    std::string error_msg(log_length, ' '); // Initialize the string with spaces

    // Retrieve the error log
    glGetShaderInfoLog(shader, log_length, NULL, &error_msg[0]);

    // Print the error message
    std::cerr << "ERROR: " << name_identifier << " Shader Compilation Failed!:\n\t" << error_msg << "\n";
}

return success;
}

bool program_linked(GLuint program, bool console_dump = true, std::string name_identifier = "")
{
    GLint success;
    glGetProgramiv(program, GL_LINK_STATUS, &success);

    if (!success && console_dump)
    {
        // Get error log length
        GLint log_length;
        glGetProgramiv(program, GL_INFO_LOG_LENGTH, &log_length);

        // Allocate space for error message
        std::string error_msg(log_length, ' '); // Initialize the string with spaces

        // Retrieve the error log
        glGetProgramInfoLog(program, log_length, NULL, &error_msg[0]);

        // Print the error message
        std::cerr << "ERROR: " << name_identifier << " Program Linking Failed!:\n\t" << error_msg << "\n";
    }

    return success;
}

// Main function
// -----
int main()
{
    // Init for random number generation
    srand(time(NULL));

    // Setup OpenGL context settings
    sf::ContextSettings settings;
    settings.depthBits = 24; // Bits for depth buffer
    settings.stencilBits = 8; // Bits for stencil buffer

    // Create a rendering window with OpenGL context
    sf::Window window(sf::VideoMode(WINDOW_WIDTH, WINDOW_HEIGHT, 32), WINDOW_TITLE, sf::Style::Titlebar |
sf::Style::Close, settings);

    window.setMouseCursorGrabbed(true);

```

```

window.setCursorVisible(false);

// window.setFramerateLimit(20);

// Enabling Z-buffer
glEnable(GL_DEPTH_TEST);
glDepthFunc(GL_LESS);

// Initialize GLEW (must be done after creating the window and OpenGL context)
glewExperimental = GL_TRUE;
glewInit();

// Create and bind a Vertex Array Object (VAO) to store vertex state
GLuint vao;
glGenVertexArrays(1, &vao);
glBindVertexArray(vao);

// Create a Vertex Buffer Object (VBO) and upload vertex data to it
GLuint vbo;
glGenBuffers(1, &vbo);

// Vertex data: positions (x, y) and colors (r, g, b) for each vertex
int vert_num = 3;
GLfloat* vertices = new GLfloat[vert_num * DATA_PER_VERT];

// Generate a polygon
// find_polygon_verts(vertices, vert_num, 1.0f);

// Generate a cube
vert_num = 36;
vertices = cube_vertices;

glBindBuffer(GL_ARRAY_BUFFER, vbo);
glBufferData(GL_ARRAY_BUFFER, vert_num * DATA_PER_VERT * sizeof(GLfloat), vertices, GL_STATIC_DRAW);

// Create and compile the vertex shader
GLuint vertex_shader = glCreateShader(GL_VERTEX_SHADER);
glShaderSource(vertex_shader, 1, &vertex_source, NULL);
glCompileShader(vertex_shader);

// Create and compile the fragment shader
GLuint fragment_shader = glCreateShader(GL_FRAGMENT_SHADER);
glShaderSource(fragment_shader, 1, &fragment_source, NULL);
glCompileShader(fragment_shader);

// Check for shader compilation
if (!shader_compiled(vertex_shader, true, "Vertex") || !shader_compiled(fragment_shader, true, "Fragment"))
{
    // Cleanup: delete shaders, buffers, and close the window
    glDeleteShader(fragment_shader);
    glDeleteShader(vertex_shader);
    glDeleteBuffers(1, &vbo);
    glDeleteVertexArrays(1, &vao);

    window.close(); // Close the rendering window
    return -1;
}

// Declare shader uniform data
glm::mat4 model_matrix = glm::mat4(1.0f);
model_matrix = glm::rotate(model_matrix, glm::radians(45.0f), glm::vec3(0.0f, 0.0f, 1.0f));
glm::mat4 view_matrix = glm::lookAt(glm::vec3(0.0f, 0.0f, 3.0f), glm::vec3(0.0f, 0.0f, 0.0f),
glm::vec3(0.0f, 1.0f, 0.0f));

```

```

glm::mat4 proj_matrix = glm::perspective(glm::radians(45.0f), WINDOW_WIDTH / WINDOW_HEIGHT, 0.01f, 100.0f);

// Link both shaders into a single shader program
GLuint shader_program = glCreateProgram();
glAttachShader(shader_program, vertex_shader);
glAttachShader(shader_program, fragment_shader);
glBindFragDataLocation(shader_program, 0, "outColor"); // Bind fragment output
glLinkProgram(shader_program);

// Use the program if linking succeeded
if (program_linked(shader_program, true, "Shader"))
{
    // Debug info
    std::cout << SEPARATOR;
    std::cout << "Version:\t" << glGetString(GL_VERSION) << "\n";
    std::cout << "Running on:\t" << glGetString(GL_RENDERER) << "\n";
    std::cout << SEPARATOR;

    // Use the program
    glUseProgram(shader_program);

    // Add uniform data
    GLint uni_trans = glGetUniformLocation(shader_program, "model_matrix");
    glUniformMatrix4fv(uni_trans, 1, GL_FALSE, glm::value_ptr(model_matrix));

    GLint uni_view = glGetUniformLocation(shader_program, "view_matrix");
    glUniformMatrix4fv(uni_view, 1, GL_FALSE, glm::value_ptr(view_matrix));

    GLint uni_proj = glGetUniformLocation(shader_program, "proj_matrix");
    glUniformMatrix4fv(uni_proj, 1, GL_FALSE, glm::value_ptr(proj_matrix));

    GLint texture_location = glGetUniformLocation(shader_program, "texture1");
    glUniform1i(texture_location, 0); // Bind texture unit 0 to "texture1"

    // Add the texture
    GLint tex_coord = glGetAttribLocation(shader_program, "in_tex_coord");
    glEnableVertexAttribArray(tex_coord);
    glVertexAttribPointer(tex_coord, TEX_COORDS, GL_FLOAT, GL_FALSE, DATA_PER_VERT * sizeof(GLfloat),
(void*)(OFFSET_TO_TEX * sizeof(GLfloat)));
}
else
{
    // Cleanup: delete shaders, buffers, and close the window
    glDeleteProgram(shader_program);
    glDeleteShader(fragment_shader);
    glDeleteShader(vertex_shader);
    glDeleteBuffers(1, &vbo);
    glDeleteVertexArrays(1, &vao);

    window.close(); // Close the rendering window
    return -2;
}

// Specify the layout of the vertex data
GLint pos_attrib = glGetAttribLocation(shader_program, "position");
glEnableVertexAttribArray(pos_attrib);
glVertexAttribPointer(pos_attrib, 3, GL_FLOAT, GL_FALSE, DATA_PER_VERT * sizeof(GLfloat), 0);

GLint col_attrib = glGetAttribLocation(shader_program, "color");
glEnableVertexAttribArray(col_attrib);
glVertexAttribPointer(col_attrib, 3, GL_FLOAT, GL_FALSE, DATA_PER_VERT * sizeof(GLfloat), (void*)(3 *
sizeof(GLfloat)));

```

```

// Create texture
unsigned int texture1; // ID
glGenTextures(1, &texture1); // Generation
glBindTexture(GL_TEXTURE_2D, texture1); // Binding

// Setting texture parameters
// Wrap-around
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_S, GL_REPEAT); // X axis
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_WRAP_T, GL_REPEAT); // Y axis

// Filtering
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MIN_FILTER, GL_LINEAR); // When texture is downsized
glTexParameteri(GL_TEXTURE_2D, GL_TEXTURE_MAG_FILTER, GL_LINEAR); // When texture is magnified

int texture_width, texture_height, texture_channels;

// Flip image on y-axis on load
stbi_set_flip_vertically_on_load(true);

// Load the texture
std::string file_path = TEXTURES_PATH + "obanma.jpeg";
unsigned char* data = stbi_load(file_path.c_str(), &texture_width, &texture_height, &texture_channels,
STBI_rgb);
if (data)
{
    glTexImage2D(GL_TEXTURE_2D, 0, GL_RGB, texture_width, texture_height, 0, GL_RGB, GL_UNSIGNED_BYTE,
data);
    glGenerateMipmap(GL_TEXTURE_2D);
}
else
    std::cout << "Failed to load texture!\n";

stbi_image_free(data);

// Main event loop
main_loop(window, shader_program, vao, vbo, vert_num, vertices);

// Cleanup: delete shaders, buffers, and close the window
glDeleteProgram(shader_program);
glDeleteShader(fragment_shader);
glDeleteShader(vertex_shader);
glDeleteBuffers(1, &vbo);
glDeleteVertexArrays(1, &vao);

window.close(); // Close the rendering window
return 0;
}

```