


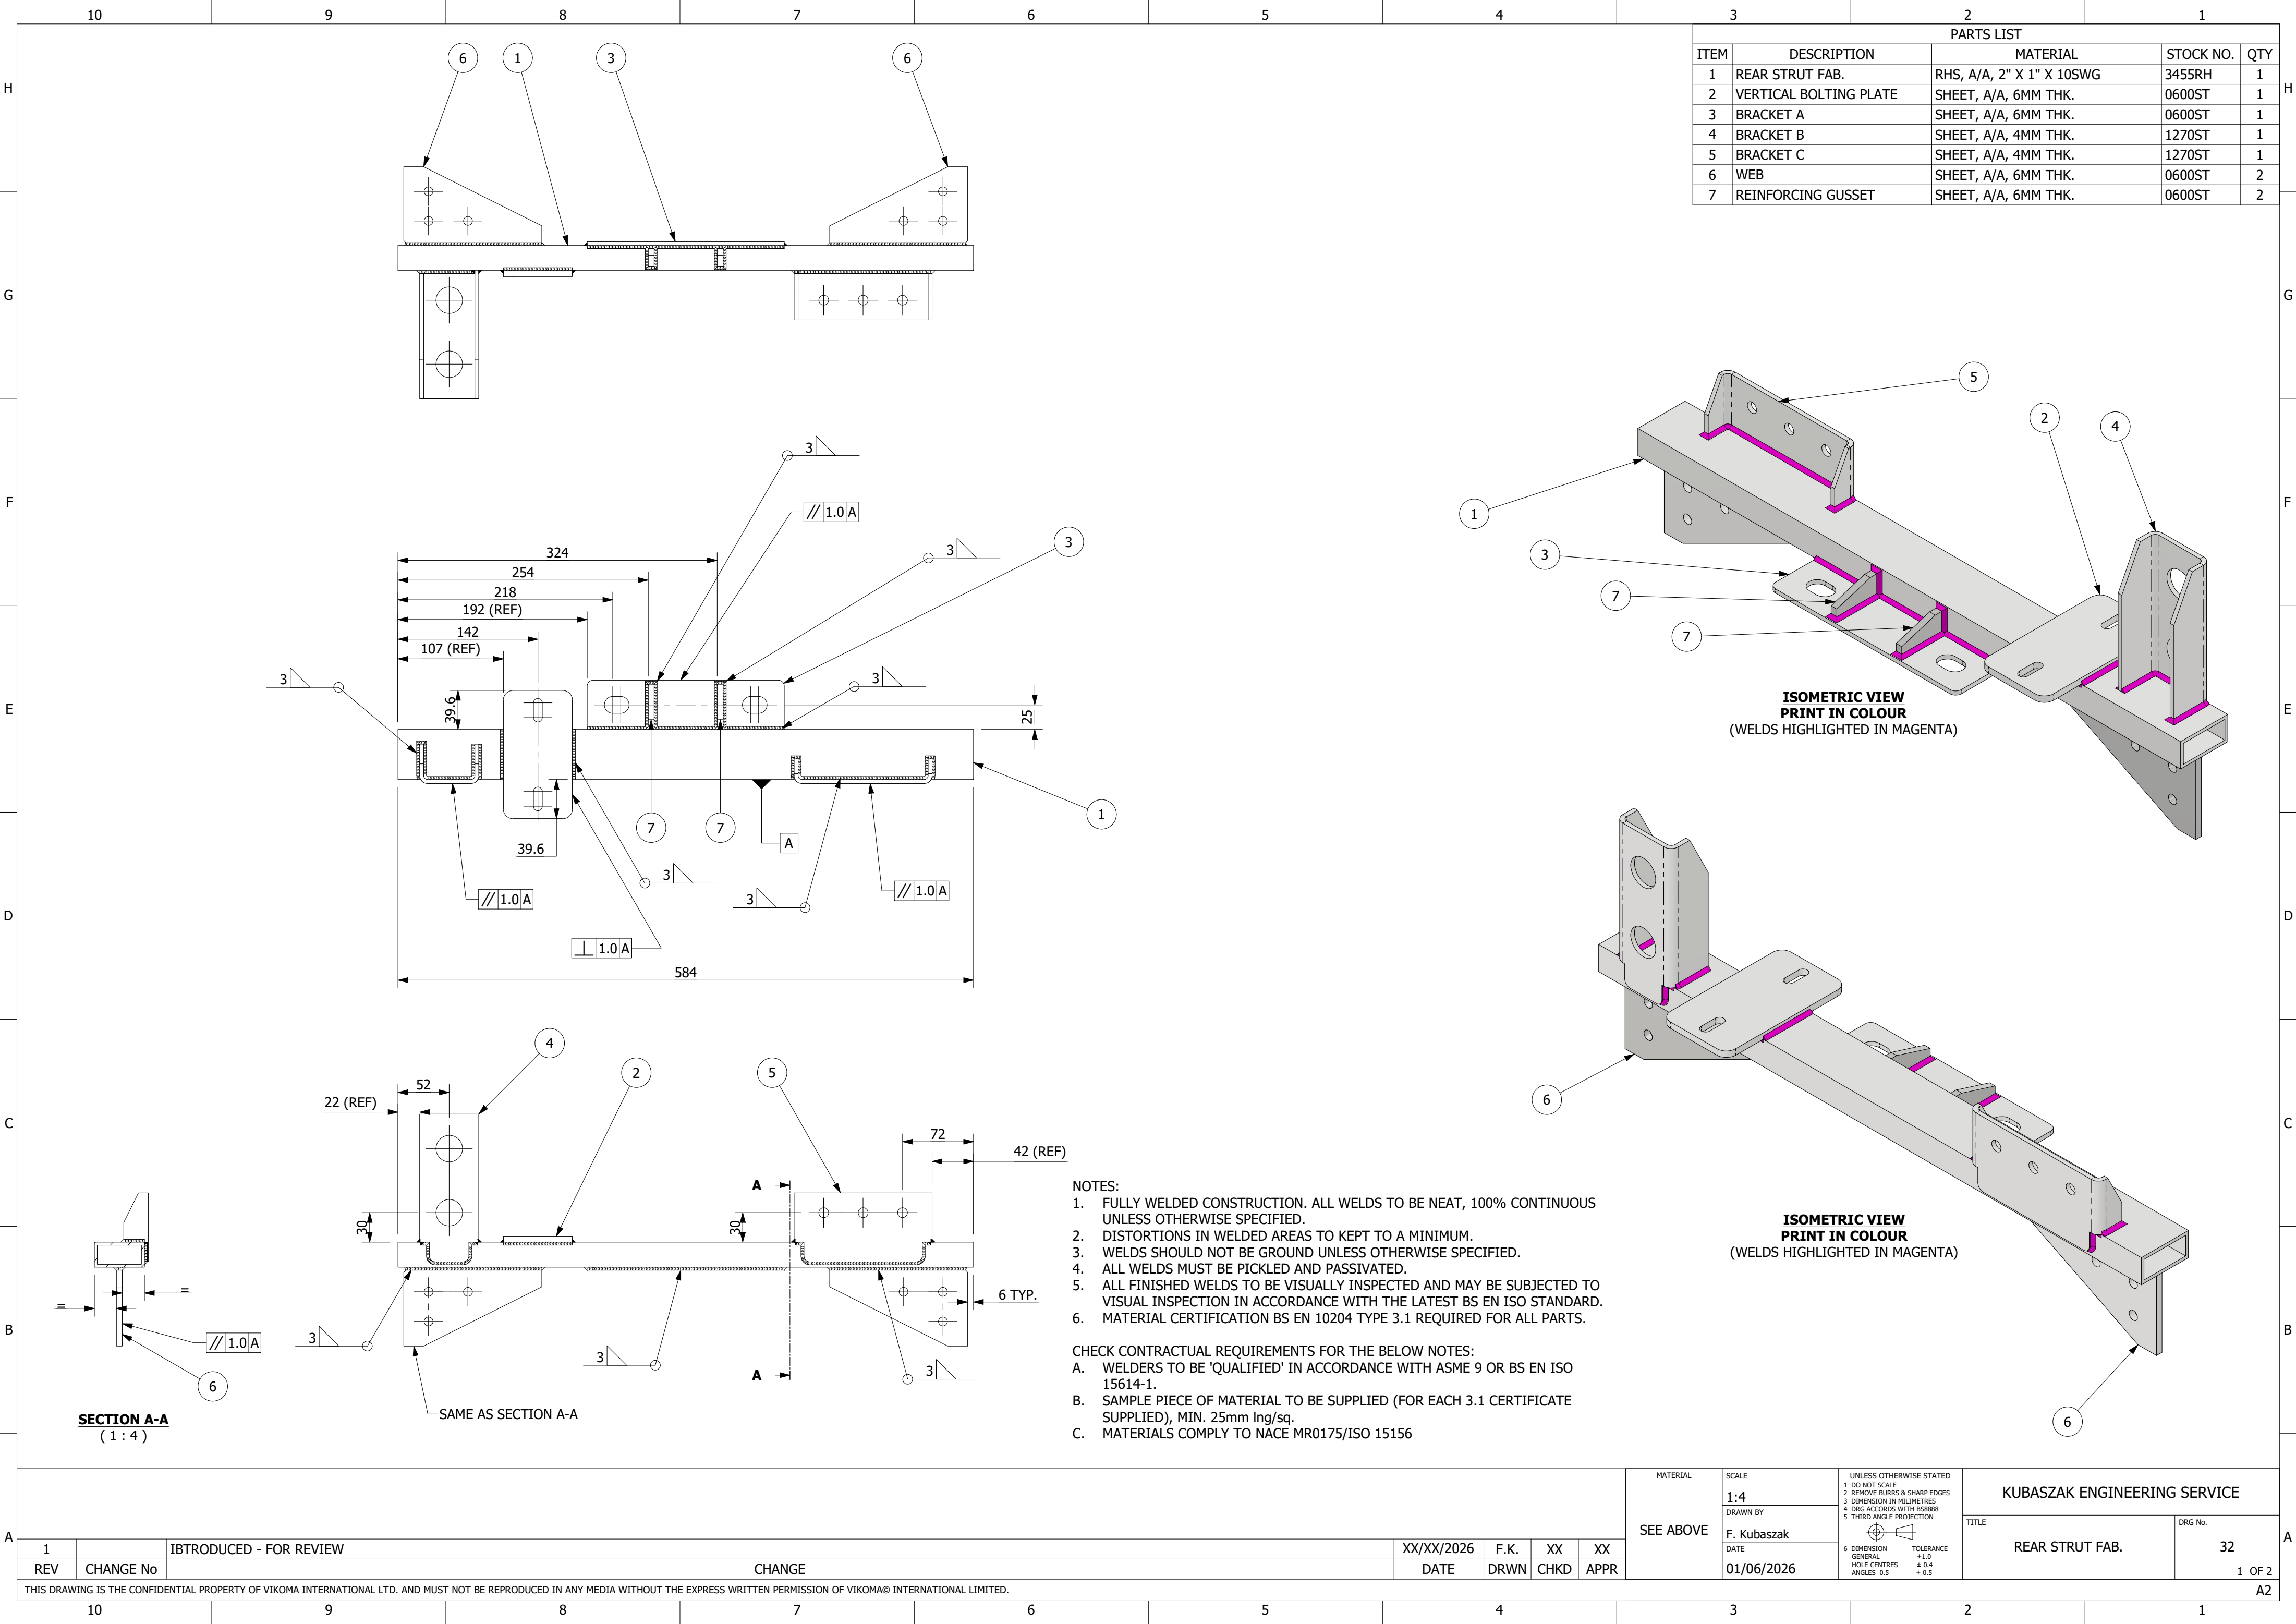

PARTS LIST				
ITEM	DESCRIPTION	MATERIAL	STOCK NO.	QTY
1	REAR STRUT FAB.	RHS, A/A, 2" X 1" X 10SWG	3455RH	1
2	VERTICAL BOLTING PLATE	SHEET, A/A, 6MM THK.	0600ST	1
3	BRACKET A	SHEET, A/A, 6MM THK.	0600ST	1
4	BRACKET B	SHEET, A/A, 4MM THK.	1270ST	1
5	BRACKET C	SHEET, A/A, 4MM THK.	1270ST	1
6	WEB	SHEET, A/A, 6MM THK.	0600ST	2
7	REINFORCING GUSSET	SHEET, A/A, 6MM THK.	0600ST	2

- NOTES:
- FULLY WELDED CONSTRUCTION. ALL WELDS TO BE NEAT, 100% CONTINUOUS UNLESS OTHERWISE SPECIFIED.
 - DISTORTIONS IN WELDED AREAS TO KEPT TO A MINIMUM.
 - WELDS SHOULD NOT BE GROUND UNLESS OTHERWISE SPECIFIED.
 - ALL WELDS MUST BE PICKLED AND PASSIVATED.
 - ALL FINISHED WELDS TO BE VISUALLY INSPECTED AND MAY BE SUBJECT TO VISUAL INSPECTION IN ACCORDANCE WITH THE LATEST BS EN ISO STANDARD.
 - MATERIAL CERTIFICATION BS EN 10204 TYPE 3.1 REQUIRED FOR ALL PARTS.

- CHECK CONTRACTUAL REQUIREMENTS FOR THE BELOW NOTES:
- A. WELDERS TO BE 'QUALIFIED' IN ACCORDANCE WITH ASME 9 OR BS EN ISO 15614-1.
- B. SAMPLE PIECE OF MATERIAL TO BE SUPPLIED (FOR EACH 3.1 CERTIFICATE SUPPLIED), MIN. 25mm lng/sq.
- C. MATERIALS COMPLY TO NACE MR0175/ISO 15156

						MATERIAL	SCALE	UNLESS OTHERWISE STATED		KUBASZAK ENGINEERING SERVICE	
						SEE ABOVE	1:4	1 DO NOT SCALE		TITLE	DRG No.
							DRAWN BY	2 REMOVE BURRS & SHARP EDGES		REAR STRUT FAB.	32
							F. Kubaszak	3 DIMENSION IN MILLIMETRES			1 OF 2
							DATE	4 DRG ACCORDS WITH BS8888			
							01/06/2026	5 THIRD ANGLE PROJECTION			
								6 DIMENSION GENERAL HOLE CENTRES ANGLES 0.5	TOLERANCE ±1.0 ±0.4 ±0.5		
THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF VIKOMA INTERNATIONAL LTD. AND MUST NOT BE REPRODUCED IN ANY MEDIA WITHOUT THE EXPRESS WRITTEN PERMISSION OF VIKOMA® INTERNATIONAL LIMITED.											A2

