

A Survey of Rural and Urban Road Identification via Satellite Imagery

1st Filipe Cavaleiro

DEEC

NOVA FCT

Lisbon, Portugal

<https://orcid.org/0009-0000-1238-3975>

2nd Diogo Novais

DEEC

NOVA FCT

Lisbon, Portugal

dm.novais@campus.fct.unl.pt

Abstract—This paper surveys the principal methods used for detecting rural and urban roads from satellite imagery. Both heuristic techniques and modern data-driven approaches are discussed, highlighting their advantages, limitations, and applicability across different environments. It is also mentioned common benchmark datasets and performance metrics used to evaluate road extraction models.

Index Terms—convolutional neural networks, remote sensing, road mapping, tropical forests, road extraction, benchmarks, machine learning

I. INTRODUCTION

Accurate and up-to-date road maps are essential for transportation planning, emergency response, and environmental monitoring. However, many regions particularly in remote or developing areas remain poorly mapped. Traditional mapping efforts are often slow, inconsistent, and difficult to scale.

Recent advances in artificial intelligence, especially deep learning applied to high-resolution satellite imagery, have significantly improved the feasibility of automated road extraction. Nonetheless, many existing approaches focus primarily on well-structured urban environments, leaving irregular and sparsely maintained rural roads comparatively understudied.

Several works demonstrate that convolutional neural networks (CNNs) can achieve strong performance across heterogeneous landscapes. For example, UNet and ResNet-based architectures trained on freely available datasets have achieved F1 scores between 72-81% and Intersection over Union (IoU) scores between 43-58%, even in semi-forested tropical regions [1]. These results highlight the potential for scalable, automated road mapping across challenging environments.

Furthermore, approximately 90% of new road construction occurs in developing regions [1], underscoring the importance of accurate tools capable of detecting both formal and informal road networks.

When given multiple datasets for performance analysis the worst performing one is chosen from papers results.

II. DATA GATHERING

Accurate road extraction depends heavily on the quality, diversity, and resolution of the imagery used for training and evaluation. Modern approaches typically rely on a combination of publicly available satellite data, commercial high-resolution

sensors, and crowdsourced annotations. This section summarizes the most commonly used sources and benchmark datasets in the literature. Each one of references following a list item is representative of a paper using said data collection.

A. Satellite and Aerial Imagery Sources

High-resolution satellite platforms provide detailed spectral and spatial information suitable for distinguishing between road surfaces, vegetation, and surrounding terrain. Commonly used satellites include:

- **IKONOS**: provides 1 m panchromatic and 4 m multispectral imagery. [2]
- **QuickBird**: offers black and white 61 centimeter resolution and 2.44-1.63 meter multispectral resolution imagery, used mostly for urban road extraction studies. (reentered Earth after orbit decay in 2015 [3] [4]) [2] [5]
- **Pleiades-1A/1B**: delivers 0.5 m spatial resolution, particularly useful for modeling complex urban road networks [6].
- **GeoEye**: another high-resolution commercial sensor often used for cross-sensor generalization experiments [6].

In addition to satellite data, very-high-resolution imagery from **unmanned aerial vehicles (UAVs)** has gained popularity. UAV imagery typically ranges from a few centimeters to tens of centimeters per pixel and allows precise extraction of small rural or unpaved road segments [7].

B. Freely Accessible Annotation Sources

Reliable road annotations are essential for supervised learning. Two widely used sources are:

- **OpenStreetMap (OSM)** A globally crowdsourced mapping platform frequently used to generate or refine road labels for training and benchmarking [1] [5].
- **Google Earth** Provides multi-source RGB aerial and satellite images with varying resolutions. These images are often used for visual comparison and manual annotation [8] [5] [9].

C. Benchmark Datasets

Several curated datasets have become standard benchmarks for evaluating road extraction models:

- **Massachusetts Roads Dataset:** Contains 1711 RGB images with 1 m spatial resolution at a size of 1500 x 1500 pixels, covering an area of 2.25 square kilometers. It is widely used for evaluating CNN-based and FCN-based approaches [10] [6] [11] [12] [13] [14] [15] [16].
- **UAV-based Road Datasets:** Provide extremely high-resolution imagery for fine-grained road segmentation tasks, especially in rural or forested areas [7].
- **TerraSAR-X Road Dataset:** Used to test the robustness of algorithms under SAR imaging conditions, where optical cues are absent [17].
- **Abu Dhabi Dataset:** The size of each image in this dataset is of 1500 x 1500 pixels composed of RGB channels and a spatial resolution of 0.5 m per pixel. It is composed of images of roads, buildings and background of Abu Dhabi [12].
- **Conghua Dataset:** The dataset image resolution is of 0.2 m per pixel, which consists of RGB images. There are 47 aerial images in this dataset, and each image consists of 3 x 6000 x 6000 pixels. [16]
- **European Road Dataset:** Composed of 200 1600x1550 RGB training images (aprox. $276.4km^2$) for training with a spatial resolution is about $1m^2$ per pixel. [18]
- **Mação Dataset:** Made of sixty-one high-resolution orthorectified aerial images consisting of RGBI channels with a spatial resolution of 0.25 m. Each image presenting 16,000 x 10,000 pixels covering an area of 4 km by 2.5 km. [19]

These datasets collectively cover diverse environmental conditions from dense urban grids to remote rural and tropical regions supporting the development of generalizable road extraction models.

III. HEURISTIC METHODS

Early road extraction pipelines rely on handcrafted features such as texture analysis, morphological filtering, and edge detection. Although these methods can be computationally efficient, they typically struggle with complex or heterogeneous terrain.

Texture-based progressive analysis and mathematical morphology techniques have been widely applied; however, they often fail to generalize across different road types, lighting conditions, or varying levels of vegetation. As a result, heuristic approaches are generally considered inferior [10] to modern data-driven techniques for high-variability environments.

In classical methods, roads are often first identified using shape and homogeneity cues. For curvilinear suburban roads, seeds can be selected from homogeneous segments and grouped using perceptual grouping theory. Additional structural cues are then extracted using multi-scale curvilinear detectors based on differential geometry [2].

A. Road Extraction Workflow

Hough transforms are frequently used for detecting straight-line segments. The standard Hough transform operates on binary images, but extensions such as the Spatial Signature

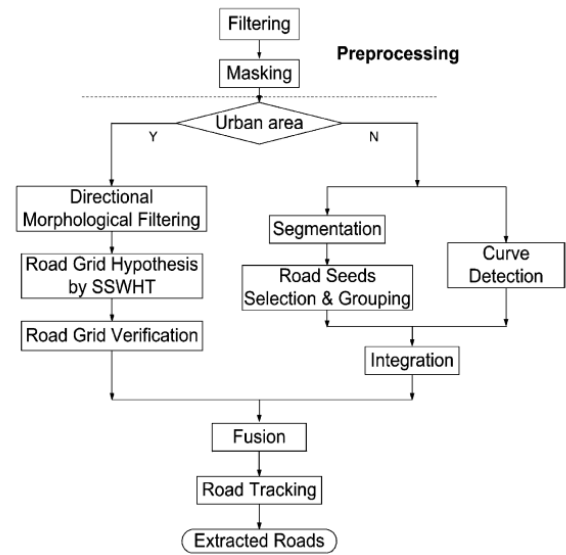


Fig. 1. Processing flow chart for the integrated road mapping system.

Fig. 1. Road extraction workflow [2]

Weighted Hough Transform (SSWHT) improve robustness by incorporating local intensity signatures. The complete workflow is shown in Fig. 1 [2].

B. Preprocessing

Typical preprocessing steps include:

- Morphological opening and closing operations [2]
- Median filtering with a 7×7 kernel [2]
- Masking using the Normalized Difference Vegetation Index (NDVI) [2]
- Edge detection using the Nevatia–Babu operator, which provides sharper results than Sobel filters [2]

IV. DATA-DRIVEN METHODS

Recent research increasingly favors data-driven approaches based on deep learning.

A. Patch-Based CNN Models

”In the patch-based CNN model, the possibility of road dispensation is firstly predicted piece-by- piece with a particular stride and then the label map of the whole image is produced by assembling all of the label patches. Figure 3 illustrat” [10]

- Patch based models [12]
- RSRCNN [8]
- DeepLabv3+ [17]

B. FCN Models

Fully Convolutional Networks improve spatial consistency but may still suffer from broken or incomplete road segments, especially in curved or occluded regions. Fig 4

- FCN [7]
- U-shaped FCN (UFCN) [20]
- SVM [20]

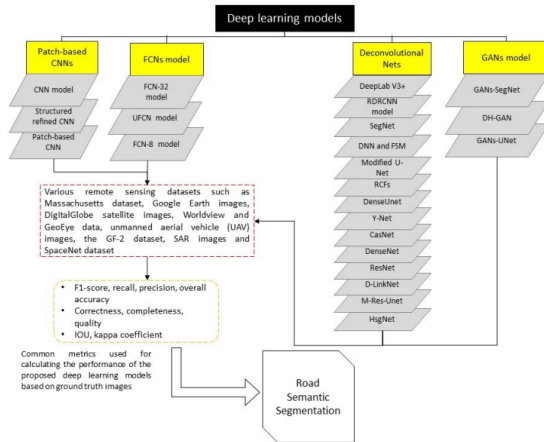


Figure 2. Road semantic segmentation using different deep learning models from remote sensing datasets.

Fig. 2. Road extraction using data-driven techniques [10]

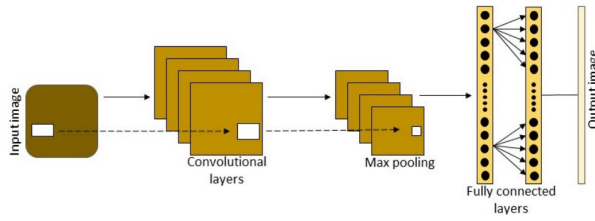


Figure 3. General architecture of the patch-level CNNs model.

Fig. 3. General architecture of the patch-level CNNs model. architecture of the patch-level CNNs model. [10]

- FCN-8 [17] [11]
- Enlarged FCN-4s [11]
- Pruned FCN-2s [11]
- Deep Residual UNet [17]

C. Deep convolutional encoder-decoder (DCED) Models

Deconvolutional architectures provide high spatial accuracy and produce smoother segmentation maps but require more computational resources and memory. Fig 5

- modified deep encoder-decoder neural network [13]
- finite state machine (FSM) and DNN [5]
- UNet CNN [14]
- richer convolutional features (RCFs) [15]
- DenseUNet [16]
- cascaded end-to-end (CasNet) [21]

D. GAN-Based Models

Generative Adversarial Networks (GANs) offer robustness and can improve boundary sharpness, though they may encounter convergence issues on large or complex datasets. Fig 6

- dual-hot generative adversarial networks(DH-GAN) [18]
- GANs-UNet [7]
- GANs [9]

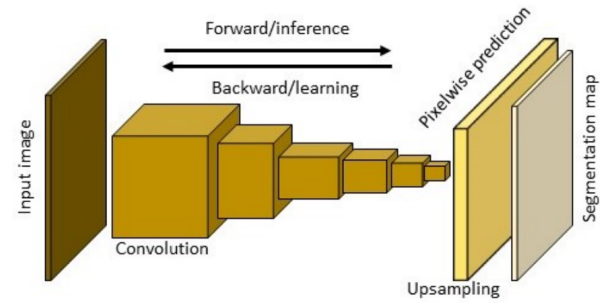


Figure 4. General architecture of FCNs model.

Fig. 4. General architecture of FCNs model [10]

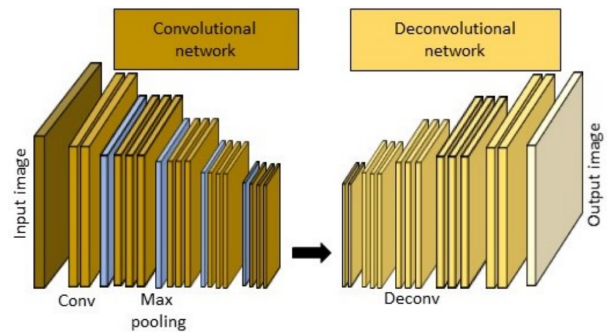


Figure 5. General architecture of deconvolutional networks.

Fig. 5. General architecture of deconvolutional network [10]

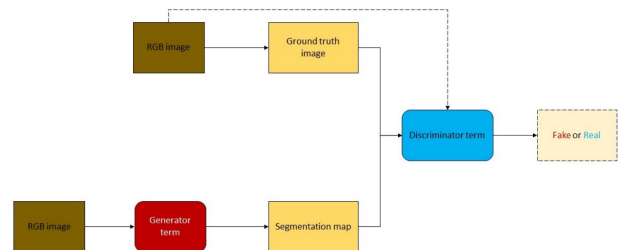


Figure 6. Generic architecture of GANs model.

Fig. 6. Generic architecture of GANs mod [10]

TABLE I
DATA RESULTS OF EACH METHOD - PART 1

Method	Paper	Model	Avg	F1 Score (1)	mIoU (2)	Completeness (3)	Correctness (4)	Quality (5)	Recall (6)	IoU (7)	precision (8)	accuracy (9)
Heuristic	[2]	Road tracking	86.0%	-	-	86%	92%	80%	-	-	-	-
	[2]	Fusion of two detectors	84.33%	-	-	84%	91%	78%	-	-	-	-
	[2]	Detector I	82.33%	-	-	81%	91%	75%	-	-	-	-
CNN	[15]	SEEDS-MCNN	82.2%	79%	-	-	-	-	80.4%	-	78%	92.2%
	[1]	ResNet-24+	81%	81%	-	-	-	-	-	-	-	-
	[12]	Rasha et al.	80.9%	-	-	-	80.9%	-	-	-	-	-
	[6]	Dice	80.52%	84.97%	-	-	83.63%	-	-	73.87%	-	-
	[20]	1D-CNN	79.72%	73.4%	-	-	-	-	99.3%	-	58.2%	88%
	[6]	Softmax	78.79%	83.55%	-	-	81.08%	-	-	71.75%	-	-
	[15]	SLIC-CNN	77.95%	72.1%	-	-	-	-	96.2%	-	58.1%	89.2%
	[15]	Pixel-CNN	77.72%	71.2%	-	-	-	-	96.2%	-	57%	86.5%
	[20]	2D-CNN	72.15%	66.6%	-	-	-	-	72.7%	-	61.4%	87.9%
	[1]	ResNet-24	69.5%	81%	58%	-	-	-	-	-	-	-
	[19]	DeepLabv3+	69.28%	72.39%	-	-	-	56.4%	62.67%	-	85.67%	-
	[17]	DeepLabv3+	40.91%	-	-	-	-	-	-	40.91%	-	-
	[8]	RSRCNN	40.38%	20.8%	-	-	-	-	61.3%	-	12.5%	70.9%
FCN	[7]	FCN-32	86.23%	-	-	74.2%	98.7%	85.8%	-	-	-	-
	[6]	Dice+BCE	80.11%	84.41%	-	-	82.91%	-	-	73.02%	-	-
	[6]	WBCE	78.99%	83.64%	-	-	81.43%	-	-	71.89%	-	-
	[7]	RSRCNN + road struct weight based	73.03%	66.2%	-	-	-	-	72.9%	-	60.6%	92.4%
	[11]	Enlarged FCN-4s	63%	-	52%	-	-	-	66%	-	71%	-
	[17]	FCN-8	54.73%	-	-	-	-	-	66.56%	42.92%	54.72%	-
	[11]	Pruned FCN-2s	53.67%	-	42%	-	-	-	61%	-	58%	-
	[11]	FCN-8s	40.67%	-	30%	-	-	-	49%	-	43%	-

TABLE II
DATA RESULTS OF EACH METHOD - PART 2

Method	Paper	Model	Avg	F1 Score (1)	mIoU (2)	Completeness (3)	Correctness (4)	Quality (5)	Recall (6)	IoU (7)	precision (8)	accuracy (9)
DCED	[1]	UNet	57.5%	72%	43%	-	-	-	-	-	-	-
	[17]	Deep Res. UNet	27.31%	-	-	-	-	-	-	27.31%	-	-
	[13]	ELU-SegNet	79.1%	78.8%	-	-	-	-	73.3%	-	85.2%	-
	[13]	ELU-SegNet-R	81.3%	81.2%	-	-	-	-	84.7%	-	78%	-
	[13]	ELU-SegNet-RL	85.73%	85.7%	-	-	-	-	86.1%	-	85.4%	-
	[20]	UFCN	97.25%	96.7%	-	-	-	-	96.1%	-	97.3%	98.9%
	[14]	Modified UNet	80.33%	74.54%	-	-	-	-	75.48%	-	74.15%	97.14%
	[15]	UNet	90.03%	88.9%	-	-	-	-	88.5%	-	89.3%	93.4%
	[15]	Road-RCF	93.02%	91.5%	-	-	-	-	98.5%	-	85.8%	96.3%
	[16]	UNet	65.36%	60.78%	-	-	-	-	70.81%	70.91%	58.92%	-
	[16]	SegNet	66.08%	62.64%	-	-	-	-	71.33%	71.91%	61.35%	-
	[16]	FRRN-B	70.57%	66.71%	-	-	-	-	64.87%	74.22%	76.51%	-
	[16]	GL-Dense-UNet	73.82%	73.98%	-	-	-	-	70.09%	72.73%	78.48%	-
	[16]	DenseUNet	74.3%	74.07%	-	-	-	-	70.41%	74.47%	78.25%	-
	[21]	CasNet	91.72%	-	-	-	-	88.84%	92.14%	-	94.18%	-
	[19]	UNet	68.56%	72.10%	-	-	-	55.64%	64.04%	-	82.47%	-
GAN	[7]	pix2pix D:ResNET	87.63%	-	-	76.3%	100%	86.6%	-	-	-	-
	[18]	DH-GAN D:PathGAN	84.05%	84.05%	-	-	-	-	-	-	-	-
	[18]	DH-GAN + Greedy G:UNet D:PathGAN	80.81%	80.81%	-	-	-	-	-	-	-	-
	[18]	DH-GAN + SBO G:UNet D:PathGAN	81.74%	81.74%	-	-	-	-	-	-	-	-
	[9]	GAN G:	84.28%	-	-	-	-	80.92%	89.81%	-	82.12%	-
Other	[5]	DNN + FSM	74.67%	-	-	78%	76%	70%	-	-	-	-
	[20]	SVM (ML)	66.98%	56.6%	-	-	-	-	90.4%	-	41.1%	76.8%
	[19]	FPN	71.6%	75.33%	-	-	-	59.75%	70.66%	-	80.67%	-

Common evaluation metrics include:

A. F1 Score

$$\frac{1}{N} \sum_{i=0}^N \frac{2 \times \text{Area of overlap}}{\text{Total Area}} \quad (1)$$

B. Mean Intersection over Union (mIoU)

$$\frac{1}{N} \sum_{i=0}^N \frac{\text{Predicted Road} \cap \text{Known Road}}{\text{Predicted Road} \cup \text{Known Road}} \quad (2)$$

C. Completeness

$$\frac{\text{length of matched reference}}{\text{length of reference}} \quad (3)$$

D. Correctness

$$\frac{\text{length of matched extraction}}{\text{length of extraction}} \quad (4)$$

E. Quality / Q

$$\frac{\text{length of matched extraction}}{\text{length of extraction} + \text{length of unmatched reference}} \quad (5)$$

F. Recall / COM

$$\frac{\text{True Positives}}{\text{True Positives} + \text{False Negatives}} \quad (6)$$

G. IoU

$$\frac{\text{True Positives}}{\text{True Positives} + \text{False Positives} + \text{True Negatives}} \quad (7)$$

H. precision / COR

$$\frac{\text{True Positives}}{\text{True Positives} + \text{False Positives}} \quad (8)$$

I. accuracy

$$\frac{\text{True Positives} + \text{True Negatives}}{\text{True Positives} + \text{False Positives} + \text{True Negatives} + \text{False Negatives}} \quad (9)$$

- [1] S. Sloan, R. R. Talkhani, T. Huang, J. Engert, and W. F. Laurance, "Mapping remote roads using artificial intelligence and satellite imagery," *Remote Sensing*, vol. 16, no. 5, 2024. [Online]. Available: <https://www.mdpi.com/2072-4292/16/5/839>
- [2] X. Jin and C. H. Davis, "An integrated system for automatic road mapping from high-resolution multi-spectral satellite imagery by information fusion," *Information Fusion*, vol. 6, no. 4, pp. 257–273, 2005, fusion of Remotely Sensed Data over Urban Areas. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1566253504000454>
- [3] "Digitalglobe completes quickbird satellite orbit raise," <https://web.archive.org/web/20140714153612/http://media.digitalglobe.com/manual-releases/DigitalGlobe-Completes-QuickBird-Satellite-Orbit-R>, accessed: 2025-11-14.
- [4] "Quickbird wiki article," <https://en.wikipedia.org/wiki/QuickBird>, accessed: 2025-11-14.
- [5] J. Wang, J. Song, M. Chen, and Z. Yang, "Road network extraction: a neural-dynamic framework based on deep learning and a finite state machine," *International Journal of Remote Sensing*, vol. 36, no. 12, pp. 3144–3169, 2015. [Online]. Available: <https://doi.org/10.1080/01431161.2015.1054049>
- [6] Y. Lin, D. Xu, N. Wang, Z. Shi, and Q. Chen, "Road extraction from very-high-resolution remote sensing images via a nested se-deeplab model," *Remote Sensing*, vol. 12, no. 18, 2020. [Online]. Available: <https://www.mdpi.com/2072-4292/12/18/2985>
- [7] N. Varia, A. Dokania, and J. Senthilnath, "Deepext: A convolution neural network for road extraction using rgb images captured by uav," in *2018 IEEE Symposium Series on Computational Intelligence (SSCI)*, 2018, pp. 1890–1895.
- [8] Y. Wei, Z. Wang, and M. Xu, "Road structure refined cnn for road extraction in aerial image," *IEEE Geoscience and Remote Sensing Letters*, vol. 14, no. 5, pp. 709–713, 2017.
- [9] Q. Shi, X. Liu, and X. Li, "Road detection from remote sensing images by generative adversarial networks," *IEEE Access*, vol. 6, pp. 25 486–25 494, 2018.
- [10] A. Abdollahi, B. Pradhan, N. Shukla, S. Chakraborty, and A. Alamri, "Deep learning approaches applied to remote sensing datasets for road extraction: A state-of-the-art review," *Remote Sensing*, vol. 12, no. 9, 2020. [Online]. Available: <https://www.mdpi.com/2072-4292/12/9/1444>
- [11] Z. Zhong, J. Li, W. Cui, and H. Jiang, "Fully convolutional networks for building and road extraction: Preliminary results," in *2016 IEEE International Geoscience and Remote Sensing Symposium (IGARSS)*, 2016, pp. 1591–1594.
- [12] R. Alshehhi, P. R. Marpu, W. L. Woon, and M. D. Mura, "Simultaneous extraction of roads and buildings in remote sensing imagery with convolutional neural networks," *ISPRS Journal of Photogrammetry and Remote Sensing*, vol. 130, pp. 139–149, 2017. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0924271617300096>
- [13] T. Panboonyuen, P. Vateekul, K. Jitkajornwanich, and S. Lawawirojwong, "An enhanced deep convolutional encoder-decoder network for road segmentation on aerial imagery," in *Recent Advances in Information and Communication Technology 2017*, P. Meesad, S. Sodsee, and H. Unger, Eds. Cham: Springer International Publishing, 2018, pp. 191–201.
- [14] A. Constantin, J.-J. Ding, and Y.-C. Lee, "Accurate road detection from satellite images using modified u-net," in *2018 IEEE Asia Pacific Conference on Circuits and Systems (APCCAS)*, 2018, pp. 423–426.
- [15] Z. Hong, D. Ming, K. Zhou, Y. Guo, and T. Lu, "Road extraction from a high spatial resolution remote sensing image based on richer convolutional features," *IEEE Access*, vol. 6, pp. 46 988–47 000, 2018.
- [16] J. Xin, X. Zhang, Z. Zhang, and W. Fang, "Road extraction of high-resolution remote sensing images derived from denseunet," *Remote Sensing*, vol. 11, no. 21, 2019. [Online]. Available: <https://www.mdpi.com/2072-4292/11/21/2499>
- [17] C. Henry, S. M. Azimi, and N. Merkle, "Road segmentation in sar satellite images with deep fully convolutional neural networks," *IEEE Geoscience and Remote Sensing Letters*, vol. 15, no. 12, pp. 1867–1871, 2018.
- [18] D. Costea, A. Marcu, M. Leordeanu, and E. Slusanschi, "Creating roadmaps in aerial images with generative adversarial networks and smoothing-based optimization," in *2017 IEEE International Conference on Computer Vision Workshops (ICCVW)*, 2017, pp. 2100–2109.

- [19] M. Lourenço, D. Estima, H. Oliveira, L. Oliveira, and A. Mora, "Automatic rural road centerline detection and extraction from aerial images for a forest fire decision support system," *Remote Sensing*, vol. 15, no. 1, 2023. [Online]. Available: <https://www.mdpi.com/2072-4292/15/1/271>
- [20] R. Kestur, S. Farooq, R. Abdal, E. Mehraj, O. S. Narasipura, and M. Mudigere, "UFCN: a fully convolutional neural network for road extraction in RGB imagery acquired by remote sensing from an unmanned aerial vehicle," *Journal of Applied Remote Sensing*, vol. 12, no. 1, p. 016020, 2018. [Online]. Available: <https://doi.org/10.1117/1.JRS.12.016020>
- [21] G. Cheng, Y. Wang, S. Xu, H. Wang, S. Xiang, and C. Pan, "Automatic road detection and centerline extraction via cascaded end-to-end convolutional neural network," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 55, no. 6, pp. 3322–3337, 2017.