

Master's Degree in Computer Science and Engineering

Lowering the Reality Gap in Aggregate Programs Validation: Running Collektive Over Unity

Thesis in:
SOFTWARE PROCESS ENGINEERING

Supervisor
Prof. Danilo Pianini

Candidate
Filippo Gurioli

Co-supervisors
Martina Baiardi
Angela Cortecchia

Graduation Session: IV
Academic Year 2024-2025

Abstract

Max 2000 characters, strict.

To my grandparents and Roberto...

Contents

Abstract	iii
1 Introduction	1
1.1 Motivation: Swarm Behavior	2
1.2 Problem Statement: Engineering Challenges in Simulation	3
2 Background and State of the Art	5
2.1 Distributed Systems and Organizational Complexity	6
2.2 Self-Organizing Frameworks	6
2.2.1 Aggregate Computing	6
2.3 Simulation Landscape	6
2.3.1 Paradigms	6
2.3.2 The Reality Gap	6
2.3.3 Realism vs. Scalability	6
2.4 Game Engines as Simulators	6
2.4.1 What is a Game Engine	6
2.4.2 Relevance of Game Engines Beyond Gaming	7
2.4.3 Unity: Core Concepts and Functionalities	7
2.4.4 Unity as the Preferred Platform for This Study	9
3 Unity-Package-Template: Automated Unity Development Infrastructure	11
3.1 Requirements	11
3.1.1 Business Requirements	12
3.1.2 Domain Requirements	12
3.1.3 Functional Requirements	13
3.1.4 Non-Functional Requirements	14
3.2 Features and Tooling	14
3.2.1 Version Control System Management	14
3.2.2 Code Quality	15
3.2.3 Dependency Drift	15

CONTENTS

3.2.4	Developer Experience	16
4	Collektive×Unity: Designing a 3D Simulator for Collective Systems	19
4.1	Goal	19
4.2	Requirements	19
4.2.1	Business Requirements	19
4.2.2	Domain Requirements	20
4.2.3	Functional Requirements	21
4.2.4	Non-Functional Requirements	22
4.3	Architecture	22
4.3.1	Architecture Rationale	22
4.3.2	Component Implementation	23
5	Implementation of Collektive×Unity	27
5.1	Design	27
5.1.1	Collektive Backend	27
5.1.2	Core Bridge	30
5.1.3	Unity Frontend	31
5.2	Implementation Details	34
5.2.1	Unity assets	35
5.2.2	Design Patterns in Unity	35
5.2.3	Unity Editor Customization	36
6	Case Study: Environment-aware Gradient Ascent	39
6.1	Case Study Statement	39
6.2	Minimal Environment	40
6.3	Rich Environment	41
7	Results	43
7.1	Comparison with Socket-based Communication	43
8	Conclusions and Future Work	45
8.1	Future Work	46
	Bibliography	49

List of Figures

2.1	The main view of the Unity Editor [Unic].	8
4.1	Diagram showing the bidirectional communication bridge between Unity and Collektive.	22
5.1	The Engine Facade.	28
5.2	How networking is handled in the Collektive backend.	29
5.3	Communication channel from the Unity domain down to the Collektive boundary.	33
5.4	General overview of the frontend components.	34
5.5	Screenshot that shows how readonly properties appear in the Unity Editor <i>Inspector</i> tab. In this image <i>Total Nodes</i> and <i>Accumulator</i> are both readonly.	38
6.1	Screenshots of the minimal environment scenario with 100 nodes. .	41
6.2	Screenshots of the rich environment scenario with 100 nodes.	42

LIST OF FIGURES

List of Listings

listings/entrypoint.kt	28
5.1 Implementation of the Singleton pattern in Unity.	36

LIST OF LISTINGS

Chapter 1

Introduction

Modern computing is moving away from the era of powerful and isolated machines toward one composed by massively interconnected ensembles of devices. We can observe this transition everywhere, from global cro:IoTInternet of Thing (IoT) sensor networks to smart city infrastructures. In such scenarios, the focus shifts from ‘how to compute’ to ‘how to coordinate’.

As the number of devices in these systems grows into the thousands or millions, traditional centralized management becomes a bottleneck. The latency, bandwidth constraints, and single-point-of-failure risks of a ‘command-and-control’ architecture make it unsuitable for the dynamic, often unpredictable environments these systems inhabit. Instead, we must look toward decentralized coordination, where collective intelligence arises from local interactions rather than global oversight.

This thesis explores the intersection of high-level collective programming and high-fidelity simulation. Specifically, it addresses the engineering gap between abstract coordination models, such as cro:ACAggregate Computing (AC), and the practical requirements of developing, testing, and deploying these models within realistic 3D environments. By leveraging the power of modern game engines and automated development workflows, this work aims to provide a robust infrastructure for the next generation of collective system design.

1.1 Motivation: Swarm Behavior

The natural world provides the strongest precedence for the goal of resilient decentralized coordination. From the coordinated flashing of fireflies to the intricate architectural achievements of termite mounds and the smooth collective motion of starling murmurings, biological systems exhibit an efficiency that is frequently difficult for classical engineering to match. These phenomena, which are collectively referred to as *cro:SiSwarm* Intelligence (SI), arise from the interaction of many simple agents that follow localized rules rather than from a global supervisor.

In a natural swarm, intelligence is inherently distributed and emergent. Individual agents (be they ants, bees or birds) possess only a partial perception of their surroundings. The collective however can solve high-order problems such as finding the shortest path to a food source or executing rapid evasive maneuvers against predators. From an engineering perspective, these systems offer three indispensable properties:

- the absence of a central controller; the loss of individual units does not compromise the mission.
- The logic governing ten agents often remains functional for ten thousand, as interactions remain local regardless of total population size.
- Swarms autonomously adapt to dynamic environments, re-configuring their behavior in response to external stimuli.

As we attempt to port these characteristics into the digital and physical domains (specifically through paradigms like AC) we face a significant translation gap. While the mathematical models for collective logic are maturing, the infrastructure to test them in realistic, high-fidelity environments remains fragmented. To truly harness the potential of swarm behavior in human-made systems, we must develop tools that can simulate the complex interplay between decentralized algorithms and the physical world.

1.2 Problem Statement: Engineering Challenges in Simulation

Simulation has been widely explored in terms of scalability, but not many researches have been done regarding high-fidelity. This field brings into play hard constraints that mathematical rigor often does not consider. Physics collisions, gravity and friction are just examples of what a good high-fidelity simulator could add to a cooperative swarm simulation. Traditional simulators often prioritize the number of agents at the expense of environmental complexity, leading to a ‘reality gap’ that complicates the deployment of algorithms onto physical hardware. Fortunately, game engines do this work for us; they add physics engines capable of computing the result of physical interactions with rigor. The real problem now becomes only one: bridging these two worlds.

The challenge of bridging high-level coordination with game-engine-driven physics is not merely a matter of data transfer, but one of architectural alignment. In particular:

- synchronism: collective programming models rely on discrete logical steps whereas game engines operate on a continuous, high-frequency tick (e.g. 60Hz, 60 frames per second).
- Abstraction: collective models treat agents like points in space whereas high-fidelity environment represent them as complex entities with mass, inertia and physical bounds.
- Scalability: the simulator should still be able to compete with other collective programming simulators in terms of nodes represented inside the experiments and their interactions.

1.2. PROBLEM STATEMENT: ENGINEERING CHALLANGES IN SIMULATION

Chapter 2

Background and State of the Art

To contextualize the contributions of this thesis, it is necessary to establish the theoretical foundations upon which it is built. This chapter explores the evolution of distributed systems toward collective intelligence and examines the formalisms of self-organizing frameworks. By evaluating the limitations of current simulators, this chapter identifies the technical ‘reality gap’ that this research aims to bridge, providing the necessary background to appreciate the integration of high-fidelity game engines into the decentralized coordination workflow.

2.1 Distributed Systems and Organizational Complexity

2.2 Self-Organizing Frameworks

2.2.1 Aggregate Computing

2.3 Simulation Landscape

2.3.1 Paradigms

2.3.2 The Reality Gap

2.3.3 Reéalism vs. Scalability

2.4 Game Engines as Simulators

Traditionally, the simulation of complex systems has been addressed through dedicated academic tools or agent-based modeling frameworks, often characterized by a high level of abstraction, but limited in their physical and spatial representation. In contrast, modern game engines integrate advanced physics engines, optimized rendering pipelines, scripting tools, and visual development environments, enabling the creation of high-fidelity three-dimensional environments in which autonomous agents can operate under realistic constraints.

2.4.1 What is a Game Engine

A game engine is the core software of a video game or any other application that uses real-time graphics. It provides the fundamental technologies, simplifies the development process, and often allows the game to run on different platforms, such as consoles and computer operating systems. The main features typically offered by a game engine include a rendering system for 2D and 3D graphics, physics and collision detection, audio management, scripting, animations, artificial intelligence, networking, and scene-graph management.

Game engines often provide a suite of visual development tools in addition to reusable software components. These tools are generally provided in an integrated development environment to enable a simplified and rapid development of games in a data-driven manner [con].

At present, Unity, Unreal Engine and Godot are the three most widely used options among the game development community.

2.4.2 Relevance of Game Engines Beyond Gaming

Adopting a game engine as a simulation platform offers several advantages over traditional academic tools.

Provides real-time 3D rendering, which supports both qualitative analysis and debugging processes. It has integrated physics engines capable of simulating realistic dynamics. The visual development environment enables rapid prototyping and iterative design. Most popular game engines have a mature ecosystem of tools and plugins and also support for automated execution and batch processing.

2.4.3 Unity: Core Concepts and Functionalities

The project developed in this thesis is built on Unity, a game engine created by Unity Technologies and widely used in both industrial and academic contexts fig.2.1.

Unity adopts a GameObject–Component architectural model, in which every entity within a scene is represented as a container object to which modular components are attached. Behaviors are implemented through C# scripts that interact with the engine's update cycle.

The fundamental concepts include:

- **Scenes:** hierarchical object containers that define and organize the simulated environment.
- **GameObject:** the basic entity of the simulation.
- **Component:** functional modules that can be applied to GameObjects (e.g., Transform, Rigidbody, Collider).

2.4. GAME ENGINES AS SIMULATORS

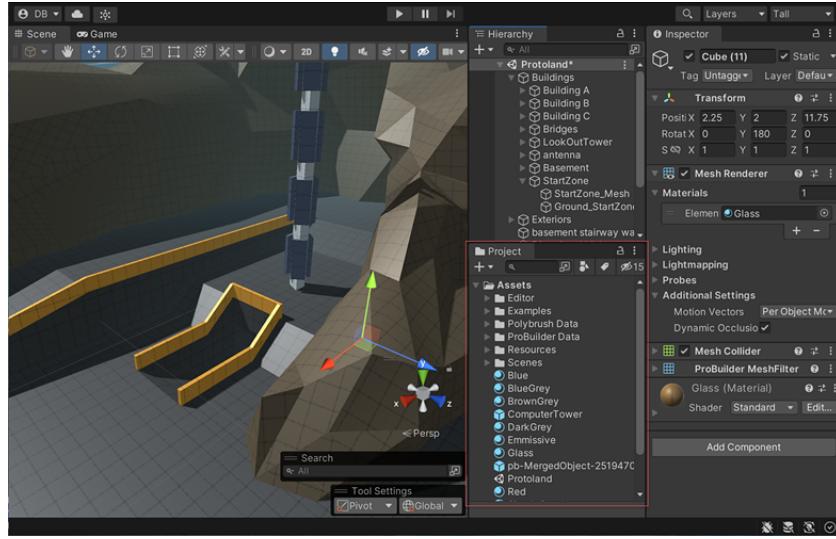


Figure 2.1: The main view of the Unity Editor [Unic].

- **Prefab:** reusable templates.
- **Lifecycle methods:** methods such as `Update()` and `FixedUpdate()` that define time-dependent behavior [Uni26c].

This paradigm naturally lends itself to the modeling of collective systems: each agent can be represented as a `GameObject` equipped with components that implement perception, communication, and decision-making behavior.

Within this architectural framework, physical interaction and spatial dynamics are handled by Unity's built-in 3D physics system, which is based on the integration of NVIDIA's PhysX engine, developed in close collaboration with NVIDIA.

The NVIDIA PhysX SDK is an open-source, scalable real-time physics engine designed to support advanced simulations, enabling more immersive gameplay through realistic physical behavior and dynamic real-time effects. It provides a framework for modeling 3D environments, allowing developers to create and remove physical entities (actors) and manage both direct and proximity-based interactions between them [Unib].

2.4.4 Unity as the Preferred Platform for This Study

The decision to adopt Unity as the platform for simulating the collective system explored in this thesis is driven by several considerations.

Unity provides the capability for realistic three-dimensional simulation and integrates naturally with an agent-based modeling approach. It allows for the accurate representation of physical and spatial constraints, offers advanced visual debugging features, and supports automation and testing workflows, making it a highly suitable environment for this study.

A comparison with Unreal Engine shows that, although the latter offers a more advanced graphics pipeline, Unity represents an effective balance between simulation fidelity, architectural flexibility, and development speed.

Chapter 3

Unity-Package-Template: Automated Unity Development Infrastructure

The mismatch between professional software engineering standards and the project-centric nature of the Unity Editor required the deliberate creation of this production-ready architecture. The environment's dependability is crucial in a research-focused setting such as the cro:CASComplex Adaptive Systems (CAS) simulator; if the underlying framework is non-deterministic or prone to human configuration errors, the validity of the data produced is compromised. The emphasis was moved from handling Unity's peculiar project structures to a modular, package-oriented approach by designing a 'template-first' methodology. by treating the simulator as a high-integrity library rather than a single executable, this methodology makes sure that the core functionality is independent of the particular Unity version or project parameters being used for visualization.

3.1 Requirements

Requirements for this project are split into separated categories. It aims at supporting both template users and developers.

3.1.1 Business Requirements

- The project shall provide a ‘Zero-Friction’ onboarding process by enabling a developer to move from cloning to a working development environment in a single step.
- The system must inject unique namespaces, names, and domains into the boilerplate code during initialization.
- The infrastructure shall automate repetitive tasks like dependency installation and secrets upload to GitHub.
- The project must treat the code as a distributable library rather than a standalone executable.
 - It must distinguish between Runtime and Editor content.
 - It must make no assumptions about the final playable build or entry point.
- The template must be self-evolving, allowing the infrastructure to be updated without breaking the projects that were instantiated from it.

3.1.2 Domain Requirements

Unity Ecosystem Domain

- The system shall enable package development with the ease of the Unity Editor.
- The repository structure must adhere to the cro:UPMUnity Package Manager (UPM) directory conventions [Uni26a].
- The system must handle the specific challenges of Unity asset version control, such as the merging of YAML-based files (scenes, prefabs, and metas).

3.1. REQUIREMENTS

DevOps Domain

- The infrastructure must guarantee deterministic versioning, where version increments are tied to the intent of the changes.
- The repository must enforce no development secrets, local licenses, or temporary editor files are leaked into the public source.
- The system must enable ‘Policy as Code’, making branching rules, quality gates, and release logic explicit and reviewable.

Trust Domain

- The system must provide authenticity ensuring that every release is signed and can be audited back to a specific commit.
- The infrastructure must support *living documentation*, where API references and usage guides stay synchronized with the evolving code.

3.1.3 Functional Requirements

- The system should allow a user to initialize a fully configured repository with a single command.
- The setup process must automatically configure project metadata across all internal configurations, including domain, company, package name, namespace, display name, description, and developer identity.
- The system should handle the automated injection of required secrets for CI/CD (Unity licenses, analysis tokens) during the initial bootstrap.
- The system must provide automated validation for code style and static analysis.
- The infrastructure should automatically execute tests across different categories (Runtime and Editor) in a headless environment.

- The system must prevent the integration of code that does not meet the defined quality gates or commit message standards.

3.1.4 Non-Functional Requirements

- The infrastructure must be executable on all three main OSes (i.e. Windows, Linux and MacOS).
- Setup failure must be ‘loud’ and diagnostic, providing clear error messages when prerequisites are missing.

3.2 Features and Tooling

To satisfy the requirements previously defined, a robust infrastructure was synthesized using a combination of industry-standard DevOps tools and bespoke automation logic.

3.2.1 Version Control System Management

The integrity of the codebase is maintained through a series of automated gates that prevent the accumulation of technical debt:

Husky To ensure a deterministic versioning history, Husky [hus26] is used to manage Git hooks. It enforces the Conventional Commits specification [con20], ensuring that every change intent is human-readable and machine-parsable. Moreover, on each commit, Husky performs fast local static checks including:

- automatic formatting of C# code to maintain stylistic consistency;
- validation of Unity-specific `.meta` and `.unity` (YAML) files to prevent asset corruption or missing references.

Semantic Release To close the loop between development and distribution, the project employs `semantic-release` [sem26]. This tool automates the entire package release workflow, including determining the next version number based on

3.2. FEATURES AND TOOLING

the commit history, generating a `CHANGELOG.md`, and publishing release artifacts to GitHub without manual intervention.

3.2.2 Code Quality

SonarQube All source code is subjected to deep static analysis via SonarQube [son08]. This tool serves as a quality gate that evaluates code smells, security vulnerabilities, and cyclomatic complexity. By integrating this into the integration pipeline, the project ensures that only code meeting a specific ‘Clean Code’ threshold is merged into the stable branches.

cro:CIContinuous Integration (CI) The CI pipeline, powered by GitHub Actions, is designed to validate the project across a matrix of environments. It performs a multi-platform build (Windows, Linux, and macOS) to ensure cross-platform compatibility, and runs both NUnit-based Runtime and Editor tests in a headless Unity environment.

Artifact Signing To ensure the authenticity and non-repudiation of the distributed package, the infrastructure includes an automated GPG signing stage. During the release process, the artifact is cryptographically signed using a private key generated during the initialization phase, allowing users to verify the integrity of the package.

3.2.3 Dependency Drift

Renovate To mitigate the risk of ‘dependency rot’, Renovate [ren26] is integrated into the repository. Unlike standard configurations, this project utilizes a custom regular expression manager to track and update dependencies within Unity’s `package.json` and manifest files. This ensures that any project instantiated from the template always benefits from the latest security patches and engine features while providing a transparent review process through automated Pull Requests.

3.2.4 Developer Experience

Ensuring a flawless development experience is a major requirement for this project. Several tools and architectural patterns have been adopted to improve the developer's quality of life.

Unity Smart Merge Since Unity assets are stored in YAML, standard merge tools often fail to resolve conflicts in scenes or prefabs. The infrastructure automatically configures the *Unity YAML Merge* tool (SmartMerge) [Uni26b] within the local Git configuration, drastically reducing the friction of collaborative environment design.

DocFX To bridge the gap between source code and usable documentation, the project utilizes DocFX [doc26]. This tool functions as a static site generator that targets .NET assemblies. It extracts XML documentation comments (docstrings) directly from the C# source code to build a comprehensive, searchable API reference. By treating documentation as code, DocFX allows the infrastructure to host a specialized website that includes both conceptual manuals and technical API documentation. This ensures that the library's public surface is always accurately reflected in the documentation, preventing the common 'documentation lag' found in rapidly evolving projects.

Boot Command The project factory is encapsulated in a bespoke `init` script. This script orchestrates the transformation from a generic template to a specific project by:

- automatically renaming directories and updating Assembly Definitions (`.asmdef`) [uni20] with project-specific namespaces;
- injecting project-specific values (Domain, Company, Package Name, Namespace, Display Name, Description, Git username, and Git email) across all internal configurations;
- handling automated licensing based on user preferences;

3.2. FEATURES AND TOOLING

- uploading repository secrets (e.g. GPG keys, Sonar tokens and Unity licenses) via the GitHub CLI [git26];
- installing npm and .NET dependencies;
- booting Unity in batch mode to generate the initial `.meta` files and installing Git hooks to ensure the environment is ‘ready-to-edit’ upon completion;
- opening the Unity Editor inside the sandbox for immediate development;
- creating the `develop` branch, applying automated branch and tag protection rules to the `main` and `develop` branches to enforce the quality gates from day one;
- committing all initialization changes and tagging that commit as `0.0.0`, which anchors the semantic versioning chain;
- removing the `.template` file and the `init` script itself, as they are no longer needed once the project has been bootstrapped.

Template Mode A key architectural challenge was that the template itself requires a CI pipeline for its own development and maintenance, while the projects instantiated from it require a fundamentally different one oriented towards package distribution. This duality is resolved through the presence of a single sentinel file: `.template`. When this file exists in the repository, the pipeline operates in *Template Mode*, executing the validation and release logic appropriate for the template infrastructure itself. Upon a successful `init` run, the file is deleted, and from that point forward the same pipeline switches to *Package Mode*, running the full package build, test, quality gate, signing, and release workflow. This design directly satisfies the self-evolving requirement: the template infrastructure can be continuously improved using its own automation, and any project instantiated from it inherits those improvements transparently via Renovate’s automated dependency update pull requests.

Sandbox Pattern Because the Unity Editor cannot develop a package in complete isolation, the project implements a ‘Sandbox’ architecture. This consists of

3.2. FEATURES AND TOOLING

a minimal Unity project within the repository that references the package via a local file path. This allows developers to use the full suite of Editor tools while ensuring the package itself remains clean and ready for external distribution via the UPM.

Chapter 4

Collektive×Unity: Designing a 3D Simulator for Collective Systems

This chapter face the core research project produced for this thesis: a simulator for 3D CAS.

4.1 Goal

The project goal is to bridge the Unity game engine with the aggregate computing library named Collektive.

This communication should be bidirectional, achieve high performance and enable huge customization.

4.2 Requirements

Requirements are split into separated categories.

4.2.1 Business Requirements

- The project should create a communication channel between the Collektive back-end and the Unity front-end.

- The project should extract environmental data from Unity node sensors and share them to the Collektive program.
- The integration must map the output of the Collektive aggregate program to Unity Actuators (e.g., changing position, color, or state of a GameObject).
- The system shall evaluate and implement a low-latency communication or bridge mechanism to minimize overhead between the JVM-based Collektive and the C#-based Unity environments.
- The integration should allow Collektive nodes to perceive Unity's colliders, rigidbodies and spatial triggers as first-class citizens.
- The integration layer should remain agnostic to the specific CAS case study.

4.2.2 Domain Requirements

Simulator Domain

- The simulator should have customizable node sensors.
- The simulator should have customizable node actuators.
- The simulator should have customizable step duration (i.e. *delta time*).
- The simulator should be able to pause the simulation.
- The simulator should have a centered handling of randomization to enable reproducibility.
- The simulator should support addition and remotion of nodes in the simulation dynamically.
- The simulator should allow nodes to interact at least with the following Unity components:
 - rigid body
 - collider

4.2. REQUIREMENTS

- The simulator should support addition and remotion of neighbors dynamically.
- The simulator should support any kind of neighborhood discovery.

Communication Domain

- The communication should follow the reactive pattern (i.e. Collektive reacts to Unity's stimuli).
- The data exchanged should be agnostic from the underlying case study.
- Performance should be the driver for choosing the right technology.

Research Domain

- The system should prove the feasibility of integrating game engines within CAS frameworks.

4.2.3 Functional Requirements

User Functional Requirements

- The user should treat a Unity scene as the simulation environment.
- The user should treat the Unity Editor as the simulator.
- The user should be able to add and remove nodes from the environment.
- The user should be able to create neighborhood discovery logic.
- The user should be able to inject any kind of collektive program inside the simulation.
- The user should be able to attach many different sensors and actuators to the same node.
- The user should be able to configure each node independently from the others.

System Functional Requirements

- The system should allow users to define custom sensors and actuators without modifying the core integration library.
- The system should allow users to define custom Collektive program without modifying the core integration library.

4.2.4 Non-Functional Requirements

- The system should maintain stable frame rate (> 30 FPS) with at least 500 active collektive nodes in a low budget laptop (ryzen 7 5700U, 16GB DDR4, integrated GPU).
- The system should be implemented with the fastest technology found during exploration.

4.3 Architecture

The integration is designed as a modular bridge between Unity and Collektive, facilitating the bidirectional flow of information as illustrated in diagram 4.1.



Figure 4.1: Diagram showing the bidirectional communication bridge between Unity and Collektive.

4.3.1 Architecture Rationale

Before detailing the individual components, it is necessary to outline the core architecture decisions that ensure the system's scalability and flexibility.

From Application to Package The architectural design of this bridge was shaped by a shift in how the simulation environment is hosted. Early design iterations focused on developing a standalone simulation application. However, this approach led to a redundant replication of complex features already native to the Unity Editor, such as spatial partitioning, inspector-based configuration, and asset management.

To resolve this, the architecture was refactored from a monolithic application into a Unity Package. This shift leverages the Unity Editor as the primary configuration interface rather than a mere rendering target. By distributing the backend and bridge as a modular library, the user can utilize Unity’s native tooling to define simulation parameters, modify environment geometry, and inspect node states in real-time. Consequently, the project functions as an extensible framework that transforms a standard Unity project into a specialized CAS simulator.

Delegated Neighborhood Discovery A critical architectural decision was the delegation of spatial logic to the Unity environment. In aggregate computing, determining network topology is fundamental. If this logic were handled in the Kotlin backend, every simulation tick would require an $O(n^2)$ complexity check to evaluate node proximity.

By moving discovery to Unity, the system exploits the engine’s highly optimized physics engine and pre-baked spatial partitioning (e.g., grids or Octrees). This allows for efficient neighborhood calculations using native features like Colliders or Raycasting, ensuring the backend remains a pure logic engine that receives a pre-calculated adjacency list.

4.3.2 Component Implementation

The bridge architecture is decomposed into three distinct functional components that realize the design principles mentioned above.

Collektive Parser

To enable communication across a network or cross-IPC inter-process communication (IPC) layer, the Collektive API requires a robust serialization strategy. Two

primary design choices were made to facilitate this:

- the simulation runs on a single machine; thus, Collektive is configured as `InMemory` to minimize communication latency;
- the generic identifier in Collektive has been reified to an integer to ensure predictable serialization.

The primary challenge lay in the program’s input and output, which are both generics. While maintaining these as generics is essential for flexible collective behavior, it complicates data exchange. Rather than the brittle approach of manually replicating data structures and custom serializers on both sides of the bridge, this implementation adopts an `cro:IDLInterface` Definition Language (IDL). By utilizing an IDL, the system decouples the data definition from the implementation language, allowing ‘a program or object written in one language [to] communicate with another program written in an unknown language’ [comb].

Unity Parser

While the Collektive Parser handles the logic-side data mapping, the Unity Parser translates these definitions into the engine’s entity-based structures. Unity operates on an `cro:ECSEntity` Component System (ECS) inspired architecture, where the state of any object is defined by its collection of attached components. To bridge this with the aggregate computing domain, the *Unity Parser* is implemented as a specialized component responsible for bidirectional data translation.

At the scene level, a central *Simulation Orchestrator* component serves as the gateway. This entity enhances a standard Unity scene into an active simulation environment by managing the communication channel’s lifecycle. It interfaces directly with the *Core Bridge*, utilizing the IDL to serialize the environmental state and deserialize incoming commands from the Collektive back-end.

For individual nodes, the parser abstracts Unity’s internal state into the language-agnostic format required by the aggregate program. The parser is responsible for neighborhood discovery. Rather than delegating spatial logic to the back-end, Unity identifies neighbors according to any arbitrary logic (e.g., physical proximity, line-of-sight or topological links) and provides them to the bridge as a collection

of identifier pairs. This ensures the system remains agnostic to the specific neighboring criteria, allowing the user to implement any discovery logic within the Unity environment.

Core Bridge

The Core Bridge represents the central link in the system, serving as the high-speed interface between the Unity C# environment and the Collektive Kotlin/JVM runtime. To satisfy the strict non-functional requirement of maintaining high frame rates with over 500 active nodes, the bridge is implemented as a cross-FFI (Foreign Function Interface) layer.

The choice of FFI over more traditional IPC methods was driven by the need to minimize serialization overhead and context-switching latency. By exposing Collektive's core logic as a native library, the bridge allows Unity to perform direct memory-to-memory communication. To ensure data consistency across the two environments, the bridge enforces a synchronous execution model. Each simulation 'tick' triggers a blocking call: the Unity engine pauses its internal loop while the bridge marshals the data and waits for the Collektive engine to complete its computation round.

The Bridge's role is strictly defined by three mechanical operations:

- Data marshalling: The process of transforming high-level language objects into a language-agnostic binary representation, as defined by the IDL schema.
- Function invocation: The execution of the foreign logic via the FFI, passing pointers to the marshalled data buffers.
- Data unmarshalling: The reconstruction of the binary data into the target language's native types, allowing the receiving environment to process the information.

A comprehensive performance comparison and a detailed evaluation of the trade-offs between FFI and Socket-based communication are provided in Chapter 7.1.

Chapter 5

Implementation of Collektive×Unity

This chapters goes into details about what produced in the Collektive×Unity project. Here it will be exposed the detailed design of the application.

5.1 Design

The design discussion will be divided into the 3 main components identified during the architecture phase: Collkutive backend, Core Bridge and Unity frontend.

5.1.1 Collektive Backend

As stated in the architecture section (4.3) the communication across the bridge is synchronous. That means, each time Unity asks something to Collektive, it awaits its answer before restart doing its work. To enforce that architecture choice it has been created a central engine in charge of exposing the main capabilities of a CAS simulation. It can be seen as a facade pattern [GHJV94] in which the engine is the middleware from which the communication passes.

As shown in fig. 5.1 diagram this class should have methods to handle the whole simulation like `addNode`, `addConnection` and `step`. The `step` method in particular is the central point that should perform a cycle of the passed node. It is what moves the simulation one step ahead.

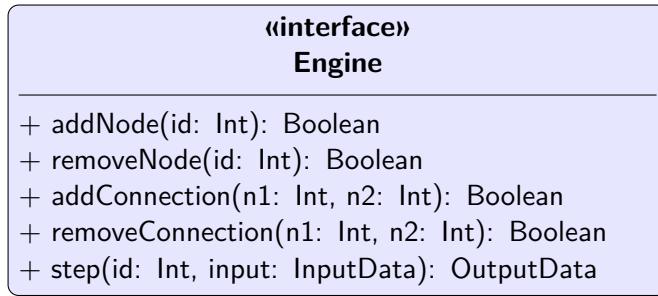


Figure 5.1: The Engine Facade.

```

1 | fun Aggregate<Int>.entrypoint(sensorData: SensorData): ActuatorData
  
```

To follow the cro:SRPSingle Responsibility Principle (SRP) [Wik24] it has been created a helper component that is in charge of handling neighborhood and network in general for the simulation. This component is split into 2 objects **Network** and **NetworkManager**. The former is a stateless representation of the network visible from the perspective of a node (i.e. the implementation of the **Mailbox** in **Collektive**) while the latter is a master that knows the entire network and handles communication. The same **NetworkManager** is injected to each **Network** that will use it in order to send and receive messages from and to the neighborhood. The fig. 5.2 diagram shows the network API and their interaction.

From requirements ‘the system should allow users to define custom **Collektive** program without modifying the core integration library’. To honor that requirement the core **collektive** program (from now on ‘entrypoint’) should be somehow injected into the engine, so that it can remain independent from the actual simulation it has being done. This inversion of control is achieved by injecting a lambda into the **Engine** constructor, as illustrated in Listing 5.1.1. This allows the **Engine** to remain agnostic of the specific collective logic being executed.

The entrypoint serves as the primary abstraction layer for the simulation designer (i.e. the simulator user), providing a restricted scope where collective behaviors are defined without exposure to the underlying engine orchestration. By isolating this logic into a standalone lambda, the framework ensures that the simulation’s behavioral rules remain decoupled from the communication and synchronization mechanics of the backend.

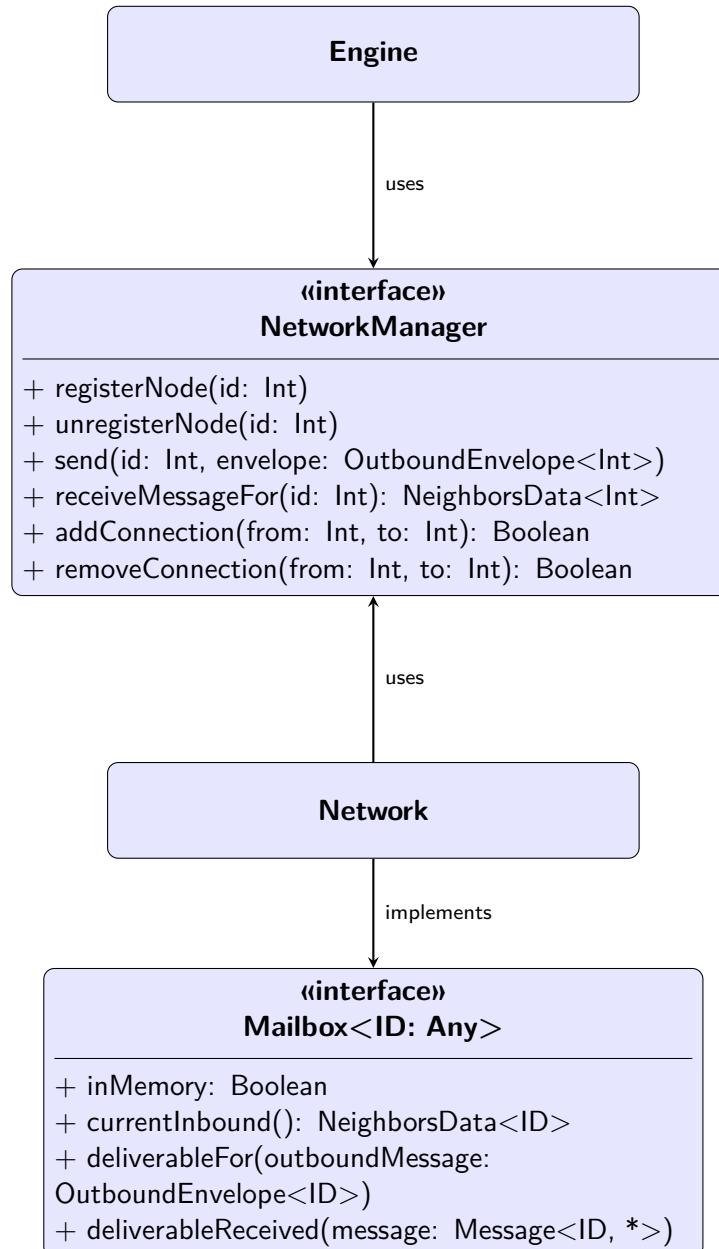


Figure 5.2: How networking is handled in the Collektive backend.

It is important to note that the `SensorData` and `ActuatorData` types utilized in the entrypoint signature represent the boundary between Collektive and Unity. To maintain strict type-safety across this boundary, these structures are centralized in the *Core Bridge*, acting as the common interface through which simulation state and environmental sensors are exchanged.

5.1.2 Core Bridge

The Core Bridge serves as the critical ‘glue code’ that enables communication between the Collektive and Unity environments. As detailed in Section 4.3, it leverages an IDL to marshal domain-specific data structures into low-level byte arrays. These are transferred via a FFI to the opposing context, where they are reconstructed into native data structures.

The IDL selected for this implementation is Protocol Buffers. While Flat-Buffers was initially considered for its superior ‘zero-copy’ performance [vO14], it was ultimately discarded due to compatibility constraints with cro:KMPKotlin MultiPlatform (KMP) projects.

Protocol Buffers As stated in the official documentation, Protocol Buffers provide a ‘language-neutral, platform-neutral, extensible mechanism for serializing structured data [...] You define how you want your data to be structured once, then you can use special generated source code to easily write and read your structured data’ [Goo24]. This system utilizes a specialized compiler (`protoc`) that processes a `.proto` definition file to generate the required source code for each target environment (e.g., `.kt` for Kotlin and `.cs` for C#).

The adoption of an IDL extends beyond mere serialization efficiency; it enforces the cro:DRYDon’t Repeat Yourself (DRY) principle by providing a single source of truth for data definitions. This decoupling ensures that the data schema remains synchronized across both the cro:JVMJava Virtual Machine (JVM) and the Unity engine, reducing the risk of structural mismatches during the development of complex collective behaviors.

Usage The responsibility for defining shared data structures is delegated to the simulation designer. Users must define the following two core structures within the IDL schema:

- **SensorData**: the information captured by Unity components from the 3D environment to be sent to the Collektive backend;
- **ActuatorData**: The resultant data produced by the Collektive program, which is returned to Unity to trigger physical or logical actions.

The decision to delegate these definitions to the user is intentional and ensures the framework remains domain-agnostic. In a monolithic environment, this flexibility would typically be achieved through generics or polymorphism. However, since data must cross a language barrier where native generic types cannot be shared, the IDL serves as a functional substitute. By requiring the user to define these structures, the bridge maintains its genericity, allowing it to support any simulation type without requiring changes to the underlying bridge implementation.

Data Transmission Once the user-defined data structures are generated, the framework manages the lifecycle of their transmission across the bridge. When a simulation ‘tick’ occurs, the Unity engine serializes the **SensorData** into a compact binary format using the Protocol Buffers library. Lastly, the Core Bridge passes a pointer to the underlying byte array through the FFI channel.

On the receiving end, the Collektive backend reads from this shared memory location and reconstructs the data into native Kotlin objects. This process ensures that while the user works with high-level, type-safe classes in both C# and Kotlin, the actual communication remains a memory-bound operation.

5.1.3 Unity Frontend

The frontend serves as the final integration layer, consolidating the previously described components into a unified simulation environment. To align with Unity’s

Component-Based architecture, the system utilizes specialized `MonoBehaviour` entities to bridge engine-level events with aggregate logic. Central to this coordination is the `SimulationManager`.

Acting as the functional counterpart to the `Collektive Engine`, the `SimulationManager` is a singleton-like component attached to a unique orchestrator object within the scene. Its role is twofold:

- environment configuration: it initializes the unity physics engine and global simulation parameters to ensure deterministic execution;
- interface bridging: it reflects the high-level facade of `Collektive` backend `Engine`. By interfacing with a static service layer that utilizes the `cro:P/InvokePlatform Invoke (P/Invoke)` mechanism [Mic24], the manager exposes native library capabilities to the Unity domain.

As illustrated in diagram 5.3, this creates a continuous communication pipeline where the `SimulationManager` orchestrates the flow of data from the Unity scene, through the binary serialization layer, and finally into the native JVM execution context.

Along with the `SimulationManager` the project introduces also another singleton: the `LinkManager`. `LinkManager` is a visualization-oriented singleton that maintains and renders the current network links (when enabled), decoupling debugging/inspection concerns from simulation logic.

Aggregate programs depend on neighbor exchange, but the definition of *who is a neighbor* is inherently situated and environment-dependent. In the project, neighborhood construction is handled on the Unity side by creating and removing directed or bidirectional links through the `SimulationManager` API. This enables multiple strategies, ranging from geometric proximity to occlusion-aware connectivity or application-specific policies. A common and efficient pattern leverages Unity's physics system and trigger colliders. For instance, a connection rule component that automatically subscribes/unsubscribes links when other nodes enter/exit a proximity volume can be implemented by annotating the implementing class with an attribute, whose `OnTriggerEnter` and `OnTriggerExit` methods call the appropriate link-management API to maintain the neighborhood structure.

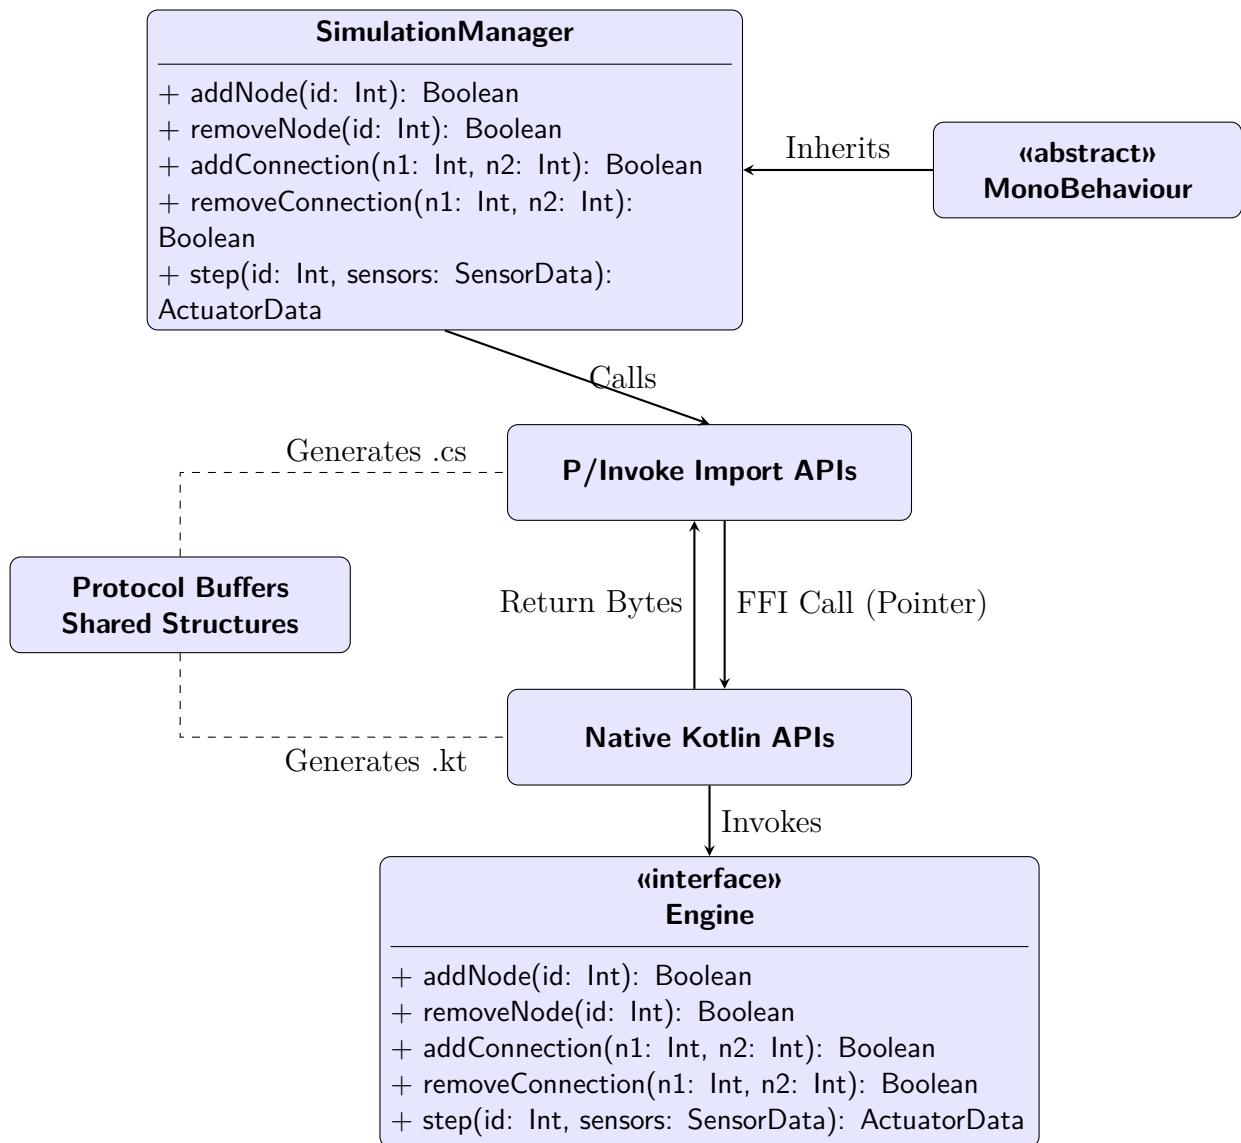


Figure 5.3: Communication channel from the Unity domain down to the Collektive boundary.

5.2. IMPLEMENTATION DETAILS

By delegating neighborhood dynamics to Unity, the integration can directly reuse engine-level facilities (collisions, triggers, layers, and spatial partitioning), while keeping the Collektive runtime agnostic of the specific spatial model.

The final piece in the Unity frontend is the `AbstractNode`. `AbstractNode` marks a game object as a Collektive device. It defines the extension points that are scenario-specific: how sensor data is sampled from the Unity world, and how actuator commands are applied. Concrete scenarios are implemented by subclassing `AbstractNode` and providing the domain logic for sensing and actuation, while reusing the integration-provided communication and execution machinery.

A final overview of the frontend is presented in fig. 5.4

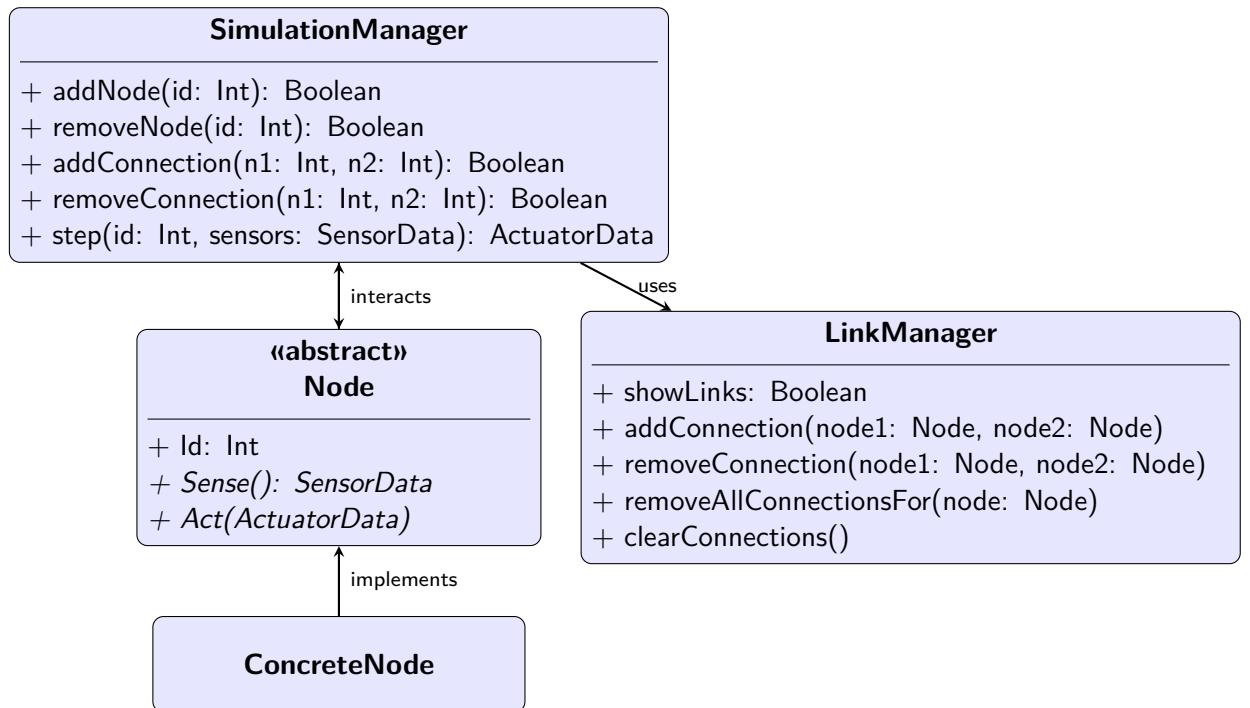


Figure 5.4: General overview of the frontend components.

5.2 Implementation Details

In this section it will be explained in more details certain parts of the project that have interesting insights.

5.2.1 Unity assets

Unity provides a robust asset system centered around *Prefabs*, which were instrumental in this project’s development. According to the official documentation, the Prefab system ‘allows you to create, configure, and store a `GameObject` complete with all its components, property values, and child `GameObjects` as a reusable asset’ [Unia]. By leveraging this system, a `SimulationManager` Prefab was developed. This asset encapsulates both the `SimulationManager` and `LinkManager` components; consequently, a standard Unity scene can be converted into a simulation environment simply by instantiating this single Prefab.

5.2.2 Design Patterns in Unity

Implementing traditional design patterns within the Unity ecosystem presents unique challenges. Because Unity utilizes a Component-Based Architecture rather than a strict object-oriented hierarchy, maintaining high-quality, decoupled code is not always intuitive. For this project, the `SimulationManager` and `LinkManager` were architected as Singletons to centralize simulation logic.

In general software engineering, the Singleton pattern is intended to ‘ensure [classes] only have one instance, provide easy access to that instance, and control their instantiation’ [Wik25]. However, in Unity, a script’s lifecycle is inextricably linked to the `GameObject` to which it is attached. To reconcile the Singleton pattern with Unity’s scene-based execution, the `SingletonBehaviour` class was implemented, as illustrated in listing 5.1.

The implementation leverages the Unity engine’s APIs to enforce instance uniqueness across the execution lifecycle:

- the `Object.FindObjectOfType<T>` method is employed to query all active `MonoBehaviour` instances within the current scene hierarchy, returning the existing instance or `null` if none is present;
- the `AddComponent<T>` method is used to attach the component to a programmatically instantiated `GameObject` in the event that no prior instance is detected;

5.2. IMPLEMENTATION DETAILS

Listing 5.1: Implementation of the Singleton pattern in Unity.

```
1  public abstract class SingletonBehaviour<T> : MonoBehaviour
2    where T : MonoBehaviour
3  {
4    private static T _instance;
5    private static readonly object _lock = new object();
6
7    /// <summary>
8    /// The singleton instance.
9    /// </summary>
10   public static T Instance
11   {
12     get
13     {
14       lock (_lock)
15       {
16         if (_instance == null)
17         {
18           _instance = (T)Object.FindAnyObjectByType(typeof(T));
19           if (_instance == null)
20           {
21             var singleton = new GameObject();
22             _instance = singleton.AddComponent<T>();
23             singleton.name = "(singleton) " + typeof(T).ToString();
24             DontDestroyOnLoad(singleton);
25           }
26         }
27         return _instance;
28       }
29     }
30   }
31 }
```

- the `DontDestroyOnLoad` method is invoked to ensure the persistence of the manager across scene transitions, preventing the engine from deallocating the object during level loads.

5.2.3 Unity Editor Customization

The Unity environment offers a robust framework for extending the Editor's native capabilities through user-defined scripts. This project leverages this extensibility for two primary objectives:

- the automation of repetitive build and configuration tasks;
- the enhancement of runtime observability and debugging.

Workflow Automation During the development phase, the integration of the backend required frequent recompilation of native libraries and the relocation of the resulting `.so` binaries into specific Unity-accessible directories. Additionally, updates to the communication protocol necessitated the regeneration of source code from `.proto` definitions. To streamline these processes, two custom menu utilities were implemented within the Editor’s global navigation bar:

- Native Rebuild: Accessible via `Tools > Native > Rebuild backend`, this utility automates the Collektive backend build process and ensures the binary is correctly placed for linking.
- Protocol Generation: The `Tools > Proto > Generate` option triggers the Protocol Buffer compiler to process `.proto` files and output the generated classes directly into the project’s script folder.

Runtime Debugging and Observability Because Unity employs a proprietary internal console for logging, monitoring the internal state of the native backend during execution can be cumbersome. To mitigate this, a custom `ReadOnly` attribute was developed.

When applied to a field already marked with Unity’s `SerializeField` attribute, this custom decorator ensures the value is rendered in the *Inspector* as a read-only field. By binding these fields to data returned from the backend, the *Inspector* serves as a real-time monitoring dashboard. This allows for the observation of backend state changes directly within the Editor UI without the risk of manual accidental modification by the user. A screenshot of this can be seen at fig. 5.5.

5.2. IMPLEMENTATION DETAILS

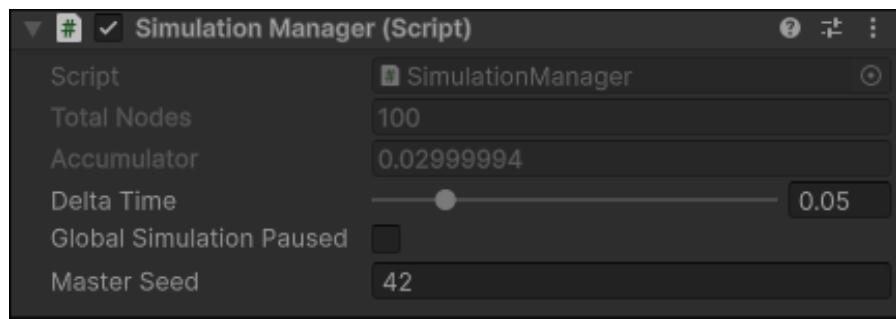


Figure 5.5: Screenshot that shows how readonly properties appear in the Unity Editor *Inspector* tab. In this image *Total Nodes* and *Accumulator* are both readonly.

Chapter 6

Case Study: Environment-aware Gradient Ascent

A case study was conducted to demonstrate the capabilities of the proposed integration and to provide a practical starting point for users interested in experimenting with aggregate programming within Unity. Although conceptually simple, this case study embodies the core challenges explored in this thesis. The experiment was replicated across two distinct exemplars. The first utilizes a minimal environment optimized for logic verification and debugging, while the second employs a rich environment to demonstrate the potential of a modern game engine as a high-fidelity simulator.

6.1 Case Study Statement

The case study addresses a classic problem in the CAS domain known as gradient ascent. In this scenario, a swarm of devices must navigate toward a source of interest while dynamically avoiding obstacles. The behavior is governed by two main logic streams involving collective intelligence and local obstacle avoidance. In the collective intelligence stream, devices sense the intensity of the source at their current location and share this data with their neighbors. By comparing local intensities, they collaboratively determine the direction of the steepest gradient, allowing the swarm to move toward the local best position. Simultaneously, each

node perceives physical obstacles in its immediate vicinity. Unlike the source intensity, obstacle data is not shared between nodes; instead, each device independently adjusts its trajectory to maintain a safe distance from collisions.

All nodes execute synchronous rounds at a fixed frequency of $20Hz$. In each round, a node performs a sense-compute-act cycle. During the perception phase, it measures the local intensity of the source, which is calculated based on Euclidean distance and detects nearby obstacles or fellow agents. Communication and vicinities are established using a distance-based neighborhood model where two nodes are considered neighbors if their separation is within 10 units, forming the connectivity graph required for aggregate computation. During the computation phase, nodes exchange intensity data to compute a movement vector. This vector is the result of a weighted sum where one component points toward higher source intensity and another points away from obstacles. These gradient computations are performed using the Collektive standard library, which implements the foundational aggregate programming building blocks defined in the field's literature [VAB⁺18].

6.2 Minimal Environment

The minimal scene consists of a simplified arena containing four parallelepipedic obstacles measuring $1 \times 3 \times 5$ units that physically obstruct the path to the source. The devices are represented by spheres moving across a flat plane toward a source located at a fixed coordinate. This environment served as the primary benchmark for performance testing. On hardware with integrated graphics, the simulation maintained real-time performance with up to 50 nodes. On a desktop equipped with a dedicated GPU (NVIDIA RTX 4070), the system scaled easily to 100 nodes while maintaining a high frame rate. The progression of the swarm through this environment is illustrated in the snapshots in fig. 6.1.

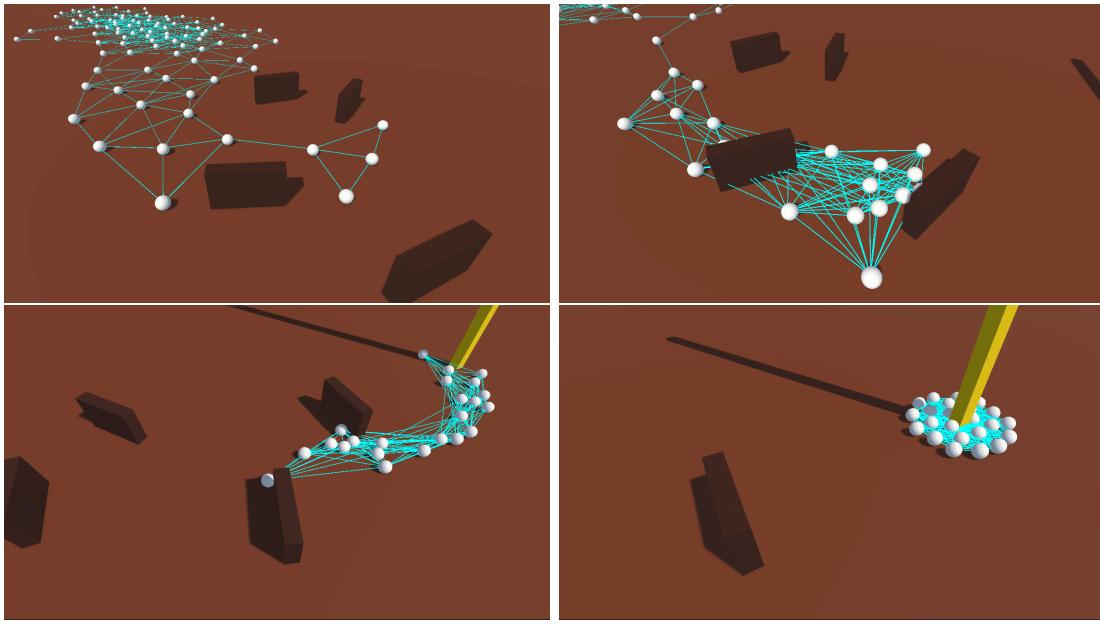


Figure 6.1: Screenshots of the minimal environment scenario with 100 nodes.

6.3 Rich Environment

To showcase the high-fidelity potential of the Unity integration, the experiment was replicated in a complex built-in environment titled ‘Oasis’. In this version, the abstract obstacles are replaced by complex geometries including trees, bushes, and rocks. The source of interest is placed inside a tent on the far side of the arena, requiring the nodes to navigate sophisticated terrain from their initial spawn point. The increased complexity of this environment, specifically regarding the detailed rendering, high-poly mesh collisions, and advanced physics interactions, significantly raised the computational requirements compared to the minimal scenario.

While a dedicated GPU is recommended to maintain optimal real-time performance, tests showed that an integrated GPU could still execute the simulation with a reduced load of 50 nodes, albeit reaching the limits of its processing capabilities. With a dedicated desktop GPU, the simulation comfortably handled 100 nodes, successfully demonstrating the swarm’s ability to navigate natural obstacles while maintaining the aggregate gradient ascent logic. The evolution of the system in this rich environment is captured in fig. 6.2.



Figure 6.2: Screenshots of the rich environment scenario with 100 nodes.

Chapter 7

Results

7.1 Comparison with Socket-based Communication

A critical evaluation was conducted to validate the performance of the communication bridge chosen for Collektive \times Unity. This study originated from an experimental prototype built with 12 nodes, designed to compare two distinct communication strategies: a socket-based backend and a native backend. In the socket-based configuration, Unity and Collektive operated as separate processes, exchanging data through TCP sockets. This was compared against a native backend where Collektive was compiled into a shared library and invoked directly by Unity through a FFI. While the socket-based approach theoretically offered greater flexibility by supporting any Collektive target, it was hypothesized that the native backend would provide the low-latency performance required for high-frequency aggregate computing.

The results of this benchmark, which has been publicly archived [PSL26], revealed a massive performance gap that confirmed the superiority of the native integration. On average, the socket-based backend was found to be over 450 times slower than the native FFI backend. Under peak load, this disparity widened even further, with a worst-case slowdown exceeding 700 times. These findings indicate that while socket-based communication is technically possible, it introduces a prohibitive ‘interop tax’ that makes real-time simulation of collective systems

unfeasible.

The data confirms that the decision to adopt FFI was essential for maintaining the $20Hz$ execution frequency required for the simulations described in the preceding case studies. By eliminating the overhead of the network stack and inter-process serialization, the FFI-based toolchain ensures that the computational budget is spent on the aggregate logic and physics interactions rather than on communication bottlenecks. This validation reinforces the position of Collektive \times Unity as a high-performance framework capable of bridging functional aggregate programming with the demanding requirements of a real-time game engine.

Chapter 8

Conclusions and Future Work

In this work, Collektive×Unity is presented as a toolchain for the execution of aggregate programs written in Collektive on top of the Unity game engine. To facilitate the adoption of this integration, a dedicated Unity package template project has been developed. This template project serves as a foundational boilerplate, providing the necessary scaffolding and pre-configured settings required to jumpstart the development of aggregate-based simulations. Within this project, the core components of the Collektive×Unity toolchain have been integrated, including the essential scripts and asset structures that bridge the Unity environment with the Collektive execution logic.

By utilizing this template, the complexity of manually setting up the communication bridge is significantly reduced, as it includes the implementation of the specialized architecture designed to unify Unity’s frame-based execution model with the functional nature of aggregate programs. The Unity engine was extended within this project to support the direct invocation of Collektive computations through FFI, while a shared platform-agnostic data model was established using Protocol Buffers. This streamlined setup allows researchers to immediately leverage Unity’s physics capabilities to create realistic and general-purpose simulations for testing and validating CAs.

To guide the design and implementation of the Collektive×Unity toolchain and its corresponding template, a benchmark was conducted to compare the performance of FFI and socket-based communication strategies. The results of this

comparison informed the decision to adopt FFI for the integration, ensuring that the low-latency requirements of collective simulations were met. By providing both the architectural bridge and a ready-to-use project template, a scalable and accessible foundation has been established for simulating complex swarm behaviors within high-fidelity environments.

8.1 Future Work

several avenues for future work have been identified to further enhance the modularity and flexibility of the system. A primary limitation of the current distribution is that the project is not yet fully *packageable*; users must clone or fork the repository to access the simulator. A more robust and professional approach would involve modularizing the framework so that it can be delivered as a standard Unity asset via OpenUPM [Opent]. This would allow for more streamlined dependency management and easier integration into existing Unity projects without the overhead of maintaining a full repository fork.

From an architectural standpoint, the current implementation of the node class in the frontend presents a design that is somewhat rigid. Currently, this class serves a dual purpose by representing the node entity while also housing the specific methods for sensing and acting. A more refined, decoupled architecture is envisioned where a simple identity component designates a GameObject as a node, while distinct components handle specific sensors and actuators independently. This would better align with Unity’s component-based design philosophy and allow for more complex, heterogeneous swarms.

Lastly, the simulation currently operates under a synchronous execution model controlled globally by the `SimulationEngine`. To achieve higher granularity and better reflect the decentralized nature of real-world collective systems, future iterations should move toward an asynchronous model. In such a system, each node would independently manage its own sense-compute-act cycle. This transition would not only improve the fidelity of the simulation by allowing for varied execution frequencies among nodes but also provide a more resilient foundation for testing systems where timing and communication delays are critical factors. By addressing these improvements, Collektive×Unity can evolve from a founda-

8.1. FUTURE WORK

tional bridge into a highly modular and industry-standard simulation framework for collective intelligence.

8.1. FUTURE WORK

Bibliography

- [cona] Wikipedia contributors. Game engine — Wikipedia, the free encyclopedia. Accessed: 2026-02-21.
- [conb] Wikipedia contributors. Interface description language.
- [con20] Conventional commits 1.0.0, 2020. Accessed: 2026-02-23.
- [doc26] Docfx documentation, 2026. Accessed: 2026-02-23.
- [GHJV94] Erich Gamma, Richard F. Helm, Ralph E. Johnson, and John Vlissides. *Design patterns: elements of reusable Object-Oriented software*. 1994.
- [git26] Github cli — take github to the command line, 2026. Accessed: 2026-02-23.
- [Goo24] Google LLC. *Protocol Buffers: Google’s Data Interchange Format*, 2024. Accessed: 2026-02-17.
- [hus26] Husky — modern native git hooks, 2026. Accessed: 2026-02-23.
- [Mic24] Microsoft. Platform invoke (p/invoke), 2024. Accessed: 2026-02-17.
- [Opent] OpenUPM. Openupm: Open source unity package registry. <https://openupm.com/>, 2019–Present. Accessed: 2026-02-25.
- [PSL26] PSLab UNIBO. experiment-2026-coordination-collektive-unity-benchmark. <https://github.com/pslab-unibo/experiment-2026-coordination-collektive-unity-benchmark>, 2026. GitHub repository. Accessed: 2026-02-25.

BIBLIOGRAPHY

- [ren26] Renovate docs, 2026. Accessed: 2026-02-23.
- [sem26] semantic-release documentation, 2026. Accessed: 2026-02-23.
- [son08] Sonarsource – better code & better software, 2008. Accessed: 2026-02-23.
- [Unia] Unity Technologies. Prefabs - unity manual.
- [Unib] Unity Technologies. Programming physics — unity. Accessed: 2026-02-21.
- [Unic] Unity Technologies. *Project View — Unity Manual*. Accessed: 2026-02-21.
- [uni20] Script compilation and assembly definition files, 2020. Accessed: 2026-02-23.
- [Uni26a] Unity Technologies. *Differences between package types - Unity Manual (Version 6000.3)*. Unity Technologies, 2026. Accessed: 2026-02-23.
- [Uni26b] Unity Technologies. *SmartMerge - Unity Manual (Version 6000.3)*. Unity Technologies, 2026. Accessed: 2026-02-23.
- [Uni26c] Unity Technologies. *Unity Manual*, 2026. Accessed: 2026-02-21.
- [VAB⁺18] Mirko Viroli, Giorgio Audrito, Jacob Beal, Ferruccio Damiani, and Danilo Pianini. Engineering resilient collective adaptive systems by self-stabilisation. *ACM Trans. Model. Comput. Simul.*, 28(2):16:1–16:28, 2018.
- [vO14] Wouter van Oortmerssen. Flatbuffers: Memory efficient serialization library. Technical report, Google, 2014. Accessed: 2026-02-17.
- [Wik24] Wikipedia contributors. Single-responsibility principle — Wikipedia, the free encyclopedia, 2024. [Online; accessed 17-February-2026].
- [Wik25] Wikipedia contributors. Singleton pattern — Wikipedia, the free encyclopedia, 2025. Last edited 17 October 2025; [Online; accessed 21-February-2026].

Acknowledgements

Optional. Max 1 page.