


FinAware — System Architecture

What runs where, and which part talks to which. Ports are the local defaults (npm run dev:stack:ml); in Docker and Kubernetes the same parts run as separate containers — see diagram 03.

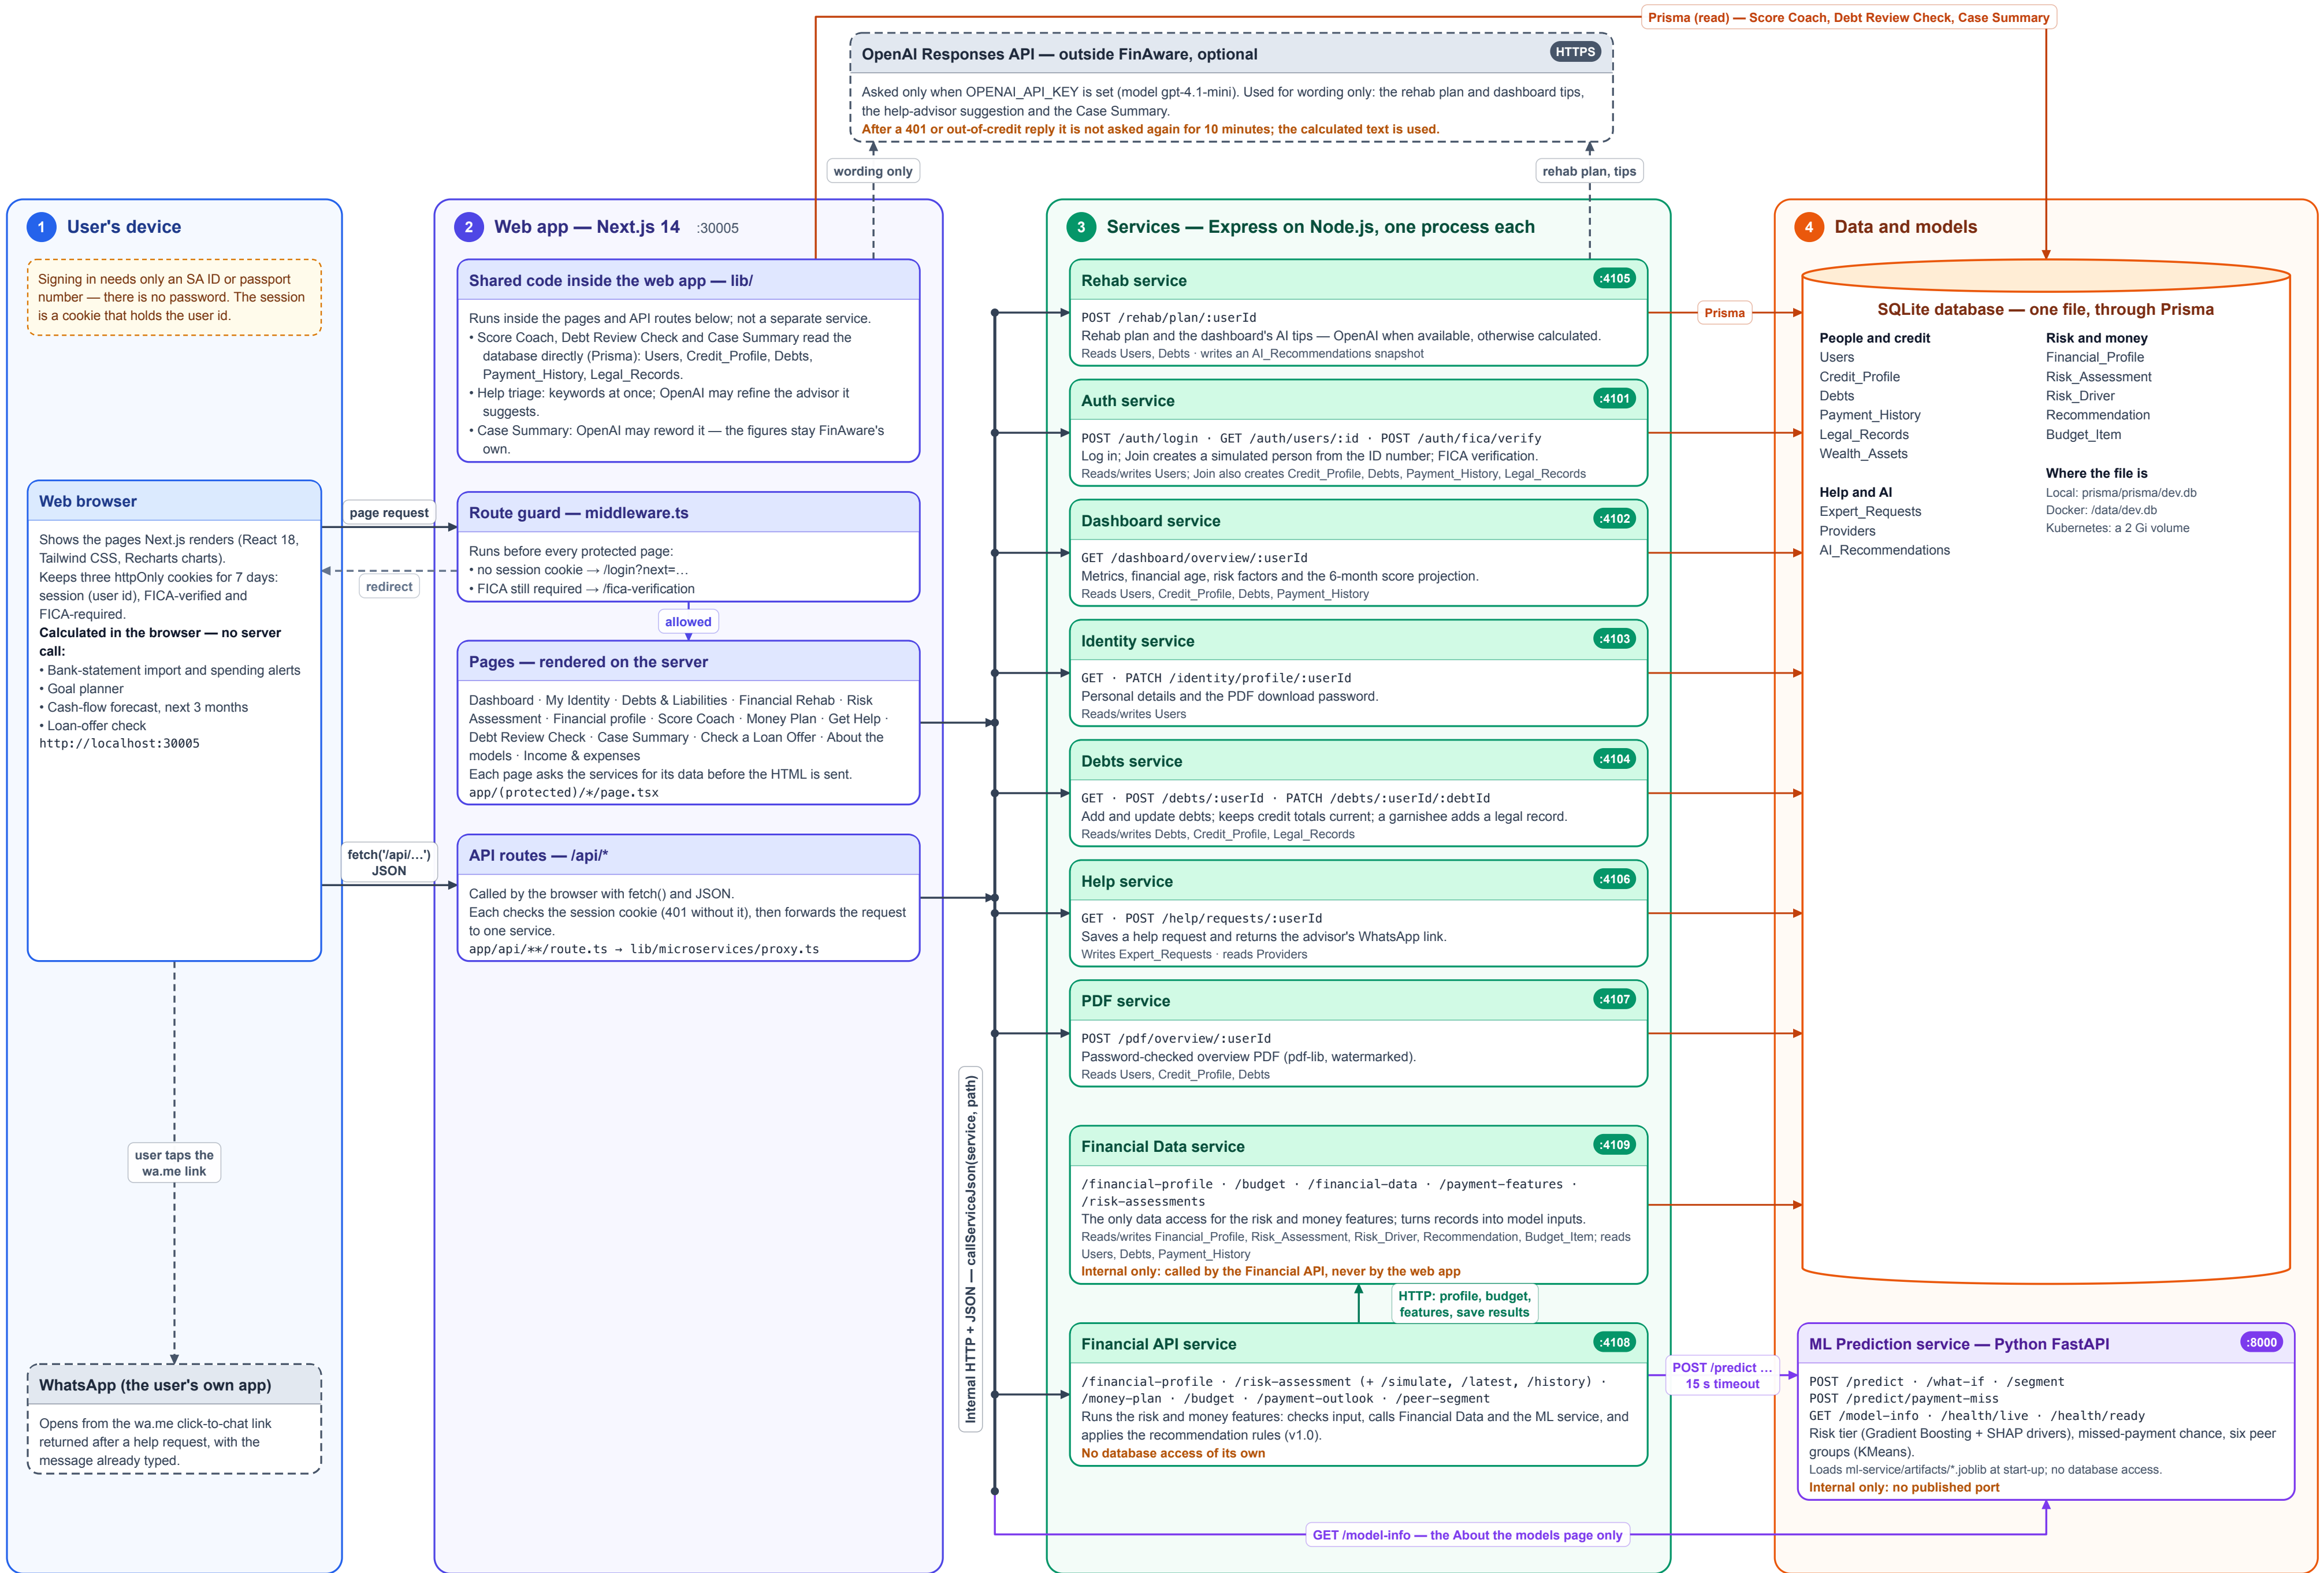

How to read this diagram

- Runs in the browser
- Next.js web app
- Node.js service
- Python ML service
- Stored data
- Outside FinAware
- Something worth knowing

- HTTP request (JSON)
- Call to the ML service
- Database access (Prisma)
- Optional / outside call
- Redirect or reply