


# FinAware — Three Ways to Run It

The same parts (the web app, nine Node.js services and the Python ML service) run as processes on one computer, as containers with Docker Compose, or as pods on Kubernetes. Only the packaging and the addresses change.

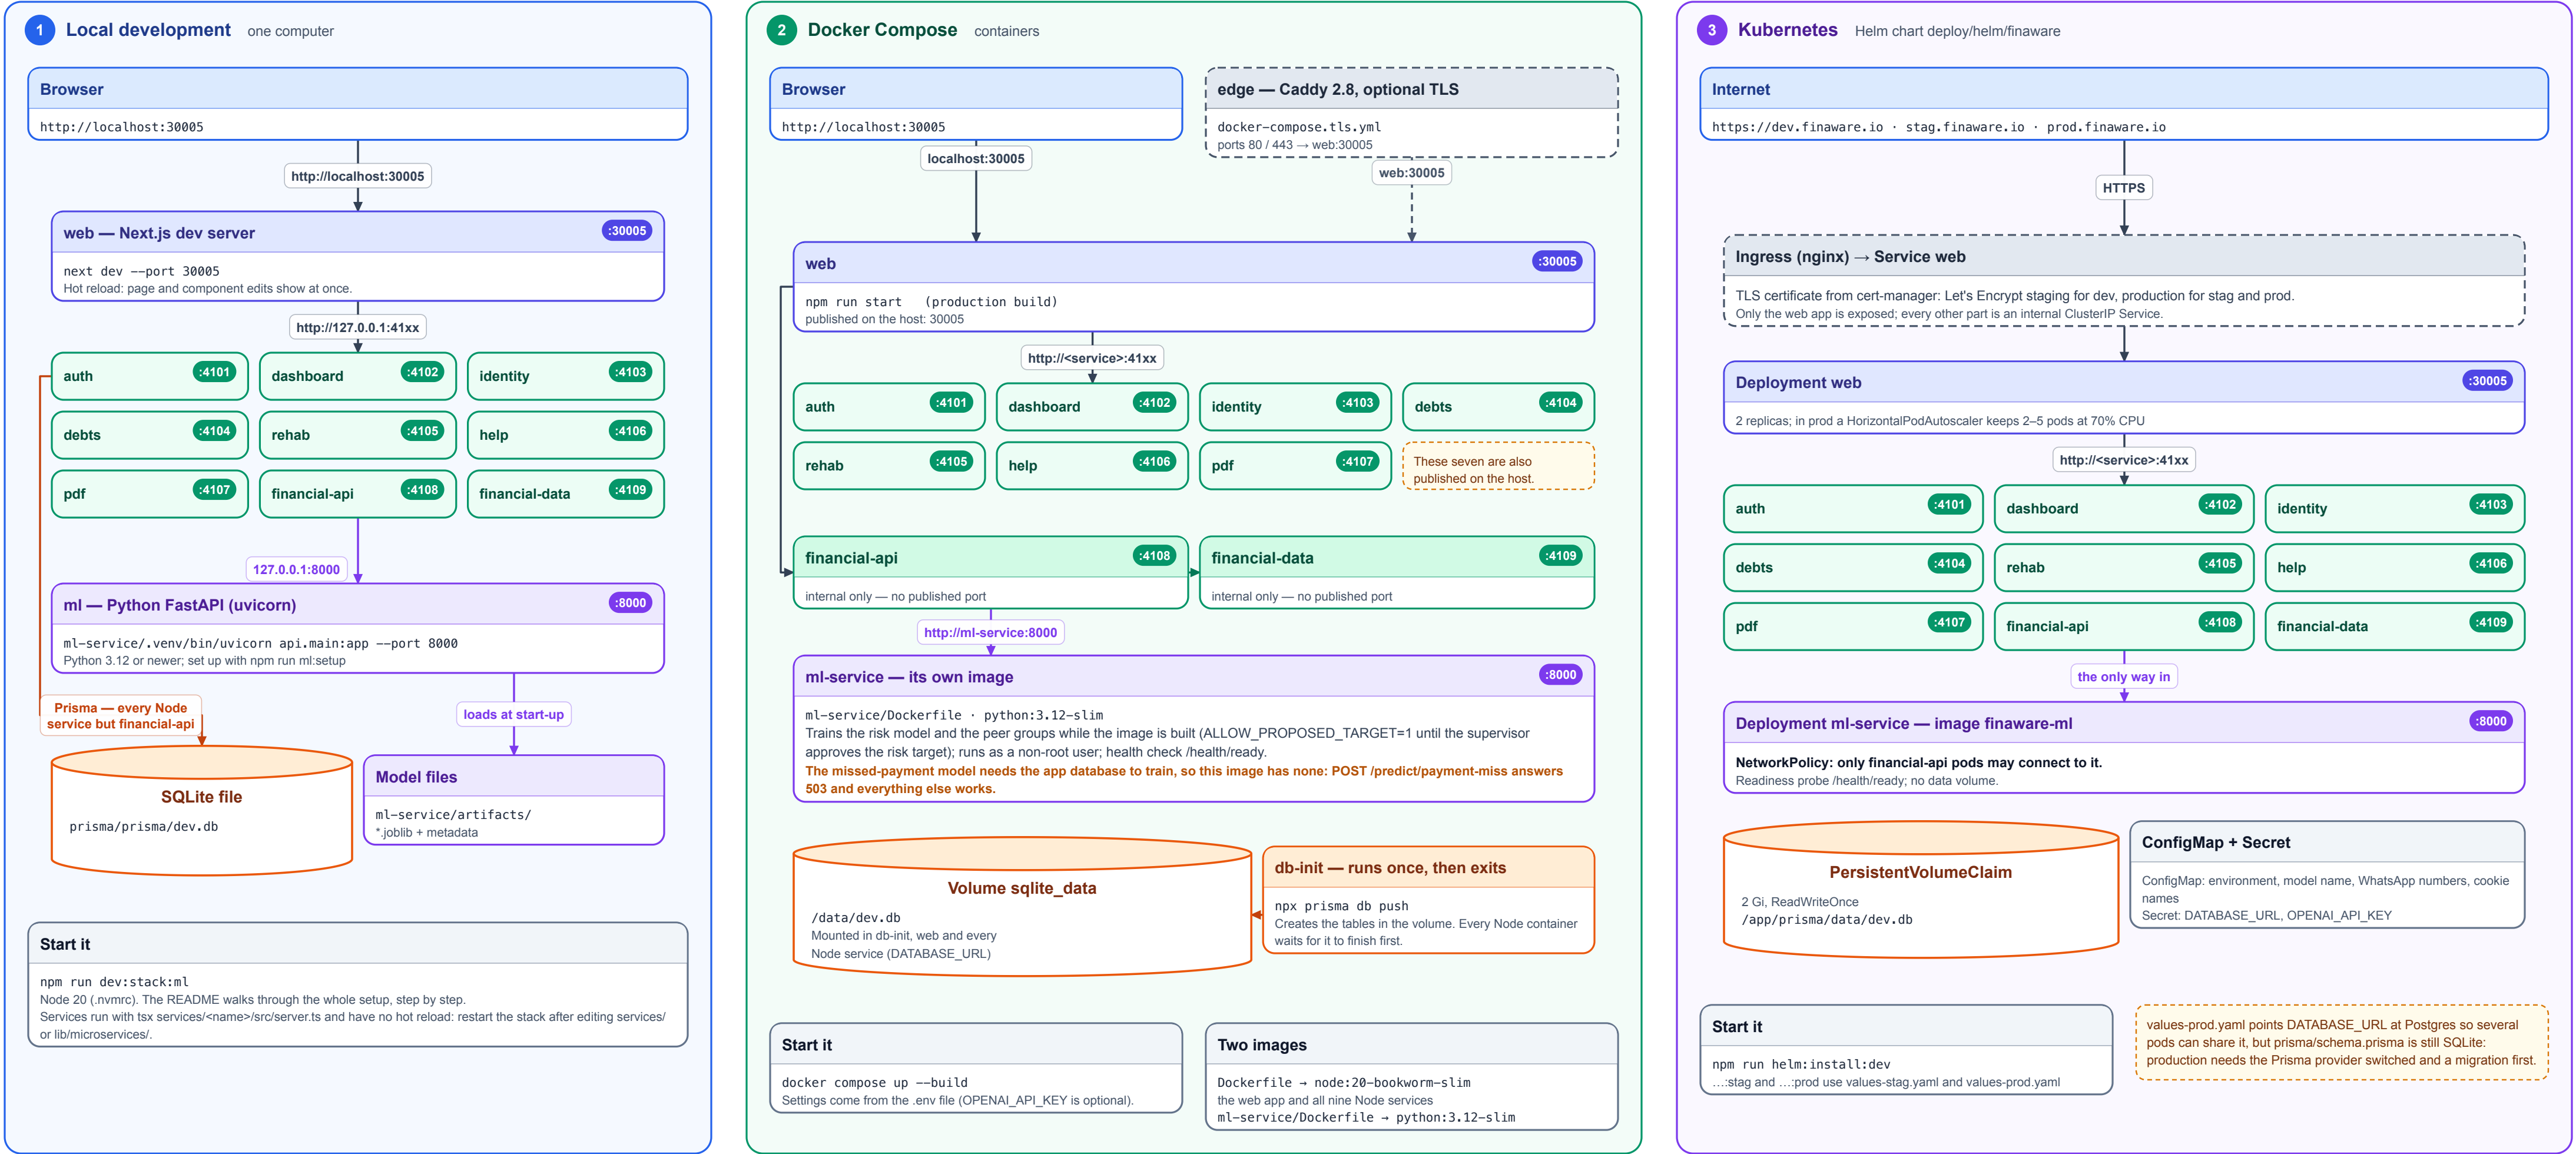

## Checks before a push — run them locally (the GitHub Actions CI workflow is paused)

npm test · npm run lint · npm run typecheck · npm run ml:test

### How to read this diagram

