


backtest_app_cpp/src
/panels/base_panel.h

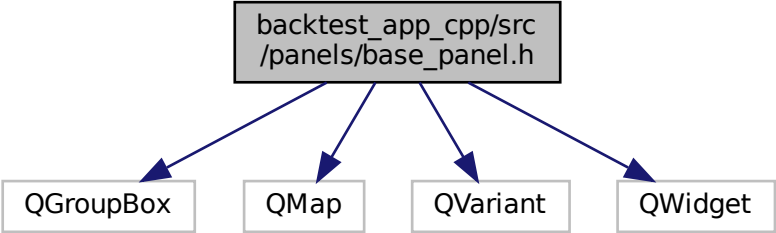

```
graph TD; A["backtest_app_cpp/src<br>/panels/base_panel.h"] --> B["QGroupBox"]; A --> C["QMap"]; A --> D["QVariant"]; A --> E["QWidget"];
```

The diagram illustrates the dependencies of the file `backtest_app_cpp/src/panels/base_panel.h`. A central box at the top points via arrows to four boxes below it, representing the classes it depends on: `QGroupBox`, `QMap`, `QVariant`, and `QWidget`.

QGroupBox

QMap

QVariant

QWidget