


Facebook3Var

```
#Grouping by age and gender
pf.fc_by_age_gender <- pf %>%
  filter(!is.na(gender)) %>%
  group_by(age, gender) %>%
  summarise(mean_friend_count = mean(friend_count),
            median_friend_count = median(friend_count),
            n = n()) %>%
  ungroup() %>%
  arrange(age)

#putting color in an aesthetic wrapper in the line
ggplot(pf.fc_by_age_gender, aes(x=age, y=median_friend_count))
+geom_line(aes(color=gender))
```

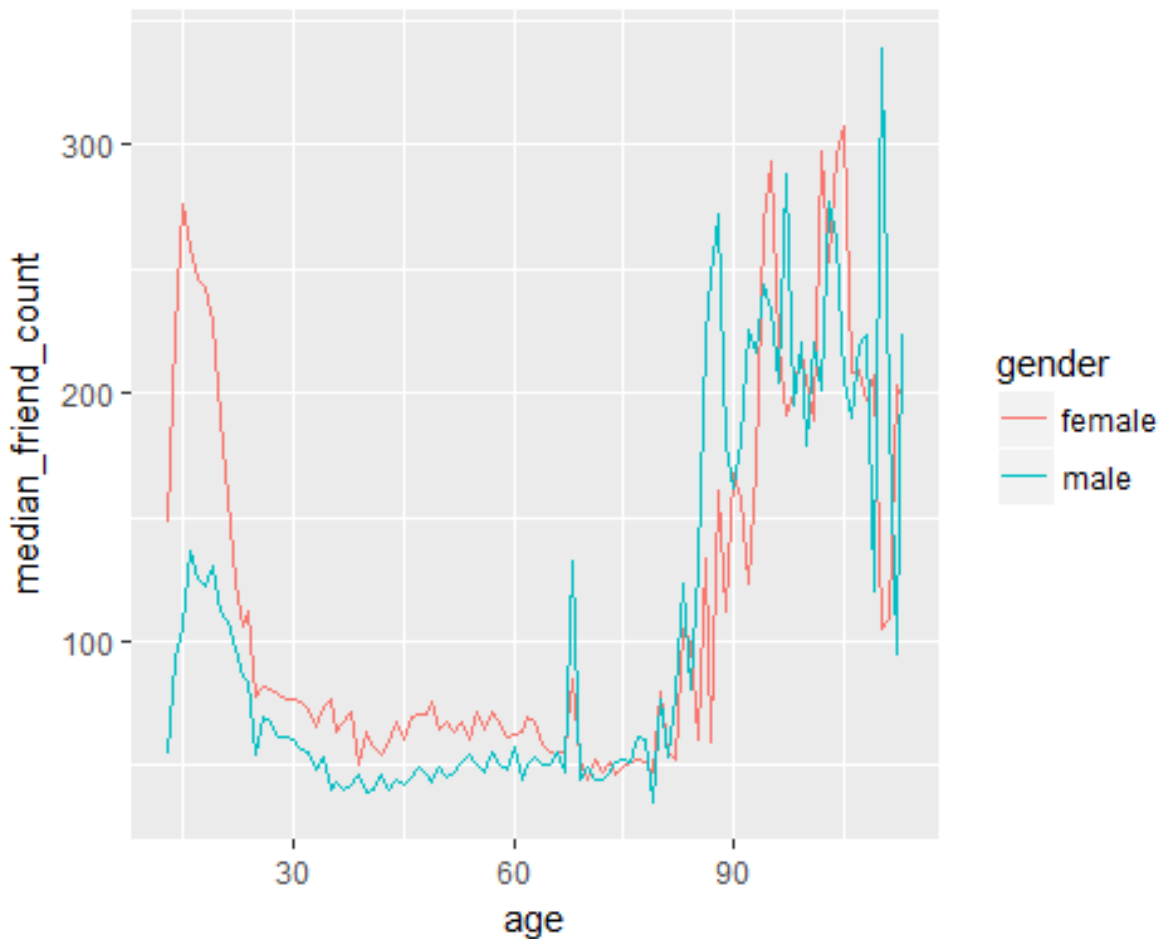


#Creating a wide dataframe

```
library(reshape2)
```

```
pf.fc_by_age_gender.wide <- dcast(pf.fc_by_age_gender,  
                                age ~ gender,  
                                value.var = 'median_friend_count')
```

#Plotting the multiple of friends that females have compared to men

```
ggplot(pf.fc_by_age_gender.wide, aes(x=age, y=female/male))  
+geom_line(color='lime green') +  
  ylab('xMale Friends')
```

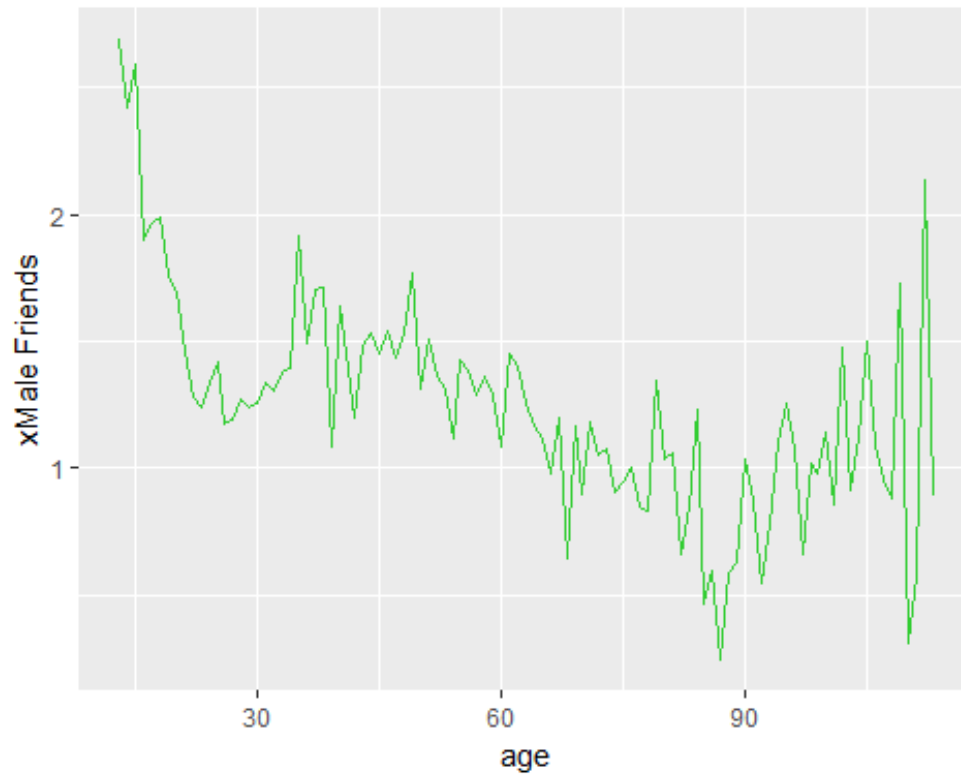

```
#Creating a variable year joined by subtracting tenure(days) from date of sample (2014)
```

```
pf$year_joined <- floor(2014 - (pf$tenure/365))  
summary(pf$year_joined)
```


```
##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.     NA's  
##      2005     2012     2012     2012     2013     2014         2
```

```
pf$year_joined.bucket <- cut(pf$year_joined, breaks = c(2004,2009,2011,2012,  
2014))  
table(pf$year_joined.bucket)
```


```
##  
## (2004,2009] (2009,2011] (2011,2012] (2012,2014]  
##          6669          15308          33366          43658
```

```
#Plotting the different lines for each year joined bucket
```

```
ggplot(subset(pf, !is.na(pf$year_joined.bucket)), aes(x=age,  
y=friend_count))+  
  geom_line(aes(color=year_joined.bucket), stat='summary', fun.y=median)
```

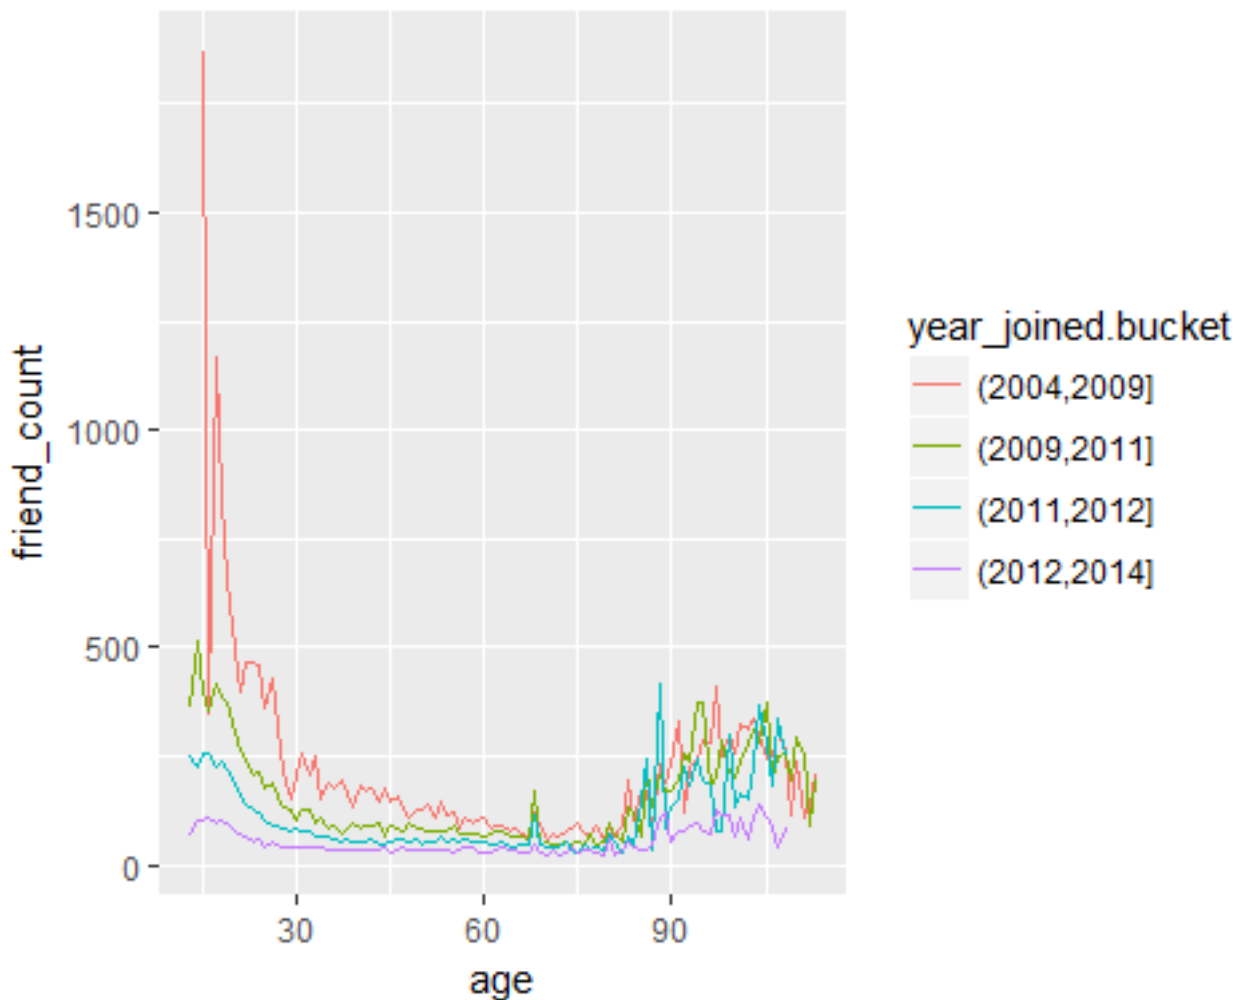

```
#Plotting the mean but also adding the grandmean
ggplot(subset(pf, !is.na(pf$year_joined.bucket)), aes(x=age,
y=friend_count))+
  geom_line(aes(color=year_joined.bucket), stat='summary', fun.y=mean)+
  geom_line(stat='summary', fun.y=mean, linetype=2)
```

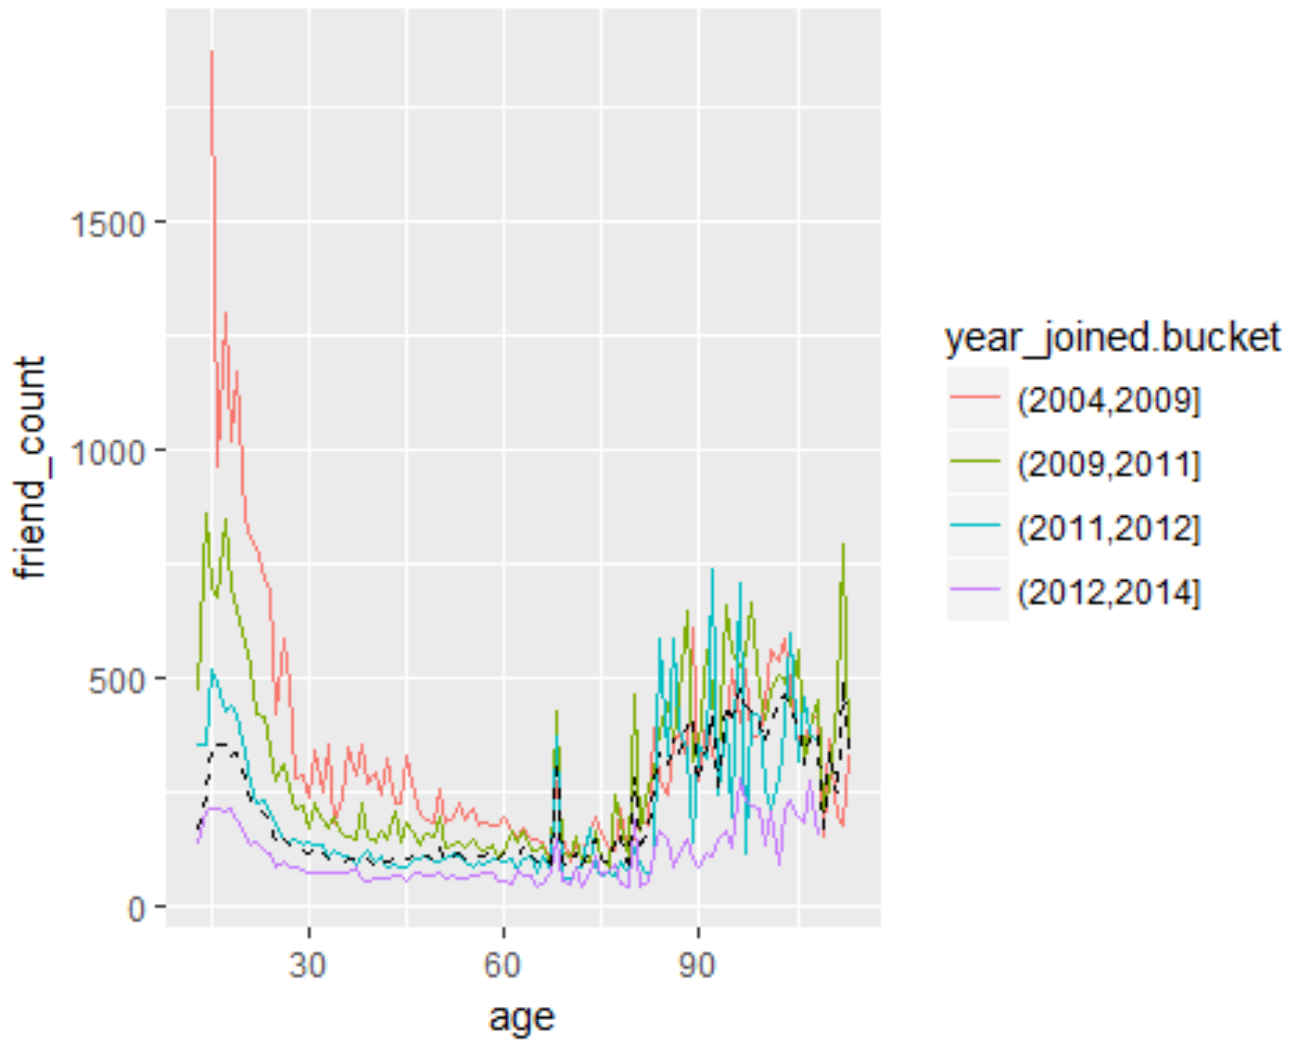

```


#If we were to look at the fc by day as a rate: (fc/tenure)
with(subset(pf, tenure>0), summary(friend_count/tenure))

##      Min.   1st Qu.   Median     Mean   3rd Qu.     Max.
##  0.00000  0.07750  0.22050  0.60960  0.56580 417.00000


#Looking at how many friendships someone initiates based on tenure, colored
by year joined
ggplot(subset(pf, tenure>0), aes(x=tenure, y=friendships_initiated/tenure)) +
  geom_line(aes(color=year_joined.bucket), stat='summary')

## No summary function supplied, defaulting to `mean_se()`

```

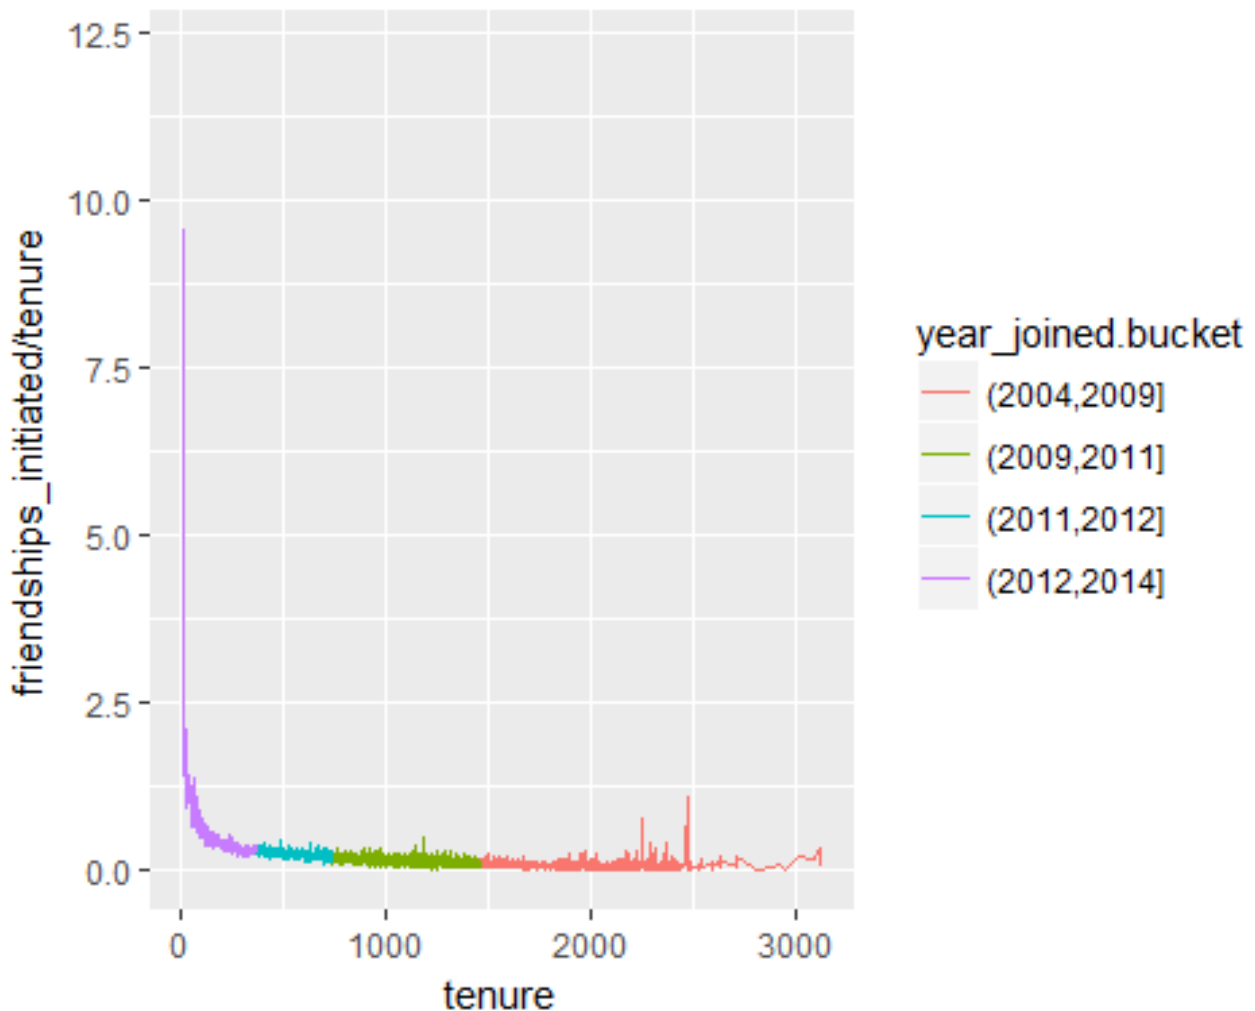

```
#With smooth line (using loess)  
ggplot(subset(pf, tenure>0), aes(x=tenure, y=friendships_initiated/tenure)) +  
  geom_smooth(aes(color=year_joined.bucket))  
## `geom_smooth()` using method = 'gam'
```

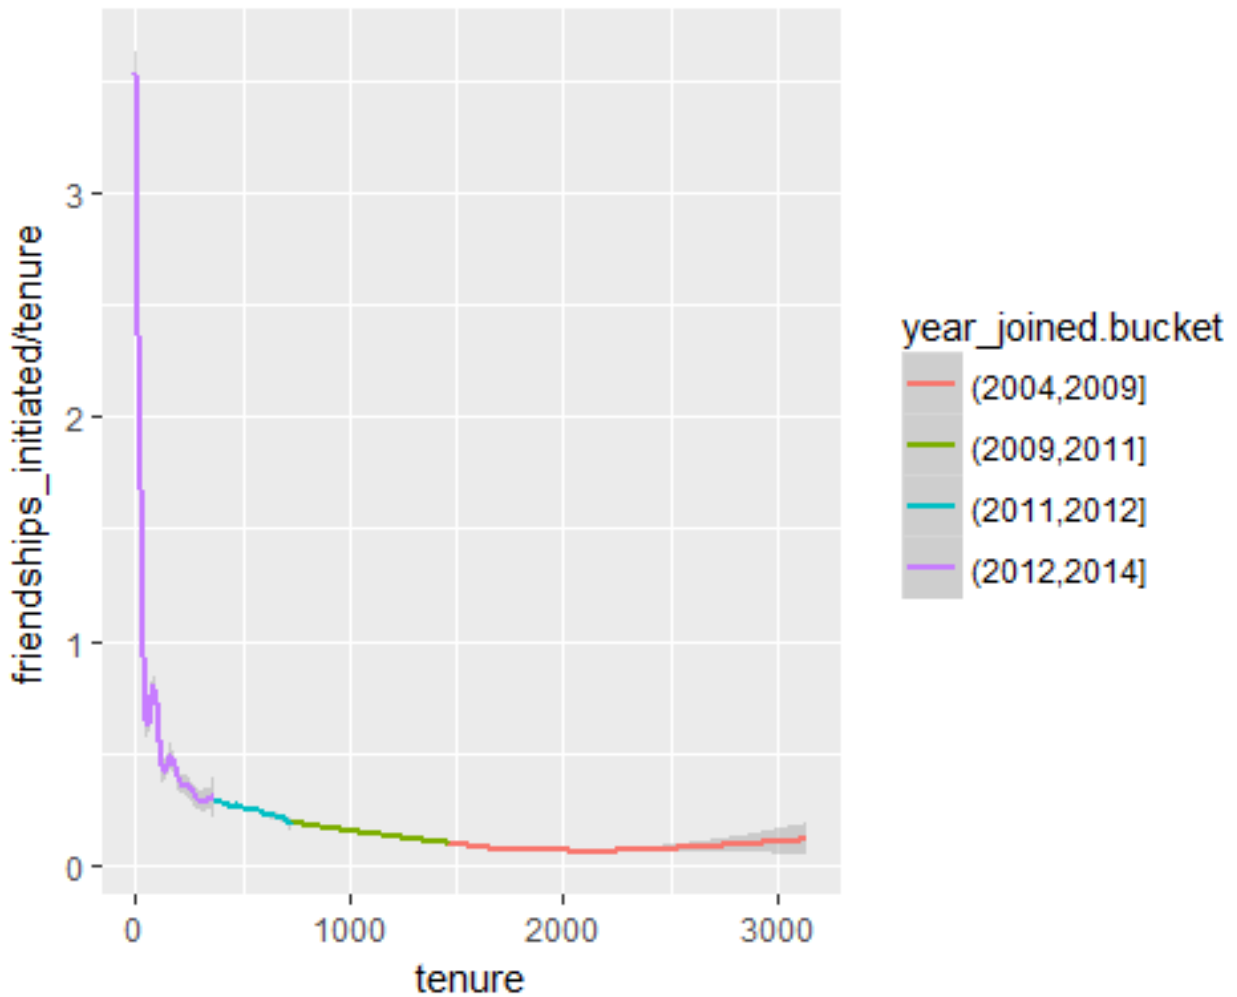

```
library(GGally)

theme_set(theme_minimal(20))

#Using a random seed and generating a scatterplot matrix
set.seed(1836)
pf_subset <- pf[, c(2:15)]
names(pf_subset)

## [1] "age" "dob_day"
## [3] "dob_year" "dob_month"
## [5] "gender" "tenure"
## [7] "friend_count" "friendships_initiated"
## [9] "likes" "likes_received"
## [11] "mobile_likes" "mobile_likes_received"
## [13] "www_likes" "www_likes_received"

ggpairs(pf_subset[sample.int(nrow(pf_subset), 1000),])
```

