

WinInteropUtils

WinInteropUtils is a C# library written in .NET 8 that provides managed P/Invoke wrappers for tons of functions you can use, from reading file attributes to interacting with COM interfaces.

The base namespace is `FireBlade.WinInteropUtils`.

⚠ WARNING

WinInteropUtils is still in beta, so bugs may occur. If you experience any bugs, please report them on the [Issues](#) page.

Features

- [WindowsFile](#) file info wrapper
- Full enums (1600+ values) for [HRESULTs](#) and [Win32 error codes](#)
- Dialog boxes
- Useful utility [User32](#) functions ([SendMessage](#), [SetWindowLongPtr](#)...)
- [Constants](#) and [Macros](#)
- [COM interfaces](#)
- Icon management ([DestroyIcon](#), ...)

Getting Started

WinInteropUtils provides many wrappers for P/Invoke functions, from simple functions to COM interfaces. This guide will show you how to install and use this library.

⚠ WARNING

WinInteropUtils is still in beta, so bugs may occur. If you experience any bugs, please report them on the [Issues](#) page.

Usage Examples

Reading file attributes

This example reads the attributes of a file named `C:\test.txt` and checks if the file is hidden.

```
// Get the WindowsFile
var winFile = Shell32.GetFileInfo(@"C:\test.txt");

if (winFile != null)
{
    // Always make sure to dispose WindowsFiles when you're done using them
    // to avoid leaks on GDI handles!
    using WindowsFile file = winFile;

    // Check the attributes
    Console.WriteLine(file.Attributes.HasFlag(WindowsFileAttributes.Hidden)
        ? "File is hidden!"
        : "File is visible...");
}
else
{
    Console.WriteLine("File not found or read error");
}
```

Showing dialog boxes

The following examples show how to display common dialog boxes.

```
// ShellAbout dialog box (for an example run the winver command)
// icon: either a System.Drawing.Icon or nint GDI icon handle

Shell32.ShellAbout(hwnd, "My app name", "Some additional info", myAppIcon);
```

```

Shell32.ShellAbout("My app name", "Some additional info"); // without an icon and hwnd

// Icon picker dialog (PickIconDlg)

Shell32.ShowPickIconDialog(@"%SYSTEMROOT%\System32\shell32.dll", 16, out Icon ic);
Shell32.ShowPickIconDialog(@"%SYSTEMROOT%\System32\imageres.dll", 48, out string path, out
int idx);

// File properties dialog (doesn't support hwnd because that's how Windows works)

Shell32.ShowFileProperties(@"C:\test.txt");

```

Using COM interfaces

This example shows how to use COM interfaces.

TIP

For more info, see [Using COM](#).

```

using FireBlade.WinInteropUtils.ComponentObjectModel; // make sure to add this for COM!

HRESULT hr = COM.Initialize(CoInit.ApartmentThreaded);

if (Macros.Succeeded(hr))
{
    hr = COM.CreateInstance<IFileOpenDialog>(
        new Guid("84bccd23-5fde-4cdb-aea4-af64b83d78ab"),
        null,
        CreateInstanceContext.InprocServer,
        new Guid("84bccd23-5fde-4cdb-aea4-af64b83d78ab"),
        out IFileOpenDialog dlg);

    if (Macros.Succeeded(hr))
    {
        dlg.SetTitle("My File Dialog - Open a File");

        hr = dlg.Show(hwnd);

        if (Macros.Succeeded(hr))
        {
            Console.WriteLine("Dialog accepted!");
        }
    }
}

```

```
}  
  
    COM.Uninitialize();  
}
```

API

For more documentation, visit the [API](#) page.

Using visual styles

In **WinInteropUtils v0.25** the new **VisualStyle** API was introduced to allow for drawing of advanced text and graphics. This article will show you how to utilize this API.

NOTE

Visual styles need to be enabled in order for the API to work properly. Make sure you enable Common Controls version 6.0 in your app manifest and, if inside a Windows Forms app, make sure to use `Application.EnableVisualStyles()` or `ApplicationConfiguration.Initialize()` before creating your window.

Opening the theme data

To utilize visual styles, we need to first open the theme data. To open the theme data, use the **VisualStyle.OpenThemeData** function. Make sure to wrap your call in a **try-catch** block, because the call may throw if visual styles are not available, themes are disabled, or the requested class name does not exist on the current system.

For example, to draw text, open the theme data like this:

```
try
{
    using (VisualStyle vs = VisualStyle.OpenThemeData(wnd, "TEXTSTYLE"))
    {
        ...
    }
}
catch
{
}
```

Draw the graphics

NOTE

The **VisualStyle** APIs currently only support drawing text. More methods may be added later.

Now you can draw your graphics. To draw text, use the `DrawThemeText` function:

```
vs.DrawThemeText(graphics, 1, 0, "Sample text", -1, ThemeTextOptions.SingleLine |  
ThemeTextOptions.AlignCenter | ThemeTextOptions.AlignMiddle,  
new Rectangle(x, y, width, height));
```

TIP

The second and third parameters (`iPartId` and `iStateId`) specify the control parts and states to use. If you don't know what values to use, you can check the list of possible values [on MSDN](#).

Utilizing the APIs in a real app

Now that we've learned how to use the APIs, let's look at a real sample. Let's say you want to have some Aero-style heading text in your app built with [Windows Forms](#). You could implement a simple user control like this:

```
public partial class HeadingTextControl : Control  
{  
    public HeadingTextControl()  
    {  
        InitializeComponent();  
    }  
  
    protected override void OnTextChanged(EventArgs e)  
    {  
        base.OnTextChanged(e);  
        Refresh();  
    }  
  
    protected override void OnPaint(PaintEventArgs pe)  
    {  
        base.OnPaint(pe);  
  
        try  
        {  
            var wnd = Window.FromHandle(Handle);  
  
            if (wnd != null)  
            {  
                using (VisualStyle vs = VisualStyle.OpenThemeData(wnd, "TEXTSTYLE"))  
                {
```

```

        // Part ID 1 = main instruction
        vs.DrawThemeText(pe.Graphics, 1, 0, Text, -1,
ThemeTextOptions.SingleLine | ThemeTextOptions.AlignCenter | ThemeTextOptions.AlignMiddle,
            new Rectangle(0, 0, Width, Height));
    }
}
}
catch
{
}
}
}
}

```

Using COM

COM (Component-Object Model) is a Windows framework that allows for reusable components in your code. This guide will go over how to use COM in WinInteropUtils.

⚠ WARNING

COM is for advanced users, so there's manual memory management and other advanced things. Wrappers for COM interfaces will come in future releases, but for now this is the only option.

Basic Setup

To begin using COM, you need to import the appropriate COM namespaces into your script:

```
using FireBlade.WinInteropUtils.ComponentObjectModel; // for base COM class and additional
future COM non-interface wrappers
using FireBlade.WinInteropUtils.ComponentObjectModel.Interfaces; // for COM interfaces

using FireBlade.WinInteropUtils; // base WinInteropUtils namespace, required for Macros
(useful for COM because we need to check a lot of HRESULTs)
```

Now we're ready to use COM. Over the course of this guide we will build up a sample of a file dialog. Before using COM interfaces, we need to initialize COM:

```
// if you're using v0.11 or earlier the function is named COM.CoInitialize instead
// if you're using v0.2 or earlier the enum is named CoInit instead (don't blame me for the
compatibility and migration issues; that's what you get for using a library in beta)
HRESULT hr = COM.Initialize(COMInitOptions.ApartmentThreaded); // or MultiThreaded if inside
a non-GUI/non-STA app
```

Now, after initializng COM, we need to check if the initialization succeeded:

```
if (Macros.Succeeded(hr))
{
    // init succeeded: proceeded with COM

    // our COM code...
}
```

Creating and Interacting with a COM instance

Now that COM is initialized, we need to actually create the COM instance, and once again check for success:

```
hr = COM.CreateInstance<IFileOpenDialog>(
    new Guid("DC1C5A9C-E88A-4dde-A5A1-60F82A20AEF7"),
    null,
    COM.CreateInstanceContext.InprocServer,
    new Guid("d57c7288-d4ad-4768-be02-9d969532d960"),
    out IFileOpenDialog dlg);

if (Macros.Succeeded(hr))
{
    // creation succeeded: proceed with interaction
}
```

And we can now proceed with interacting with the interface, which is a lot easier. In the following example, we configure the file dialog with a custom title and 2 filters:

NOTE

This code defines the `COMDLG_FILTERSPEC` struct itself, because WinInteropUtils doesn't support it yet.

```
[StructLayout(LayoutKind.Sequential, CharSet = CharSet.Unicode)]
public struct COMDLG_FILTERSPEC
{
    public string pszName;
    public string pszSpec;
}

COMDLG_FILTERSPEC[] filters = new COMDLG_FILTERSPEC[]
{
    new COMDLG_FILTERSPEC { pszName = "Text Files", pszSpec = "*.txt" },
    new COMDLG_FILTERSPEC { pszName = "All Files", pszSpec = "*.*" }
};

// Allocate unmanaged memory (SetFileTypes requires pointer)
IntPtr ptr = Marshal.AllocHGlobal(Marshal.SizeOf<COMDLG_FILTERSPEC>() * filters.Length);

try
{

```

```

// Copy each struct into unmanaged memory
for (int i = 0; i < filters.Length; i++)
{
    IntPtr structPtr = IntPtr.Add(ptr, i * Marshal.SizeOf<COMDLG_FILTERSPEC>());
    Marshal.StructureToPtr(filters[i], structPtr, false);
}

// ptr now points to the unmanaged array
dlg.SetFileTypes((uint)filters.Length, ptr);
}
finally
{
    Marshal.FreeHGlobal(ptr);
}

dlg.SetTitle("Cool File Dialog");

```

And now we can actually SHOW the file dialog and read its results:

```

hr = dlg.Show(hWnd);

if (Macros.Succeeded(hr))
{
    Console.WriteLine("Dialog accepted!");

    hr = dlg.GetResult(out nint iptr);

    if (Macros.Succeeded(hr))
    {
        IShellItem item = (IShellItem)Marshal.GetTypedObjectForIUnknown(iptr,
typeof(IShellItem));

        hr = item.GetDisplayName(
            SIGDN.SIGDN_FILESYSPATH,
            out nint pptr);

        if (Macros.Succeeded(hr))
        {
            string path = Marshal.PtrToStringUni(pptr);

            Console.WriteLine("Chosen path: " + path);

            Marshal.FreeCoTaskMem(pptr);
        }
    }
}

```

```
}  
}
```

Cleanup

Once you're done using COM, you need to deinitialize the COM library (if the initialization succeeded) and release any COM interfaces, using the [Release](#) method:

```
dlg.Release();  
COM.Uninitialize();
```

Final Example

So now, our final example code looks like this:

```
using FireBlade.WinInteropUtils.ComponentObjectModel;  
using FireBlade.WinInteropUtils.ComponentObjectModel.Interfaces;  
using FireBlade.WinInteropUtils;  
  
[StructLayout(LayoutKind.Sequential, CharSet = CharSet.Unicode)]  
public struct COMDLG_FILTERSPEC  
{  
    public string pszName;  
    public string pszSpec;  
}  
  
HRESULT hr = COM.Initialize(COMInitOptions.ApartmentThreaded);  
  
if (Macros.Succeeded(hr))  
{  
    hr = COM.CreateInstance<IFileOpenDialog>(  
        new Guid("DC1C5A9C-E88A-4dde-A5A1-60F82A20AEF7"),  
        null,  
        COM.CreateInstanceContext.InprocServer,  
        new Guid("d57c7288-d4ad-4768-be02-9d969532d960"),  
        out IFileOpenDialog dlg);  
  
    if (Macros.Succeeded(hr))  
    {  
        COMDLG_FILTERSPEC[] filters = new COMDLG_FILTERSPEC[]  
        {  
            new COMDLG_FILTERSPEC { pszName = "Text Files", pszSpec = "*.txt" },  
            new COMDLG_FILTERSPEC { pszName = "All Files", pszSpec = "*.*" }  
        };  
    }  
}
```

```

    // Allocate unmanaged memory (SetFileTypes requires pointer)
    IntPtr ptr = Marshal.AllocHGlobal(Marshal.SizeOf<COMDLG_FILTERSPEC>()
* filters.Length);

    try
    {
        // Copy each struct into unmanaged memory
        for (int i = 0; i < filters.Length; i++)
        {
            IntPtr structPtr = IntPtr.Add(ptr, i * Marshal.SizeOf<COMDLG_FILTERSPEC>());
            Marshal.StructureToPtr(filters[i], structPtr, false);
        }

        // ptr now points to the unmanaged array
        dlg.SetFileTypes((uint)filters.Length, ptr);
    }
    finally
    {
        Marshal.FreeHGlobal(ptr);
    }

    dlg.SetTitle("Cool File Dialog");

    hr = dlg.Show(hWnd);

    if (Macros.Succeeded(hr))
    {
        Console.WriteLine("Dialog accepted!");

        hr = dlg.GetResult(out nint iptr);

        if (Macros.Succeeded(hr))
        {
            IShellItem item = (IShellItem)Marshal.GetTypedObjectForIUnknown(iptr,
typeof(IShellItem));

            hr = item.GetDisplayName(
                SIGDN.SIGDN_FILESYSPATH,
                out nint pptr);

            if (Macros.Succeeded(hr))
            {
                string path = Marshal.PtrToStringUni(pptr);

                Console.WriteLine("Chosen path: " + path);
            }
        }
    }
}

```

```
        Marshal.FreeCoTaskMem(pptr);
    }

    item.Release();
}

dlg.Release();
}

COM.Uninitialize();
}
```

If we run this sample code, a file dialog should appear and, after picking a file, its path should be outputted.

Basic COM Interfaces

This article lists the basic COM interfaces.

NOTE

This article lists only COM interfaces defined by WinInteropUtils.

For interfaces for the Common Item Dialog, see [File Dialog COM Interfaces](#).

IUnknown

[API](#)

The base interface that all COM interfaces inherit from. This interface defines the base [Release](#) and [AddRef](#) methods.

IShellItem

[API](#)

Exposes methods that retrieve information about a Shell item, such as a file or directory. Third parties do not implement this interface; only use the implementation provided with the system.

IModalWindow

[API](#)

This interface represents a modal window, such as a file dialog. This interface only exposes the [Show](#) method.

File Dialog COM Interfaces

This article lists the COM interfaces for the Common Item Dialog, the modernized common file dialog introduced in Windows Vista.

NOTE

This article lists only COM interfaces defined by WinInteropUtils.
For basic interfaces that are not associated with the Common Item Dialog, see [Basic COM Interfaces](#).

IFileDialog

[API](#)

The base interface for file dialogs. This interface exposes methods that initialize, show, and get results from the common file dialog, and inherits from [IModalWindow](#).

IFileOpenDialog

[API](#)

This interface exposes methods for the Open file dialog. The only methods exposed in this interface are [GetResults](#) and [GetSelectedItems](#). It inherits from [IFileDialog](#).

IFileSaveDialog

[API](#)

This interface exposes methods for the Save file dialog. It extends the [IFileDialog](#) interface by adding methods specific to the save dialog, which include those that provide support for the collection of metadata to be persisted with the file.

IFileDialogCustomize

[API](#)


This interface exposes methods that allow adding controls and customizing a file dialog.

WARNING

Controls are added to the dialog before the dialog is shown. Their layout is implied by the order in which they are added. Once the dialog is shown, controls cannot be added or removed, but the existing controls can be hidden or disabled at any time. Their labels can also be changed at any time.

WinInteropUtils.WinForms

`WinInteropUtils.WinForms` is a sub-package of `WinInteropUtils` that provides Windows Forms (WinForms) wrappers for Win32 controls.

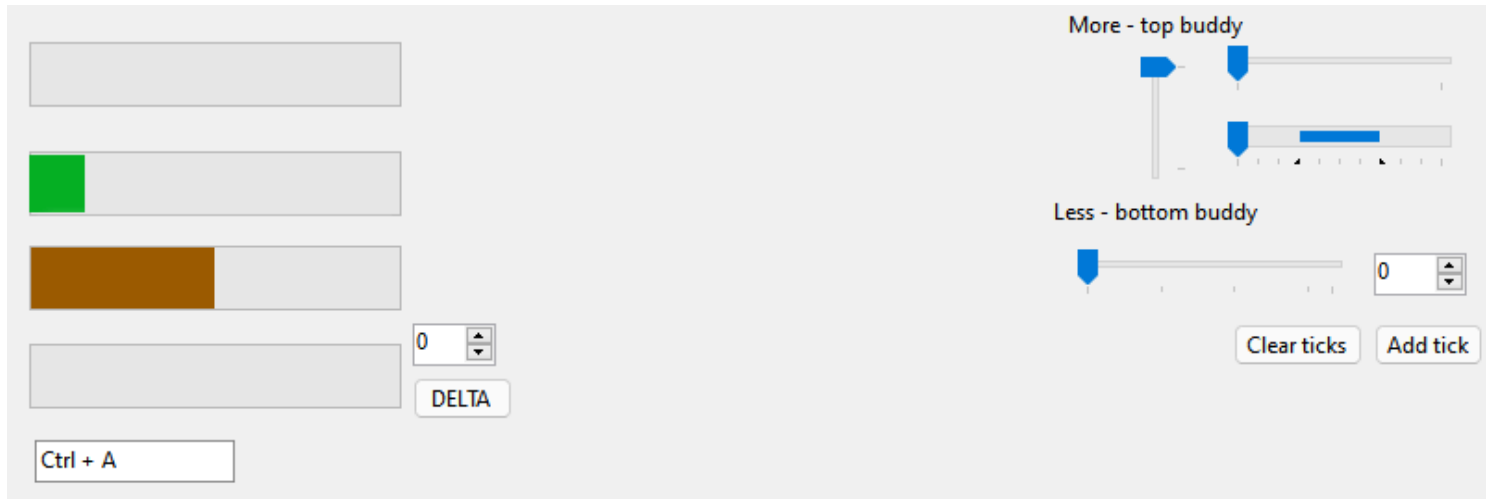

Controls

`WinInteropUtils.WinForms` currently has the following control wrappers:

- [Slider](#) (Win32: `Track Bar`)
- [ProgressBarEx](#) (Win32: `ProgressBar`)
- [HotKeyBox](#) (Win32: `HotKey`)

What is WinInteropUtils.WinForms for?

`WinInteropUtils.WinForms` allows you to make better apps with new Win32 controls that are not built-in by default with WinForms or extended versions of the built-in controls that support all the features of the native Win32 control.

Install WinInteropUtils.WinForms

`WinInteropUtils.WinForms` is inside the same branch and repository on Git as the main `WinInteropUtils` package. To use it, you can go to the same [releases](#) page as the main `WinInteropUtils` library, but get the `WinInteropUtils.WinForms.dll` file instead of the base `WinInteropUtils.dll` file. Alternatively, you can install the package on [NuGet](#).

Add the controls to the Toolbox

If the controls don't show up in your WinForms designer's toolbox after installation, you need to do the following steps:

1. Inside the Toolbox, right-click on the header where you'd like the `WinInteropUtils.WinForms` controls to be located, and click **Choose Items...** .
2. Inside the dialog, find and check the controls to add. If you need all the controls, make sure you check:
 - Slider
 - ProgressBarEx
 - HotKeyBox

Make sure that the namespace(s) of the controls you checked are all `FireBlade.WinInteropUtils.WinForms`.

 TIP

You can use the **Filter** box to search through the list to find the controls easier.


3. Once done, press **OK**. The checked controls should now show up in the toolbox.

Additional info

The base namespace for all `WinInteropUtils.WinForms` controls is `FireBlade.WinInteropUtils.WinForms`.

ProgressBarEx control

The **ProgressBarEx** control is an extended version of the WinForms **ProgressBar** control that provides all the features of the Win32 **ProgressBar**.

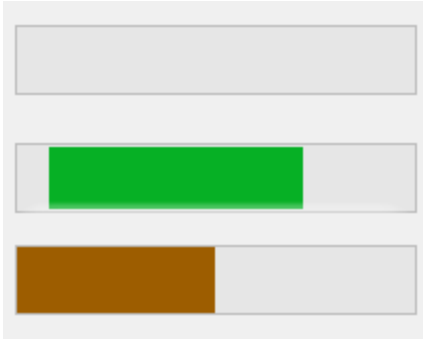

Range

To set the range of the progress bar, use the **Maximum** and **Minimum** properties. To set the value of the progress bar, set the **Value** property:

```
progressBarEx1.Minimum = 0;  
progressBarEx1.Maximum = 250;  
progressBarEx1.Value = 125;
```

Progress Bar Types

A progress bar type is the type of movement of the progress bar. It can be one of the following values:

- **Marquee**
- **Blocks**
- **Smooth**

Marquee makes the progress bar act like a marquee, where the progress portion of the bar repeatedly moves along the bar. The **Blocks** type moves the progress bar in small blocks until it reaches the destination value. **Smooth** smoothly moves the progress bar to the target value.

To set the progress bar type, use the **Type** property on the **ProgressBarEx** control:

```
progressBarEx1.Type = ProgressBarExType.Marquee;
```


Reverse on Backward

If you're using a `ProgressBarEx` type of either `Smooth` or `Blocks`, by default, the bar will snap to the target value if the new value is smaller than the previous value. If you want to make the progress bar perform the normal movement animation even when going backwards, set the `ReverseOnBackward` property to `true` to re-enable the behavior.

Orientation

A `ProgressBarEx` control can be in one of 2 orientations:

- Horizontal



- Vertical



To set the orientation, use the `Orientation` property:

```
progressBarEx1.Orientation = Orientation.Vertical;
```

Style

⚠ WARNING

Requires visual styles. Make sure that `Application.EnableVisualStyles` is inside your `Program.Main` function.

A `ProgressBarEx` can be styled for a normal, paused or error bar. To set the style, use the `Style` property:

```
progressBarEx1.Style = ProgressBarExStyle.Error;
```

Colors

NOTE

Most visual styles override these colors, meaning that these changes may not apply if your app uses visual styles.

You can customize the bar color using the `ForeColor` property and the background color using the `BackColor` property.

Steps

You can step a `ProgressBarEx` control by a specified amount. The `PerformStep` function will step the progress bar by the amount of the `Step` property:


```
progressBarEx1.Step = 10;  
  
// steps the progress bar by the step amount and wraps it around if it exceeds the range  
progressBarEx1.PerformStep();
```

On the other hand, the `StepBy` function will step the progress bar by a specific amount:

```
// note: does not wrap around!  
progressBarEx1.StepBy(25);
```

Slider control

The **Slider** control allows the user to pick a numerical value by dragging a thumb on a slider. Commonly also referred to as a **TrackBar** in Win32 programming.

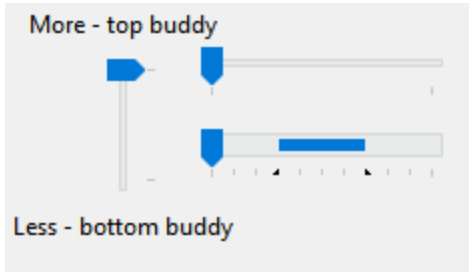


Slider Range

To set the range of the slider, use the **Maximum** and **Minimum** properties. To set the value of the slider, set the **Value** property:

```
// example: allow millisecond input, 1 ms - 1 s
slider1.Minimum = 1;
slider1.Maximum = 1000;
slider1.Value = 500;
```

Buddy Controls

A **Slider** can have buddy controls that can appear on the left or right if the **Slider** is horizontal or on the top or bottom when the **Slider** is vertical.

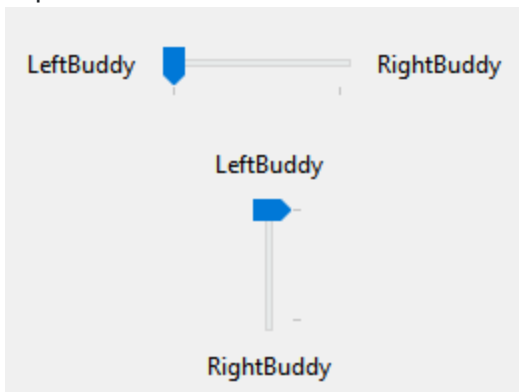

To set the buddy controls, use the **LeftBuddy** and **RightBuddy** properties:

```
slider1.LeftBuddy = label1;
slider1.RightBuddy = label2;
```

TIP

You can assign any control as the buddy of a slider, including another slider! The only exceptions to this are Forms and the slider that you're setting the buddy on itself.

Orientation

A **Slider** can be set to **Horizontal** or **Vertical** orientation:

```
slider1.Orientation = Orientation.Vertical;
```

Reverse Sliders

You can reverse a slider to make it so that smaller numbers mean higher and larger numbers mean lower.


```
slider1.Reversed = true;
```

You can also reverse the input of the slider separately, by setting the **ReverseInput** property:

```
slider1.ReverseInput = true;
```

Thumb

The thumb on the **Slider** is the actual handle you drag. In the screenshot below, the blue part is the thumb:



The thumb may look different in different visual styles. For example, this is how a **Slider** may look like under the **Aero** visual style in Windows Vista or Windows 7. Note the fact that the thumb under this visual style is a silver color:



To hide the thumb, use the **IsThumbVisible** property:

```
slider1.IsThumbVisible = false;
```


By default, the thumb is automatically sized to fit the `Slider`. To override the width, set the `FixedLength` property to `true` and use the `ThumbLength` property to specify the desired length.

```
slider1.FixedLength = true;  
slider1.ThumbLength = 10;
```

To get the current `Rectangle` size of the thumb, use the `ThumbRect` property.

Slider Selection Range

The selection range allows you to define a range that is highlighted by the `Slider`:



The slider will also show triangular ticks marks at the start and end of the range. To set the selection range, set the `ShowSelectionRange` property to `true` and use the `SelectionRangeStart` and `SelectionRangeEnd` properties to set the desired range:

```
slider1.ShowSelectionRange = true;  
slider1.SelectionRangeStart = 25;  
slider1.SelectionRangeEnd = 75;
```

To clear the selection range, call the `ClearSelectionRange` method.

NOTE

The slider's selection range does not affect its functionality in any way. It is up to the application to implement the range. You might do this in one of the following ways:

- Use a selection range to enable the user to set maximum and minimum values for some parameter. For example, the user could move the slider to a position and then click a button labeled **Max**. The application then sets the selection range to show the values chosen by the user.
- Limit the movement of the slider to a predetermined subrange within the control, by handling the [ValueChanging](#) event and disallowing any movement outside the selection range. You might do this, for example, if the range of values available to the user can change because of other choices the user has made, or according to available resources.

Ticks

The `Slider` can be in one of three tick modes: `None`, `Auto`, or `Custom`. `None` indicates no ticks. `Auto` indicates ticks will show up on every single value in the `Slider`'s available range of values. `Custom` indicates that ticks will show up every `x` values in the slider's range, where `x` is the value of the `TickFrequency` property.

To set the tick mode, set the `TickMode` property to the desired mode:

```
slider1.TickMode = SliderTickMode.None;
```

To use a custom tick amount, set the `TickMode` property to `SliderTickMode.Custom`, and set the `TickFrequency` property to the desired frequency:

```
slider1.TickMode = SliderTickMode.Custom;  
slider1.TickFrequency = 10;
```

When using a `TickMode` of `Custom`, you can also manually add ticks individually:

```
slider1.AddTick(5);
```


NOTE

Once a tick is added using `AddTick`, you cannot remove it. If you want to remove a certain tick, you must call the `ClearTicks` method to clear the ticks and re-add the ticks back:

```
// add some ticks...
slider1.AddTick(10);
slider1.AddTick(12);
slider1.AddTick(17);

// to remove the tick for 12:
// clear the ticks...
slider1.ClearTicks();
// ...and add back the ticks we want and exclude the ones we don't want
slider1.AddTick(10);
slider1.AddTick(17);
```

This is a **Windows limitation**.

To get the current tick positions, call the `GetTickPosition`, `GetTickCount`, or `GetTickPositions` methods.

Large and Small Change (page/line size)

The small change (also called the "line size") is the amount the `Slider` moves after performing an action such as moving the slider with the arrow keys. To set the small change, use the `SmallChange` property:

```
slider1.SmallChange = 1;
```

The large change (also called the "page size") is the amount the `Slider` moves after performing an action such as moving the slider with the `PageUp` or `PageDown` keys. To set the large change, use the `LargeChange` property:

```
slider1.LargeChange = 5;
```

Tooltips

The `Slider` can provide tooltips when the user hovers over the thumb to show the current value. To show the tooltip, use the `ShowToolTip` property:

```
slider1.ShowToolTip = true;
```

You can also customize the side where the tooltip appears. To set the tooltip side, use the `ToolTipSide` property:

```
slider1.ToolTipSide = SliderToolTipSide.Left; // or: Top, Bottom, Right
```

Validation

You can validate the value the user drags the slider to and accept or block it. To validate the `Slider`'s value, subscribe to the `ValueChanging` event. The `ValueChanging` event fires before the slider's value is updated, allowing you to validate or cancel the change.


```
slider1.ValueChanging += Slider1_ValueChanging;
```

In the event, perform the necessary validation checks and set `e.Cancel` to `true` if you want to block the movement operation.

```
private void Slider1_ValueChanging(object sender, SliderValueChangingEventArgs e)
{
    // perform validation checks...
    e.Cancel = true;
}
```

HotKeyBox control

The **HotKeyBox** control enables the user to enter a combination of keystrokes to be used as a hot key. A hot key is a key combination that the user can press to perform an action quickly. For example, a user can create a hot key that undoes the last action performed in the application and assign it to **Ctrl + Z**. The hot key box control displays the user's choices and ensures that the user selects a valid key combination. The following screen shot shows how a hot key box control appears after the user enters the Ctrl + A key combination.



Keys

To get or set the currently inputted keys in the control, use the **Keys** property:

```
hotKeyBox1.Keys = Keys.Control | Keys.Z;
```

The control also allows setting the extended key. To get or set the extended key, use the **IsExKey** property.

```
hotKeyBox1.IsExKey = true;
```

Rules

The hot key box control allows setting rules. Rules determine which modifiers are counted as invalid and are not able to be used as a key combination. For example, you may block the **Ctrl** key to make combinations like **Ctrl + Z** invalid. To set the rules, set the **Rules** property to a bitwise combination of **HotKeyBoxRules** values:

```
hotKeyBox1.Rules = HotKeyBoxRules.Ctrl | HotKeyBoxRules.ShiftCtrl;
```

When a user enters an invalid key combination, as defined by rules, the system uses the bitwise-OR operator to combine the keys entered by the user with the flags specified in the **FallbackValue** property. The resulting key combination is converted into a string and then displayed in the hot key control.

```
// Example: fall back to Ctrl+Alt if user enters invalid combination
hotKeyBox1.FallbackValue = Keys.Control | Keys.Alt;
```

HotKeyChanged event

The `HotKeyChanged` event fires when the inputted hot key changes in the control. Note that this event fires for every keystroke, even if that keystroke is a modifier key, so the event will still fire before the user types an actual non-modifier key.

Once the event fires, invoke the getter of the `Keys` property on the `HotKeyBox` to get the pressed keys.

File System

WinInteropUtils v0.31 introduces the new `WinFile` and `WinFileInfo` APIs to replace the old `WindowsFile` API. These APIs allow you to easily manage file system items, query shell info about them, and manipulate their data.

The new APIs live in the namespace `FireBlade.WinInteropUtils.FileSystem`, as part of our goal to separate APIs into proper namespaces instead of cluttering the base namespace.

WinFile

The `WinFile` API allows you to open and close Win32 file handles and utilize them in an object-oriented manner. You can query the size, content, and attributes of the file, as well as write to it, create a new file, or use special Windows-exclusive options.

WinFileInfo

The `WinFileInfo` API allows you to query information about a file, such as the small, large, and shell-sized icons, as well as the Shell display name, the type of an EXE or DLL file, and the display name of the file type.

The file doesn't have to exist; by specifying the `attrs` parameter in the `WinFileInfo` constructor, you can use the API in a simulated mode - the API will query information as if the file existed at the specified location with the specified attributes, without needing to actually create the file.

TIP

If you already have a `WinFile`, you can get the `WinFileInfo` for it by using the `FileInfo` property.

More info

For more information about the **Windows filesystem**, see the following subtopics:


- [Caching](#)
- [Reparsing Points](#)

Filesystem Caching

By default, **Windows** caches file data that is read from disks and written to disks. This implies that read operations read file data from an area in system memory known as the *system file cache*, rather than from the physical disk. Correspondingly, write operations write file data to the system file cache rather than to the disk, and this type of cache is referred to as a **write-back cache**. Caching is managed per file object.

Caching occurs under the direction of the **cache manager**, which operates continuously while **Windows** is running. File data in the system file cache is written to the disk at intervals determined by the operating system, and the memory previously used by that file data is freed — this is referred to as flushing the cache. The policy of delaying the writing of the data to the file and holding it in the cache until the cache is flushed is called **lazy writing**, and it is triggered by the cache manager at a determinate time interval. The time at which a block of file data is flushed is partially based on the amount of time it has been stored in the cache and the amount of time since the data was last accessed in a read operation. This ensures that file data that is frequently read will stay accessible in the system file cache for the maximum amount of time.

This file data caching process is illustrated in the following figure.

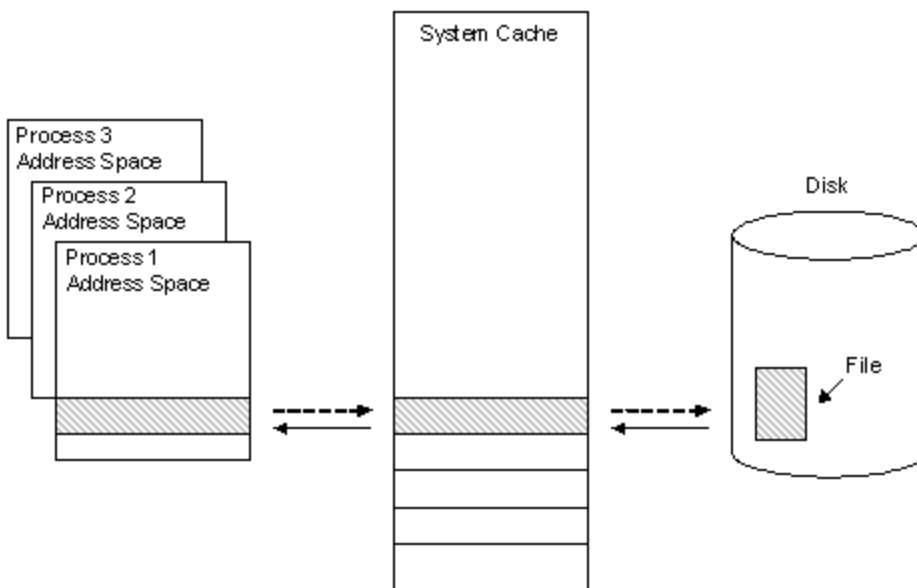

As depicted by the solid arrows in the previous figure, a **256 KB** region of data is read into a **256 KB** cache "slot" in system address space when it is first requested by the cache manager during a **file read** operation. A user-mode process then copies the data in this slot to its own address space. When the process has completed its data access, it writes the altered data back to the same slot in the system cache, as shown by the dotted arrow between the process address space and the system cache. When the cache manager has determined that the data will no longer be needed for a certain amount of time, it writes the altered data back to the file on the disk, as shown by the dotted arrow between the system cache and the disk.

The amount of I/O performance improvement that file data caching offers depends on the size of the file data block being read or written. When large blocks of file data are read and written, it is more likely that disk reads and writes will be necessary to finish the I/O operation. I/O performance will be increasingly impaired as more of this kind of I/O operation occurs.

In these situations, caching can be turned off. This is done at the time the file is opened by passing `WinFileOptions.NoBuffering` as a value for the `options` parameter of the `WinFile` constructor. When caching is disabled, all read and write operations directly access the physical disk. However, the file metadata may still be cached.

The frequency at which flushing occurs is an important consideration that balances system performance with system reliability. If the system flushes the cache too often, the number of large write operations flushing incurs will degrade system performance significantly. If the system is not flushed often enough, then the likelihood is greater that either system memory will be depleted by the cache, or a sudden system failure (such as a **loss of power to the computer**) will happen before the flush. In the latter instance, **the cached data will be lost**.

To ensure that the right amount of flushing occurs, the cache manager spawns a process every second called a lazy writer. The lazy writer process queues one-eighth of the pages that have not been flushed recently to be written to disk. It constantly reevaluates the amount of data being flushed for optimal system performance, and if more data needs to be written it queues more data. Lazy writers do not flush temporary files, because the assumption is that they will be deleted by the application or system.

Some applications, such as virus-checking software, require that their write operations be flushed to disk immediately; **Windows** provides this ability through *write-through caching*. A process enables write-through caching for a specific I/O operation by passing the `WinFileOptions.WriteThrough` option into its call to the `WinFile` constructor. With write-through caching enabled, data is still written into the cache, but the cache manager writes the data immediately to disk rather than incurring a delay by using the lazy writer.

File system metadata is always cached. Therefore, to store any metadata changes to disk, the file must either be flushed or be opened with `WinFileOptions.WriteThrough`.

Reparse Points

A file or directory can contain a **reparse point**, which is a collection of **user-defined data**. The format of this data is understood by the application which stores the data, and a **file system filter**, which you install to interpret the data and process the file. When an application sets a reparse point, it stores this data, plus a **reparse tag**, which uniquely identifies the data it is storing. When the file system opens a file with a reparse point, it attempts to find the file system filter associated with the data format identified by the reparse tag. If a file system filter is found, the filter processes the file as directed by the reparse data. If a file system filter is not found, the file open operation fails.

For example, reparse points are used to implement NTFS **file system links** and the Microsoft **Remote Storage Server** (RSS). RSS uses an administrator-defined set of rules to move infrequently used files to long term storage, such as tape or optical media. It uses reparse points to store information about the file in the file system. This information is stored in a stub file that contains a reparse point whose data points to the device where the actual file is now located. The file system filter can use this information to retrieve the file.

Reparse points are also used to implement mounted folders.

Reparse point restrictions

The following restrictions apply to reparse points:

- Reparse points can be established for a directory, but the directory must be empty. Otherwise, the NTFS file system fails to establish the reparse point. In addition, you can create directories or files in a directory that contains a reparse point with the directory bit set, but not otherwise.
- Reparse points and extended attributes are mutually exclusive. The NTFS file system cannot create a reparse point when the file contains extended attributes, and it cannot create extended attributes on a file that contains a reparse point.
- Reparse point data, including the tag and optional **GUID**, cannot exceed **16 kilobytes**. Setting a reparse point fails if the amount of data to be placed in the reparse point exceeds this limit.
- There is a limit of **63 reparse points** on any given path.

NOTE

The limit can be reduced depending on the length of the reparse point. For example, if your reparse point targets a fully qualified path, the limit becomes 31.

Migration guide to v0.25

WinInteropUtils v0.25 fully changes the infrastructure of the library for a new, **.NET**-style usage.

Migrating to the new version could be hard to do because of the dozens of changes in this version. This migration guide will help you migrate to the new version.

- [Changes in v0.25](#)
- [1. Migrate window management functionality.](#)
- [2. Migrate class names](#)

Changes in v0.25

WinInteropUtils v0.25 brings a lot of changes for the library.

Window management

Let's start with the biggest change: Now, instead of working with native handles, you can use the new **Window** class for managed, .NET-style window management. Most APIs have been changed to use the new **Window** class, and tons of old window management APIs have been migrated to be instance methods on the **Window**. This ultimately lead to most **User32** functions to be deprecated as the new **Window** APIs should be used instead. The APIs still exist and still take native handles, however you should consider migrating your code to the new API.

Class name changes

Classes that previously started with **Win32** have been changed to instead use the **Win** prefix to avoid numbers in class names. This is because numbers in class names look weird and are overall not great to use. There are still alias versions of the classes in the library to make sure your old code stays working, however, you should still migrate to the new class names.

Visual styles

Don't worry; this change won't need to be migrated, as it is a new feature.

The library now provides a new **VisualStyle** API that allows you to draw nice, Windows-style text and graphics. For more info, see the [Using visual styles](#) article.

Why were these changes made?

You may be wondering about the answer to this question.

WinInteropUtils from the start was intended to provide .NET-style wrappers for all things Win32. These changes were made as a push more into that direction. After all, this library is still in beta, so you should expect drastic changes like this.

Migrating window management functionality

One change you may recall from the [Changes](#) article is the new window management. In this new release, you need to migrate to the new **Window** APIs. This guide will help you do that.

Find old APIs

You need to first, find and identify the places in your code where you use the old windowing APIs. You can use your IDE's find functionality for this - you can try to search for **User32** (that's where most of the old windowing APIs were).

Migrate

Now you need to change out the old windowing functions to the new window APIs. Below is a table containing the new functions:

Old API (User32)	New API (Window)
<code>SetWindowLongPtr</code>	<code>SetWindowLongPtr</code>
<code>GetWindowLongPtr</code>	<code>GetWindowLongPtr</code>
<code>SendMessage</code>	<code>SendMessage</code>
<code>GetWindowAtPoint</code>	<code>Window.FromPoint</code>
<code>GetWindowState</code>	<code>State</code> (property)
<code>PostMessage</code>	<code>PostMessage</code>
<code>GetParent</code>	<code>Parent</code> (property)

For example, if you have code like this:

```
User32.SendMessage(hwnd, MY_MESSAGE_ID, myWParam, myLParam);
```

The new, equivalent version would be:

```
var wnd = Window.FromHandle(hwnd);
wnd?.SendMessage(MY_MESSAGE_ID, myWParam, myLParam);
```

Migrating class names

Another thing that changed is the new class names. Most classes with `Win32` with the name changed to instead, use `Win`.

Find old class names

First, find the places in your code where you use the old class names. The only class names that changed were `Win32Constants` and `Win32MessageBox`, so search for them using your IDE's find function.

Migrate

Remove the `32` from the class names - for example, change `Win32MessageBox` to `WinMessageBox`.

Technically, class names are not the only thing that changed - enumerations that are used with those classes also changed:

Old class name	New class name
Win32Constants	WinConstants
Win32MessageBox	WinMessageBox
Win32MessageBoxButtons	WinMessageBoxButtons
Win32MessageBoxResult	WinMessageBoxResult
Win32MessageBoxIcon	WinMessageBoxIcon
Win32MessageBoxModality	WinMessageBoxModality