

TL;DR: Users derive benefit whilst using a browser extension leveraging SoTA models for rumour detection in real time, but more work needs to be done.

Rumour Detection in the Wild: A Browser Extension for Twitter

Background: Users wishing to perform rumour detection for themselves cannot directly leverage SoTA solutions published in the literature; these are typically deployed by social media companies. We develop a novel rumour detection browser extension to address this issue.

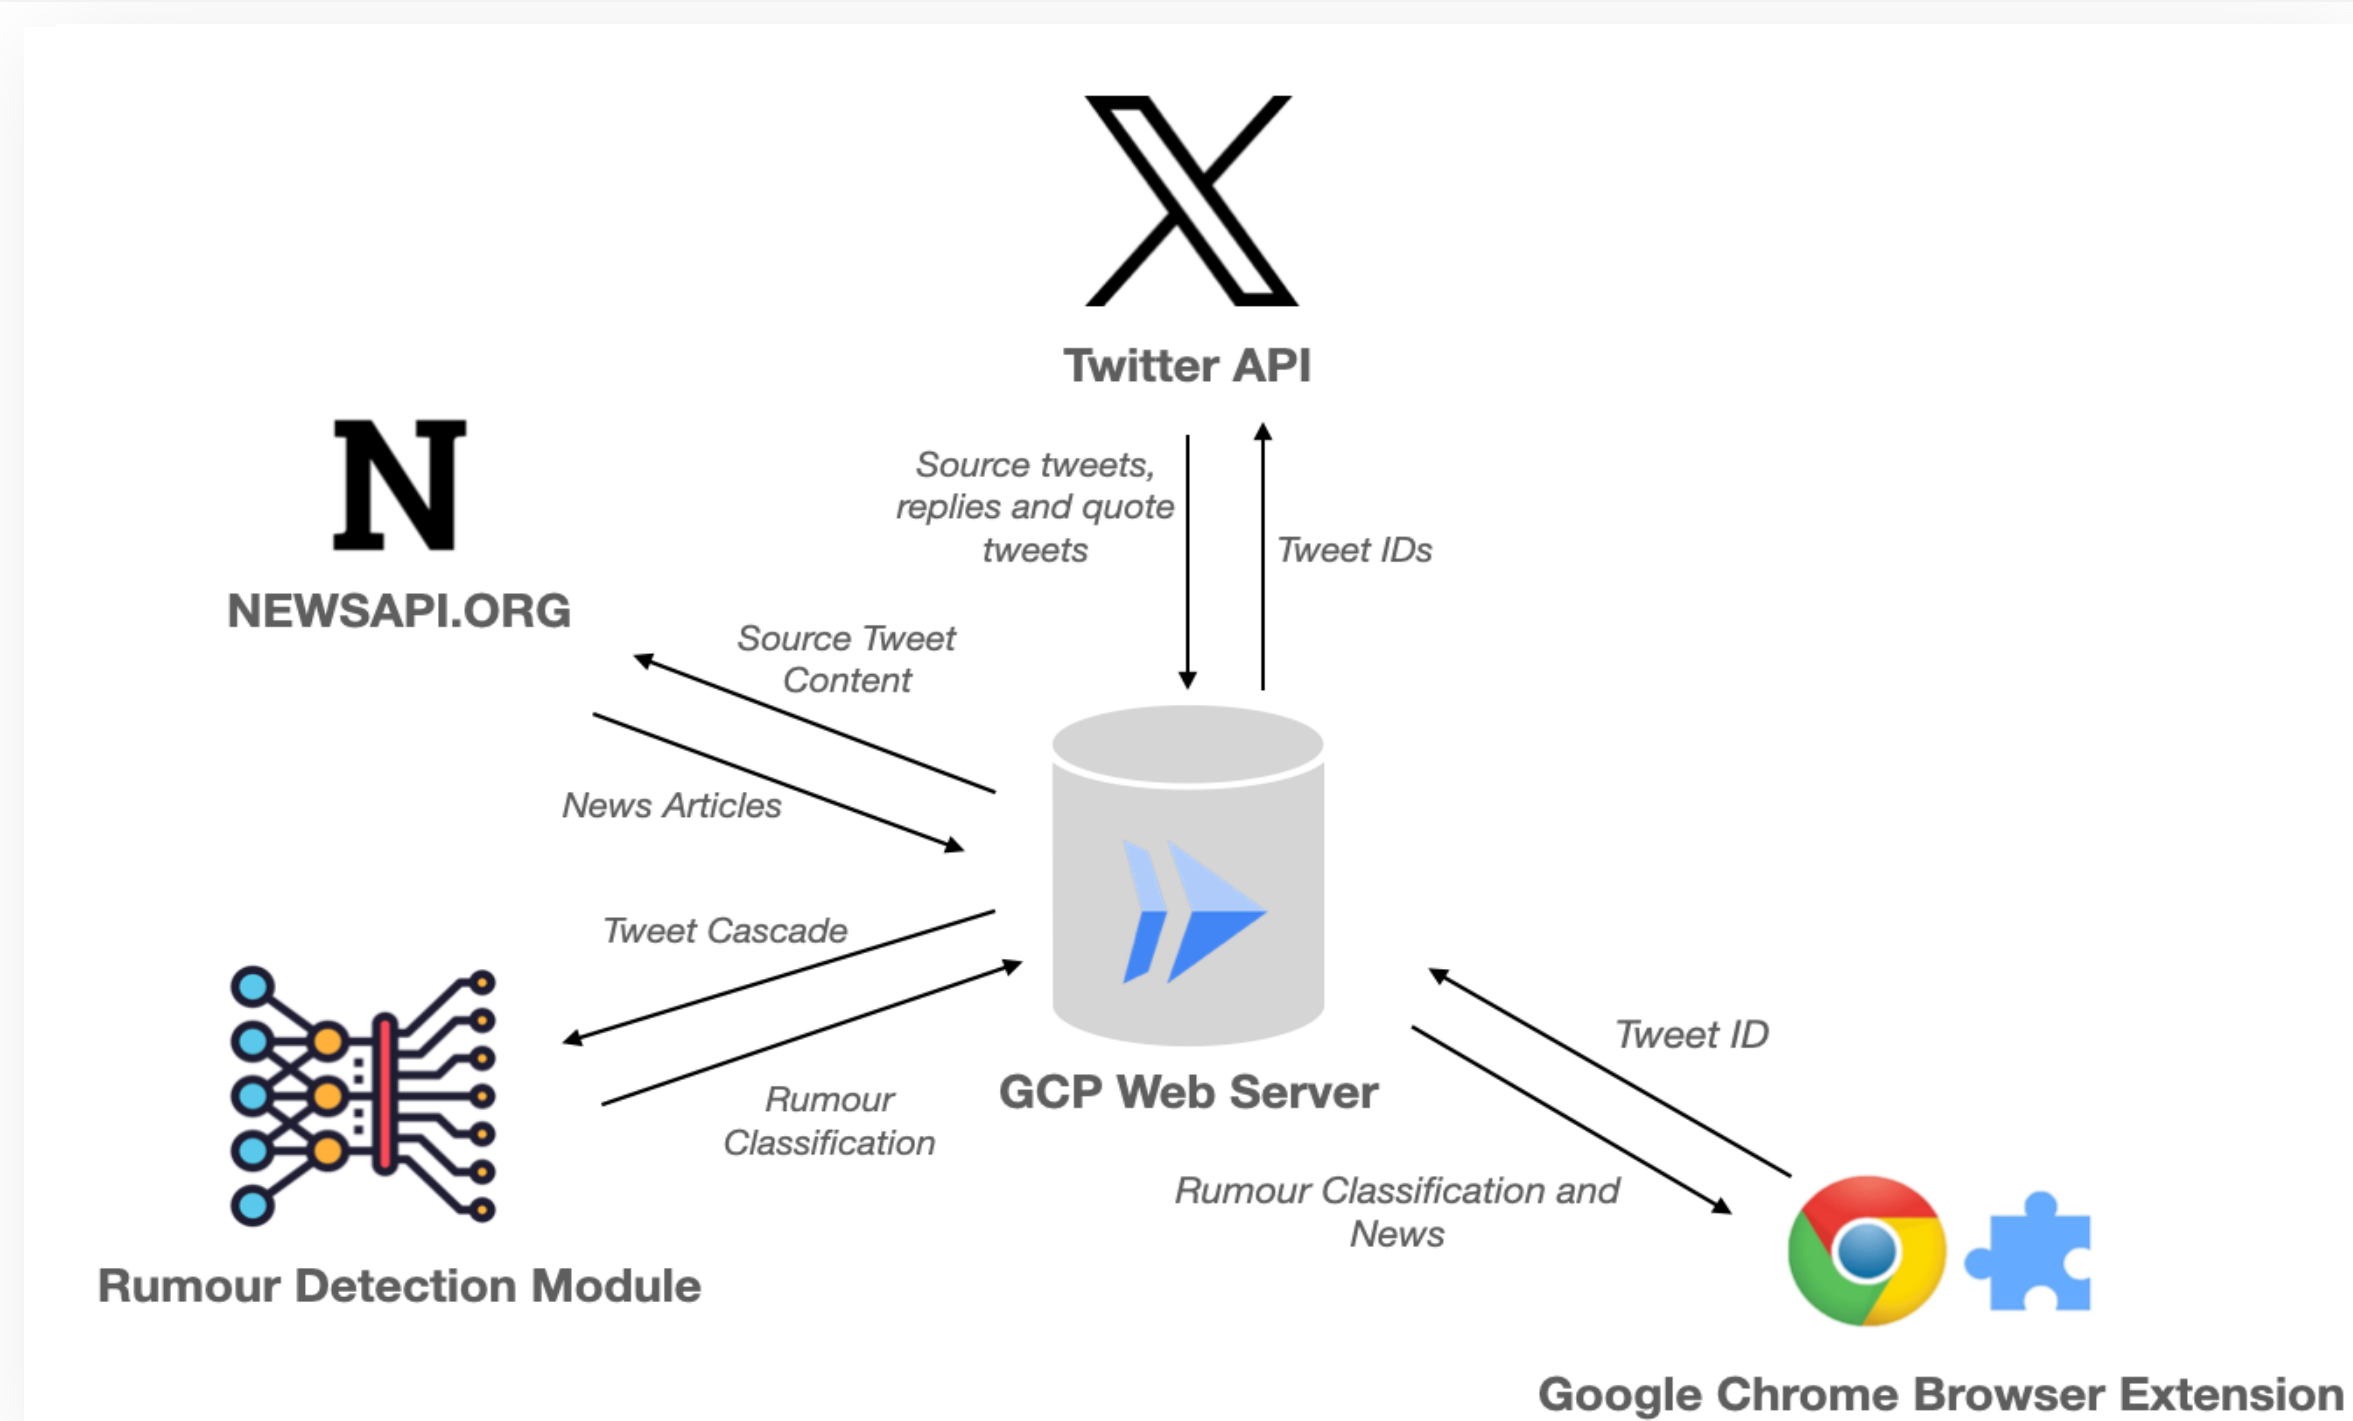


Figure 1: Decentralised architecture used to deliver the rumour detection service.

Findings

Data Ablation Tasks

Rumour detection models generally underperform when there is no linguistic signal from the content (missing textual features). However, the model is still able to correctly identify the rumour status of a tweet without access to the full cascade.

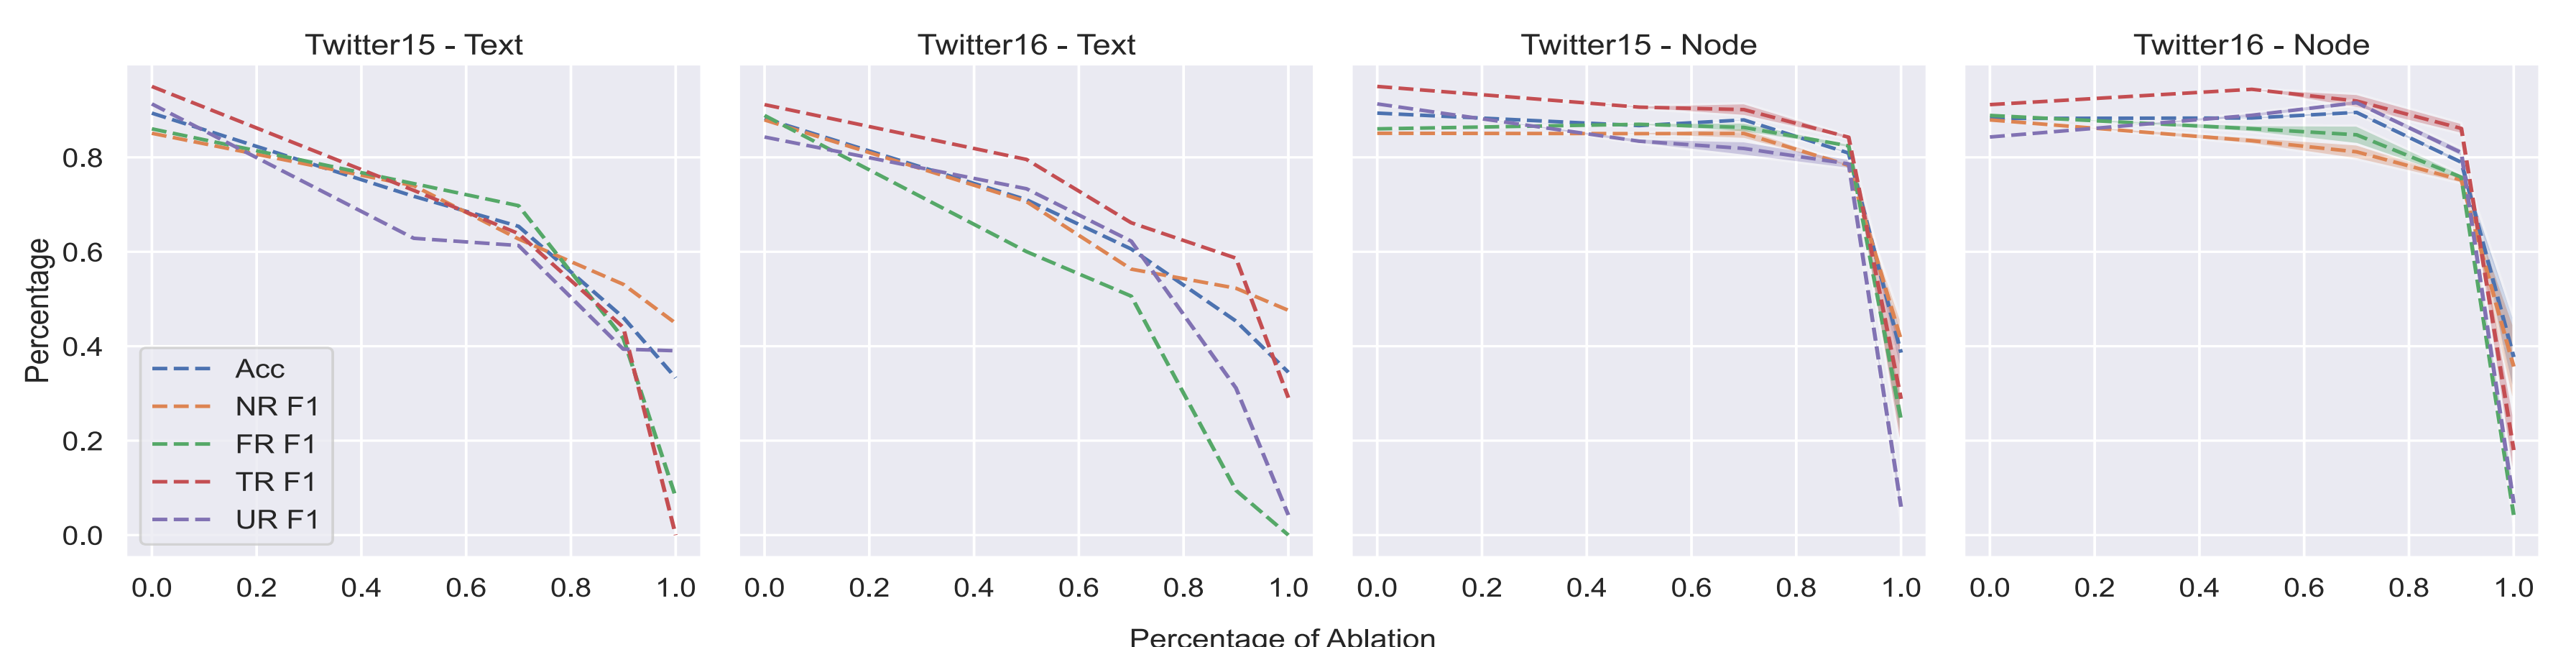


Figure 3: Data ablation experiments


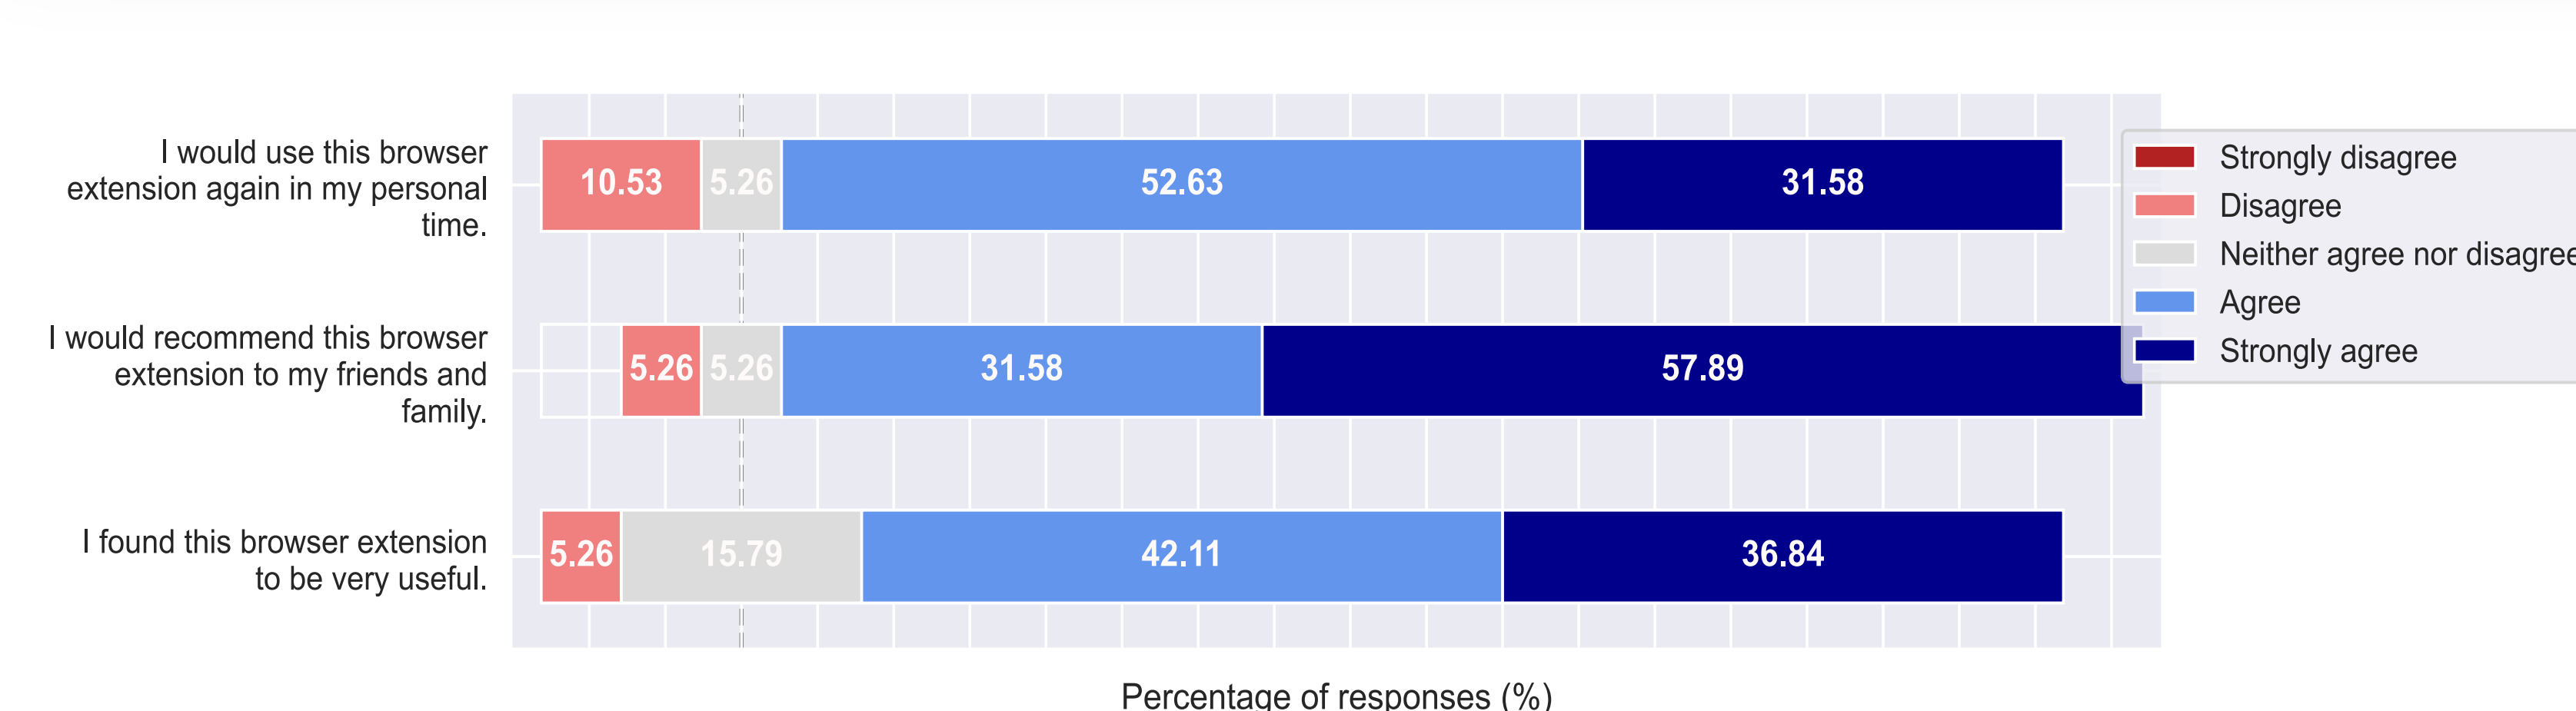


Figure 2: Results from our user study

User Study

Users generally found benefit when using the browser extension tool whilst performing rumour detection on Twitter as it created additional informative context for the tweet. However, additional measures, such as a robust retraining mechanism, need to be into place to make users more confident in the tool's performance.

Conclusions and Future Work: Our work shows that this tool provides benefit to those Twitter users wanting autonomy over their rumour detection. However, we note that our work is merely the first iteration in a series of deployments.

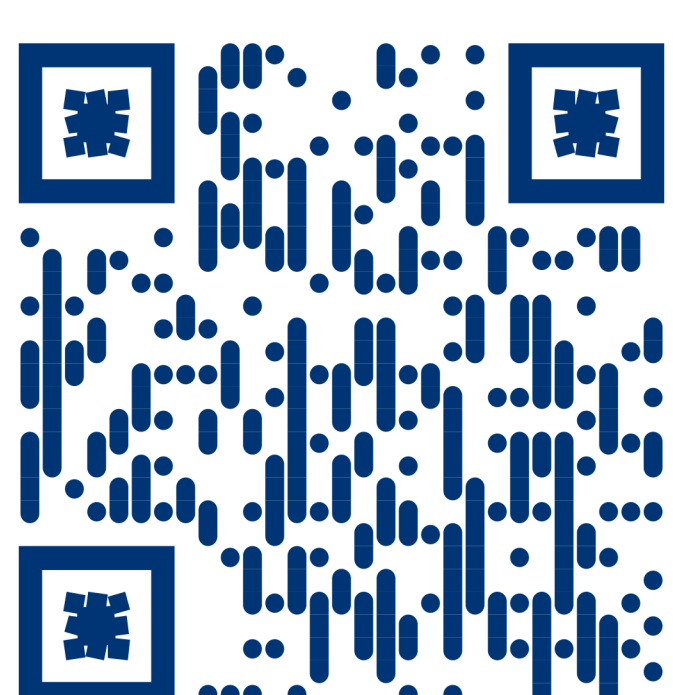


Andrej Jovanović and Björn Ross

The University of Edinburgh, Edinburgh, United Kingdom




contact.me.maddox@gmail.com



@itsmaddox_j



b.ross@ed.ac.uk



@bjoernross



THE UNIVERSITY of EDINBURGH
informatics