



CS 412 Intro. to Data Mining

Chapter 3. Data Preprocessing

Jiawei Han, Computer Science, Univ. Illinois at Urbana-Champaign, 2017





Chapter 3: Data Preprocessing

☐ Data Preprocessing: An Overview



☐ Data Cleaning

☐ Data Integration

☐ Data Reduction and Transformation

เลือก เอาทิ้ง

☐ Dimensionality Reduction

ตัว Dimension เพื่อจะประมวลผลได้
ฟังก์ชัน จะหา Dimension ที่สำคัญ

☐ Summary

What is Data Preprocessing? — Major Tasks

☐ Data cleaning

- ☐ Handle missing data, smooth noisy data, identify or remove outliers, and resolve inconsistencies

☐ Data integration

- ☐ Integration of multiple databases, data cubes, or files

☐ Data reduction

- ☐ Dimensionality reduction
- ☐ Numerosity reduction
- ☐ Data compression

☐ Data transformation and data discretization

- ☐ Normalization
- ☐ Concept hierarchy generation

Why Preprocess the Data? — Data Quality Issues

မေးခွန်းမှာ အဲဒါတွေကို ဖြေဆိုရမယ်

- ❑ Measures for data quality: A multidimensional view
 - ❑ Accuracy: correct or wrong, accurate or not
 - ❑ Completeness: not recorded, unavailable, ...
 - ❑ Consistency: some modified but some not, dangling, ... *အချင်းချင်း မတူညီတာတွေ*
 - ❑ Timeliness: timely update? *အချိန်မီ ဖော်ပြတာတွေ*
 - ❑ Believability: how trustable the data are correct?
 - ❑ Interpretability: how easily the data can be understood?

Chapter 3: Data Preprocessing

- ❑ Data Preprocessing: An Overview
- ❑ Data Cleaning or Data Cleansing 
- ❑ Data Integration
- ❑ Data Reduction and Transformation
- ❑ Dimensionality Reduction
- ❑ Summary

Data Cleaning

ได้มา จาก 10 ล้านคน 5 ล้านคน 1 ล้านคน 500,000 คน 100,000 คน 50,000 คน 10,000 คน 5,000 คน 1,000 คน 500 คน 100 คน 50 คน 10 คน 5 คน 1 คน 0 คน

- ❑ Data in the Real World Is Dirty: Lots of potentially incorrect data, e.g., instrument faulty, human or computer error, and transmission error
- ❑ Incomplete: lacking attribute values, lacking certain attributes of interest, or containing only aggregate data
 - ❑ e.g., *Occupation* = " " (missing data) data ที่หายไป
- ❑ Noisy: containing noise, errors, or outliers
 - ❑ e.g., *Salary* = "-10" (an error) เงินติดลบ
- ❑ Inconsistent: containing discrepancies in codes or names, e.g.,
 - ❑ *Age* = "42", *Birthday* = "03/07/2010" อายุ 42 ปี แล้ววันเกิด 03/07/2010
 - ❑ Was rating "1, 2, 3", now rating "A, B, C" เปลี่ยนจาก 1, 2, 3 เป็น A, B, C
 - ❑ discrepancy between duplicate records ความแตกต่างระหว่างบันทึกซ้ำ
- ❑ Intentional (e.g., *disguised missing data*) การใส่ข้อมูลเท็จที่ซ่อนอยู่
 - ❑ Jan. 1 as everyone's birthday? วันที่ 1 มกราคม เป็นวันเกิดของทุกคน

วันที่ 1 มกราคม เป็นวันเกิดของทุกคน
โดยที่คนที่ไม่ใช่วันเกิดวันที่ 1 มกราคม ก็ใส่วันเกิดวันที่ 1 มกราคม

Incomplete (Missing) Data

ข้อมูลที่ไม่สมบูรณ์

- ❑ Data is not always available
 - ❑ E.g., many tuples have no recorded value for several attributes, such as customer income in sales data
- ❑ Missing data may be due to
 - ❑ Equipment malfunction
 - ❑ Inconsistent with other recorded data and thus deleted
 - ❑ Data were not entered due to misunderstanding
 - ❑ Certain data may not be considered important at the time of entry
 - ❑ Did not register history or changes of the data
- ❑ Missing data may need to be inferred

How to Handle Missing Data?

- ❑ Ignore the tuple: usually done when class label is missing (when doing classification)—not effective when the % of missing values per attribute varies considerably
- ❑ Fill in the missing value manually: tedious + infeasible?
စာတမ်းအားလုံးကို လက်တွေ့ သတ်မှတ်တာ data
11A-အားလုံးကို လက်တွေ့ သတ်မှတ်တာ 10%တိ
- ❑ Fill in it automatically with
 - ❑ a global constant : e.g., “unknown”, a new class?!
 - ❑ the attribute mean နံပါတ်
 - ❑ the attribute mean for all samples belonging to the same class: smarter
ဒီ 2 မှာ
အဲဒီ mean မှာ အမှန်တကယ်
ဒီ mean မှာ
အမှန်တကယ်
 - ❑ **the most probable value: inference-based such as Bayesian formula or decision tree**
ဒီ အမှန်တကယ် မှာ အမှန်တကယ်
(အမှန်တကယ် ကို missing)

Noisy Data


data transmission errors
human input errors

- ❑ **Noise:** random error or variance in a measured variable
- ❑ **Incorrect attribute values** may be due to
 - ❑ Faulty data collection instruments
 - ❑ Data entry problems
 - ❑ Data transmission problems
 - ❑ Technology limitation
 - ❑ Inconsistency in naming convention
- ❑ **Other data problems**
 - ❑ Duplicate records
 - ❑ Incomplete data
 - ❑ Inconsistent data

How to Handle Noisy Data?


□ Binning *การbinข้อมูลที่มีเสียงรบกวน*

- First sort data and partition into (equal-frequency) bins
- Then one can **smooth by bin means, smooth by bin median, smooth by bin boundaries, etc.** *Linear*

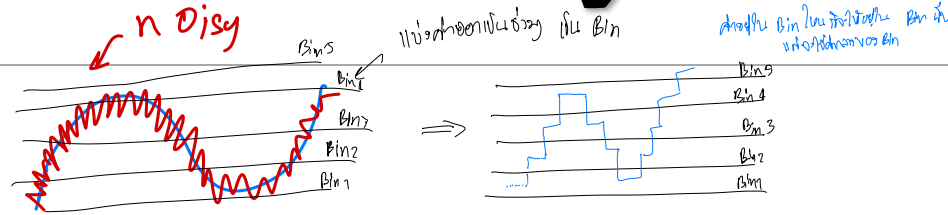

□ Regression

- Smooth by fitting the data into regression functions

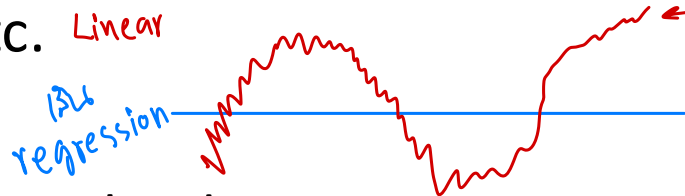

□ Clustering

- Detect and remove outliers

□ Semi-supervised: Combined computer and human inspection

- Detect suspicious values and check by human (e.g., deal with possible outliers)

Noisy
 แก้น้อยๆ ให้ดู X, y แล้ว Regression เพื่อ ดูว่ามี noise หรือไม่

to
 ~ regression มี ~
 ~ run มี ~

การหาค่าเฉลี่ยและ plot

การ smoothing ที่เรียกว่า Binning หรือการหาค่าเฉลี่ย
ของ histogram ที่ใช้ Binning

↓
การ output (def_valve_info_bin)
คือการหาค่าเฉลี่ยของ bin (ค่าเฉลี่ยของแต่ละ bin)

↑
ใน pandas จะ Apply function ไปยังแต่ละ row
ใช้ lambda หรือ Apply

Noisy ที่เกิดจากรandom data outlier

ใน Box plot จะดูว่า data อยู่ภายใน IQR

ถ้าค่าอยู่ $IQR \times 1.5$ ถือว่าค่านี้คือ outlier
↑
ค่าที่ผิดปกติ

การหาค่าเฉลี่ย outlier ในการ outlier analysis

สมมติ data $\Rightarrow xdata$ หรือ x | $ydata$ หรือ y

Data Cleaning as a Process

❑ Data discrepancy detection

- ❑ Use metadata (e.g., domain, range, dependency, distribution)
- ❑ Check field overloading
- ❑ Check uniqueness rule, consecutive rule and null rule
- ❑ Use commercial tools
 - ❑ Data scrubbing: use simple domain knowledge (e.g., postal code, spell-check) to detect errors and make corrections
 - ❑ Data auditing: by analyzing data to discover rules and relationship to detect violators (e.g., correlation and clustering to find outliers)

❑ Data migration and integration

- ❑ Data migration tools: allow transformations to be specified
 - ❑ ETL (Extraction/Transformation/Loading) tools: allow users to specify transformations through a graphical user interface
- ## ❑ Integration of the two processes
- ❑ Iterative and interactive (e.g., Potter's Wheels)

Chapter 3: Data Preprocessing

- ❑ Data Preprocessing: An Overview
- ❑ Data Cleaning
- ❑ Data Integration 
- ❑ Data Reduction and Transformation
- ❑ Dimensionality Reduction
- ❑ Summary

Data Integration

□ Data integration

- Combining data from multiple sources into a coherent store

□ Schema integration: e.g., A.cust-id $\equiv$ B.cust-#

- Integrate metadata from different sources

□ Entity identification:

- Identify real world entities from multiple data sources, e.g., Bill Clinton = William Clinton

□ Detecting and resolving data value conflicts

- For the same real world entity, attribute values from different sources are different
- Possible reasons: different representations, different scales, e.g., metric vs. British units

- 2 tables map ฟิลด์ที่ key ของ 2 tables
เหมือนกัน

- กับ 2 data มาจากที่อื่น ๆ ไม่รู้ชื่อ
ว่ามาจากไหน

- (กับ data ที่มาจาก
แหล่งเดียวกันแต่ชื่อต่าง)
- ชื่อ data dict how
• ชื่อของ data

Handling Redundancy in Data Integration

- ❑ Redundant data occur often when integration of multiple databases
 - ❑ *Object identification*: The same attribute or object may have different names in different databases
 - ❑ *Derivable data*: One attribute may be a “derived” attribute in another table, e.g., annual revenue
- ❑ **Redundant attributes may be able to be detected by *correlation analysis* and *covariance analysis***
- ❑ Careful integration of the data from multiple sources may help reduce/avoid redundancies and inconsistencies and improve mining speed and quality

Dimensionality Reduction

သက်တောင့်သက်သာ

ဒီမင်ရှင်ရှယ်တီ
အားလျှော့ချခြင်း
နည်းလမ်း

❑ Curse of dimensionality

- ❑ When dimensionality increases, data becomes increasingly sparse
- ❑ Density and distance between points, which is critical to clustering, outlier analysis, becomes less meaningful
- ❑ The possible combinations of subspaces will grow exponentially

❑ Dimensionality reduction

- ❑ Reducing the number of random variables under consideration, via obtaining a set of principal variables

❑ Advantages of dimensionality reduction

- ❑ Avoid the curse of dimensionality
- ❑ Help eliminate irrelevant features and reduce noise
- ❑ Reduce time and space required in data mining
- ❑ Allow easier visualization

ថ្ងៃជុំវិញ ២០៖ ការងារ បង្កើន ប្រសិទ្ធភាព ១៖ បង្កើន ជំនាញ
(បង្កើន ប្រសិទ្ធភាព ប្រសិទ្ធភាព ១១០០ បង្កើន ប្រសិទ្ធភាព ១១០០)

បង្កើន ប្រសិទ្ធភាព បង្កើន ប្រសិទ្ធភាព ១១០០ បង្កើន ប្រសិទ្ធភាព ១១០០
បង្កើន ប្រសិទ្ធភាព បង្កើន ប្រសិទ្ធភាព ១១០០ បង្កើន ប្រសិទ្ធភាព ១១០០


Dimensionality Reduction Techniques

- ❑ Dimensionality reduction methodologies
 - ❑ **Feature selection:** Find a subset of the original variables (or features, attributes)
 - ❑ **Feature extraction:** Transform the data in the high-dimensional space to a space of fewer dimensions
- ❑ Some typical dimensionality methods
 - ❑ Principal Component Analysis (PCA)
 - ❑ Supervised and nonlinear techniques
 - ❑ Feature subset selection
 - ❑ Feature creation

dimensionality reduction
X and Y relationship
and the relationship between Prop and

Principal Component Analysis (PCA)


- ❑ PCA: A statistical procedure that uses an orthogonal transformation to convert a set of observations of possibly correlated variables into a set of values of linearly uncorrelated variables called *principal components*
- ❑ The original data are projected onto a much smaller space, resulting in dimensionality reduction
- ❑ Method: Find the eigenvectors of the covariance matrix, and these eigenvectors define the new space

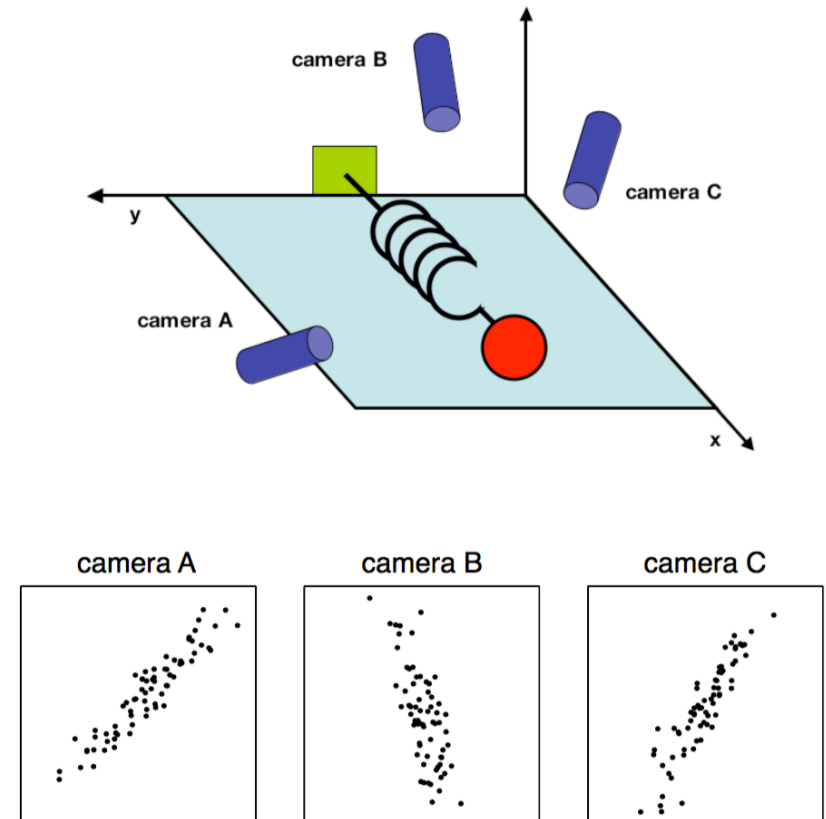

Ball travels in a straight line. Data from three cameras contain much redundancy

Principal Component Analysis (Method)

- Given N data vectors from n -dimensions, find $k \leq n$ orthogonal vectors (*principal components*) best used to represent data
 - Normalize input data: Each attribute falls within the same range
 - Compute k orthonormal (unit) vectors, i.e., *principal components*
 - Each input data (vector) is a linear combination of the k principal component vectors
 - The principal components are sorted in order of decreasing “significance” or strength
 - Since the components are sorted, the size of the data can be reduced by eliminating the *weak components*, i.e., those with low variance (i.e., using the strongest principal components, to reconstruct a good approximation of the original data)
- Works for numeric data only

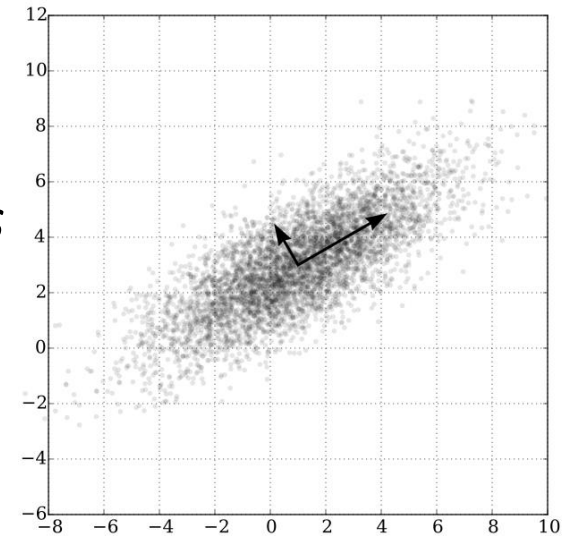


Ack. Wikipedia: Principal Component Analysis

Attribute Subset Selection

mission Attribute utilization
(feature data)

- Another way to reduce dimensionality of data
- Redundant attributes
 - Duplicate much or all of the information contained in one or more other attributes
 - E.g., purchase price of a product and the amount of sales tax paid
- Irrelevant attributes
 - Contain no information that is useful for the data mining task at hand
 - Ex. A student's ID is often irrelevant to the task of predicting his/her GPA

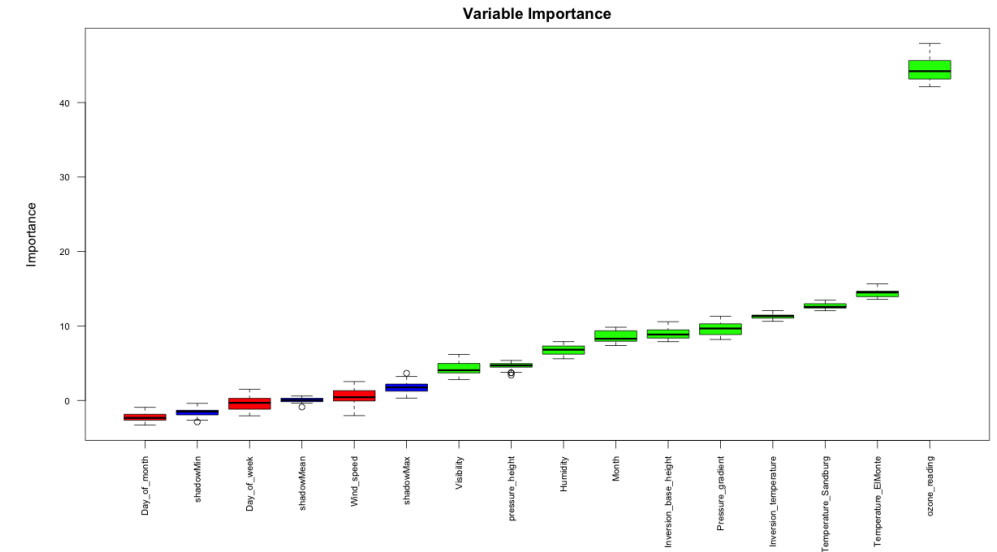

Heuristic Search in Attribute Selection

- ❑ There are 2^d possible attribute combinations of d attributes
- ❑ Typical heuristic attribute selection methods:
 - ❑ Best single attribute under the attribute independence assumption: choose by significance tests
 - ❑ Best step-wise feature selection:
 - ❑ The best single-attribute is picked first
 - ❑ Then next best attribute condition to the first, ...
 - ❑ Step-wise attribute elimination:
 - ❑ Repeatedly eliminate the worst attribute
 - ❑ Best combined attribute selection and elimination
 - ❑ Optimal branch and bound:
 - ❑ Use attribute elimination and backtracking

Attribute Creation (Feature Generation)

- ❑ Create new attributes (features) that can capture the important information in a data set more effectively than the original ones
- ❑ Three general methodologies
 - ❑ Attribute extraction
 - ❑ Domain-specific
 - ❑ Mapping data to new space (see: data reduction)
 - ❑ E.g., Fourier transformation, wavelet transformation, manifold approaches (not covered)
 - ❑ Attribute construction
 - ❑ Combining features (see: discriminative frequent patterns in Chapter on “Advanced Classification”)
 - ❑ Data discretization

ដឹង ផ្លូវ

អរិយធម៌ ជនបទដែល ក្នុងស្ថានភាព ដែលមាន ភាពស្រស់ស្អាត (គោរពច្បាប់ , ក្នុងស្ថានភាព)
ដែលមាន ឧបករណ៍ ក្នុងស្ថានភាព ដែលមាន ភាពស្រស់ស្អាត

Summary

- ❑ **Data quality:** accuracy, completeness, consistency, timeliness, believability, interpretability
- ❑ **Data cleaning:** e.g. missing/noisy values, outliers
- ❑ **Data integration** from multiple sources:
 - ❑ Entity identification problem; Remove redundancies; Detect inconsistencies
- ❑ **Data reduction, data transformation and data discretization**
 - ❑ Numerosity reduction; Data compression
 - ❑ Normalization; Concept hierarchy generation
- ❑ **Dimensionality reduction**

References

- ❑ D. P. Ballou and G. K. Tayi. Enhancing data quality in data warehouse environments. *Comm. of ACM*, 42:73-78, 1999
- ❑ T. Dasu and T. Johnson. *Exploratory Data Mining and Data Cleaning*. John Wiley, 2003
- ❑ T. Dasu, T. Johnson, S. Muthukrishnan, V. Shkapenyuk. [Mining Database Structure; Or, How to Build a Data Quality Browser](#). SIGMOD'02
- ❑ H. V. Jagadish et al., Special Issue on Data Reduction Techniques. *Bulletin of the Technical Committee on Data Engineering*, 20(4), Dec. 1997
- ❑ D. Pyle. *Data Preparation for Data Mining*. Morgan Kaufmann, 1999
- ❑ E. Rahm and H. H. Do. Data Cleaning: Problems and Current Approaches. *IEEE Bulletin of the Technical Committee on Data Engineering*. Vol.23, No.4
- ❑ V. Raman and J. Hellerstein. *Potters Wheel: An Interactive Framework for Data Cleaning and Transformation*, VLDB'2001
- ❑ T. Redman. *Data Quality: Management and Technology*. Bantam Books, 1992
- ❑ R. Wang, V. Storey, and C. Firth. A framework for analysis of data quality research. *IEEE Trans. Knowledge and Data Engineering*, 7:623-640, 1995

