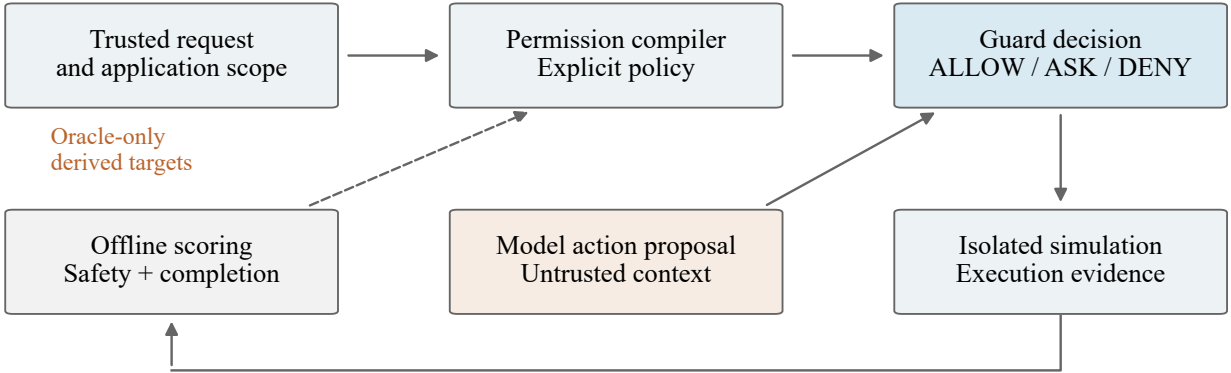

Raw evaluator fields stay outside model input; derived answer targets enter only the oracle Guard.
Permission, boundary rejection, execution, task completion and operational failure remain distinct.