

Name: Faizan


Mission Field: Cyber Security

Universal tracking ID: NST-2026-11187

Day 6: Linux Commands Practice Tools: Kali Linux Terminal Practical

Task: Practice ls, pwd, cd, mkdir, nano, chmod commands.

Ls, pwd, cd, mkdir Screenshot:

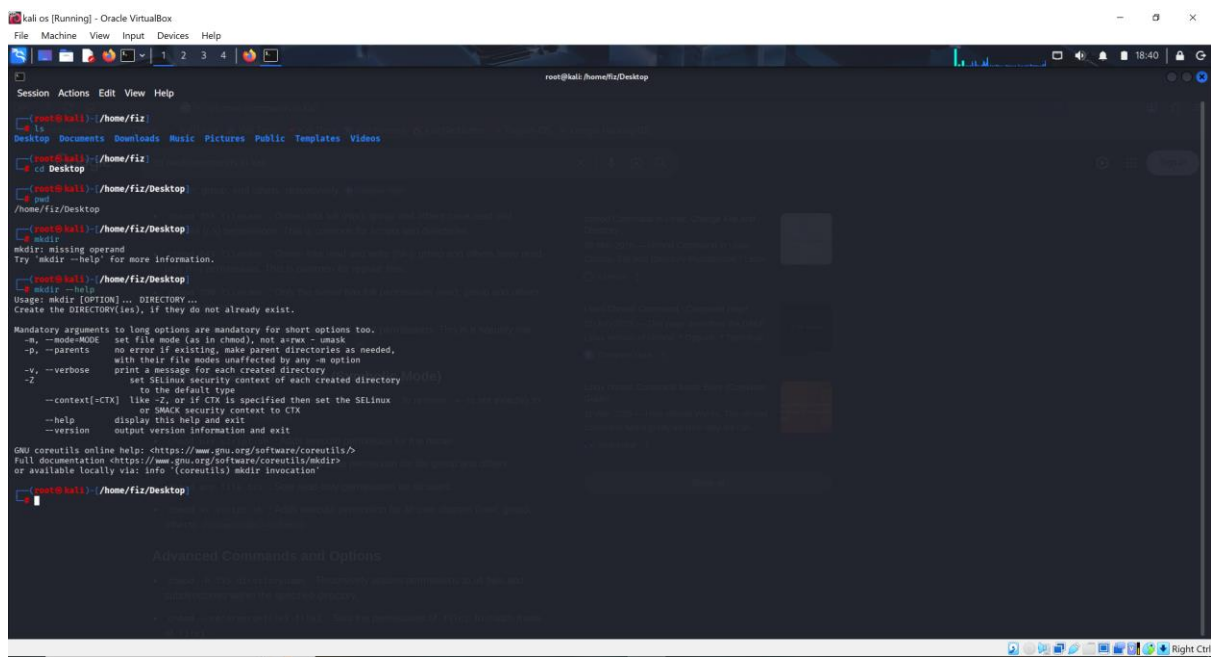


```
kali os [Running] - Oracle VirtualBox
File Machine View Input Devices Help

root@kali:~/Desktop
root@kali:~/Desktop# ls
Desktop  Documents  Downloads  Music  Pictures  Public  Templates  Videos
root@kali:~/Desktop# pwd
/home/fiz/Desktop
root@kali:~/Desktop# cd Desktop
root@kali:~/Desktop/Desktop# pwd
/home/fiz/Desktop/Desktop
root@kali:~/Desktop/Desktop# mkdir
mkdir: missing operand
Try 'mkdir --help' for more information.
root@kali:~/Desktop/Desktop# mkdir --help
Usage: mkdir [OPTION]... DIRECTORY...
Create the DIRECTORY(ies), if they do not already exist.


Mandatory arguments to long options are mandatory for short options too.
  -m, --mode=MODE      set file mode (as in chmod), not a=rwx - umask
  -p, --parents         no error if existing, make parent directories as needed,
                        with their file modes unaffected by any -m option
  -v, --verbose         print a message for each created directory
  -Z, --context=CTX     set SELinux security context of each created directory
                        to the default type
                        --context[-CTX] like --Z, or if CTX is specified then set the SELinux or SMACK security context to CTX
  --help               display this help and exit
  --version             output version information and exit

GNU coreutils online help: <https://www.gnu.org/software/coreutils/>
Full documentation <https://www.gnu.org/software/coreutils/mkdir>
or available locally via: info '(coreutils) mkdir invocation'
```

Nano Command Screenshot:

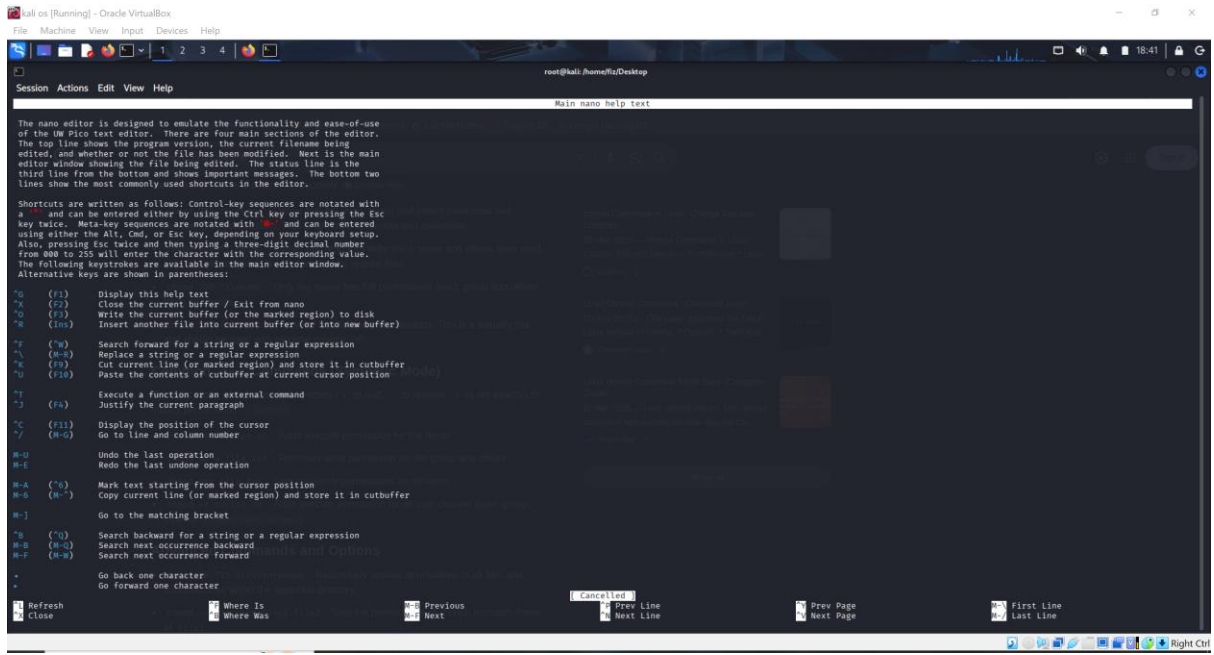

Chmod Command Screenshot:

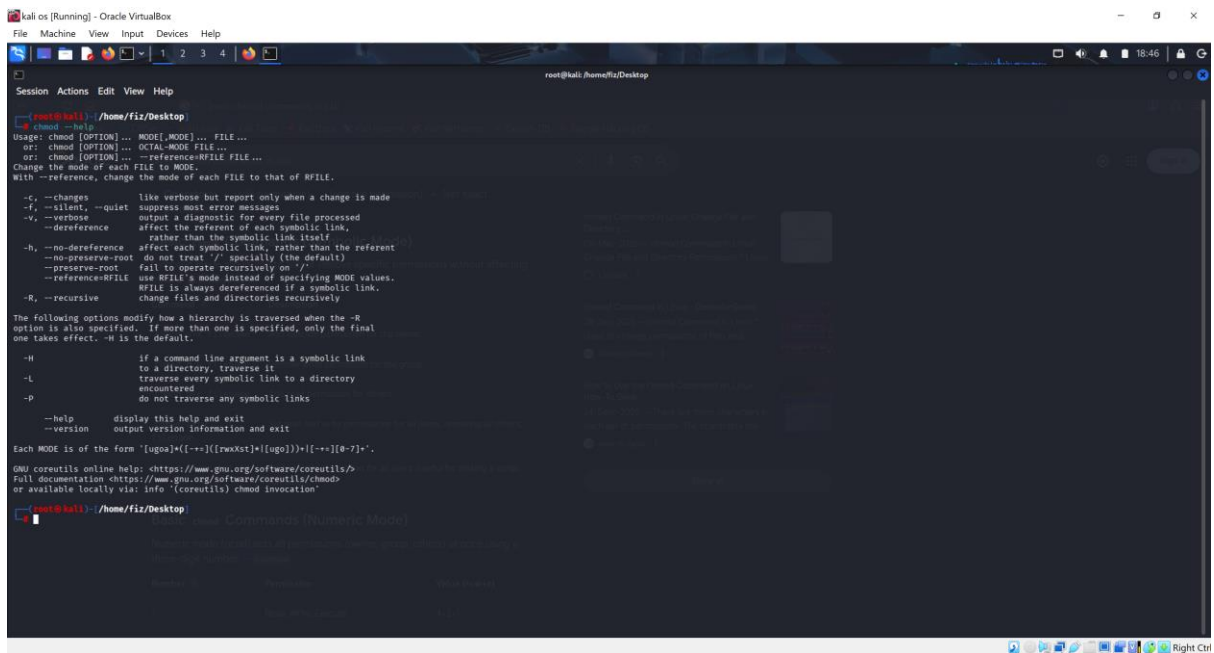

Thankyou