Pick four - comparing trends in population over time

Purpose

The purpose of this report is to compare the population trends for four countries of your choosing. In addition, this serves as an example of literate programming. Literate programming is a way to document how you performed your analysis. It serves as a guide to other to others (and your future self) how to reproduce your work.

Required Libraries

```
library(ggplot2)
```

Loading required package: methods

Data

Always add as many details as possible about your data including where it came from, how it was processed, licensing, and where it can be accessed.

- Gapminder data available here. Gapminder data is licensed CC-BY 3.0.
- Processed data via [@jennybc](https://github.com/jennybc), R package available here. The data-raw sub-directory reveals the journey from Gapminder.org's Excel workbooks to increasingly clean and tidy data.

Read in data: To read in the data, make sure this file is in the same directory/folder as the gapminderDataFiveYear.txv file. To set the proper working directory go to Session > Set Working Directory > To Source File Location.

```
gapMinder <- read.delim("gapminderDataFiveYear.tsv")

##Check data
head(gapMinder) #First 10 lines of dataset</pre>
```

```
dim(gapMinder) #number of rows and columns in data set
```

```
## [1] 1704 6
```

You can see what countries are available by looking at the how many unique categories are in the country column of the gapMinder dataset.

```
levels(gapMinder$country)
```

Pick Four Countries

Now pick four countries that you are intrested in. Just replace with the countries name below.


```
countryName1 <- "India"
countryName2 <- "United States"
countryName3 <- "Nigeria"
countryName4 <- "Germany"</pre>
```

Country One

We want to look at how population changes over time for the first country.


```
country1 <- subset(gapMinder, country == countryName1)

ggplot(country1, aes(year, pop)) +
   geom_path() +
   ggtitle(countryName1) +
   theme(plot.title = element_text(size = 15, face = "bold"))</pre>
```

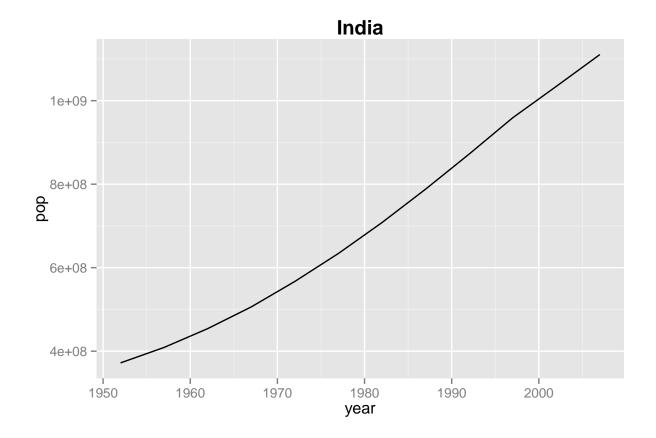


This second graph is looking at the correlation between life expectancy (lifeExp) and GDP per person (gdpPercap). The size of the circles on the plot represents total population.

```
ggplot(country1, aes(gdpPercap, lifeExp, size = pop)) +
  geom_point() +
  ggtitle(countryName1) +
  theme(plot.title = element_text(size = 15, face = "bold"))
```

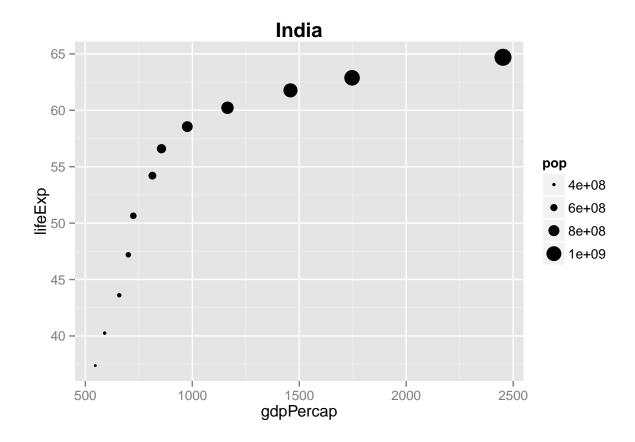


Country 2


We will do this for each country. Since the code is very similar, we will omit viewing it below by adding the named parameter echo=FALSE (TRUE is the default):

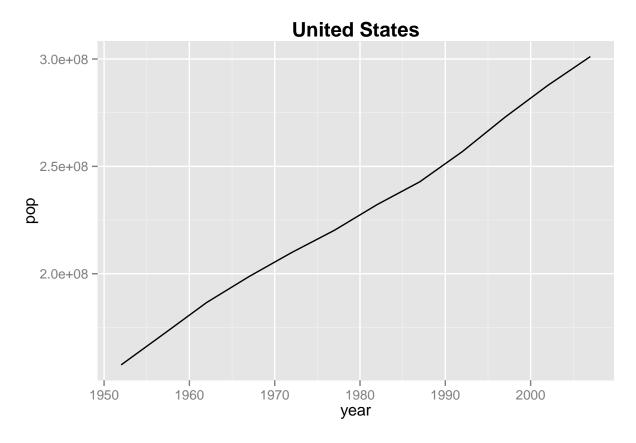

Notes: In a real report you can add information about the results of the analysis you are performing. That way your code, analysis, questions, and results are all in one place.

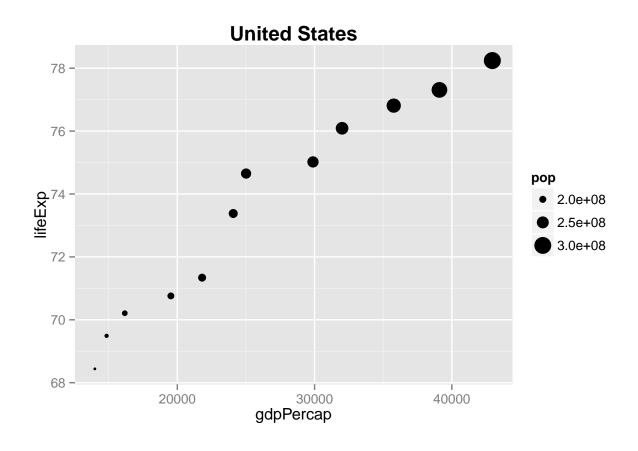


Country 3

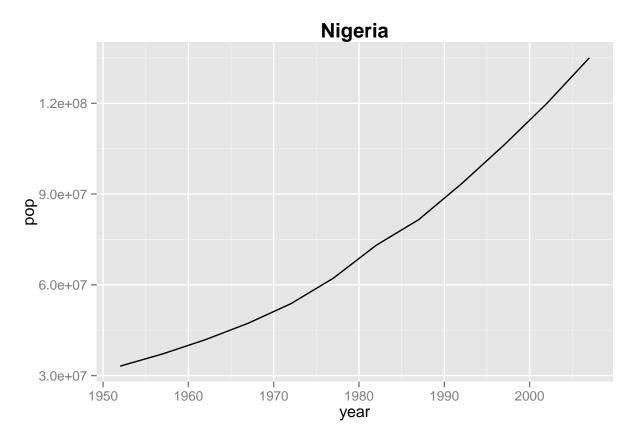


Notes Maybe a country has an unusual distribution and we want to label the graph with the year. We added label = year to the first line of the code below. To display the text we also added the geom_text(hjust = 1, vjust = 0, size = 5) option.

```
ggplot(country3, aes(gdpPercap, lifeExp, size = pop, label = year)) +
geom_point() +
geom_text(hjust = 1.3, vjust = 0, size = 3) +
ggtitle(countryName3) +
theme(plot.title = element_text(size = 15, face = "bold"))
```

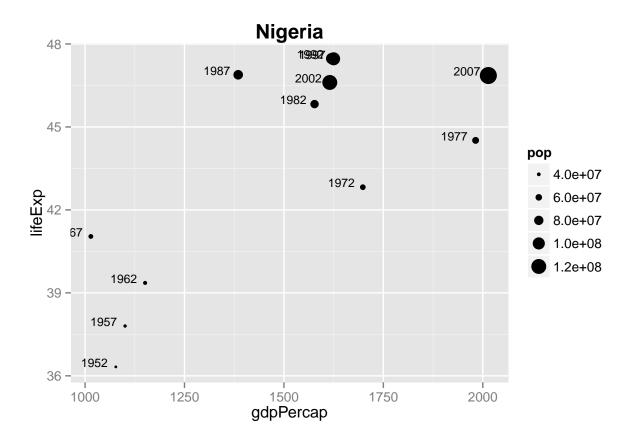


Country 4

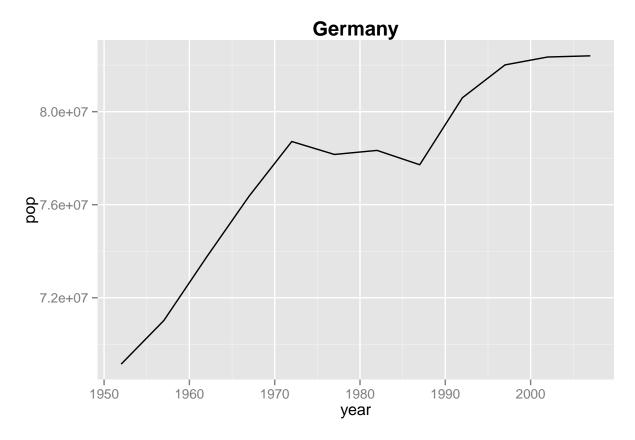

Notes: Or we can try out labeling the year by adding color.

```
ggplot(country4, aes(gdpPercap, lifeExp, size = pop, color = year)) +
  geom_point() +
  ggtitle(countryName4) +
  theme(plot.title = element_text(size=15, face = "bold"))
```

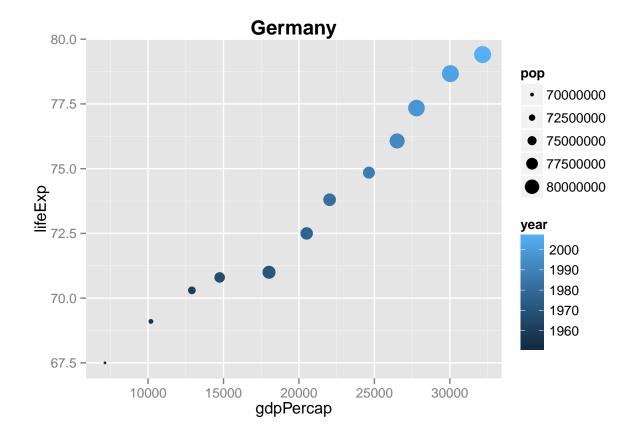


All four countries


Let's add all four countries together and to see how they compare.

```
#Add subsetted data together
allCountries <- rbind(country1, country2, country3, country4)


#Notice the code for this is similar to when we are just looking at one country
#just with the added color option
ggplot(allCountries, aes(year, pop, color=country)) +
   geom_path() +
   xlab("Year") + ylab("Population Size") +
   ggtitle("All four countries") +
   theme(plot.title = element_text(lineheight=.8, face = "bold"))</pre>
```

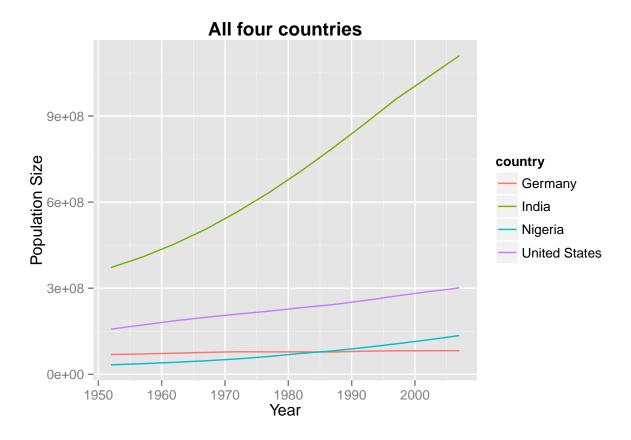

What about what is occurring in a particular year? You can change the year by changing the code in the year == 2007 section. To look at what years are possible use allCountries\$year.

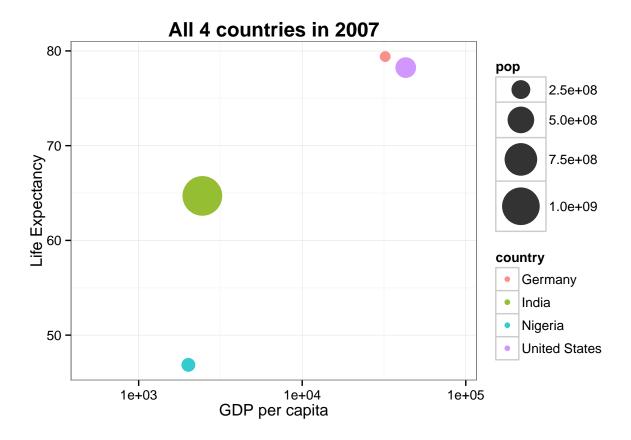

You can plot all the years at once also!

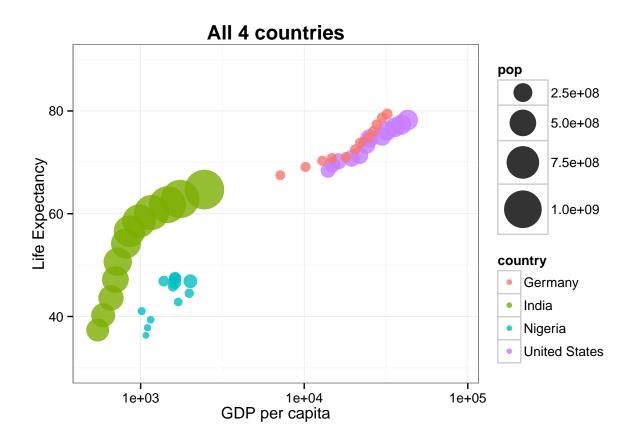

Conclusions

In a real report you can add conclusions about your analysis or future plans for the project. The best part is that if you want to change something in your report you don't have to redo every step. You can just make the change and re-print the report.