

# Bitbucket Integration

# Table of Contents

1. What can we do currently? .....	1
2. And what can't we do? .....	1
3. Configure the integration module in Taiga .....	2
4. Configure Webhooks in your Bitbucket repository .....	2

**Bitbucket** is a web-based hosting service for projects that use Git revision control systems.

## 1. What can we do currently?

Right now you can connect a Bitbucket repository with a Taiga project and generate a one-way communication (from Bitbucket to Taiga) to:

- **Change the status of an epic, user story, issue, or task in Taiga with the commit message:** you may want to read more about this feature in the article ["Changing elements status via commit message"](#).
- **Attach commits in an epic, user story, issue, or task of Taiga with the commit message:** you may want to read more about this feature in the article ["Attach commits to elements via commit message"](#).

## 2. And what can't we do?

- **Create issues on Taiga when they are created on Bitbucket.**
- **Add comments to the connected issues on Taiga when they are created on Bitbucket.**
- **Dual synchronization:** currently the integration functionality only allows receiving messages from Bitbucket. Taiga can't communicate with Bitbucket (the one-way communication is from Bitbucket to Taiga), so changes made in Taiga won't be reflected in Bitbucket.
- **Show commit links in Taiga issues:** If you name a story, task or issue in a commit message (by its reference number) a link to commit not appear in Taiga.
- **Sync current Bitbucket issues and comment when the integration module in Taiga is enabled:** the integration only works with the future issues and comments added in Bitbucket.

Currently Bitbucket offers some limitations on its webhooks system that must be considered. These limitations are not hardcore but it's good to know them to be aware of the limitations that exist.


- Bitbucket doesn't sign the messages so Taiga only can confirm the origin checking the IPs in the request. Bitbucket can change their [IP ranges](#) of their servers when they want so with every change you have to update your configuration in Taiga to prevent errors.
- Webhooks messages can only contains a maximum of 5 commits (up to 5 of the most recent commits pushed) according to the [Bitbucket documentation](#).

### WARNING

Integration will always take time so please be patient. If you need a specific integration and you feel ready to get a machete and get into the Taiga, please review our [API Docs](#) and our section in [Taiga](#) resources about ["How you can contribute?"](#). If you need help with a specific feature, you can always get in touch with our community through our [community space](#).

## 3. Configure the integration module in Taiga

1. Go to **Admin > Integrations > Bitbucket**
2. Fill **secret key** or use the auto generated one
3. Copy the Payload URL field.
4. Optionally you can define the valid emitter IPs or IP ranges to validate the origin of the requests. You can find the valid IP ranges for the Bitbucked Cloud service [here](#).

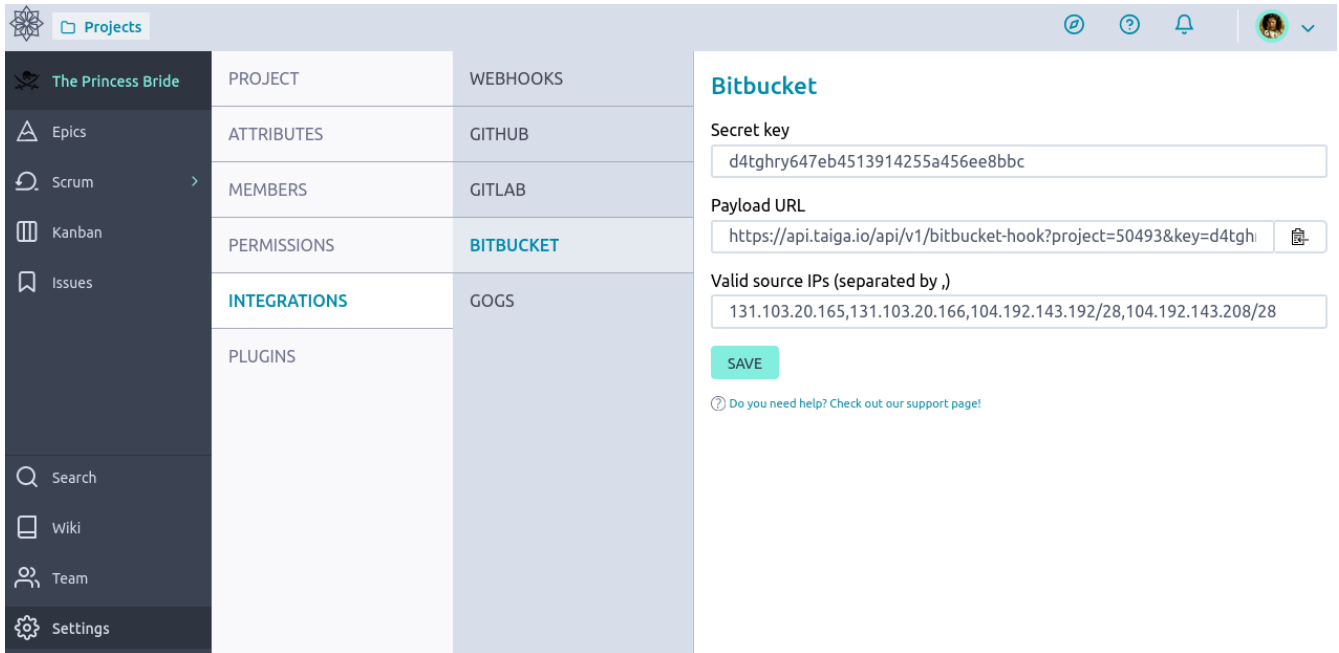

The screenshot shows the Taiga Admin interface. On the left is a sidebar with navigation links: Projects, The Princess Bride, Epics, Scrum, Kanban, Issues, Search, Wiki, Team, and Settings. The main content area is divided into two columns: PROJECT and WEBHOOKS. Under PROJECT, there are links for ATTRIBUTES, MEMBERS, PERMISSIONS, INTEGRATIONS (highlighted), and PLUGINS. Under WEBHOOKS, there are links for GITHUB, GITLAB, BITBUCKET (highlighted), and GOGS. The right panel shows the Bitbucket configuration form with fields for Secret key, Payload URL, and Valid source IPs, along with a SAVE button and a help link.

PROJECT	WEBHOOKS
ATTRIBUTES	GITHUB
MEMBERS	GITLAB
PERMISSIONS	BITBUCKET
INTEGRATIONS	GOGS
PLUGINS	

### Bitbucket

**Secret key**

**Payload URL**


**Valid source IPs (separated by ,)**

**SAVE**

Do you need help? Check out our support page!

## 4. Configure Webhooks in your Bitbucket repository

1. Click on **Settings > Webhooks**
2. Click on **"Add webhook"** button
3. On that form set the url with the **payload url** of this screen and choose some title (ex. "Taiga.io").
4. Taiga listens for three different triggers, you can select all of them or just some:
  - a. **Repository - Push:** Changing element status via commit message
5. Press **Save** button to create the new webhook



the-princess-bride

ACTIONS

Clone

Create branch

Create pull request

Compare

Fork

NAVIGATION

Overview

Source

Commits

Branches

Pull requests

Issues

4

Wiki

Downloads

Settings

## Settings

### GENERAL

- Repository details
- Access management
- Branch management
- Username aliases
- Deployment keys
- Transfer repository
- Delete repository

### INTEGRATIONS

#### Services

#### Webhooks

#### Links

### PULL REQUESTS

#### Default reviewers

### ISSUES

- Issue tracker settings
- Components
- Milestones
- Versions
- Mailing list
- Import & export

### WIKI

- Wiki settings

### Webhooks

## Add new webhook

To learn more about how webhooks work, check out the [documentation](#).

Title

URL

Status ☒ Active

Inactive webhooks don't trigger requests.

SSL / TLS ☐ Skip certificate verification

Untrusted or self-signed certificates may not be secure. [Learn more](#)

Triggers ☐ Repository push

☒ Choose from a full list of triggers

#### Repository

- ☒ Push
- ☐ Fork
- ☐ Updated
- ☐ Commit comment created
- ☐ Commit status created
- ☐ Commit status updated

#### Issue

- ☒ Created
- ☒ Updated
- ☒ Comment created

#### Pull Request

- ☐ Created
- ☐ Updated
- ☐ Approved
- ☐ Approval removed
- ☐ Merged
- ☐ Declined
- ☐ Comment created
- ☐ Comment updated
- ☐ Comment deleted

[Save](#) [Cancel](#)