

Project management tool

Github repository : <https://github.com/FloRobart/pmt>

Table des matières


- [Project management tool](#)
 - [Table des matières](#)
 - [Description](#)
 - [MCD et MLD](#)
 - [MCD \(Modèle Conceptuel de Données\)](#)
 - [MLD \(Modèle Logique de Données\)](#)
 - [Launching the application](#)
 - [In production](#)
 - [For the developpement](#)
 - [Stop the application](#)
 - [Coverage](#)
 - [API](#)
 - [Frontend](#)


Description

PMT est une plateforme de gestion de projet collaboratif destinée aux équipes de développement logiciel.

MCD et MLD

MCD (Modèle Conceptuel de Données)



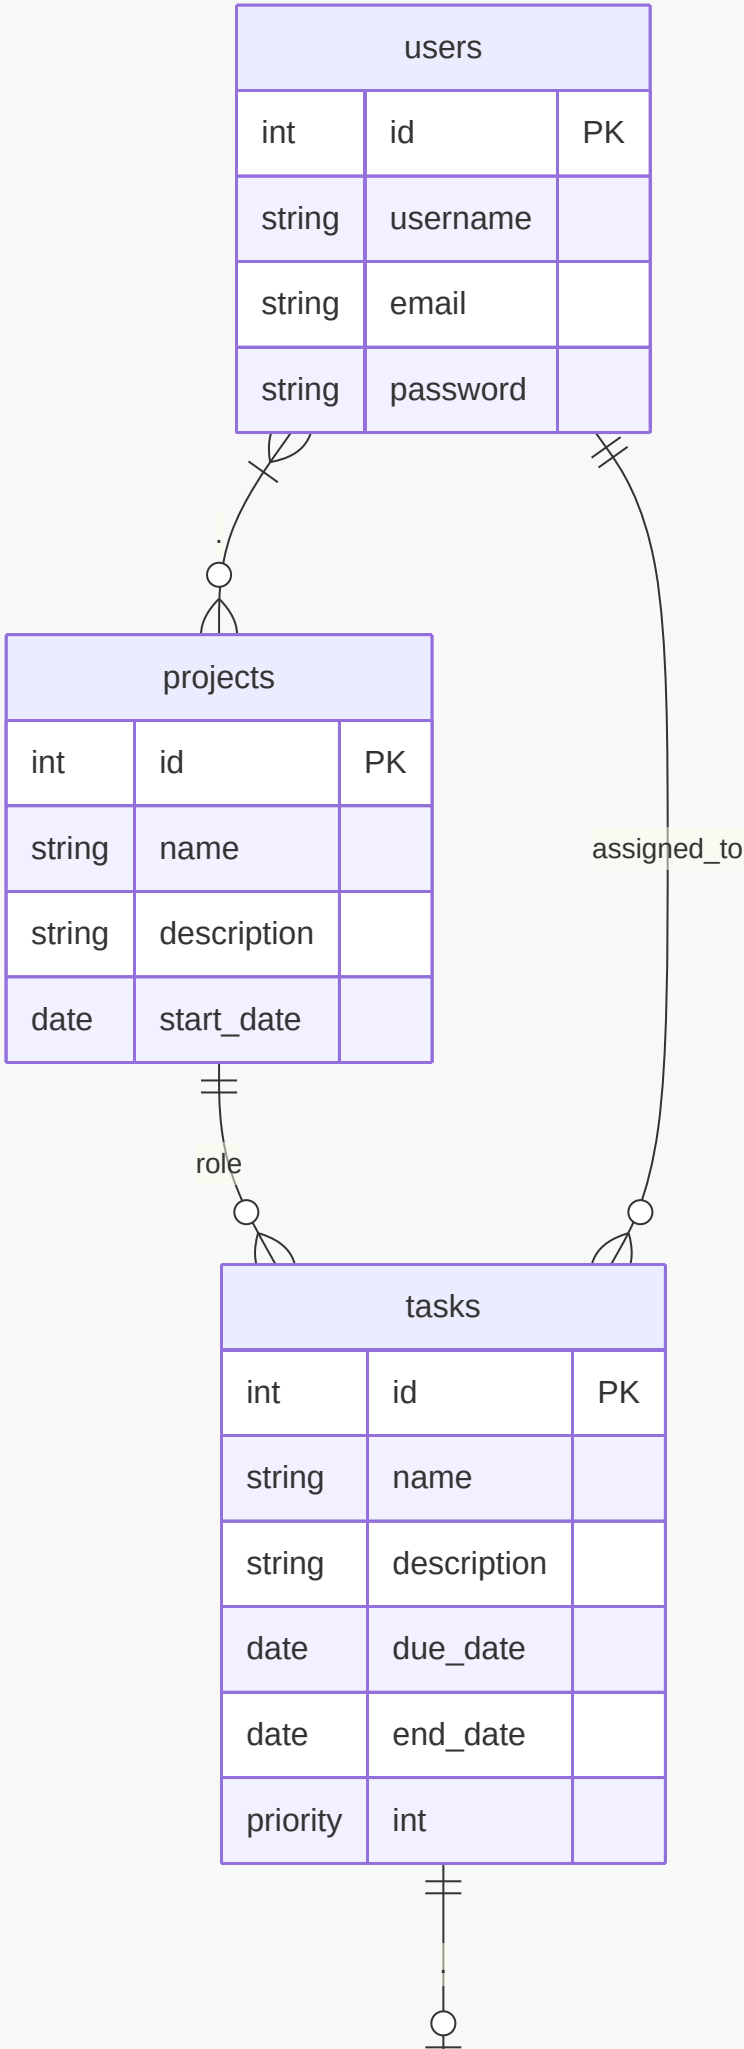

tasks_history		
int	id	PK
string	name	
string	description	
date	due_date	
date	end_date	

MLD (Modèle Logique de Données)

users (id, username, email, password) projects (id, name, description, start_date) tasks (id, name, description, due_date, end_date, priority, id_project, assigned_to) tasks_history (id, name, description, due_date, end_date, id_task) r_users_projects (id_user, id_project, role)

Launching the application

In production

- In empty repository
- Copy file `.env.example` from Github in file `.env` on your local machine.
- Copy file `docker-compose.yml` from Github in file `docker-compose.yml` on your local machine.
- Copy file `run.sh` from Github in file `run.sh` on your local machine.
- Make the script executable.

```
chmod +x run.sh
```

- execute `run.sh` to pull the production image and launch the application.

For the developpement

- Clone repository

```
git clone https://github.com/FloRobart/pmt.git
```

- Copy file `.env.example` in file `.env`.

```
cp .env.example .env
```

- execute docker compose command to build and launch the application.

```
docker compose -f docker-compose.prod.test.yml up -d --force-recreate --build
```

Stop the application

- execute `stop.sh` to stop the application and remove the Docker container.

```
./stop.sh
```

Coverage

API



Sessions

Element	Missed Instructions	Cov.	Missed Branches	Cov.	Missed	Cxty	Missed	Lines	Missed	Methods	Missed	Classes
fr.florobart.pmt.modules.users		67 %		100 %	10	32	16	53	10	30	0	4
fr.florobart.pmt.modules.usersProjects		80 %		81 %	12	39	13	69	9	31	0	5
fr.florobart.pmt.modules.tasks		82 %		87 %	7	39	10	77	6	35	0	4
fr.florobart.pmt.modules.projects		75 %		100 %	7	25	11	50	7	24	0	3
fr.florobart.pmt.core.error		17 %		n/a	1	2	5	6	1	2	0	1
fr.florobart.pmt.modules.tasksHistory		89 %		n/a	2	13	2	24	2	13	0	2
fr.florobart.pmt		37 %		n/a	1	2	2	3	1	2	0	1
fr.florobart.pmt.modules		60 %		n/a	1	2	1	2	1	2	0	1
fr.florobart.pmt.core.config		100 %		n/a	0	2	0	7	0	2	0	1
Total	237 of 1 087	78 %	4 of 30	86 %	41	156	60	291	37	141	0	22

Created with JaCoCo 0.8.13.202504020838

Frontend

All files

89.32% Statements 276/309 73.68% Branches 84/114 43.33% Functions 26/60 91.06% Lines 163/179

Press *n* or *j* to go to the next uncovered block, *b*, *p* or *k* for the previous block.

Filter:

File	Statements	Branches	Functions	Lines
app	100%21/21	100%10/10	100%1/1	100%11/11
app/core/services	15.78%3/19	75%3/4	0%0/14	6.25%1/16
app/modules/auth	93.1%54/58	78.12%25/32	54.54%6/11	100%39/39
app/modules/home	100%17/17	100%10/10	100%1/1	100%7/7
app/modules/workspace	93.29%181/194	62.06%36/58	54.54%18/33	99.05%105/106