

Project management tool

Github repository : <https://github.com/FloRobart/pmt>

Table des matières


- [Project management tool](#)
 - [Table des matières](#)
 - [Description](#)
 - [MCD et MLD](#)
 - [MCD \(Modèle Conceptuel de Données\)](#)
 - [MLD \(Modèle Logique de Données\)](#)
 - [Launching the application](#)
 - [In production](#)
 - [For the developpement](#)
 - [Stop the application](#)


Description

PMT est une plateforme de gestion de projet collaboratif destinée aux équipes de développement logiciel.

MCD et MLD

MCD (Modèle Conceptuel de Données)



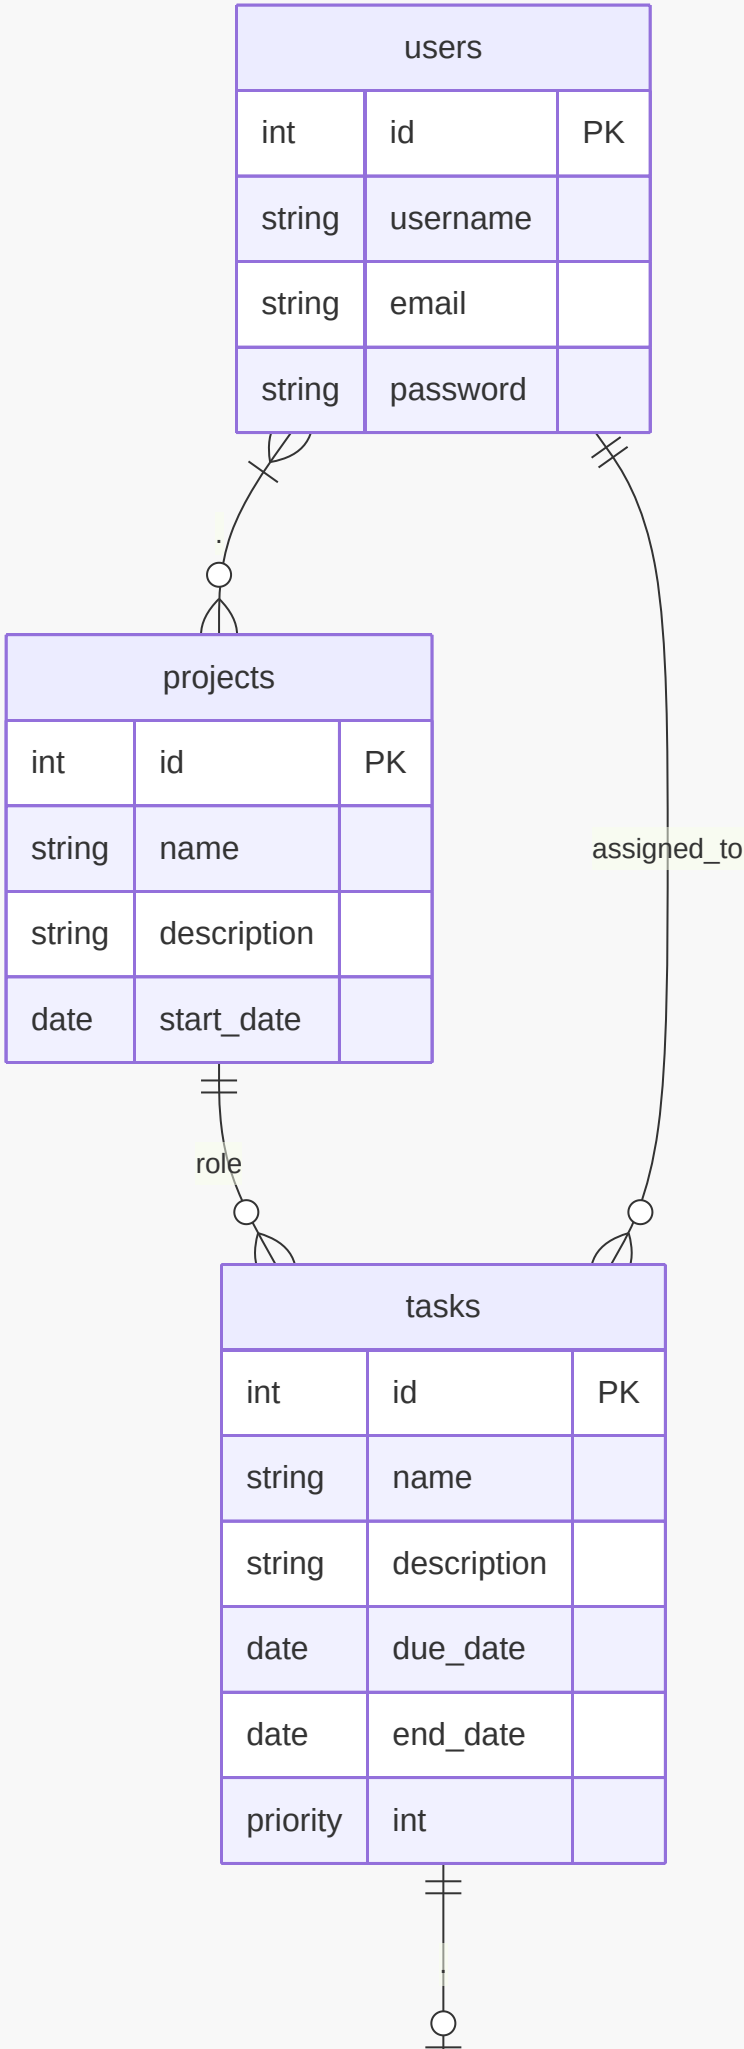

tasks_history		
int	id	PK
string	name	
string	description	
date	due_date	
date	end_date	

MLD (Modèle Logique de Données)

users (id, username, email, password) projects (id, name, description, start_date) tasks (id, name, description, due_date, end_date, priority, id_project, assigned_to) tasks_history (id, name, description, due_date, end_date, id_task) r_users_projects (id_user, id_project, role)

Launching the application

In production

- In empty repository
- Copy file `.env.example` from Github in file `.env` on your local machine.
- Copy file `docker-compose.yml` from Github in file `docker-compose.yml` on your local machine.
- Copy file `run.sh` from Github in file `run.sh` on your local machine.
- Make the script executable.

```
chmod +x run.sh
```

- execute `run.sh` to pull the production image and launch the application.

For the developpement

- Clone repository

```
git clone https://github.com/FloRobart/pmt.git
```

- Copy file `.env.example` in file `.env`.

```
cp .env.example .env
```

- execute docker compose command to build and launch the application.

```
docker compose -f docker-compose.prod.test.yml up -d --force-recreate  
--build
```

Stop the application

- execute `stop.sh` to stop the application and remove the Docker container.

```
./stop.sh
```