



ConTeXt

comandi

IT

ConTeXt

comandi

language : it / italiano
version : 10 settembre 2026
maintainer : Wolfgang Schuster
comments : ntg-context@ntg.nl

\AfterPar {...} * BEFEHL
\Alphabeticnumerals {...} * NUMMER
\AMSTEX
\AmSTeX
\abjadnaivenumerals {...} * NUMMER
\abjadnodotnumerals {...} * NUMMER
\abjadnumerals {...} * NUMMER
\activatespacehandler {...} * attivo disattivo si fisso
\actualday
\actualmonth
\actualyear
\adaptdcollector [¹ ...] [..., ² ...,...] 1 NAME OPT 2 inherits: \setupcollector
\adaptdfontfeature [¹] [..., ² ...,...] 1 NAME 2 inherits: \definefontfeature
\adaptive \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\adaptivebox [¹] [..., ² ...,...] { ³ ...} 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT
\adaptivehbox [¹] [..., ² ...,...] { ³ ...} 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT
\adaptivevbox [¹] [..., ² ...,...] { ³ ...} 1 NAME OPT OPT 2 inherits: \setupadaptive 3 CONTENT
\adaptpapersize [..., ¹ ...] [..., ² ...] 1 inherits: \impostadimensionicarta OPT 2 inherits: \impostadimensionicarta

```
\adattacampo    [...]1    [...,...2...,...]OPT
1  NAME
2  inherits: \setupfieldbody
```

```
\adattalayout    [...]1,...    [...,...2...,...]OPT
1  NUMBER
2  altezza = max DIMENSION
    righe   = NUMBER
    cima    = DIMENSION
```

```
\addfeature    [...]  
*  NAME
```

```
\addfeature    {...}  
*  NAME
```

```
\addriverstobox    [...,...1...,...]OPT    ...2
1  margine      = DIMENSIONOPT
    passo       = DIMENSION
    altezza     = DIMENSION
    profondita  = DIMENSION
    spaceinbetween = DIMENSION
2  CSNAME NUMBER
```

```
\addtocommalist    {...}1    \...2
1  TEXT
2  CSNAME
```

```
\addtoJSreamble    {...}1    {...}2
1  NAME
2  CONTENT
```

```
\addvalue    {...}1    {...}2
1  NAME
2  TEXT
```

```
\aftersplitstring    ... \at    ... \to    \...3
1  TEXT
2  TEXT
3  CSNAME
```

```
\aftertestandsplitstring    ... \at    ... \to    \...3
1  TEXT
2  TEXT
3  CSNAME
```

```
\al    {...}1    {...}2    [...]3
1  TEXTOPT    TEXTOPT
2  TEXT
3  REFERENCE
```

```
\alignanchor    {...}1    {...}2    {...}3    {...}4
1  NAME
2  NUMBER
3  NUMBER
4  r destra c m centro
```

```
\alignbottom
```

```
\aligncontentleft
```

```
\aligncontentmiddle
```

<code>\aligncontentright</code>
<code>\aligned [...¹,...] {...²}</code> 1 sinistra centro destra cima fondo riga l c r m t b g 2 CONTENT
<code>\alignedbox [...¹,...] \.² {...³}</code> 1 sinistra centro destra cima fondo riga l c r m t b g 2 CSNAME 3 CONTENT
<code>\alignedline {...¹} {...²} {...³}</code> 1 sinistra destra centro flushleft flushright center max interno esterno margineinterno margineesterno bordointerno bordoesterno backspace cutspace marginesinistro marginedestro bordosinistro bordodestro 2 sinistra destra centro flushleft flushright center max interno esterno margineinterno margineesterno bordointerno bordoesterno backspace cutspace marginesinistro marginedestro bordosinistro bordodestro 3 CONTENT
<code>\alignhere</code>
<code>\alignmentcharacter</code>
<code>\allineacentro {...}</code> * CONTENT
<code>\allineadestra {...}</code> * CONTENT
<code>\allineasinistra {...}</code> * CONTENT
<code>\allinputpaths</code>
<code>\allowbreak</code>
<code>\allowhbreak</code>
<code>\allowvbreak</code>
<code>\alphabeticnumerals {...}</code> * NUMMER
<code>\alternate {...¹} {...²}</code> 1 TEXT 2 CONTENT
<code>\alwayscitation [...¹,...²,...] [...²]</code> 1 riferimento = REFERENCE ^{OPT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE
<code>\alwayscitation [...¹] [...²]</code> 1 implicito category entry ^{OPT} short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE

<pre> \alwayscitation [...,..¹...,...] [...,..²...,...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \alwayscite [...,..¹...,...] [...².] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \alwayscite [...¹.] [...².] 1 implicito category^{opt} entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \alwayscite [...,..¹...,...] [...,..²...,...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \ambiente [...] * FILE </pre>
<pre> \ambiente ... * FILE </pre>
<pre> \amedian {...} * CONTENT </pre>
<pre> \ampersand </pre>
<pre> \analyzelocalanchors ... * CSNAME NUMBER </pre>
<pre> \anchor [...¹.] [...,..²...,...] [...,..³...,...] {...⁴.} 1 NAME 2 inherits: \setupplayer 3 inherits: \setupplayerinherits: \impostaincorniciato 4 CONTENT </pre>
<pre> \ap [...] * NUMBER </pre>
<pre> \apagina [...] * REFERENCE </pre>

\appendetoks ¹ \to \ ² .. 1 BEFEHL 2 CSNAME
\appendgvalue { ¹ ..} { ² .. 1 NAME 2 BEFEHL
\appendhiddenbackground {...,*...} * NAME
\appendtocommalist { ¹ ..} \ ² .. 1 TEXT 2 CSNAME
\appendtoks ¹ \to \ ² .. 1 BEFEHL 2 CSNAME
\appendtoksonce ¹ \to \ ² .. 1 BEFEHL 2 CSNAME
\appendvalue { ¹ ..} { ² .. 1 NAME 2 BEFEHL
\apply { ¹ ..} { ² .. 1 CONTENT 2 CONTENT
\applyalternativestyle { ¹ .. * NAME
\applypattern [¹ ..] [... ² ... _{OPT} ...] 1 NAME _{OPT} 2 nome = NAME ampiezza = DIMENSION altezza = DIMENSION
\applyprocessor { ¹ ..} { ² .. 1 NAME 2 CONTENT
\applytocharacters \ ¹ .. { ² .. 1 CSNAME 2 TEXT
\applytofirstcharacter \ ¹ .. { ² .. 1 CSNAME 2 TEXT
\applytosplitstringchar \ ¹ .. { ² .. 1 CSNAME 2 TEXT
\applytosplitstringcharspaced \ ¹ .. { ² .. 1 CSNAME 2 TEXT

\applytosplitstringline \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\applytosplitstringlinespaced \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\applytosplitstringword \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\applytosplitstringwordspaced \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\applytowords \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\HIGH {...} * CONTENT instances: unitshigh
\unitshigh {...} * CONTENT
\arabicdecimals {...} * NUMMER
\arabicexnumerals {...} * NUMMER
\arabicnumerals {...} * NUMMER
\arg {...} * CONTENT
\asciimode
\asciistr {...} * CONTENT
\assignalfadimension { ¹ ...} \ ² ... { ³ ...} { ⁴ ...} { ⁵ ...} 1 piccolo medio grande nessuno DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION
\assigndimen \ ¹ ... { ² ...} 1 CSNAME 2 DIMENSION
\assigndimension { ¹ ...} \ ² ... { ³ ...} { ⁴ ...} { ⁵ ...} 1 [-+]piccolo [-+]medio [-+]grande nessuno DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION

$\backslash\text{assignifempty}$ $\backslash^1\ldots$ $\{^2\ldots\}$ 1 CSNAME 2 BEFEHL
$\backslash\text{assigntranslation}$ $[\ldots,\ldots\stackrel{1}{=}\ldots,\ldots]$ $\backslash\text{to}$ $\backslash^2\ldots$ 1 SPRACHE = TEXT 2 CSNAME
$\backslash\text{assignvalue}$ $\{^1\ldots\}$ $\backslash^2\ldots$ $\{^3\ldots\}$ $\{^4\ldots\}$ $\{^5\ldots\}$ 1 piccolo medio grande TEXT 2 CSNAME 3 BEFEHL 4 BEFEHL 5 BEFEHL
$\backslash\text{assignwidth}$ $\{^1\ldots\}$ $\backslash^2\ldots$ $\{^3\ldots\}$ $\{^4\ldots\}$ 1 adatta ampio DIMENSION 2 CSNAME 3 TEXT 4 DIMENSION
$\backslash\text{assumelongusagecs}$ $\backslash^1\ldots$ $\{^2\ldots\}$ 1 CSNAME 2 CONTENT
$\backslash\text{astype}$ $\{^*\ldots\}$ * CONTENT
$\backslash\text{async}$ $\{^1\ldots\}$ $\ldots$ $\{^3\ldots\}$ 1 NAME 2 NUMMER 3 r destra c m centro
$\backslash\text{attachinsert}$ $\{^*\ldots\}$ * CONTENT
$\backslash\text{attachinsertion}$ $\ldots$ $\backslash^2\ldots$ 1 NUMMER 2 CSNAME
$\backslash\text{attachinsertions}$ $\backslash^*\ldots$ * CSNAME
$\backslash\text{ATTACHMENT}$ $[\ldots]$ $[\ldots,\ldots\stackrel{2}{=}\ldots,\ldots]$ 1 NAME OPT OPT 2 inherits: \setupattachment instances: attachment
$\backslash\text{attachment}$ $[\ldots]$ $[\ldots,\ldots\stackrel{2}{=}\ldots,\ldots]$ 1 NAME OPT OPT 2 inherits: \setupattachment
$\backslash\text{autobigmath}$
$\backslash\text{autocap}$ $\{^*\ldots\}$ * TEXT
$\backslash\text{autodirhbox}$ $\ldots$ $\{^2\ldots\}$ 1 TEXT OPT 2 CONTENT

$\backslash$ Big ... * CHARACTER
$\backslash$ Bigg ... * CHARACTER
$\backslash$ Biggl ... * CHARACTER
$\backslash$ Biggm ... * CHARACTER
$\backslash$ Biggr ... * CHARACTER
$\backslash$ Bigl ... * CHARACTER
$\backslash$ Bigm ... * CHARACTER
$\backslash$ Bigr ... * CHARACTER
$\backslash$ backgroundimage { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NUMBER 2 DIMENSION 3 DIMENSION 4 BEFEHL
$\backslash$ backgroundimagefill { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NUMBER 2 DIMENSION 3 DIMENSION 4 BEFEHL
$\backslash$ backgroundline [¹ ...] { ² ...} 1 COLOR 2 CONTENT
$\backslash$ balancesubcolumnsets [...] * spread OPT
$\backslash$ barracolori [...*...] * COLOR
$\backslash$ barrainterazione [¹ ...] [² ...,... _{OPT} ...,...] 1 NAME OPT 2 inherits: \impostabarrainterazione OPT
$\backslash$ BAR {...} * CONTENT instances: overbar underbar overstrike understrike overbars underbars overstrikes understrikes hiddenbar outline outlined backgroundbar mathbackground undergraphic underrandom underrandoms underdash underdashes underdot underdots
$\backslash$ backgroundbar {...} * CONTENT

$\backslash\text{hiddenbar}$ {...} * CONTENT
$\backslash\text{mathbackground}$ {...} * CONTENT
$\backslash\text{outline}$ {...} * CONTENT
$\backslash\text{outlined}$ {...} * CONTENT
$\backslash\text{overbar}$ {...} * CONTENT
$\backslash\text{overbars}$ {...} * CONTENT
$\backslash\text{overstrike}$ {...} * CONTENT
$\backslash\text{overstrikes}$ {...} * CONTENT
$\backslash\text{underbar}$ {...} * CONTENT
$\backslash\text{underbars}$ {...} * CONTENT
$\backslash\text{underdash}$ {...} * CONTENT
$\backslash\text{underdashes}$ {...} * CONTENT
$\backslash\text{underdot}$ {...} * CONTENT
$\backslash\text{underdots}$ {...} * CONTENT
$\backslash\text{undergraphic}$ {...} * CONTENT
$\backslash\text{underrandom}$ {...} * CONTENT
$\backslash\text{underrandoms}$ {...} * CONTENT
$\backslash\text{understrike}$ {...} * CONTENT
$\backslash\text{understrikes}$ {...} * CONTENT

<pre> \base [...]¹ {...}² 1 TEXT OPT 2 TEXT </pre>
<pre> \basegrid [...,...[*]...,...] * nx = NUMBER ny = NUMBER dx = NUMBER dy = NUMBER fattore = NUMBER scala = NUMBER xstep = NUMBER ystep = NUMBER offset = DIMENSION xoffset = DIMENSION yoffset = DIMENSION allinea = centro unita = cm mm in pc pt bp stile = STYLE BEFEHL colore = COLOR colorelinea = COLOR spessorelinea = DIMENSION </pre>
<pre> \baselinebottom </pre>
<pre> \baselineleftbox {...} * CONTENT </pre>
<pre> \baselinemiddlebox {...} * CONTENT </pre>
<pre> \baselinerightbox {...} * CONTENT </pre>
<pre> \bbordermatrix {...} * CONTENT </pre>
<pre> \bbox {...} * CONTENT </pre>
<pre> \beforesplitstring ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME </pre>
<pre> \beforetestandsplitstring ...¹ \at ...² \to \...³ 1 TEXT 2 TEXT 3 CSNAME </pre>
<pre> \beginBLOCK [...,¹...] [...,...²...,...] ... \endBLOCK 1 + - NAME OPT OPT 2 KEY = VALUE </pre>
<pre> \beginhbox ... \endhbox </pre>
<pre> \beginofshapebox ... \endofshapebox </pre>
<pre> \beginvbox ... \endvbox </pre>
<pre> \beginvtop ... \endvtop </pre>

<code>\begstrut ... \endstrut</code>
<code>\bengalinumerals {...}</code> * NUMBER
<code>\bigbreak</code>
<code>\bigg ...</code> * CHARACTER
<code>\bigger</code>
<code>\biggl ...</code> * CHARACTER
<code>\biggm ...</code> * CHARACTER
<code>\biggr ...</code> * CHARACTER
<code>\bigl ...</code> * CHARACTER
<code>\bigm ...</code> * CHARACTER
<code>\bigmath</code>
<code>\bigr ...</code> * CHARACTER
<code>\bigskip</code>
<code>\bitmapimage [...¹...²...] {...}</code> 1 colore = rgb cmyk grigio ampiezza = DIMENSION altezza = DIMENSION x = NUMBER y = NUMBER 2 NUMBER
<code>\blankafter [...*...]</code> * inherits: \rigovuoto
<code>\blankbefore [...*...]</code> * inherits: \rigovuoto
<code>\blap {...}</code> * CONTENT
<code>\bleedheight</code>
<code>\bleeding [...¹] [...²_{OPT}...] {...³}</code> 1 NAME 2 inherits: \setupbleeding 3 CONTENT

<code>\bleedwidth</code>
<code>\BLEED</code> [..., ¹ ..., ² ...] {...} 1 inherits: \setupbleeding 2 CONTENT instances: bleed
<code>\bleed</code> [..., ¹ ..., ² ...] {...} 1 inherits: \setupbleeding 2 CONTENT
<code>\blockcolumnsetrows</code>
<code>\blockligatures</code> [...,*...] * TEXT
<code>\blocksynctexfile</code> [...,*...] * FILE
<code>\blockuservariable</code> {...} * KEY
<code>\bodyfontenvironmentlist</code>
<code>\bodyfontsize</code>
<code>\boldface</code>
<code>\booleanmodevalue</code> {...} * NAME
<code>\bordermatrix</code> {...} * CONTENT
<code>\bottombox</code> {...} * CONTENT
<code>\bottomleftbox</code> {...} * CONTENT
<code>\bottomrightbox</code> {...} * CONTENT
<code>\boxanchorpresetcode</code> {...} * riga altezza profondita sinistra left,height left,top left,depth left,bottom destra right,height right,top right,depth right,bottom centro middle,height middle,top middle,depth middle,bottom middle,left middle,right
<code>\boxcursor</code>
<code>\boxfixstretch</code> 1 DIMENSION 2 CSNAME NUMBER
<code>\boxmarker</code> {...} {...} 1 NAME 2 NUMMER

<code>\boxofsize \... ... ²... ... {...}</code> 1 CSNAME 2 DIMENSION 3 CONTENT
<code>\boxreference [...,¹...] \... {...³}</code> 1 REFERENCE 2 CSNAME 3 CONTENT
<code>\bpar ... \epar</code>
<code>\bpos {...}</code> * NAME
<code>\break</code>
<code>\breakhere [...¹] {...²}</code> 1 sinistra destra ^{OPT} prima dopo ^{OPT} pagina stessapagina 2 TEXT
<code>\bTABLE [...,[*]...,...] ... \eTABLE</code> * inherits: \setupTABLE
<code>\bTABLEbody [...,[*]...,...] ... \eTABLEbody</code> * inherits: \setupTABLE ^{OPT}
<code>\bTABLEfoot [...,[*]...,...] ... \eTABLEfoot</code> * inherits: \setupTABLE ^{OPT}
<code>\bTABLEhead [...,[*]...,...] ... \eTABLEhead</code> * inherits: \setupTABLE ^{OPT}
<code>\bTABLEnested [...,[*]...,...] ... \eTABLEnested</code> * inherits: \setupTABLE ^{OPT}
<code>\bTABLEnext [...,[*]...,...] ... \eTABLEnext</code> * inherits: \setupTABLE ^{OPT}
<code>\bTABLEsection [...,[*]...,...] ... \eTABLEsection</code> * ripeti = NUMMER ^{OPT}
<code>\bTC [...,[*]...,...] ... \eTC</code> * inherits: \bTF
<code>\bTD [...,[*]...,...] ... \eTD</code> * nx = NUMMER ny = NUMMER nc = NUMMER nr = NUMMER n = NUMMER m = NUMMER azione = REFERENCE inherits: \setupTABLE
<code>\bTDs [...] ... \eTDs</code> * NAME
<code>\bTH [...,[*]...,...] ... \eTH</code> * inherits: \bTF

\btN [...,.. [*] ...,...] ... \eTN * inherits: \bfp ^{OPT}
\btR [...,.. [*] ...,...] ... \eTR * inherits: \setupTABLE
\bTRs [...] ... \eTRs * NAME
\btX [...,.. [*] ...,...] ... \eTX * inherits: \bfp ^{OPT}
\btY [...,.. [*] ...,...] ... \eTY * inherits: \setupTABLE
\btX ... \etX
\btXabbreviatedjournal {...} * NAME
\btXaddjournal [... ¹] [... ²] 1 NAME 2 NAME
\btXalwayscitation [...,.. ¹ ...,...] [... ²] 1 riferimento = REFERENCE ^{OPT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtX 2 REFERENCE
\btXalwayscitation [... ¹] [... ²] 1 implicito category entry ^{OPT} short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE
\btXalwayscitation [...,.. ¹ ...,...] [...,.. ² ...,...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtX 2 KEY = VALUE
\btXauthorfield {...} * initials firstnames vons surnames juniors
\btXdetail {...} * address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\btXdirect {...} * address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

\btxdoif {¹...} {²...}

1 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
yearfiled NAME
2 TRUE

\btxdoifcitedoneelse {¹...} {²...} {³...} {⁴...}

1 NAME
2 REFERENCE
3 TRUE
4 FALSE

\btxdoifcombiinlistelse {¹...} {²...} {³...} {⁴...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\btxdoifelse {¹...} {²...} {³...}

1 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
yearfiled NAME
2 TRUE
3 FALSE

\btxdoifelsecitedone {¹...} {²...} {³...} {⁴...}

1 NAME
2 REFERENCE
3 TRUE
4 FALSE

\btxdoifelsecombiinlist {¹...} {²...} {³...} {⁴...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\btxdoifelsesameasprevious {¹...} {²...} {³...}

1 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
yearfiled NAME
2 TRUE
3 FALSE

\btxdoifelsesameaspreviouschecked {¹...} {²...} {³...} {⁴...}

1 sempre doppiafaccia
2 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
yearfiled NAME
3 TRUE
4 FALSE

\btxdoifelseuservariable {¹...} {²...} {³...}

1 KEY
2 TRUE
3 FALSE

\btxdoifnot {¹...} {²...}

1 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
yearfiled NAME
2 TRUE

\btxdoifsameaspreviouscheckedelse {...} {...} {...} {...}

1 sempre doppiafaccia

2 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

3 TRUE

4 FALSE

\btxdoifsameaspreviouselse {...} {...} {...}

1 address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

2 TRUE

3 FALSE

\btxdoifuservariableelse {...} {...} {...}

1 KEY

2 TRUE

3 FALSE

\btxexpandedjournal {...}

* NAME

\btxfield {...}

* address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

\btxfieldname {...}

* address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

\btxfieldtype {...}

* address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

\btxfirstofrange {...}

* volume pages

\btxflush {...}

* address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME

\btxflushauthor [...] {...}

1 num normale normalshort^{OPT} inverted invertedshort

2 autore editor

\btxflushauthorinverted {...}

* autore editor

\btxflushauthorinvertedshort {...}

* autore editor

\btxflushauthorname {...}

* autore editor

\btxflushauthornormal {...}

* autore editor

\btxflushauthornormalshort {...} * autore editor
\btxflushsuffix
\btxfoundname {...} * address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\btxfoundtype {...} * address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\btxhiddencitation [...] * REFERENCE
\btxhybridcite [...,.. ¹ ...,...] [... ² .] 1 riferimento = REFERENCE ^{OPT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxhybridcite [... ¹ .] [... ² .] 1 implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE
\btxhybridcite {...} * REFERENCE
\btxhybridcite [...,.. ¹ ...,...] [...,.. ² ...,...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE
\btxlistcitation [...,.. ¹ ...,...] [... ² .] 1 riferimento = REFERENCE ^{OPT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxlistcitation [... ¹ .] [... ² .] 1 implicito category entry ^{OPT} short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE

```

\btxlistcitation [...1...2...] [...2...1...]
1 riferimento = REFERENCE
  alternativa = implicit category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\btxloadjournalist [...]
* FILE

```

```

\btxoneorrange {...} {...} {...}
1 volume pages
2 TRUE
3 FALSE

```

```

\btxrawfield {...}
* address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language
  mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno
  yearfiled NAME

```

```

\btxremapauthor [...1] [...2]
1 TEXT
2 TEXT

```

```

\btxsavejournalist [...]
* FILE

```

```

\btxsetup {...}
* NAME

```

```

\btxsingularorplural {...1} {...2} {...3}
1 editor producer director
2 TRUE
3 FALSE

```

```

\btxsingularplural {...1} {...2} {...3}
1 editor producer director
2 TRUE
3 FALSE

```

```

\btxstarttaggedcite ... \btxstoptaggedcite

```

```

\btxttextcitation [...1...2...] [...2...]
1 riferimento = REFERENCEOPT
  alternativa = implicit category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 REFERENCE

```

```

\btxttextcitation [...1] [...2]
1 implicit category entryOPT short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum
  authoryear
2 REFERENCE

```

<code>\btxttextcitation</code> <code>[...¹...]</code> <code>[...²...]</code> 1 <code>riferimento</code> = <code>REFERENCE</code> <code>alternativa</code> = <code>implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears</code> <code>authornum authoryear</code> <code>prima</code> = <code>BEFEHL</code> <code>dopo</code> = <code>BEFEHL</code> <code>sinistra</code> = <code>BEFEHL</code> <code>destra</code> = <code>BEFEHL</code> <code>inherits:</code> <code>\setupbtx</code> 2 <code>KEY</code> = <code>VALUE</code>
<code>\buildtextaccent</code> <code>{...¹...}</code> <code>{...²...}</code> 1 <code>CHARACTER</code> 2 <code>CHARACTER</code>
<code>\buildtextbottomcomma</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\buildtextbottomdot</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\buildtextcedilla</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\buildtextgrave</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\buildtextmacron</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\buildtextognek</code> <code>{...[*]...}</code> * <code>CHARACTER</code>
<code>\Camel</code> <code>{...[*]...}</code> * <code>TEXT</code>
<code>\Cap</code> <code>{...[*]...}</code> * <code>TEXT</code>
<code>\Caps</code> <code>{...[*]...}</code> * <code>TEXT</code>
<code>\CONTEXT</code>
<code>\ConTeXt</code>
<code>\Context</code>
<code>\ConvertConstantAfter</code> <code>\...¹...</code> <code>{...²...}</code> <code>{...³...}</code> 1 <code>CSNAME</code> 2 <code>TEXT</code> 3 <code>TEXT</code>
<code>\ConvertToConstant</code> <code>\...¹...</code> <code>{...²...}</code> <code>{...³...}</code> 1 <code>CSNAME</code> 2 <code>TEXT</code> 3 <code>TEXT</code>
<code>\calligrafico</code>

<pre> \cambiaafontdeltesto [...] * inherits: \impostafontdeltesto </pre>
<pre> \camel {...} * TEXT </pre>
<pre> \campi [...] [...] 1 NAME OPT 2 TEXT </pre>
<pre> \cap {...} * TEXT </pre>
<pre> \capello </pre>
<pre> \SECTION [...] [...] {...} 1 REFERENCE OPT 2 TEXT instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject </pre>
<pre> \SECTION [...] * titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject </pre>
<pre> \chapter [...] * titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT </pre>
<pre> \part [...] * titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT </pre>
<pre> \section [...] * titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT </pre>

`\subject` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsection` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubject` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubsection` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubsubject` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubsubsection` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubsubsubject` [`..,..*``..,..`]

```
*    titolo        = TEXT
     segnalibro   = TEXT
     marcatura    = TEXT
     elenco        = TEXT
     riferimento   = REFERENCE
     referencetext = TEXT
     numeroproprio = TEXT
     placeholder   = TEXT
```

`\subsubsubsubsection` [...,..^{*}...,...]

* titolo = TEXT
 segnalibro = TEXT
 marcatura = TEXT
 elenco = TEXT
 riferimento = REFERENCE
 referencetext = TEXT
 numeroproprio = TEXT
 placeholder = TEXT

`\subsubsubsubsubject` [...,..^{*}...,...]

* titolo = TEXT
 segnalibro = TEXT
 marcatura = TEXT
 elenco = TEXT
 riferimento = REFERENCE
 referencetext = TEXT
 numeroproprio = TEXT
 placeholder = TEXT

`\title` [...,..^{*}...,...]

* titolo = TEXT
 segnalibro = TEXT
 marcatura = TEXT
 elenco = TEXT
 riferimento = REFERENCE
 referencetext = TEXT
 numeroproprio = TEXT
 placeholder = TEXT

`\chapter` [...,¹...] {...²}

1 REFERENCE OPT
2 TEXT

`\SECTION` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject

`\chapter` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\part` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\section` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subject` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

`\subsection` [...,¹...] {...²} {...³}

1 REFERENCE OPT
2 NUMMER
3 TEXT

<code>\subsubject</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsection</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsubject</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsubsection</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsubsubject</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsubsubsection</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\subsubsubsubsubject</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\title</code> [...,¹...] {...².} {...³.} 1 REFERENCE OPT 2 NUMMER 3 TEXT
<code>\part</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT
<code>\section</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT
<code>\subject</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT
<code>\subsection</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT
<code>\subsubject</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT
<code>\subsubsection</code> [...,¹...] {...².} 1 REFERENCE OPT 2 TEXT

\subsubsubject [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\subsubsubsection [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\subsubsubsubject [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\subsubsubsubsection [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\subsubsubsubsubject [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\title [..., ¹ ...] {... ² .} 1 REFERENCE OPT 2 TEXT
\casing [... ¹ .] {... ² .} 1 reimposta PAROLA parola Parola Parole maiuscolo Maiuscolo casuale mixed camel Camel cap Cap 2 CONTENT
\catcodetablename
\cbox ... ¹ {... ² .} 1 TEXT OPT 2 CONTENT
\centeraligned {...*} * CONTENT
\centerbox ... ¹ {... ² .} 1 TEXT OPT 2 CONTENT
\centeredbox ... ¹ {... ² .} 1 TEXT OPT 2 CONTENT
\centeredlastline
\centerednextbox ... ¹ {... ² .} 1 TEXT OPT 2 CONTENT
\centerline {...*} * CONTENT
\centro ...* * CHARACTER
\chaintocurrentCOMANDO {...*} * NAME

$$\backslash\mathrm{checkpage} \quad [\dots] \quad [\dots,\dots\overset{2}{=}\dots,\dots]$$

```
1 NAME
2 inherits: \setuppagechecker
```

```
\checkparameters [..]
```

* TEXT

```
\checkpreviousinjector [...]
```

* NAME

\checksidefloat

`\checkvariables` $[...]$ $[...,\dots^2\dots]$

```

1  NAME
2  set      =  BEFEHL
   reset    =  BEFEHL
   KEY      =  VALUE

```

`\chemical` [¹...] [...,²...] [...,³...]

```

1  NAME                                OPT                                OPT
2  TEXT
3  TEXT

```

\chemicalbottext {.*}

* TEXT

`\chemicalmidtext` `{...}`

* TEXT

`\chemicalsymbol` `[...]`

* NAME

$$\backslash\mathrm{chemicaltext}\quad\{...\}$$

* TEXT

`\chemicaltopertext` `{...}`

* TEXT

$$\backslash\mathrm{chim} \quad \{.^1..\} \quad \{.^2..\} \quad \{.^3..\}$$

```
1  TEXT
2  TEXT
3  TEXT
```

`\chineseallnumerals` `{...}`

* NUMMER

`\chinesecapnumerals {..}`

* NUMMER.

`\chinesenumerals` `{...}`

* NUMMER.

$$\backslash \mathrm{chr} \quad \{ \cdot \cdot \cdot \}^*$$

* TEXT

`\circondato` $[\dots, \dots \overset{1}{=} \dots, \dots]$ $\{ \dots \overset{2}{.} \}$

```

1 inherits: \impostaincorniciatoOPT
2 CONTENT

```

```

\citation [...1...] [...2]
1 riferimento = REFERENCE
  alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 REFERENCE

```

```

\citation [...1] [...2]
1 implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum
  authoryear
2 REFERENCE

```

```

\citation {...}
* REFERENCE

```

```

\citation [...1...] [...2...]
1 riferimento = REFERENCE
  alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\cite [...1...] [...2]
1 riferimento =OPTREFERENCE
  alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 REFERENCE

```

```

\cite [...1] [...2]
1 implicitoPTcategory entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum
  authoryear
2 REFERENCE

```

```

\cite {...}
* REFERENCE

```

```

\cite [...1...] [...2...]
1 riferimento = REFERENCE
  alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears
                authornum authoryear
  prima       = BEFEHL
  dopo        = BEFEHL
  sinistra    = BEFEHL
  destra      = BEFEHL
  inherits: \setupbtx
2 KEY = VALUE

```

```

\clap {...}
* CONTENT

```

```

\classfont {...} {...}
1 NAME
2 FONT

```


\cldcommand {...} * BEFEHL
\cldcontext {...} * BEFEHL
\cldloadfile {...} * FILE
\cldprocessfile {...} * FILE
\clearmarking [...] * BESCHRIFTUNG
\clip [..., ¹ ..., ² ...] {...} 1 inherits: \impostaclipping 2 CONTENT
\clippedoverlayimage {...} * FILE
\clonacampo [...] ¹ [...] ² [...] ³ [..., ⁴ ...] 1 NAME 2 NAME 3 NAME 4 NAME
\collapsehyphensequences
\collect {...} * CONTENT
\collectedmath
\collectedtext [..., ¹ ..., ² ...] [..., ² ..., ³ ...] {...} ³ {...} ⁴ 1 inherits: \setupcollector ^{OPT} 2 stile = STYLE BEFEHL colore = COLOR inherits: \impostaincorniciato 3 TEXT 4 CONTENT
\collectexpanded {...} * CONTENT
\collectexported
\colonna [..., ¹ ...] * inherits: \columnbreak
\colorcomponents {...} * COLOR
\colore [...] ¹ {...} ² 1 COLOR 2 CONTENT

<code>\colored [...,¹...,...] {...}</code> 1 inherits: \definiscicolore 2 CONTENT
<code>\colored [...¹] {...²}</code> 1 COLOR 2 CONTENT
<code>\coloregrigio [...¹] {...²}</code> 1 COLOR 2 CONTENT
<code>\coloronly [...¹] {...²}</code> 1 COLOR 2 CONTENT
<code>\columnbreak [...[*],...]</code> * si no preferenza loca ^{OPT} Te forza primo ultimo NUMBER NAME
<code>\columnsetgridlines {...[*]}</code> * NUMMER
<code>\combinepages [...¹] [...,²...,...]</code> 1 FILE 2 alternativa = a b c orizzontale verticale n = NUMMER nx = NUMMER ny = NUMMER inizia = NUMMER termina = NUMMER distanza = DIMENSION cima = BEFEHL fondo = BEFEHL sinistra = BEFEHL destra = BEFEHL prima = BEFEHL dopo = BEFEHL tra = BEFEHL cornice = attivo disattivo sfondo = foreground colore NAME coloresfondo = COLOR
<code>\commalistelement</code>
<code>\commalistprocessor {...[*]}</code> * NAME
<code>\commalistsentence [...,¹...,...] [...,²...,...]</code> 1 TEXT 2 TEXT
<code>\commalistsize</code>
<code>\COMANDOnamespace</code>
<code>\COMANDOparameter {...[*]}</code> * KEY
<code>\COMANDOparameterhash {...[*]}</code> * KEY
<code>\COMANDOsetupmode</code>

```

\commento      (...1,...)      (...2,...)      [...3=...3,...]      {...4}
1  POSITION
2  POSITION
3  inherits: \impostaincorniciato
4  TEXT

```

```

\COMMENT      [ 1... ]      [ 2...,...2 ]      { 3... }
1  TEXT              OPT              OPT
2  inherits: \impostacommento
3  TEXT
instances: comment

```

```
\comment      [ 1... ]      [ ..., ...2..., ... ]      { ...3 }
1 TEXT                OPT                OPT
2 inherits: \impostacommento
3 TEXT
```

```
\comparedimension    {...}    {...}
1  DIMENSION
2  DIMENSION
```

```
\comparedimensioneps    {...}    {...}
1  DIMENSION
2  DIMENSION
```

```
\comparetext    [...]  
* NAME
```

```
\completebtxrendering    [...]1    [...,...2...,...]
```

```
1  NAME                                OPT
```

```
2  inherits: \setupbtxrendering
```

```
\completoCOMBINEDLIST    [...,*=...,...]
* inherits: \impostaelencocombinato OPT
instances: content
```

```
\completocontent    [...,..*=...,...]
* inherits: \impostaelencocombinato
```

```
\completelist    [...]    [...,2...,...]
1  LISTE
2  inherits: \impostaelenco
```

```
\completelistofFLOATS    [...,.*,...,...]
* inherits: \impostaelenco      OPT
instances: chemicals figures tables intermezzi graphics
```

```
\completelistofchemicals    [...,\*...,...]
* inherits: \impostaelenco      OPT
```

```
\completelistoffigures    [...,..*=...,...]
* inherits: \impostaelenco      OPT
```

```
\completelistofgraphics    [...,*=...,...]
* inherits: \impostaelenco    OPT
```

```
\completelistofintermezzi    [...,*=...,...]
* inherits: \impostaelenco    OPT
```

```
* inherits: \impostaelenco OPT
```

```
\completelistofpublications    [..]    [...,\stackrel{2}{.},...]
```

```
1  NAME                        OPT
```

```
2  inherits: \setupbtrendering
```

```
\completelistofsorts    [...]1    [...,...]2...,...]
```

```
1 SINGULAR
```

```
2 inherits: \impostaordinamento
```

```
\completelistofSORTS    [...,..*=...,...]
* inherits: \impostaordinamento      OPT
instances: logos
```

```
\completelistoflogos    [...,*=...,...]
* inherits: \impostaordinamento      OPT
```

```
\completelistofsynonyms    [..1.]    [.....2...]
```

```
1 SINGULAR
2 inherits: \impostasinonimi
```

```
OPT
```

```
\completelistofSYNONYMS    [...,..*=...,...]
* inherits: \impostasinonimi      OPT
instances: abbreviations
```

```
\completelistofabbreviations    [...,..*=...,...]
* inherits: \impostasinonimi      OPT
```

[illegible]

```
\completoREGISTER    [...,*...,...]
* inherits: \impostaregistro    OPT
instances: index
```

```
\completoindex    [...,..=*...,...]
* inherits: \impostaregistroOPT
```

```
\complexorsimple \.*
* CSNAME
```

```
\complexorsimpleempty \.*
* CSNAME
```

```
\complexorsimpleempty    {...}
* TEXT CSNAME
```

```
\complexorsimple    {...}
* TEXT CSNAME
```

```
\componenet    [...]  
* FILE
```

```
\componenet      ...
* FILE
```

$\backslash\text{composedcollector}$ {...} * NAME
$\backslash\text{composedlayer}$ {...} * NAME
$\backslash\text{compounddiscretionary}$
$\backslash\text{compresult}$
$\backslash\text{confrontagruppocolori}$ {...} * NAME
$\backslash\text{confrontatavolozza}$ {...} * NAME
$\backslash\text{connectboxanchors}$ [¹ ...] [² ...] [..., ³ ...,...] [..., ⁴ ...,...] {... ⁵ } {... ⁶ } 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 inherits: \setupboxanchorcontent 5 NAME 6 NAME
$\backslash\text{connectmatrixanchors}$ [¹ ...] [² ...] [..., ³ ...,...] [..., ⁴ ...,...] {... ⁵ } {... ⁶ } 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 inherits: \setupboxanchorcontent 5 NAME 6 NAME
$\backslash\text{constantdimen}$ *... * CSNAME
$\backslash\text{constantdimenargument}$ *... * CSNAME
$\backslash\text{constantemptyargument}$ *... * CSNAME
$\backslash\text{constantnumber}$ *... * CSNAME
$\backslash\text{constantnumberargument}$ *... * CSNAME
$\backslash\text{contentreference}$ [..., ¹ ...] [..., ² ...,...] {... ³ } 1 REFERENCE 2 inherits: \impostaincorniciato 3 CONTENT
$\backslash\text{continuednumber}$ {...} * NUMMER
$\backslash\text{continueifinputfile}$ {...} * FILE

$\backslash\text{convertargument}$ $\overset{1}{...}$ $\backslash\text{to}$ $\backslash\overset{2}{...}$ 1 TEXT 2 CSNAME
$\backslash\text{convertcommand}$ $\backslash\overset{1}{...}$ $\backslash\text{to}$ $\backslash\overset{2}{...}$ 1 CSNAME 2 CSNAME
$\backslash\text{convertedcounter}$ $[\overset{1}{...}]$ $[...,...\overset{2}{...},...]$ 1 NAME 2 inherits: $\backslash\text{setupcounter}$
$\backslash\text{convertedddimen}$ $\{\overset{1}{...}\}$ $\{\overset{2}{...}\}$ 1 DIMENSION 2 ex em pt in cm mm sp bp pc dd cc nc
$\backslash\text{convertedsubcounter}$ $[\overset{1}{...}]$ $[\overset{2}{...}]$ $[...,...\overset{3}{...},...]$ 1 NAME 2 NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tutti 3 inherits: $\backslash\text{setupcounter}$
$\backslash\text{convertinumero}$ $\{\overset{1}{...}\}$ $\{\overset{2}{...}\}$ 1 vuoto implicito nessuno mese month:mnem lettera Lettera lettere Lettere a A Numeri parola words Parola Parole n N numeriromani Numeriromani i I r R KR RK greco Greco math:greek math:Greek g G abjadnumerals abjadnodotnumerals abjadnaivenumerals hebrewnumerals yiddishnumerals thainumerals devanagarinumerals malayalamnumerals tamilnumerals kannadanumerals telugunumerals bengalinumerals gurmurkhinumerals gujaratinumerals tibetannumerals greeknumerals Greeknumerals arabicnumerals persiannumerals arabicexnumerals arabicdecimals persiandecimals mathgreeknumerals mathGreeknumerals koreannumerals koreanparentnumerals koreancirclednumerals kr kr-p kr-c chinesenumerals chinesecapnumerals chineseallnumerals chinesedatenumerals cn cn-c cn-a cn-d sloveniannumerals slovenianNumerals spanishnumerals spanishNumerals russiannumerals russianNumerals mathgreek set_0 set_1 set_2 set_3 set_1x continued zero NAME 2 NUMBER
$\backslash\text{convertmonth}$ $\{\overset{*}{...}\}$ * NUMBER
$\backslash\text{convertvalue}$ $\overset{1}{...}$ $\backslash\text{to}$ $\backslash\overset{2}{...}$ 1 NAME 2 CSNAME
$\backslash\text{convertvboxtohbox}$
$\backslash\text{copiacampo}$ $[\overset{1}{...}]$ $[\overset{2}{...}]$ 1 NAME 2 NAME
$\backslash\text{copyboxfromcache}$ $\{\overset{1}{...}\}$ $\{\overset{2}{...}\}$ $\overset{3}{...}$ 1 NAME 2 NUMBER TEXT 3 CSNAME NUMBER
$\backslash\text{copyLABELtesto}$ $[\overset{1}{...}]$ $[...,...\overset{2}{...},...]$ 1 SPRACHE 2 KEY = KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{copybtxlabeltesto}$ $[\overset{1}{...}]$ $[...,...\overset{2}{...},...]$ 1 SPRACHE 2 KEY = KEY
$\backslash\text{copyheadtesto}$ $[\overset{1}{...}]$ $[...,...\overset{2}{...},...]$ 1 SPRACHE 2 KEY = KEY

$\backslash\text{copylabeltesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copymathlabeltesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copyoperatortesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copyprefixtesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copiesuffixtesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copytaglabeltesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copyunittesto}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copypages}$ $[^1\ldots]$ $[^2\ldots\ldots\ldots]$ $[^3\ldots\ldots\ldots]$ 1 FILE OPT OPT 2 marcatura = attivo disattivo offset = DIMENSION n = NUMMER 3 inherits: \setupexternalfigure
$\backslash\text{copyparameters}$ $[^1\ldots]$ $[^2\ldots]$ $[^3\ldots,\ldots]$ 1 TEXT 2 TEXT 3 KEY
$\backslash\text{copyposition}$ $\{^1\ldots\}$ $\{^2\ldots\}$ 1 NAME 2 NAME
$\backslash\text{copysetups}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME 2 NAME
$\backslash\text{correggispaziobianco}$ $\{^*\ldots\}$ * CONTENT
$\backslash\text{corsivo}$
$\backslash\text{corsivograssetto}$
$\backslash\text{countersubs}$ $[^1\ldots]$ $[^2\ldots]$ 1 NAME OPT 2 NUMMER

<code>\counttoken</code> ¹ ... \in ² ... \to \ ³ ... 1 TEXT 2 TEXT 3 CSNAME
<code>\counttokens</code> ¹ ... \to \ ² ... 1 TEXT 2 CSNAME
<code>\cramped</code> {...} * CONTENT
<code>\crampedclap</code> {...} * CONTENT
<code>\crampedllap</code> {...} * CONTENT
<code>\crampedrlap</code> {...} * CONTENT
<code>\crlf</code>
<code>\crlfplaceholder</code>
<code>\ctop</code> ¹ ... {...} ² 1 TEXT OPT 2 CONTENT
<code>\ctxcommand</code> {...} * BEFEHL
<code>\ctxdirectcommand</code> {...} * BEFEHL
<code>\ctxdirectlua</code> {...} * BEFEHL
<code>\ctxfunction</code> {...} * NAME
<code>\CTXFUNCTIONDEFINITION</code>
<code>\CTXFUNCTION</code>
<code>\ctxlatecommand</code> {...} * BEFEHL
<code>\ctxlatelua</code> {...} * BEFEHL
<code>\ctxloadluafile</code> {...} * FILE
<code>\ctxlua</code> {...} * BEFEHL

\ d { ... } * CHARACTER
\ da [...] * REFERENCE
\ daqualcheparte { ... } { ... } { ... } 1 TEXT 2 TEXT 3 REFERENCE
\ data [... , ... ¹ ... , ...] [... , ... ² ...] 1 d = NUMMER m = NUMMER y = NUMMER 2 anno year:NAME y y:NAME yy Y Y:NAME YY mese month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali MESE MONTH:mnem MONTH:hebrew MONTH:jalali mm M giorno day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord giornosettimana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali GIORNOSETTIMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referral spazio _ TEXT hebrew:to jalali:to jalali:from
\ datadioggi [... , * , ...] * anno year:NAME y y:NAME yy Y Y:NAME YY mese month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali MESE MONTH:mnem MONTH:hebrew MONTH:jalali mm M giorno day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord giornosettimana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali GIORNOSETTIMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referral spazio _ TEXT hebrew:to jalali:to jalali:from
\ datadioggi [...] * NAME OPT
\ datasetentry { ... } * KEY realpage
\ datasetindex
\ datasetsize [...] { ... } 1 FILE OPT 2 NAME
\ datasetvariable [...] { ... } { ... } { ... } 1 FILE OPT 2 NAME 3 NAME NUMMER 4 KEY realpage
\ data [... , ... ¹ ... , ...] [... ² ...] 1 d = NUMMER m = NUMMER y = NUMMER 2 NAME
\ data [... , ... ¹ ...] [... , ... ² ...] 1 anno year:NAME y y:NAME yy Y Y:NAME YY mese month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali MESE MONTH:mnem MONTH:hebrew MONTH:jalali mm M giorno day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord giornosettimana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali GIORNOSETTIMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referral spazio _ TEXT hebrew:to jalali:to jalali:from 2 d = NUMMER m = NUMMER y = NUMMER

\data [¹ ...] [... ² ...,...] 1 NAME 2 d = NUMBER m = NUMBER y = NUMBER
\daylong {...} * NUMBER
\dayoftheweek { ¹ ...} { ² ...} { ³ ...} 1 NUMBER 2 NUMBER 3 NUMBER
\dayshort {...} * NUMBER
\dayspermonth { ¹ ...} { ² ...} 1 NUMBER 2 NUMBER
\decrement *.. * CSNAME
\decrementcounter [¹ ...] [. ² ...] 1 NAME 2 NUMBER OPT
\decrementedcounter [...] * NAME
\decrementpagenumber
\decrementsubpagenumber
\decrementvalue {...} * NAME
\decrement (...*...) * CSNAME NUMBER
\defaultinterface
\defaultobjectpage
\defaultobjectreference
\defcatcodecommand \ ¹ ... ² ... { ³ ...} 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
\defconvertedargument \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\defconvertedcommand \ ¹ ... \ ² ... 1 CSNAME 2 CSNAME

<pre> \defconvertedvalue \¹... {\²...} 1 CSNAME 2 NAME </pre>
<pre> \defineactivecharacter \¹... {\²...} 1 CHARACTER 2 BEFEHL </pre>
<pre> \defineadaptive [\¹...] [\²...] [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \setupadaptive </pre>
<pre> \definealign [\¹...] [\²...,\³...] 1 NAME 2 inherits: \impostaallineamento </pre>
<pre> \definealternativestyle [\¹...,\²...] [\³...] [\⁴...] 1 NAME 2 BEFEHL 3 BEFEHL </pre>
<pre> \defineanchor [\¹...] [\²...] [\³...³...,\⁴...] [\⁵...⁴...,\⁶...] 1 NAME 2 NAME 3 inherits: \setupplayer 4 inherits: \setupplayerinherits: \impostaincorniciato </pre>
<pre> \defineanchorbox [\¹*...] * NAME </pre>
<pre> \defineanchorboxoverlay [\¹*...] * NAME </pre>
<pre> \defineattachment [\¹...] [\²...] [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \setupattachment </pre>
<pre> \defineattribute [\¹...] [\²...²...,\³...] 1 NAME 2 locale globale public private pickup </pre>
<pre> \definebackground [\¹...] [\²...] [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \impostasfondo </pre>
<pre> \definebalancing [\¹...] [\²...] [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \setupbalancing </pre>
<pre> \definebar [\¹...] [\²...] [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \setupbar </pre>
<pre> \definebleeding {\¹...} {\²...} [\³...³...,\⁴...] 1 NAME 2 NAME 3 inherits: \setupbleeding </pre>

<pre> \definebodyfontswitch [...] [...,²...] 1 NAME 2 inherits: \impostafontdeltesto </pre>
<pre> \defineboundary [¹...] [²...] 1 NAME 2 public </pre>
<pre> \defineboxanchor [...[*]] * NAME </pre>
<pre> \defineboxanchorcontent [...] [...,²...,...] 1 NAME 2 inherits: \setupboxanchorcontent </pre>
<pre> \definebreakpoint [¹...] [²...] [...,³...,...] 1 NAME 2 CHARACTER 3 type = 1 2 3 4 5 nsinistra = NUMMER ndestra = NUMMER sinistra = BEFEHL centro = BEFEHL destra = BEFEHL range = si no language = SPRACHE </pre>
<pre> \definebreakpoints [...[*]] * NAME </pre>
<pre> \definebtx [...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupbtx </pre>
<pre> \definebtxdataset [...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupbtxdataset </pre>
<pre> \definebtxregister [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupbtxregister </pre>
<pre> \definebtxrendering [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupbtxrendering </pre>
<pre> \definebutton [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupbutton </pre>
<pre> \definecapitals [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \impostamaiuscole </pre>
<pre> \definecharacterkerning [¹...] [²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcharacterkerning </pre>

`\definecharacterspacing` [¹...] [²...]

1 NAME
2 NAME

`\definechemical` [¹] {...}

1 NAME
2 CONTENT

`\definechemicals` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupchemical

`\definechemicalsymbol` [¹] [²...]

1 NAME
2 TEXT

`\definechemistry` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupchemistry

`\definecollector` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupcollector

`\definecolumnbreak` [¹] [...,²...]

1 NAME
2 si no preferenza locale forza primo ultimo NUMBER

`\definecolumnsetarea` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupcolumnsetarea

`\definecolumnsetspan` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupcolumnsetspan

`\definecombination` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupcombination

`\definecomment` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \impostacommento

`\definecomparingtext` [¹] [²...] [...,³...]

1 NAME
2 NAME
3 inherits: \setupcomparingtext

`\definecomplexorsimple` *

* CSNAME

`\definecomplexorsimpleempty` *

* CSNAME

<pre> \definecomplexorsimpleempty {...} * TEXT CSNAME </pre>
<pre> \definecomplexorsimple {...} * TEXT CSNAME </pre>
<pre> \defineconversionset [...]¹ [...,²...] [...]³ 1 NAME SECTIONBLOCK:NAME 2 NAME PROCESSOR->NAME 3 NAME PROCESSOR->NAME </pre>
<pre> \definecounter [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupcounter </pre>
<pre> \definedataset [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdataset </pre>
<pre> \definedate [...]¹ [...,²...] 1 NAME 2 anno year:NAME y y:NAME yy Y Y:NAME YY mese month:mnem month:hebrew month:jalali m m:mnem m:hebrew m:jalali MESE MONTH:mnem MONTH:hebrew MONTH:jalali mm M giorno day:NAME day:+ day:ord day:++ day:highord d d:NAME d:+ d:ord d:++ d:highord dd dd:+ dd:ord dd:++ dd:highord D D:+ D:ord D:++ D:highord giornosettimana weekday:mnem weekday:hebrew weekday:jalali w w:mnem w:hebrew w:jalali GIORNOSETTIMANA WEEKDAY:mnem WEEKDAY:hebrew WEEKDAY:jalali W referral spazio _ TEXT hebrew:to jalali:to jalali:from </pre>
<pre> \definedelimitedtext [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdelimitedtext </pre>
<pre> \definedfont [...][*] * FONT </pre>
<pre> \definedocument [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupdocument </pre>
<pre> \defineeffect [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupeffect </pre>
<pre> \defineexpandable [...]¹ \...² {...}³ 1 NUMMER 2 CSNAME 3 CONTENT </pre>
<pre> \defineexpansion [...]¹ [...]² [...,³...,...] 1 NAME 2 NAME 3 inherits: \setuexpansion </pre>
<pre> \defineextensiblefiller [...]¹ [...]² 1 NAME 2 NUMMER </pre>

`\defineexternalfigure` [¹...] [²...] [³...,...³...,...]

1 NAME
2 NAME
3 inherits: \setupexternalfigure

`\definefacingfloat` [¹...] [²...] [³...,...³...,...]

1 NAME
2 NAME
3 inherits: \setupfacingfloat

`\definefallbackfamily` [¹...] [²...] [³...] [⁴...,...⁴...,...]

1 NAME
2 rm ss tt mm hw cg roman serif regolare sansserif sans supporto teletype type mono grafiamanuale calligrafico math
matematica
3 FONT
4 rscale = NUMBER
designsize = implicito auto
goodies = FILE
range = NUMBER NAME
offset = NUMBER NAME
check = si no
forza = si no
features = NAME
tf = TEXT
bf = TEXT
it = TEXT
sl = TEXT
bi = TEXT
bs = TEXT
sc = TEXT

`\definefallbackfamily` [¹...] [²...] [³...] [⁴...,...⁴...,...]

1 NAME
2 rm ss tt mm hw cg roman serif regolare sansserif sans supporto teletype type mono grafiamanuale calligrafico math
matematica
3 FONT
4 NAME

`\definefieldbody` [¹...] [²...] [³...,...³...,...]

1 NAME
2 NAME
3 inherits: \setupfieldbody

`\definefieldbodyset` [¹...] [²...,...]

1 NAME
2 NAME

`\definefieldcategory` [¹...] [²...] [³...,...³...,...]

1 NAME
2 NAME
3 inherits: \setupfieldcategory

`\definefileconstant` {...} {...}

1 NAME
2 NAME

`\definefilefallback` [¹...] [²...,...]

1 NAME
2 FILE

`\definefilesynonym` [¹...] [²...]

1 NAME
2 FILE

`\definefiller` [¹...] [²...] [³...,...³...,...]

1 NAME
2 NAME
3 inherits: \setupfiller

```
\definefirstline  [...1]  [...2]  [...,...3...,...]
1  NAME
2  NAME
3  inherits: \setupfirstline
```

```
\definefittingpage  [...1]  [...2]  [...,...3...,...]
1  NAME
2  NAME
3  inherits: \setupfittingpage
```

```
\definefontalternative  [...*]
*  NAME
```

```
\definefontfallback  [...1]  [...2]  [...,...3...,...]  [...,...4...,...]
1  NAME
2  FONT NAME
3  NAME NUMBER
4  rscale      =  NUMBER
   forza      =  si no
   check      =  si no
   offset     =  NUMBER NAME
   target     =  NUMBER NAME
   features   =  NAME
   fattore    =  NUMBER
   metodo     =  lowercase uppercase
```

```
\definefontfamily  [...1]  [...2]  [...3]  [...,...4...,...]
1  NAME
2  rm ss tt mm hw cg roman serif regolare sansserif sans supporto teletype type mono grafiamanuale calligrafico math
   matematica
3  FONT
4  rscale      =  NUMBER
   designsize  =  implicito auto
   goodies     =  FILE
   features    =  NAME
   tf          =  TEXT
   bf          =  TEXT
   it          =  TEXT
   sl          =  TEXT
   bi          =  TEXT
   bs          =  TEXT
   sc          =  TEXT
```

```
\definefontfamilypreset  [...1]  [...,...2...,...]
1  NAME
2  inherits: \definefontfamily
```

```
\definefontfamilypreset  [...1]  [...2]
1  NAME
2  NAME
```

```
\definefontfamily  [...1]  [...2]  [...3]  [...,...4...,...]
1  NAME
2  rm ss tt mm hw cg roman serif regolare sansserif sans supporto teletype type mono grafiamanuale calligrafico math
   matematica
3  FONT
4  NAME
```

```

\definefontfeature  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  language      = NAME
    script       = NAME auto
    mode         = node base auto nessuno
    liga         = si no
    kern         = si no
    extrakerns   = si no
    tlig         = si no
    trep         = si no
    missing      = si no
    dummies      = si no
    analyze      = si no
    unicoding    = si no
    espansione  = NAME
    protrusion   = NAME
    nostackmath  = si no
    realdimensions = si no
    itlc         = si no
    textitalics  = si no
    mathitalics  = si no
    slant        = NUMMER
    extend       = NUMMER
    dimensions   = NUMMER strut
    boundingbox   = si no sfondo cornice vuoto COLOR
    compose      = si no
    char-ligatures = si no
    compat-ligatures = si no
    goodies      = FILE
    extrafeatures = si no
    featureset   = NAME
    colorscheme  = NAME
    postprocessor = NAME
    mathdimensions = NAME
    keepligatures = si no auto
    devanagari   = si no
    features     = si no
    tcom         = si no
    anum         = si no
    mathsize     = si no
    decomposehangul = si no
    mathalternatives = si no
    mathgaps     = si no
    checkmarks   = si no
    uppercasing  = si no
    lowercasing  = si no
    mathnolimitsmode = NUMMER
    blockligatures = si no
    metapost     = NAME
    NAME        = si no

```

```

\definefontfile  [...1]  [...2]  [...,3...,...]
1  NAME
2  FILE
3  features      = NAME
    fallbacks    = NAME
    goodies      = NAME
    designsize   = auto implicito

```

```

\definefontscriptset  [...1]  [...,2,...]
1  NAME
2  NAME

```

```

\definefontsize  [...*]
*  NAME

```

```

\definefontsolution  [...1]  [...2]  [...,3...,...]
1  NAME
2  NAME
3  inherits: \setupfontsolution

```

$\backslash$ defineformula [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \impostaformule
$\backslash$ defineformulaalternative [¹ ...] [² ...] [³ ...]
1 NAME 2 CSNAME 3 CSNAME
$\backslash$ defineformulaframed [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \setupformulaframed
$\backslash$ defineframedcontent [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \setupframedcontent
$\backslash$ defineframedmath [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \impostaincorniciato
$\backslash$ defineframedtable [¹ ...] [² ...]
1 NAME 2 NAME
$\backslash$ definefrozenfont [¹ ...] [² ...]
1 NAME 2 FONT
$\backslash$ defineglobalcolor [¹ ...] [..., ² ...,...]
1 NAME 2 inherits: \definiscicolore
$\backslash$ defineglobalcolor [¹ ...] [² ...]
1 NAME 2 COLOR
$\backslash$ definegraphictypesynonym [¹ ...] [² ...]
1 NAME 2 NAME
$\backslash$ definegridsnapping [¹ ...] [..., ² ...]
1 NAME 2 locale globale noheight nodepth box max min nessuno riga mezzariga primo ultimo altezzamin maxheight mindepth maxdepth cima fondo strut NUMMER minheight:NUMMER maxheight:NUMMER mindepth:NUMMER maxdepth:NUMMER box:NUMMER top:NUMMER bottom:NUMMER offset:NUMMER
$\backslash$ defineheadalternative [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \setupheadalternative
$\backslash$ definehelp [¹ ...] [² ...] [..., ³ ...,...]
1 NAME 2 NAME 3 inherits: \setuphelp

`\definehigh` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setuphigh

`\definehighlight` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setuphighlight

`\definehorizontalbox` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setuphorizontalbox

`\definehspace` [¹...] [²...] [³...]

1 NAME
2 NAME
3 DIMENSION

`\definehyphenationfeatures` [¹...] [...,²...,...]

1 NAME
2 characters = TEXT
hyphens = si tutti TEXT
joiners = si tutti TEXT
rightwords = NUMMER
hyphenmin = NUMMER
lefthyphenmin = NUMMER
righthyphenmin = NUMMER
lefthyphenchar = NUMMER
righthyphenchar = NUMMER
alternativa = original tex hyphenate expanded traditional nessuno
bordodestro = tex
rightchars = parola NUMMER

`\defineindentedtext` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupindentedtext

`\defineindenting` [¹...] [...,²...]

1 NAME
2 [-+]piccolo [-+]medio [-+]grande nessuno no non primo successivo si sempre mai dispari pari normale reimposta
toggle DIMENSION

`\defineinitial` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupinitial

`\defineinsertion` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \setupinsertion

`\defineinteraction` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \impostainterazione

`\defineinteractionbar` [¹...] [²...] [...,³...,...]

1 NAME
2 NAME
3 inherits: \impostabarrainterazione

<pre> \defineinterfaceconstant {¹...} {²...} 1 NAME 2 NAME </pre>
<pre> \defineinterfaceelement {¹...} {²...} 1 NAME 2 NAME </pre>
<pre> \defineinterfacevariable {¹...} {²...} 1 NAME 2 NAME </pre>
<pre> \defineinterlinespace [¹...] [²...] [³...,...³...,...] 1 NAME 2 NAME 3 inherits: \impostainterlinea </pre>
<pre> \defineintermediatecolor [¹...] [²...,...²] [³...,...³...,...³] 1 NAME 2 COLOR NUMMER 3 a = NUMMER t = NUMMER </pre>
<pre> \defineitemgroup [¹...] [²...] [³...,...³...,...³] 1 NAME 2 NAME 3 inherits: \setupitemgroup </pre>
<pre> \defineitems [¹...] [²...] [³...,...³...,...³] 1 NAME 2 NAME 3 inherits: \impostaelementi </pre>
<pre> \definelabcolor [¹...] [²...,...²...,...²] 1 NAME 2 l = NUMMER a = NUMMER nessuno normale multiply schermo sovrapponi softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation colore luminosity b = NUMMER c = NUMMER h = NUMMER t = NUMMER x = NUMMER y = NUMMER z = NUMMER s = NUMMER </pre>
<pre> \definelabcolor [¹...] [²...] 1 NAME 2 COLOR </pre>
<pre> \definelabelclass [¹...] [²...] 1 NAME 2 NUMMER </pre>
<pre> \definelayer [¹...] [²...] [³...,...³...,...³] 1 NAME 2 NAME 3 inherits: \setuplayer </pre>
<pre> \definelayerpreset [¹...] [²...,...²...,...²] 1 NAME 2 inherits: \setuplayer </pre>

`\definelaypreset    [...]1    [...]2`

1 NAME
2 NAME

`\definelinefiller    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplinefiller

`\definelinenote    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplinenote

`\definelinenumbering    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \impostanumerazionerighe

`\definelineprofile    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplineprofile

`\definelines    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \impostarighe

`\definelistalternative    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplistalternative

`\definelistextra    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplistextra

`\definelocalboxes    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplocalboxes

`\definelow    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplow

`\definelowhigh    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplowhigh

`\definelowmidhigh    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setuplowmidhigh

`\defineMPinstance    [...]1    [...]2    [...,...3...,...]`

1 NAME
2 NAME
3 inherits: \setupMPinstance

$\backslash$ definemarginblock [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmarginblock
$\backslash$ definemargindata [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmargindata
$\backslash$ definemarkers [...*]
* NAME
$\backslash$ definemathaccent [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmathaccent
$\backslash$ definemathalignment [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmathalignment
$\backslash$ definemathannotation [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmathannotation
$\backslash$ definemathbottomaccent [¹ ...] [² ...] [³ ...]
1 fondo bottom:stretch NAME OPT 2 NAME 3 NUMMER
$\backslash$ definemathcases [¹ ...] [² ...] [..., ³ ≡...,...]
1 NAME 2 NAME 3 inherits: \setupmathcases
$\backslash$ definemathcommand [¹ ...] [² ...] { ³ ...}
1 NAME 2 tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 3 BEFEHL
$\backslash$ definemathcommand [¹ ...] [² ...] [³ ...] { ⁴ ...}
1 NAME 2 tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 3 tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 4 BEFEHL
$\backslash$ definemathcommand [¹ ...] [² ...] [³ ...] { ⁴ ...}
1 NAME 2 tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation 3 uno 4 \...#1


```

\definemathcommand [...] [...] [...] [...]
1 NAME
2 tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over
fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral
ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
fake numbergroup continuation
3 due
4 \...#1#2

```

```

\definemathconstant [...] [...]
1 NAME
2 CHARACTER

```

```

\definemathdelimited [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathdelimited

```

```

\definemathdelimiter [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathdelimiters

```

```

\definemathdouble [...] [...] [...] [...] [...]
1 entrambi vfenced NAME
2 inherits: \setupmathstackers
3 NAME
4 NUMMER
5 NUMMER

```

```

\definemathdoubleaccent [...] [...] [...] [...]
1 entrambi both:stretch NAME
2 NAME
3 NUMMER
4 NUMMER

```

```

\definemathdoubleextensible [...] [...] [...] [...]
1 entrambi vfenced
2 NAME
3 NUMMER
4 NUMMER

```

```

\definematematics [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmatematics

```

```

\definemathextensible [...] [...] [...]
1 invertito matematica testo chemistry
2 NAME
3 NUMMER

```

```

\definemathfence [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathfences

```

```

\definemathfraction [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathfraction

```

```

\definemathframed [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupmathframed

```

```
\definemathfunction [1...] [2...] [3...=...,...]
1 NAME
2 NAME
3 inherits: \setupmathfunctions
```

```
\definemathgroupset [1...] [2...]
1 NAME
2 every implicito binary_relation binary_set_relation integral limit number_set postfix_operator prime binary_operator
binary_vector binary_arithmetic binary_logical binary_set constant arithmetic constant_set differential differential2
factorial interval quantifier unary_set constant_logical partial nary_operator nary_logical specifier specifier2
pause punctuation unary_logical whatever whatever2
```

```
\definemathmatrix [1...] [2...] [3...=...,...]
1 NAME
2 NAME
3 inherits: \setupmathmatrix
```

```
\definemathnesting [1...] [2...] [3...=...,...]
1 NAME
2 NAME
3 inherits: \setupmathnesting
```

```
\definemathoperator [1...] [2...] [3...=...,...]
1 NAME
2 NAME
3 inherits: \setupmathoperators
```

```
\definemathornament [1...] [2...] [3...=...,...]
1 NAME
2 NAME
3 inherits: \setupmathornament
```

```
\definemathover [1...] [2...] [3...]
1 cima vfenced NAME
2 NAME
3 NUMMER
```

```
\definemathoverextensible [1...] [2...] [3...]
1 cima vfenced
2 NAME
3 NUMMER
```

```
\definemathovertextextensible [1...] [2...] [3...]
1 bothtext
2 NAME
3 NUMMER
```

```

\definemathpreset    [...]1    [...]2...
1  NAME
2  fattore = NUMBER
   stile   = tutti schermo testo script scriptscript crampeddisplay crampedtext crampedscript crampedscriptscript
   elenco  = quad exheight axis accentbaseheight accentbasedepth flattenedaccentbaseheight flattenedaccentbasedepth
              xscale yscale operatorsize overbarkern overbarrule overbarvgap underbarkern underbarrule underbarvgap
              radicalkern radicalrule radicalvgap radicaldegreebefore radicaldegreeafter radicaldegreeraise radicalextensibleraise
              radicalextensiblebefore stackvgap stacknumup stackdenomdown fractionrule fractionnumvgap fractionnumup
              fractiondenomvgap fractiondenomdown fractiondelsize skewedfractionhgap skewedfractionvgap limitabovevgap
              limitabovekern limitbelowvgap limitbelowbgap limitbelowkern nolimitsubfactor nolimitsupfactor
              underdelimitervgap underdelimiterbgap overdelimitervgap overdelimiterbgap subshiftdrop supshiftdrop
              subshiftdown subsupshiftdown subtopmax supshiftdown subbottommin supsubbottommax subsupvgap spacebeforescript
              spacebetweenascript spaceafterscript connectoroverlapmin superscriptsnap subscriptsnap extrasuperscriptshift
              extrasubscriptshift extrasuperprescriptshift extrasubprescriptshift primeraise primeraisecomposed
              primeshiftup primeshiftup primespaceafter ruleheight ruledepth extrasuperscriptspace extrasubscriptspace
              extrasuperprescriptspace extrasubprescriptspace skeweddelimitertolerance accenttopshiftup accentbottomshiftdown
              accenttopovershoot accentbottomovershoot accentsuperscriptdrop accentsuperscriptpercent accentextendmargin
              flattenedaccenttopshiftup flattenedaccentbottomshiftdown delimiterpercent delimitershortfall delimiterextendmargin
              overlinevariant underlinevariant overdelimitervariant underdelimitervariant delimiterovervariant
              delimiterundervariant hextensiblerule variant xextensiblerule variant fractionvariant radicalvariant accentvariant
              degreevariant topaccentvariant bottomaccentvariant overlayaccentvariant numeratorvariant denominatorvariant
              superscriptvariant subscriptvariant primevariant stackvariant

   unita   = axis

```

```

\definemathradical  [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathradical

```

```

\definemathsimplealign [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathsimplealign

```

```

\definemathspacing  [...]1    [...]2    [...]3
1  NAME
2  orizzontale verticale NUMBER
3  NUMBER

```

```

\definemathstackers [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathstackers

```

```

\definemathstyle    [...]1    [...]2...,...]
1  NAME
2  schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande

```

```

\definemathsymbol    [...]1    [...]2    [...]3
1  NAME
2  tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over
   fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral
   ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
   fake numbergroup continuation
3  NUMBER

```

```

\definemathtext      [...]1    [...]2    [...]3...,...]
1  NAME
2  NAME
3  inherits: \setupmathtext

```

```

\definemathtopaccent [...]1    [...]2    [...]3
1  cima top:stretch top:dot NAMET
2  NAME
3  NUMBER

```

```
\definemathtoysymbol  [...1]  [...2]  [...3]
1  NAME
2  tutti begin end unset ordinary operator binary relation open close punctuation variable active interno under over
   fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral
   ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental
   fake numbergroup continuation
3  CHARACTER
```

```
\definemathtriplet  [...1]  [...2]  [...3]
1  NAME OPT
2  NAME OPT
3  TEXT
```

```
\definemathunder  [...1]  [...2]  [...3]
1  fondo vfenced NAME
2  NAME
3  NUMMER
```

```
\definemathunderextensible  [...1]  [...2]  [...3]
1  fondo vfenced OPT
2  NAME
3  NUMMER
```

```
\definemathundertextextensible  [...1]  [...2]  [...3]
1  bothtext OPT
2  NAME
3  NUMMER
```

```
\definemathunstacked  [...1]  [...2]  [...3]
1  ampio OPT
2  NAME
3  NUMMER
```

```
\definemeasure  [...1]  [...2]
1  NAME
2  DIMENSION
```

```
\definemessageconstant  {...*}
*  NAME
```

```
\definemixedcolumns  [...1]  [...2]  [...,...3...,...]
1  NAME OPT OPT
2  NAME
3  inherits: \setupmixedcolumns
```

```
\definemode  [...,1...]  [...2]
1  NAME OPT
2  si no mantieni
```

```
\definemulticolumns  [...1]  [...2]  [...,...3...,...]
1  NAME OPT OPT
2  NAME
3  inherits: \setupmulticolumns
```

```
\definemultitonecolor  [...1]  [...,...2...,...]  [...,...3...,...]  [...,...4...,...]
1  NAME OPT
2  COLOR = NUMMER
3  inherits: \definiscicolore
4  inherits: \definespotcolor
```

```
\definenaamedcolor  [...1]  [...,...2...,...]
1  NAME
2  inherits: \definiscicolore
```

`\definenamecolor` [¹...] [²...]

- 1 NAME
- 2 COLOR

`\definenamespace` [¹...] [...,²...,...]

- 1 NAME
- 2 nome = TEXT
- parent = TEXT
- stile = si no
- comando = si no elenco
- setup = si no elenco
- set = si no elenco
- cornice = si no

`\definennarrower` [¹...] [²...] [...,³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \impostapiustretto

`\definernote` [¹...] [²...] [...,³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupnote

`\defineoptimize` [¹...] [²...] [...,³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupoptimize

`\defineorientation` [¹...] [²...] [...,³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuporientation

`\defineornament` [¹...] [...,²...,...] [...,³...,...]

- 1 NAME
- 2 alternativa = a b
- inherits: \setupcollector
- 3 stile = STYLE BEFEHL
- colore = COLOR
- inherits: \impostaincorniciato

`\defineornament` [¹...] [...,²...,...] [...,³...,...]

- 1 NAME
- 2 alternativa = a b
- inherits: \setupplayer
- 3 inherits: \setuplayeredtext

`\defineoutputroutine` [¹...] [²...] [...,³...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupoutputroutine

`\defineoutputroutinecommand` [...,*...]

- * KEY

`\definepage` [¹...] [²...]

- 1 NAME
- 2 REFERENCE

`\definepagebreak` [¹...] [...,²...,...]

- 1 NAME
- 2 vuoto intestazione piedipagina dummy cornice NUMMER +NUMMER implicito reimposta disattiva si no makeup rigovuoto
preferenza grandepreferenza sinistra destra pari dispari quadruplo ultimo ultimapagina inizia termina xy note

<pre> \definepagechecker [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagechecker </pre>
<pre> \definepagecolumns [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagecolumns </pre>
<pre> \definepageinjection [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppageinjection </pre>
<pre> \definepageinjectionalternative [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppageinjectionalternative </pre>
<pre> \definepageshift [...¹] [...²] [...,...³...] 1 NAME 2 orizzontale verticale 3 DIMENSION </pre>
<pre> \definepagestate [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppagestate </pre>
<pre> \definepairedbox [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuppairedbox </pre>
<pre> \defineparagraph [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupparagraph </pre>
<pre> \defineparallel [...¹] [...,...²...] 1 NAME 2 NAME </pre>
<pre> \defineparbuilder [...[*]] * NAME </pre>
<pre> \defineparinsert [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupparinsert </pre>
<pre> \defineperiodkerning [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupperiodkerning </pre>
<pre> \defineplaceholder [...¹] [...²] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupplaceholder </pre>

```

\defineplacement  [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupplacement

```

```

\definepositioning [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \impostaposizionamento

```

```

\defineprefixset [...1] [...2,...] [...3]
1  NAME SECTIONBLOCK:NAME
2  ABSCHNITT
3  ABSCHNITT

```

```

\defineprocesscolor [...1] [...2] [...3...]
1  NAME
2  COLOR
3  inherits: \definiscicolore

```

```

\defineprocessor [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupprocessor

```

```

\definepushbutton [...1] [...2...]
1  NAME
2  inherits: \setupfieldcontentframed

```

```

\definepushsymbol [...1] [...2]
1  NAME
2  n r d

```

```

\definerenderingwindow [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setuprenderingwindow

```

```

\defineresetset [...1] [...2,...] [...3]
1  NAME SECTIONBLOCK:NAME
2  NUMMER
3  NUMMER

```

```

\defineruby [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupruby

```

```

\definesavebuffer [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupsavebuffer

```

```

\definescale [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupscale

```

```

\definescript [...1] [...2] [...3...]
1  NAME
2  NAME
3  inherits: \setupscript

```

`\definesectionlevels` [¹...] [²...,...]

- 1 NAME
- 2 ABSCHNITT

`\defineselector` [¹...] [²...,..._{OPT},...]

- 1 NAME
- 2 inherits: \setupselector

`\defineseparatorset` [¹...] [²...,...]_{OPT} [³...]

- 1 NAME SECTIONBLOCK:NAME
- 2 BEFEHL PROCESSOR->BEFEHL
- 3 BEFEHL PROCESSOR->BEFEHL

`\defineshadow` [¹...] [²...]_{OPT} [³...,..._{OPT},...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupshadow

`\defineshift` [¹...] [²...]_{OPT} [³...,..._{OPT},...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupshift

`\definesidebar` [¹...] [²...]_{OPT} [³...,..._{OPT},...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupsidebar

`\definesort` [¹...] [²...] [³...]_{OPT} {⁴...}

- 1 si no
- 2 SINGULAR
- 3 NAME
- 4 CONTENT

`\definespotcolor` [¹...] [²...] [³...,..._{OPT},...]

- 1 NAME
- 2 COLOR
- 3 a = NUMMER nessuno normale multiply schermo sovrapponi softlight hardlight colordodge colorburn darken lighten
difference exclusion hue saturation colore luminosity
t = NUMMER
e = TEXT
p = NUMMER

`\definestacking` [¹...] [²...]_{OPT} [³...,..._{OPT},...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupstacking

`\definestyleinstance` [¹...] [²...]_{OPT} [³...] [⁴...]_{OPT}

- 1 NAME
- 2 rm ss tt mm hw cg
- 3 tf bf it sl bi bs sc
- 4 BEFEHL

`\definesubcolumnset` [¹...] [²...] [³...,...]

- 1 NAME
- 2 NAME
- 3 NUMMER

`\definesubformula` [¹...] [²...]_{OPT} [³...,..._{OPT},...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupsubformula

$\backslash\text{definesynchronize}$ [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupsynchronize
$\backslash\text{definesynchronizecontent}$ [¹ ...] [² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupsynchronizecontent
$\backslash\text{definesynonym}$ [...] ¹ [...] ² [...] ³ [...] ⁴ {...} ⁵ {...} ⁶ 1 si no 2 SINGULAR 3 NAME 4 TEXT 5 TEXT 6 CONTENT
$\backslash\text{definesystemattribute}$ [...] ¹ [..., ² ...] 1 NAME 2 locale globale public private pickup
$\backslash\text{definesystemconstant}$ {...} [*] * NAME
$\backslash\text{definesystemvariable}$ {...} [*] * NAME
$\backslash\text{defineTABLEsetup}$ [...] ¹ [..., ² ...,...] 1 NAME 2 inherits: \setupTABLE
$\backslash\text{definetabulatemove}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptabulatemove
$\backslash\text{definetextbackground}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptextbackground
$\backslash\text{definetextdisplay}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptextdisplay
$\backslash\text{definetextflow}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptextflow
$\backslash\text{definetextnote}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptextnote
$\backslash\text{definetokenlist}$ [...] [*] * NAME
$\backslash\text{definetooltip}$ [...] ¹ [...] ² [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setuptooltip

<pre> \definetransliteration [...] [...] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptransliteration </pre>
<pre> \definetransparency [...] [...] 1 NAME 2 NUMMER </pre>
<pre> \definetransparency [...] [...,...²...,...] 1 NAME 2 a = NUMMER nessuno normale multiply schermo sovrapponi softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation colore luminosity t = NUMMER </pre>
<pre> \definetransparency [...] [...] 1 NAME 2 NAME </pre>
<pre> \definetweakedfont [...] [...] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setuptweakedfont </pre>
<pre> \definetypesface [...] [...] [...] [...] [...] [...,...⁶...,...] 1 NAME 2 rm ss tt mm hw cg 3 serif sans mono math handwriting calligraphy 4 NAME 5 implicito dtp 6 rscale = auto NUMMER features = NAME fallbacks = NAME goodies = NAME designsizes = auto implicito direzione = entrambi </pre>
<pre> \definetypescriptprefix [...] [...] 1 NAME 2 TEXT </pre>
<pre> \definetypescriptsynonym [...] [...] 1 NAME 2 TEXT </pre>
<pre> \definetypesetting [...] [...] [...,...³...,...] 1 NAME 2 TEXT 3 inherits: \setupexternalfigure </pre>
<pre> \defineunit [...] [...] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupunit </pre>
<pre> \defineuserdata [...] [...] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupuserdata </pre>
<pre> \defineuserdataalternative [...] [...] [...,...³...,...] 1 NAME 2 NAME 3 inherits: \setupuserdataalternative </pre>

```
\defineverticalbox  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setupverticalbox
```

```
\defineviewerlayer  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setupviewerlayer
```

```
\definevspace  [...1]  [...2]  [...3]
1  NAME                                OPT
2  NAME
3  DIMENSION
```

```
\definevspacing  [...1]  [...2]
1  NAME
2  inherits: \vspacing
```

```
\definevspacingamount  [...1]  [...2]  [...3]
1  NAME                                OPT      OPT
2  DIMENSION
3  DIMENSION
```

```
\definewrows  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setuprows
```

```
\definetable  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setupxtable
```

```
\definisci  [...1]  \...2  {...3}
1  NUMBER                                OPT
2  CSNAME
3  CONTENT
```

```
\definisciaccento  ...1  ...2  ...3
1  CHARACTER
2  CHARACTER
3  CHARACTER
```

```
\definisciambientefontdeltesto  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  implicito DIMENSION
3  grande      = DIMENSION NUMBER
   piccolo    = DIMENSION NUMBER
   a          = DIMENSION NUMBER
   b          = DIMENSION NUMBER
   c          = DIMENSION NUMBER
   d          = DIMENSION NUMBER
   testo      = DIMENSION NUMBER
   x          = DIMENSION NUMBER
   xx         = DIMENSION NUMBER
   script     = DIMENSION NUMBER
   scriptscript = DIMENSION NUMBER
   interlinea = DIMENSION
   em         = inclinato corsivo STYLE BEFEHL
   *          = NUMBER
```

```
\definisciblocco  [...1]  [...2]  [...,...3...,...]
1  NAME                                OPT      OPT
2  NAME
3  inherits: \impostablocco
```

<pre> \definiscibloccosezione [...¹] [...²] [...,³...³,...] 1 NAME 2 NAME 3 inherits: \impostabloccosezione </pre>
<pre> \definiscibuffer [...¹] [...²] [...,³...³,...] 1 NAME 2 BUFFER 3 inherits: \impostabuffer </pre>
<pre> \definiscicampo [...¹] [...²] [...³] [...,⁴...] [...⁵] 1 NAME 2 radio sotto testo riga push check signature 3 NAME 4 NAME 5 NAME </pre>
<pre> \definiscicapoversi [...¹] [...²] [...,³...³,...] 1 NAME 2 NAME 3 inherits: \impostacapoversi </pre>
<pre> \definiscicarattere ...¹ ...² 1 CHARACTER 2 NUMMER </pre>
<pre> \definiscicolore [...¹] [...,²...²,...] 1 NAME 2 r = NUMMER g = NUMMER b = NUMMER c = NUMMER m = NUMMER y = NUMMER k = NUMMER h = NUMMER s = NUMMER v = NUMMER w = NUMMER x = NUMMER a = NUMMER nessuno normale multiply schermo sovrapponi softlight hardlight colordodge colorburn darken lighten difference exclusion hue saturation colore luminosity t = NUMMER </pre>
<pre> \definiscicolore [...¹] [...²] 1 NAME 2 COLOR </pre>
<pre> \definiscicomando ...¹ ...² 1 CHARACTER 2 BEFEHL </pre>
<pre> \definisciconversione [...¹] [...²] [...³] 1 SPRACHE 2 NAME 3 CSNAME </pre>
<pre> \definisciconversione [...¹] [...²] [...,³...] 1 SPRACHE 2 NAME 3 TEXT </pre>
<pre> \definiscidescrizione [...¹] [...²] [...,³...³,...] 1 NAME 2 NAME 3 inherits: \setupdescription </pre>

\definiscidimensionicarta [¹...] [...,²...,...]

```
1  NAME
2  ampiezza = DIMENSION
   altezza = DIMENSION
   cima     = BEFEHL
   fondo    = BEFEHL
   sinistra = BEFEHL
   destra   = BEFEHL
   distanza = DIMENSION
   pagina   = inherits: \impostadimensionicarta
   carta    = inherits: \impostadimensionicarta
```

\definiscidimensionicarta [¹...] [...,²...,...] [...,³...,...]

```
1  NAME
2  inherits: \impostadimensionicarta
3  inherits: \impostadimensionicarta
```

\definiscielenco [¹...] [²...] [...,³...,...]

```
1  NAME
2  LISTE
3  inherits: \impostaelenco
```

\definiscielencocombinato [¹...] [...,²...,...] [...,³...,...]

```
1  NAME
2  LISTE
3  inherits: \impostaelencocombinato
```

\definiscienumerazione [¹...] [²...] [...,³...,...]

```
1  NAME
2  NAME
3  inherits: \setupenumeration
```

\definiscietichetta [¹...] [²...] [...,³...,...]

```
1  NAME
2  NAME
3  inherits: \setuplabel
```

\definiscifigurasimbolo [¹...] [²...] [...,³...,...]

```
1  NAME
2  FILE NAME
3  inherits: \figuraesterna
```

\definiscifont [¹...] [²...] [...,³...,...]

```
1  NAME
2  FONT
3  inherits: \impostainterlinea
```

\definiscifontdeltesto [...,¹...,...] [...,²...,...] [...,³...,...] [...,⁴...,...]

```
1  NAME implicito
2  NAME DIMENSION
3  rm ss tt hw cg
4  tf = FILE
   bf = FILE
   it = FILE
   sl = FILE
   bi = FILE
   bs = FILE
   sc = FILE
   mr = FILE
   mrlr = FILE
   mrrl = FILE
   mb = FILE
   mblr = FILE
   mbrl = FILE
```

<pre> \definiscifontdeltesto [...] [...] [...] [...] 1 NAME implicito 2 NAME DIMENSION 3 rm ss tt hw cg 4 NAME </pre>
<pre> \definiscifont [...] [...] [...] 1 NAME 2 FONT 3 NAME </pre>
<pre> \definisciformatoriferimento [...] [...] [...] 1 NAME 2 NAME 3 inherits: \setupreferenceformat </pre>
<pre> \definiscigruppocolonne [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostagruppocolonne </pre>
<pre> \definiscigruppocolori [...] [...] [x:y:z,...] 1 NAME 2 grigio rgb cmyk spot 3 TRIPLET </pre>
<pre> \definiscihbox [...] [...] 1 NAME 2 DIMENSION </pre>
<pre> \definisciincorniciato [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostaincorniciato </pre>
<pre> \definisciiniziatermina [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostainiziatermina </pre>
<pre> \definiscilayout [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostalayout </pre>
<pre> \definiscimakeup [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostamakeup </pre>
<pre> \definiscimarcatura [...] [...] [...] 1 NAME 2 BESCHRIFTUNG 3 inherits: \impostamarcatura </pre>
<pre> \definiscimenuinterazione [...] [...] [...] 1 NAME 2 NAME 3 inherits: \impostamenuinterazione </pre>
<pre> \definiscimodellotabella [...] [...] [...] [...] 1 NAME 2 TEMPLATE 3 NAME 4 NAME </pre>

```

\definiscioggettomobile [...] [...] [...]
1 SINGULAR
2 SINGULAR PLURAL
3 inherits: \impostaoggettomobile
instances: chemical figure table intermezzo graphic

```

```

\definiscioggettomobile [...] [...] [...]
1 SINGULAR
2 PLURAL
3 SINGULAR
instances: chemical figure table intermezzo graphic

```

```

\definisciordinamento [...] [...] [...]
1 SINGULAR
2 PLURAL
3 nessuno CSNAME

```

```

\definisciprofilo [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupprofile

```

```

\definisciprogramma [...] [...] [...]
1 NAME
2 TEXT
3 TEXT

```

```

\definisciregistro [...] [...] [...]
1 NAME
2 NAME
3 inherits: \impostaregistro

```

```

\definisciriferimento [...] [...] [...]
1 NAME
2 REFERENCE

```

```

\definiscisezione [...]
* NAME

```

```

\definiscisimbolo [...] [...] [...]
1 NAME
2 NAME
3 BEFEHL

```

```

\definiscisinonimi [...] [...] [...] [...]
1 SINGULAR
2 PLURAL
3 CSNAME
4 CSNAME

```

```

\definiscisinonimofont [...] [...] [...]
1 NAME
2 FONT
3 features = NAME
  fallbacks = NAME
  goodies = NAME
  designsize = auto implicito

```

```

\definiscisottocampo [...] [...] [...]
1 NAME
2 NAME
3 NAME

```

<pre> \definiscisovrapposizione [...,¹...] [...²] [...³] 1 NAME 2 NAME 3 BEFEHL </pre>
<pre> \definiscistackcampi [...¹] [...,²...] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupfieldcategory </pre>
<pre> \definiscistile [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupstyle </pre>
<pre> \definiscistilefont [...,¹...] [...²] 1 NAME 2 NAME </pre>
<pre> \definiscitabulato [...¹] [...²] [³...] 1 NAME 2 NAME 3 TEMPLATE </pre>
<pre> \definiscitavolozza [...¹] [...,²...,...] 1 NAME 2 NAME = COLOR </pre>
<pre> \definiscitavolozza [...¹] [...²] 1 NAME 2 NAME </pre>
<pre> \definiscitesta [...¹] [...²] [...,³...,...] 1 NAME 2 ABSCHNITT 3 inherits: \impostatesta </pre>
<pre> \definiscitesto [...¹] [...²] [...³] [...⁴] [...⁵] [...⁶] [...⁷] 1 NAME 2 cima intestazione testo piedipagina fondo 3 testo margine bordo 4 data numeropagina BESCHRIFTUNG TEXT BEFEHL 5 data numeropagina BESCHRIFTUNG TEXT BEFEHL 6 data numeropagina BESCHRIFTUNG TEXT BEFEHL 7 data numeropagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \definiscitestoincorniciato [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \setupframedtext </pre>
<pre> \definiscitype [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \impostatype </pre>
<pre> \definiscityping [...¹] [...²] [...,³...,...] 1 NAME 2 NAME 3 inherits: \impostatyping </pre>
<pre> \defrostparagraphproperties </pre>

$\backslash\text{delimited}$ $[...]$ $[...]$ $\{...\}$ 1 NAME OPT 2 SPRACHE 3 CONTENT
$\backslash\text{delimitedtext}$ $[...]$ $[...]$ $\{...\}$ 1 NAME OPT 2 SPRACHE 3 CONTENT
$\backslash\text{DELIMITEDTEXT}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT instances: quotation quote blockquote speech aside
$\backslash\text{aside}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT
$\backslash\text{blockquote}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT
$\backslash\text{quotation}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT
$\backslash\text{quote}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT
$\backslash\text{speech}$ $[...]$ $\{...\}$ 1 SPRACHE OPT 2 CONTENT
$\backslash\text{depthlinebottom}$
$\backslash\text{depthofstring}$ $\{...\}$ * TEXT
$\backslash\text{depthonlybox}$ $\{...\}$ * CONTENT
$\backslash\text{depthspanningtext}$ $\{...\}$ $\{...\}$ $\{...\}$ 1 TEXT 2 DIMENSION 3 FONT
$\backslash\text{depthstrut}$
$\backslash\text{DESCRIZIONE}$ $[...]$ ¹ $,...$ $\{...\}$ ² $\dots$ ³ $\backslash\text{par}$ 1 REFERENCE OPT OPT 2 TEXT 3 CONTENT
$\backslash\text{destra}$ $\dots$ * $\backslash\}$ $\backslash)$ $\backslash)$ $\backslash $ $\backslash\text{egroup}$ $\backslash\text{rparent}$ $\backslash\text{rparenthesis}$ " $\backslash\text{rparen}$ " $\backslash\text{rbracket}$ $\backslash\text{rbrack}$ " $\backslash\text{rbrace}$ $\backslash\text{rceil}$ $\backslash\text{rceiling}$ $\backslash\text{rfloor}$ $\backslash\text{urcorner}$ $\backslash\text{lrcorner}$ $\backslash\text{rmoustache}$ $\backslash\text{rrbracket}$ $\backslash\text{rangle}$ $\backslash\text{rrangle}$ $\backslash\text{rgroup}$ $\backslash\text{vert}$ $\backslash\text{singleverticalbar}$ $\backslash\text{doubleverticalbar}$ $\backslash\text{tripleverticalbar}$ $\backslash\text{rvert}$ $\backslash\text{rVert}$ $\backslash\text{rointerval}$ $\backslash\text{rlointerval}$ CHARACTER

```
\detachinsections    ...
*    NUMBER
```

```
\determinacaratteristicheregistro  [... ]  [...,...2...,... ]
1  NAME                                OPT
2  language      =  implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE
   metodo        =  implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   numberorder   =  numeri
   compress      =  si no tutti
   criterio      =  locale testo corrente precedente tutti ABSCHNITT
```

```
\determinacarattersticheelenco    [...,1...]    [...,2OPT...,...]
```

```
\determinanumerotesta    [...]  
*   ABSCHNITT
```

```
\determinednoflines    {...}
*   CONTENT
```

```
\determinenoflines    {...}
*    CONTENT
```

```
\detokenizedCOMANDOparameter  {...}
*    KEY
```

```
\detokenizedrootCOMANDOparameter    {...}
*   KEY
```

```
\devanagarinumerals {...}
*   NUMBER
```

```
\digits {...}
*  NUMBER
```

<code>\digitsbreak</code>

```
\digits    ...
*  NUMBER
```

```
\dimensione  {...}
*  CONTENT
```

```
\dimensiontount    {...}    \...
```

1	DIMENSION
2	CSNAME

```
\directboxfromcache    {...}    {...}
1  NAME
2  NUMBER TEXT
```

```
\directcolor  [...]
* COLOR
```

```
\directcolored    [...,...*=...,...]
* inherits: \definiscicolore
```

\directcolored [...] * COLOR
\directCOMANDOparameter {...} * KEY
\directconvertedcounter {...} {...} 1 NAME 2 primo precedente successivo ultimo numero
\directcopyboxfromcache {...} {...} 1 NAME 2 NUMMER TEXT
\directdummysparameter {...} * KEY
\directgetboxllx ... * CSNAME NUMMER
\directgetboxlly ... * CSNAME NUMMER
\directgoto {...} {...} 1 CONTENT 2 REFERENCE
\directhighlight {...} {...} 1 NAME 2 TEXT
\directlocalframed [...] {...} 1 NAME 2 CONTENT
\directluacode {...} * BEFEHL
\directmathextensible [...] {...} {...} {...} 1 invertito matematica testo chemistry 2 NUMMER 3 TEXT 4 TEXT
\directparwrapper {...} {...} 1 CONTENT 2 CONTENT
\directselect {...} {...} {...} {...} {...} {...} 1 NAME 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
\directsetbar {...} * NAME
\directsetup {...} * NAME

$\backslash\text{directsymbol}$ $\{.^1.\}$ $\{.^2.\}$ 1 NAME 2 NAME
$\backslash\text{directtextextensible}$ $[.^1.]$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 invertito matematica testo chem ^{ERT} istry 2 NUMMER 3 TEXT 4 TEXT
$\backslash\text{directvspacing}$ $\{.^*,.^*\}$ * inherits: $\backslash\text{vspacing}$
$\backslash\text{dis}$ $\{.^*\}$ * CONTENT
$\backslash\text{disableddelimiter}$
$\backslash\text{disabledirectives}$ $[.^*,.^*]$ * NAME
$\backslash\text{disableexperiments}$ $[.^*,.^*]$ * NAME
$\backslash\text{disablefiller}$
$\backslash\text{disablemathautofencing}$
$\backslash\text{disablemathautonumbers}$
$\backslash\text{disablemathautospaceing}$
$\backslash\text{disablemathpunctuation}$
$\backslash\text{disablemode}$ $[.^*,.^*]$ * NAME
$\backslash\text{disableoutputstream}$
$\backslash\text{disableparpositions}$
$\backslash\text{disableregime}$
$\backslash\text{disabletrackers}$ $[.^*,.^*]$ * NAME
$\backslash\text{displaymath}$ $\{.^*\}$ * CONTENT
$\backslash\text{displaymathematics}$ $\{.^*\}$ * CONTENT
$\backslash\text{displaymessage}$ $\{.^*\}$ * TEXT

\disposeluatable \{.*. * CSNAME
\distributedhsize {.*.} {.*.} {.*.} 1 DIMENSION 2 DIMENSION 3 NUMMER
\dividedsize {.*.} {.*.} {.*.} 1 DIMENSION 2 DIMENSION 3 NUMMER
\dm {.*. * CONTENT
\doadaptleftskip {.*. * si no standard DIMENSION
\doadaptrightskip {.*. * si no standard DIMENSION
\doaddfeature {...,*. * NAME
\doapostrophes
\doassign [...]. [... ² .. 1 TEXT 2 KEY = VALUE
\doassignempty [...]. [... ² .. 1 TEXT 2 KEY = VALUE
\doboundtext {.*.} {.*.} {.*.} 1 TEXT 2 DIMENSION 3 BEFEHL
\docheckassignment {.*. * TEXT
\docheckedpair {...,*. * TEXT
\documentvariable {.*. * KEY
\dodoubleargument \{.*. [...]. [...]. 1 CSNAME 2 TEXT 3 TEXT
\dodoubleargumentwithset \{.*. [... ² ,...]. [...]. 1 CSNAME 2 TEXT 3 TEXT

```
\dodoubleempty \.^1. [.2.] [.3.]
1 CSNAME OPT OPT
2 TEXT
3 TEXT
```

```
\dodoubleemptywithset    \...    [...,2...]    [...3]
1 CSNAME
2 TEXT
3 TEXT
```

```
\dodoublegroupempty  \.^{.1}  \.^{.2}  \.^{.3}
1 CSNAME
2 TEXT
3 TEXT
```

```
\doeassign    [.1.]    [..2..]
1    TEXT
2    KEY  =  VALUE
```

```
\doexpandedrecurse   {\..}   {\..}
1  NUMMER
2  BEFEHL
```

```
\doexpandedrecursed   {\.^{.1}.}   {\.^{.2}.}
```

```
1  NUMMER
```

```
2  BEFEHL
```

`\doexplicitlyphens`

```
\dofastloopcs  {...}  \dots
1  NUMBER
2  CSNAME
```

```
\dogetattribute    {...}
*   NAME
```

```
\dogetattributeid    {...}
*   NAME
```

```
\dogetcommacommandelement    ^1. \from    ^2. \to    \^3.
1  NUMBER
2  TEXT
3  CSNAME
```

```
\dogetobjectreference    {1..2}    \3..4}

1  NAME
2  NAME
3  CSNAME
4  CONTENT
```

\dogetobjectreferencepage {.. ¹ .} {.. ² .} \.. ³ {.. ⁴ .}				
1	NAME			
2	NAME			
3	CSNAME			
4	CONTENT			

\dogobbledoubleempty			[. ¹ .]	[. ² .]
1	TEXT		OPT	OPT
2	TEXT			

<pre> \dogobblesingleempty [...] * TEXT OPT </pre>

<code>\dohyphencollapsing</code>
<code>\dohyphens</code>
<code>\doif {¹...} {²...} {³...}</code> 1 CONTENT 2 CONTENT 3 TRUE
<code>\doifallcommon {...,¹...} {...,²...} {³...}</code> 1 TEXT 2 TEXT 3 TRUE
<code>\doifallcommonelse {...,¹...} {...,²...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\doifalldefinedelse {...,¹...} {²...} {³...}</code> 1 NAME 2 TRUE 3 FALSE
<code>\doifallmodes {...,¹...} {²...}</code> 1 NAME 2 TRUE
<code>\doifallmodeselse {...,¹...} {²...} {³...}</code> 1 NAME 2 TRUE 3 FALSE
<code>\doifallundefinedelse {...,¹...} {²...} {³...}</code> 1 NAME 2 TRUE 3 FALSE
<code>\doifassignmentelse {¹...} {²...} {³...}</code> 1 TEXT 2 TRUE 3 FALSE
<code>\doifassignmentelsecs {¹...} \²... \³...</code> 1 TEXT 2 CSNAME 3 CSNAME
<code>\doifblackelse {¹...} {²...} {³...}</code> 1 COLOR 2 TRUE 3 FALSE
<code>\doifbothsides {¹...} {²...} {³...}</code> 1 BEFEHL 2 BEFEHL 3 BEFEHL
<code>\doifbothsidesoverruled {¹...} {²...} {³...}</code> 1 BEFEHL 2 BEFEHL 3 BEFEHL

```
\doifboxelse  {...}  {...}  {...}  {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifbufferelse  {...}  {...}  {...}
1  BUFFER
2  TRUE
3  FALSE
```

```
\doifcheckedpagestate  {...}  {...}  {...}  {...}  {...}  {...}  {...}
1  REFERENCE
2  BEFEHL
3  BEFEHL
4  BEFEHL
5  BEFEHL
6  BEFEHL
7  BEFEHL
```

```
\doifcheckedreferencefoundelse  {...}  {...}  {...}
1  REFERENCE
2  TRUE
3  FALSE
```

```
\doifcolor  {...}  {...}
1  COLOR
2  TRUE
```

```
\doifcolorelse  {...}  {...}  {...}
1  COLOR
2  TRUE
3  FALSE
```

```
\doifcommandhandler  \...  {...}  {...}
1  CSNAME
2  NAME
3  TRUE
```

```
\doifcommandhandlerelse  \...  {...}  {...}  {...}
1  CSNAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifcommon  {...,1...}  {...,2...}  {...}
1  TEXT
2  TEXT
3  TRUE
```

```
\doifcommonelse  {...,1...}  {...,2...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifcontent  {...}  {...}  {...}  \...  {...}
1  BEFEHL
2  BEFEHL
3  BEFEHL
4  CSNAME
5  CONTENT
```

```
\doifconversiondefinedelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```



```
\doifconversionnumberelse  {...}  {...}  {...}  {...}
1  NAME
2  NUMMER
3  TRUE
4  FALSE
```

```
\doifcounter  {...}  {...}
1  NAME
2  TRUE
```

```
\doifcounterelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifcurrentfonthasfeatureelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifdefined  {...}  {...}
1  NAME
2  TRUE
```

```
\doifdefinedcounter  {...}  {...}
1  NAME
2  TRUE
```

```
\doifdefinedcounterelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifdefinedelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifdimensionelse  {...}  {...}  {...}
1  TEXT
2  TRUE
3  FALSE
```

```
\doifdimenstringelse  {...}  {...}  {...}
1  TEXT
2  TRUE
3  FALSE
```

```
\doifdocumentargument  {...}  {...}
1  NAME
2  TRUE
```

```
\doifdocumentargumentelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifdocumentfilename  {...}  {...}
1  NUMMER
2  TRUE
```

\doifdocumentfilenameelse {...} {...} {...}

1 NUMBER
2 TRUE
3 FALSE

\doifdocumentvariable {...} {...}

1 KEY
2 TRUE

\doifdocumentvariableelse {...} {...} {...}

1 KEY
2 TRUE
3 FALSE

\doifdrawingblackelse {...} {...}

1 TRUE
2 FALSE

\doifelse {...} {...} {...} {...}

1 CONTENT
2 CONTENT
3 TRUE
4 FALSE

\doifelseallcommon {...,¹...} {...,²...} {...³} {...⁴}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifelsealldefined {...,¹...} {...²} {...³}

1 NAME
2 TRUE
3 FALSE

\doifelseallmodes {...,¹...} {...²} {...³}

1 NAME
2 TRUE
3 FALSE

\doifelseallundefined {...,¹...} {...²} {...³}

1 NAME
2 TRUE
3 FALSE

\doifelseassignment {...¹} {...²} {...³}

1 TEXT
2 TRUE
3 FALSE

\doifelseassignmentcs {...¹} \...² \...³

1 TEXT
2 CSNAME
3 CSNAME

\doifelseblack {...¹} {...²} {...³}

1 COLOR
2 TRUE
3 FALSE

```
\doifelseblocksempy  {...} {...} {...} {...} {...}
1 NAME
2 NAME
3 testo ABSCHNITT
4 TRUE
5 FALSE
```

```
\doifelsebox {...} {...} {...} {...}
1 NAME
2 NAME
3 TRUE
4 FALSE
```

```
\doifelseboxincache {...} {...} {...} {...}
1 NAME
2 NUMMER TEXT
3 TRUE
4 FALSE
```

```
\doifelsebuffer {...} {...} {...}
1 BUFFER
2 TRUE
3 FALSE
```

```
\doifelsebufferempty {...} {...} {...}
1 BUFFER
2 TRUE
3 FALSE
```

```
\doifelsecolor {...} {...} {...}
1 COLOR
2 TRUE
3 FALSE
```

```
\doifelsecommandhandler \... {...} {...} {...}
1 CSNAME
2 NAME
3 TRUE
4 FALSE
```

```
\doifelsecommon {...,1...} {...,2...} {...} {...}
1 TEXT
2 TEXT
3 TRUE
4 FALSE
```

```
\doifelseconversiondefined {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelseconversionnumber {...} {...} {...} {...}
1 NAME
2 NUMMER
3 TRUE
4 FALSE
```

```
\doifelsecounter {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsecounteractive {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

\doifelsecurrentfonthasfeature {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsecurrentsortingtonused {...} {...} 1 TRUE 2 FALSE
\doifelsecurrentsynonymshown {...} {...} 1 TRUE 2 FALSE
\doifelsecurrentsynonymused {...} {...} 1 TRUE 2 FALSE
\doifelsedefined {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedefinedcounter {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedimension {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsedimenstring {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifelsedocumentargument {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsedocumentfilename {...} {...} {...} 1 NUMBER 2 TRUE 3 FALSE
\doifelsedocumentvariable {...} {...} {...} 1 KEY 2 TRUE 3 FALSE
\doifelsedrawingblack {...} {...} 1 TRUE 2 FALSE
\doifelseempty {...} {...} {...} 1 CONTENT 2 TRUE 3 FALSE

```
\doifelseemptyvalue  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseemptyvariable  {...}  {...}  {...}  {...}
1  NAME
2  KEY
3  TRUE
4  FALSE
```

```
\doifelseenv  {...}  {...}  {...}
1  KEY
2  TRUE
3  FALSE
```

```
\doifelsefastoptionalcheck  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelsefastoptionalcheckcs  \^1...  \^2...
1  CSNAME
2  CSNAME
```

```
\doifelsefieldbody  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsefieldcategory  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsefigure  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifelsefile  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifelsefiledefined  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsefileexists  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifelsefirstchar  {...}  {...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifelseflagged  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsefontchar    {...}    {...}    {...}    {...}
1  FONT
2  NUMMER
3  TRUE
4  FALSE
```

```
\doifelsefontfeature {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsefontpresent {...}    {...}    {...}
1  FONT
2  TRUE
3  FALSE
```

```
\doifelsefontsynonym {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseframed    \^1...    {...}    {...}
1  CSNAME
2  TRUE
3  FALSE
```

```
\doifelsehasspace    {...}    {...}    {...}
1  TEXT
2  TRUE
3  FALSE
```

```
\doifelsehelp    {...}    {...}
1  TRUE
2  FALSE
```

```
\doifelseincsname    {...}    {...}    {...}    {...}
1  TEXT
2  CSNAME
3  TRUE
4  FALSE
```

```
\doifelseindented    {...}    {...}
1  TRUE
2  FALSE
```

```
\doifelseinelement {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseinputfile    {...}    {...}    {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifelseinsertion    {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseinset    {...}    {...}^2,...    {...}    {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifelseinstring  {...}  {...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifelseinsymbolset  {...}  {...}  {...}  {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifelseintoks  {...}  {...}  {...}  {...}
1  BEFEHL
2  BEFEHL
3  TRUE
4  FALSE
```

```
\doifelseitalic  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelselanguage  {...}  {...}  {...}
1  SPRACHE
2  TRUE
3  FALSE
```

```
\doifelselayerdata  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelselayoutdefined  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelselayoutsomeline  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelselayouttextline  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseleapyear  {...}  {...}  {...}
1  NUMMER
2  TRUE
3  FALSE
```

```
\doifelselist  {...}  {...}  {...}
1  LISTE
2  TRUE
3  FALSE
```

```
\doifelselocation  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelselocfile  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

\doifelseMPgraphic {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsemainfloatbody {...} {...} 1 TRUE 2 FALSE
\doifelsemarkedcontent {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsemarkedpage {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsemarking {...} {...} {...} 1 BESCHRIFTUNG 2 TRUE 3 FALSE
\doifelsemessage {...} {...} {...} {...} 1 NAME 2 NAME NUMMER 3 TRUE 4 FALSE
\doifelsemode {..., ¹ ...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifelsenextbgroup {...} {...} 1 TRUE 2 FALSE
\doifelsenextbgroupcs \ ¹ ... \ ² ... 1 CSNAME 2 CSNAME
\doifelsenextchar {...} {...} {...} 1 CHARACTER 2 TRUE 3 FALSE
\doifelsenextoptional {...} {...} 1 TRUE 2 FALSE
\doifelsenextoptionalcs \ ¹ ... \ ² ... 1 CSNAME 2 CSNAME
\doifelsenextparenthesis {...} {...} 1 TRUE 2 FALSE
\doifelsenonzeropositive {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE

\doifelseonoteonsamepage {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifelsenothing {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifelsenumber {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifelseobjectfound {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifelseobjectreferencefound {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifelseoddpage {...} {...}

1 BEFEHL
2 BEFEHL

\doifelseoddpagefloat {...} {...}

1 TRUE
2 FALSE

\doifelseoldercontext {...} {...} {...}

1 NUMMER
2 TRUE
3 FALSE

\doifelseolderversion {...} {...} {...} {...}

1 NUMMER
2 NUMMER
3 TRUE
4 FALSE

\doifelseorientation {...} {...} {...}

1 normale up down sinistra destra cima fondo NAME
2 TRUE
3 FALSE

\doifelseoverlapping {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifelseoverlay {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

```
\doifelseparallel  {...}  {...,2...}  {...3}  {...4}  
1  NAME  
2  NAME tutti  
3  TRUE  
4  FALSE
```

```
\doifelseparentfile  {...}  {...2}  {...3}  
1  FILE  
2  TRUE  
3  FALSE
```

```
\doifelseparwrapper  {...}  {...2}  {...3}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsepath  {...1}  {...2}  {...3}  
1  PATH  
2  TRUE  
3  FALSE
```

```
\doifelsepathexists  {...1}  {...2}  {...3}  
1  PATH  
2  TRUE  
3  FALSE
```

```
\doifelsepatterns  {...1}  {...2}  {...3}  
1  SPRACHE  
2  TRUE  
3  FALSE
```

```
\doifelseposition  {...1}  {...2}  {...3}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsepositionaction  {...1}  {...2}  {...3}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsepositiononpage  {...1}  {...2}  {...3}  {...4}  
1  NAME  
2  NUMBER  
3  TRUE  
4  FALSE
```

```
\doifelsepositionsonsamepage  {...,1...}  {...2}  {...3}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsepositionsonthispage  {...,1...}  {...2}  {...3}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsepositionsused  {...1}  {...2}  
1  TRUE  
2  FALSE
```

```
\doifelserferencechecked  {...1}  {...2}  {...3}  
1  REFERENCE  
2  TRUE  
3  FALSE
```

\doifelsereferenced {...} {...} {...}

1 REFERENCE
2 TRUE
3 FALSE

\doifelsereferencefound {...} {...} {...}

1 REFERENCE
2 TRUE
3 FALSE

\doifelserightpage {...} {...}

1 TRUE
2 FALSE

\doifelserightpagefloat {...} {...}

1 TRUE
2 FALSE

\doifelserighttoleftinbox ... {...} {...}

1 CSNAME NUMBER
2 TRUE
3 FALSE

\doifelsesamelinereference {...} {...} {...}

1 REFERENCE
2 TRUE
3 FALSE

\doifelsesamestring {...} {...} {...} {...}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifelsesetups {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifelsesimilartokens {...} {...} {...} {...}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifelsesomebackground {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifelsesomespace {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifelsesomething {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifelsesometoks \... {...} {...}

1 CSNAME
2 TRUE
3 FALSE

```
\doifelsestringinstring  {...}  {...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\doifelsestructurelisthasnumber  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelsestructurelisthaspage  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelsesymboldefined  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsesymbolset  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsetaggednoteonsamepage  {...}  {...}  {...}  {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifelsetext  {...}  {...}  {...}
1  TEXT
2  TRUE
3  FALSE
```

```
\doifelsetextflow  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsetextflowcollector  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelsetopofpage  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelsetypingfile  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifelseundefined  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifelseupcomingrightpage  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifelseurldefined  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsevalue  {...}  {...}  {...}  {...}  
1  NAME  
2  TEXT  
3  TRUE  
4  FALSE
```

```
\doifelsevaluenothing  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifelsevariable  {...}  {...}  {...}  {...}  
1  NAME  
2  KEY  
3  TRUE  
4  FALSE
```

```
\doifempty  {...}  {...}  
1  CONTENT  
2  TRUE
```

```
\doifemptyelse  {...}  {...}  {...}  
1  CONTENT  
2  TRUE  
3  FALSE
```

```
\doifemptytoks  \^{1..}  {...}  
1  CSNAME  
2  TRUE
```

```
\doifemptyvalue  {...}  {...}  
1  NAME  
2  TRUE
```

```
\doifemptyvalueelse  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifemptyvariable  {...}  {...}  {...}  
1  NAME  
2  KEY  
3  TRUE
```

```
\doifemptyvariableelse  {...}  {...}  {...}  {...}  
1  NAME  
2  KEY  
3  TRUE  
4  FALSE
```

```
\doifenv  {...}  {...}  
1  KEY  
2  TRUE
```

```
\doifenvelse  {...}  {...}  {...}  
1  KEY  
2  TRUE  
3  FALSE
```

\doiffastoptionalcheckcselse \¹... \²...

1 CSNAME
2 CSNAME

\doiffastoptionalcheckelse {¹...} {²...}

1 TRUE
2 FALSE

\doiffielddbodyelse {¹...} {²...} {³...}

1 NAME
2 TRUE
3 FALSE

\doiffielddcategoryelse {¹...} {²...} {³...}

1 NAME
2 TRUE
3 FALSE

\doiffigureelse {¹...} {²...} {³...}

1 FILE
2 TRUE
3 FALSE

\doiffile {¹...} {²...}

1 FILE
2 TRUE

\doiffiledefinedelse {¹...} {²...} {³...}

1 NAME
2 TRUE
3 FALSE

\doiffileelse {¹...} {²...} {³...}

1 FILE
2 TRUE
3 FALSE

\doiffileexistselse {¹...} {²...} {³...}

1 FILE
2 TRUE
3 FALSE

\doiffirstcharelse {¹...} {²...} {³...} {⁴...}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifflaggedelse {¹...} {²...} {³...}

1 NAME
2 TRUE
3 FALSE

\doiffontcharelse {¹...} {²...} {³...} {⁴...}

1 FONT
2 NUMMER
3 TRUE
4 FALSE

\doiffontfeatureelse {¹...} {²...} {³...}

1 NAME
2 TRUE
3 FALSE

\doiffontpresentelse {...} {...} {...}

1 FONT
2 TRUE
3 FALSE

\doiffontsynonymelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifhasspaceelse {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifhelpelse {...} {...}

1 TRUE
2 FALSE

\doifincsnameelse {...} {...} {...} {...}

1 TEXT
2 CSNAME
3 TRUE
4 FALSE

\doifinelementelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifinputfileelse {...} {...} {...}

1 FILE
2 TRUE
3 FALSE

\doifinsectionelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifinset {...} {...,²...} {...}

1 TEXT
2 TEXT
3 TRUE

\doifinsetelse {...} {...,²...} {...} {...⁴}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifinstring {...} {...} {...}

1 TEXT
2 TEXT
3 TRUE

\doifinstringelse {...} {...} {...} {...}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

```
\doifinsymbolset    {...}    {...}    {...}    {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifinsymbolsetelse {...}    {...}    {...}    {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifintokselset    {...}    {...}    {...}    {...}
1  BEFEHL
2  BEFEHL
3  TRUE
4  FALSE
```

```
\doifitalicelset    {...}    {...}
1  TRUE
2  FALSE
```

```
\doiflanguageelset {...}    {...}    {...}
1  SPRACHE
2  TRUE
3  FALSE
```

```
\doiflayerdataelset {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayoutdefinedelset {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayoutsomelineelset {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doiflayouttextlineelset {...}    {...}    {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifleapyearelset {...}    {...}    {...}
1  NUMMER
2  TRUE
3  FALSE
```

```
\doiflistelset    {...}    {...}    {...}
1  LISTE
2  TRUE
3  FALSE
```

```
\doiflocationelset {...}    {...}
1  TRUE
2  FALSE
```

```
\doiflocfileelset {...}    {...}    {...}
1  FILE
2  TRUE
3  FALSE
```


<pre> \doifMPgraphicelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifmainfloatbodyelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifmarkedpage {...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifmarkingelse {...} {...} {...} 1 BESCHRIFTUNG 2 TRUE 3 FALSE </pre>
<pre> \doifmessageelse {...} {...} {...} {...} 1 NAME 2 NAME NUMBER 3 TRUE 4 FALSE </pre>
<pre> \doifmode {...,¹...} {...} 1 NAME 2 TRUE </pre>
<pre> \doifmodeelse {...,¹...} {...} {...} 1 NAME 2 TRUE 3 FALSE </pre>
<pre> \doifnextbgroupcselse \¹... \²... 1 CSNAME 2 CSNAME </pre>
<pre> \doifnextbgroupelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifnextcharelse {...} {...} {...} 1 CHARACTER 2 TRUE 3 FALSE </pre>
<pre> \doifnextoptionalcselse \¹... \²... 1 CSNAME 2 CSNAME </pre>
<pre> \doifnextoptionalelse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifnextparenthesiselse {...} {...} 1 TRUE 2 FALSE </pre>
<pre> \doifnonzeropositiveelse {...} {...} {...} 1 NUMMER 2 TRUE 3 FALSE </pre>

\doifnot {...} {...} {...}

1 CONTENT
2 CONTENT
3 TRUE

\doifnotallcommon {...,¹...} {...,²...} {...,³...}

1 TEXT
2 TEXT
3 TRUE

\doifnotallmodes {...,¹...} {...,²...}

1 NAME
2 TRUE

\doifnotanchorbox {...} {...}

1 NAME
2 TRUE

\doifnotcommandhandler \... {...} {...}

1 CSNAME
2 NAME
3 TRUE

\doifnotcommon {...,¹...} {...,²...} {...,³...}

1 TEXT
2 TEXT
3 TRUE

\doifnotcounter {...} {...}

1 NAME
2 TRUE

\doifnotdocumentargument {...} {...}

1 NAME
2 TRUE

\doifnotdocumentfilename {...} {...}

1 NUMBER
2 TRUE

\doifnotdocumentvariable {...} {...}

1 KEY
2 TRUE

\doifnotempty {...} {...}

1 CONTENT
2 TRUE

\doifnotemptyvalue {...} {...}

1 NAME
2 TRUE

\doifnotemptyvariable {...} {...} {...}

1 NAME
2 KEY
3 TRUE

\doifnotenv {...} {...}

1 KEY
2 TRUE

\doifnoteonsamepageelse {...} {...} {...} 1 NAME 2 TRUE 3 FALSE
\doifnotescollected {...} {...} 1 NAME 2 TRUE
\doifnotfile {...} {...} 1 FILE 2 TRUE
\doifnotflagged {...} {...} 1 NAME 2 TRUE
\doifnothing {...} {...} 1 TEXT 2 TRUE
\doifnothingelse {...} {...} {...} 1 TEXT 2 TRUE 3 FALSE
\doifnotinset {...} {..., ² ...} {...} 1 TEXT 2 TEXT 3 TRUE
\doifnotinfloat {...} * TRUE
\doifnotinstring {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE
\doifnotmode {..., ¹ ...} {...} 1 NAME 2 TRUE
\doifnotnumber {...} {... ² .. 1 TEXT 2 TRUE
\doifnotsamestring {...} {...} {...} 1 TEXT 2 TEXT 3 TRUE
\doifnotsetups {...} {...} 1 NAME 2 TRUE
\doifnotvalue {...} {...} {...} 1 NAME 2 TEXT 3 TRUE

\doifnotvariable {...} {...} {...}

1 NAME
2 KEY
3 TRUE

\doifnumber {...} {...}

1 TEXT
2 TRUE

\doifnumberelse {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifobjectfoundelse {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifobjectreferencefoundelse {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifoddpagelse {...} {...}

1 BEFEHL
2 BEFEHL

\doifoddpagefloatelse {...} {...}

1 TRUE
2 FALSE

\doifoldercontextelse {...} {...} {...}

1 NUMBER
2 TRUE
3 FALSE

\doifolderversionelse {...} {...} {...} {...}

1 NUMBER
2 NUMBER
3 TRUE
4 FALSE

\doifoutermode {...}

* CONTENT

\doifoverlappingelse {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doifoverlayelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifparallelelse {...} {...,²...} {...} {...}

1 NAME
2 NAME tutti
3 TRUE
4 FALSE

```
\doifparentfileelse  {...}  {...}  {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifpathelse  {...}  {...}  {...}
1  PATH
2  TRUE
3  FALSE
```

```
\doifpathexistselse  {...}  {...}  {...}
1  PATH
2  TRUE
3  FALSE
```

```
\doifpatternself  {...}  {...}  {...}
1  SPRACHE
2  TRUE
3  FALSE
```

```
\doifposition  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionaction  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionactionelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionelse  {...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositiononpageelse  {...}  {...}  {...}  {...}
1  NAME
2  NUMMER
3  TRUE
4  FALSE
```

```
\doifpositionsonsamepageelse  {...,1...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionsonthispageelse  {...,1...}  {...}  {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionsusedelse  {...}  {...}
1  TRUE
2  FALSE
```

```
\doifreferencedelse  {...}  {...}  {...}
1  REFERENCE
2  TRUE
3  FALSE
```

```
\doifreferencefoundelse  {...}  {...}  {...}  
1  REFERENCE  
2  TRUE  
3  FALSE
```

```
\doifrightpageelse  {...}  {...}  
1  TRUE  
2  FALSE
```

```
\doifrightpagefloatelse  {...}  {...}  
1  TRUE  
2  FALSE
```

```
\doifrighttoleftinboxelse  ...  {...}  {...}  
1  CSNAME NUMMER  
2  TRUE  
3  FALSE
```

```
\doifsamelinereferenceelse  {...}  {...}  {...}  
1  REFERENCE  
2  TRUE  
3  FALSE
```

```
\doifsamestring  {...}  {...}  {...}  
1  TEXT  
2  TEXT  
3  TRUE
```

```
\doifsamestringelse  {...}  {...}  {...}  {...}  
1  TEXT  
2  TEXT  
3  TRUE  
4  FALSE
```

```
\doifsetups  {...}  {...}  
1  NAME  
2  TRUE
```

```
\doifsetupselse  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifsomebackground  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifsomebackgroundelse  {...}  {...}  {...}  
1  NAME  
2  TRUE  
3  FALSE
```

```
\doifsomespaceelse  {...}  {...}  {...}  
1  TEXT  
2  TRUE  
3  FALSE
```

```
\doifsomething  {...}  {...}  
1  TEXT  
2  TRUE
```

\doifsomethingelse {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doifsometoks \... {...}

1 CSNAME
2 TRUE

\doifsometokselse \... {...} {...}

1 CSNAME
2 TRUE
3 FALSE

\doifstringinstringelse {...} {...} {...} {...}

1 TEXT
2 TEXT
3 TRUE
4 FALSE

\doifstructurelisthasnumberelse {...} {...}

1 TRUE
2 FALSE

\doifstructurelisthaspageelse {...} {...}

1 TRUE
2 FALSE

\doifsymboldefinedelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doifsymbolsetelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doiftaggednoteonsamepageelse {...} {...} {...} {...}

1 NAME
2 NAME
3 TRUE
4 FALSE

\doiftext {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doiftextelse {...} {...} {...}

1 TEXT
2 TRUE
3 FALSE

\doiftextflowcollectorelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

\doiftextflowelse {...} {...} {...}

1 NAME
2 TRUE
3 FALSE

`\doiftopofpageelse    {...}    {...}`

1 TRUE
2 FALSE

`\doiftypingfileelse    {...}    {...}    {...}`

1 FILE
2 TRUE
3 FALSE

`\doifundefined    {...}    {...}`

1 NAME
2 TRUE

`\doifundefinedcounter    {...}    {...}`

1 NAME
2 TRUE

`\doifundefinedelse    {...}    {...}    {...}`

1 NAME
2 TRUE
3 FALSE

`\doifunknownfontfeature    {...}    {...}    {...}`

1 NAME
2 TRUE
3 FALSE

`\doifurldefinedelse    {...}    {...}    {...}`

1 NAME
2 TRUE
3 FALSE

`\doifvalue    {...}    {...}    {...}`

1 NAME
2 TEXT
3 TRUE

`\doifvalueelse    {...}    {...}    {...}    {...}`

1 NAME
2 TEXT
3 TRUE
4 FALSE

`\doifvaluenothing    {...}    {...}`

1 NAME
2 TRUE

`\doifvaluenothingelse    {...}    {...}    {...}`

1 NAME
2 TRUE
3 FALSE

`\doifvaluesomething    {...}    {...}`

1 NAME
2 TRUE

`\doifvariable    {...}    {...}    {...}`

1 NAME
2 KEY
3 TRUE

<code>\doifvariableelse {¹..} {²..} {³..} {⁴..}</code> 1 NAME 2 KEY 3 TRUE 4 FALSE
<code>\doindentation</code>
<code>\dollar</code>
<code>\doloop {[*]..}</code> * BEFEHL
<code>\doloopoverlist {¹..²..} {²..}</code> 1 TEXT 2 BEFEHL
<code>\donothing</code>
<code>\dontconvertfont</code>
<code>\dontleavehmode</code>
<code>\dontpermitspacesbetweenegroups</code>
<code>\dopositionaction {[*]..}</code> * NAME
<code>\doprocesslocalsetups {[*]..[*]..}</code> * NAME
<code>\doquadrupleargument \¹.. [²..] [³..] [⁴..] [⁵..]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\doquadrupleempty \¹.. [²..] [³..] [⁴..] [⁵..]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\doquadruplegroupempty \¹.. {²..} {³..} {⁴..} {⁵..}</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\doquintupleargument \¹.. [²..] [³..] [⁴..] [⁵..] [⁶..]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT

<code>\doquintupleempty</code> $\overset{1}{\dots}$ $\overset{2}{[\dots]}$ $\overset{3}{[\dots]}$ $\overset{4}{[\dots]}$ $\overset{5}{[\dots]}$ $\overset{6}{[\dots]}$ 1 CSNAME OPT OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\doquintuplegroupempty</code> $\overset{1}{\dots}$ $\overset{2}{\{\dots\}}$ $\overset{3}{\{\dots\}}$ $\overset{4}{\{\dots\}}$ $\overset{5}{\{\dots\}}$ $\overset{6}{\{\dots\}}$ 1 CSNAME OPT OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\dorechecknextindentation</code>
<code>\dorecurse</code> $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ 1 NUMMER 2 BEFEHL
<code>\dorepeatwithcommand</code> $[\overset{1}{\dots}]$ $\overset{2}{\dots}$ 1 TEXT NUMMER*TEXT 2 CSNAME
<code>\doreplacefeature</code> $\{\dots,\dots\}$ * NAME
<code>\doresetandaddfeature</code> $\{\dots,\dots\}$ * NAME
<code>\doresetattribute</code> $\{\overset{*}{\dots}\}$ * NAME
<code>\dorotatebox</code> $\{\overset{1}{\dots}\}$ $\overset{2}{\dots}$ $\{\overset{3}{\dots}\}$ 1 NUMMER 2 CSNAME 3 CONTENT
<code>\dosetattribute</code> $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ 1 NAME 2 NUMMER
<code>\dosetleftskipadaption</code> $\{\overset{*}{\dots}\}$ * si no standard DIMENSION
<code>\dosetrighskipadaption</code> $\{\overset{*}{\dots}\}$ * si no standard DIMENSION
<code>\dosetupcheckedinterlinespace</code> $\{\dots,\dots,\overset{*}{\dots},\dots\}$ * inherits: \impostainterlinea
<code>\dosetupcheckedinterlinespace</code> $\{\dots,\dots\}$ * attivo disattivo reimposta auto piccolo medio grande NUMMER DIMENSION
<code>\dosetupcheckedinterlinespace</code> $\{\overset{*}{\dots}\}$ * NAME

<code>\dostepwiserecurse {...} {...} {...} {...}</code> 1 NUMBER 2 NUMBER 3 [-+]NUMBER 4 BEFEHL
<code>\dosubtractfeature {...,*...}</code> * NAME
<code>\dotaggedplaceholder</code>
<code>\dotfill</code>
<code>\dotfskip {...}</code> * DIMENSION
<code>\dotoks \...</code> * CSNAME
<code>\dotripleargument \... [...] [...] [...]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
<code>\dotripleargumentwithset \... [...,²...] [...] [...]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
<code>\dotripleempty \... [...] [...] [...]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
<code>\dotripleemptywithset \... [...,²...] [...] [...]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
<code>\dotriplegroupempty \... [...] [...] [...]</code> 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
<code>\doublebond</code>
<code>\dousecurrentlanguageparameter</code>
<code>\douselanguageparameter \...</code> * CSNAME
<code>\dowith {...,¹...} [...²]</code> 1 BEFEHL 2 BEFEHL

`\dowithminmaxrangeslice` $\{...^1\}$ $\{...^2\}$ $\{...^3\}$ $\{...^4\}$ $\{...^5,...\}$

1 NUMBER
2 NUMBER
3 NUMBER
4 NUMBER
5 NUMBER

`\dowithnextbox` $\{...^1\}$ $\{...^2\}$ $\{...^3\}$

1 BEFEHL
2 CSNAME
3 CONTENT

`\dowithnextboxcontent` $\{...^1\}$ $\{...^2\}$ $\{...^3\}$ $\{...^4\}$

1 BEFEHL
2 BEFEHL
3 CSNAME
4 CONTENT

`\dowithnextboxcontentcs` $\{...^1\}$ $\{...^2\}$ $\{...^3\}$ $\{...^4\}$

1 CSNAME
2 CSNAME
3 CSNAME
4 CONTENT

`\dowithnextboxcs` $\{...^1\}$ $\{...^2\}$ $\{...^3\}$

1 CSNAME
2 CSNAME
3 CONTENT

`\dowithpargument` $\{...^*\}$

* CSNAME

`\dowithrange` $\{...^1,...\}$ $\{...^2\}$

1 NUMBER NUMBER:NUMBER
2 CSNAME

`\dowithwargument` $\{...^*\}$

* CSNAME

`\dpofstring` $\{...^*\}$

* TEXT

`\drawbalancepoints` $[...^*...]$

* dx = DIMENSION OPT
 dy = DIMENSION
 sx = DIMENSION
 sy = DIMENSION
 spessorelinea = DIMENSION

`\drawbreakpoints` $[...^*...]$

* dx = DIMENSION OPT
 dy = DIMENSION
 sx = DIMENSION
 sy = DIMENSION
 spessorelinea = DIMENSION

`\dummydigit`

`\dummyparameter` $\{...^*\}$

* KEY

`\ETEX`

* BEFEHL

* BEFEHL

```

1  CSNAME
2  TEXT

```

* NAME

* NAME

* NAME

* NAME

1	NAME
2	KEY

```
1  interno esterno entrambi normale nascosto clip dilata NAME
2  CONTENT
```

```
1  NAME
2  NAME
3  criterio = testo ABSCHNITT
```

\elapsedseconds

\elapsedsteptime

```
\elapsedtime
```

```
1 inherits: \impostaelementi8PT
2 TEXT
```

* REFERENCE

\em

\emphisboldface

`\emphasistypeface`

\emphsize

<code>\emptycolumnset</code> [...,*=...,...] * ampiezza = DIMENSION altezza = DIMENSION c = NUMBER r = NUMBER metodo = qui fisso cima fondo tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt opzione = pagina ncima = NUMBER nfondo = NUMBER
<code>\emptyhangrangestep</code>
<code>\emptylines</code> [...] * NUMBER OPT
<code>\emspace</code>
<code>\enableasciimode</code>
<code>\enabledelimiter</code>
<code>\enabledirectives</code> [...,*;...] * NAME
<code>\enableexperiments</code> [...,*;...] * NAME
<code>\enablefiller</code>
<code>\enablemathautofencing</code>
<code>\enablemathautonumbers</code>
<code>\enablemathautospaceing</code>
<code>\enablemathpunctuation</code>
<code>\enablemathrules</code>
<code>\enablemode</code> [...,*;...] * NAME
<code>\enableoutputstream</code> [...] * NAME
<code>\enableparpositions</code>
<code>\enableregime</code> [...] * cp1250 cp1251 cp1252 cp1253 cp1254 cp1255 cp1256 cp1257 cp1258 8859-1 8859-2 8859-3 8859-4 8859-9 8859-10 8859-13 8859-14 8859-15 8859-16 utf windows-1250 windows-1251 windows-1252 windows-1253 windows-1254 windows-1255 windows-1256 windows-1257 windows-1258 il1 il2 il3 il4 il5 il6 il7 il8 il9 il10 iso-8859-1 iso-8859-2 iso-8859-3 iso-8859-4 iso-8859-9 iso-8859-10 iso-8859-13 iso-8859-14 iso-8859-15 iso-8859-16 latin1 latin2 latin3 latin4 latin5 latin6 latin7 latin8 latin9 latin10 utf-8 utf8 windows
<code>\enabletrackers</code> [...,*;...] * NAME
<code>\enskip</code>

<code>\enspace</code>
<code>\ENUMERAZIONE</code> $[...;...]$ $\{...\}$ $\dots$ <code>\par</code> 1 REFERENCE OPT OPT 2 TEXT 3 CONTENT
<code>\env</code> $\{...\}$ * KEY
<code>\envvar</code> $\{...\}$ $\{...\}$ 1 KEY 2 BEFEHL
<code>\epos</code> $\{...\}$ * NAME
<code>\equaldigits</code> $\{...\}$ * TEXT
<code>\eTeX</code>
<code>\ETICHETTA</code> $[...;...]$ $\{...\}$ 1 REFERENCE OPT OPT 2 TEXT
<code>\everydefineCOMANDO</code>
<code>\everypresetCOMANDO</code>
<code>\everysetupCOMANDO</code>
<code>\everysetupCOMANDOroot</code>
<code>\everyswitchCOMANDO</code>
<code>\executeifdefined</code> $\{...\}$ $\{...\}$ 1 NAME 2 BEFEHL
<code>\exitloop</code>
<code>\exitloopnow</code>
<code>\expandcheckedcsname</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 CSNAME 2 KEY 3 TEXT
<code>\expanded</code> $\{...\}$ * CONTENT
<code>\expandeddoif</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 CONTENT 2 CONTENT 3 TRUE


```
\expandeddoifelse  {...}  {...}  {...}  {...}
1  CONTENT
2  CONTENT
3  TRUE
4  FALSE
```

```
\expandeddoifnot  {...}  {...}  {...}
1  CONTENT
2  CONTENT
3  TRUE
```

```
\expandfontsynonym  \.^..  {...}
1  CSNAME
2  NAME
```

```
\expdoif  {...}  {...}  {...}
1  CONTENT
2  CONTENT
3  TRUE
```

```
\expdoifcommonelse  {...,1...}  {...,2...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\expdoifelse  {...}  {...}  {...}  {...}
1  CONTENT
2  CONTENT
3  TRUE
4  FALSE
```

```
\expdoifelsecommon  {...,1...}  {...,2...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\expdoifelseinset  {...}  {...,2...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\expdoifinsetelse  {...}  {...,2...}  {...}  {...}
1  TEXT
2  TEXT
3  TRUE
4  FALSE
```

```
\expdoifnot  {...}  {...}  {...}
1  CONTENT
2  CONTENT
3  TRUE
```

```
\externalfigurecollectionmaxheight  {...}
*  NAME
```

```
\externalfigurecollectionmaxwidth  {...}
*  NAME
```

```
\externalfigurecollectionminheight  {...}
*  NAME
```

<code>\externalfigurecollectionminwidth</code> {...} * NAME
<code>\externalfigurecollectionparameter</code> {...} {...} 1 NAME 2 KEY
<code>\F</code> {...} * + - = * NUMBER
<code>\fakebox</code> ... * CSNAME NUMBER
<code>\fakeleftdelimiter</code>
<code>\fakerrightdelimiter</code>
<code>\fastdecrement</code> {...} * CSNAME
<code>\fastincrement</code> {...} * CSNAME
<code>\fastlocalframed</code> [...] ¹ [...,...] ² [...] {...} ³ 1 NAME 2 inherits: \impostaincorniciato 3 CONTENT
<code>\fastloopfinal</code>
<code>\fastloopindex</code>
<code>\fastscale</code> {...} {...} 1 NUMBER 2 CONTENT
<code>\fastsetup</code> {...} * NAME
<code>\fastsetupwithargument</code> {...} {...} 1 NAME 2 CONTENT
<code>\fastsetupwithargumentswapped</code> {...} {...} 1 CONTENT 2 NAME
<code>\fastswitchtobodyfont</code> {...} * x xx piccolo grande script scriptscript
<code>\fastsxsy</code> {...} {...} {...} 1 NUMBER 2 NUMBER 3 CONTENT
<code>\feature</code> [...] ¹ [...] ² [...] 1 + - = ! > < more less nuovo reimposta implicito old locale 2 NAME

```

\feature   {1...}   {...,2...}
1   + - = ! > < more less nuovo reimposta implicito old locale
2   NAME

```

```

\fenced    [1...]    [...,2...,...]    {...}    {3...}
1   cases sesac tekcarb parenthesisOPTis bracket brace bar doublebar triplebar angle doubleangle solidus ceiling floor
   moustache uppercorner lowercorner group openbracket nothing mirroredparenthesis mirroredbracket mirroredbrace
   mirroredbar mirreddoublebar mirroredtriplebar mirroredangle mirreddoubleangle mirroredsolidus mirroredceiling
   mirroredfloor mirroredmoustache mirroreduppercorner mirroredlowercorner mirroredgroup mirroredopenbracket mirrorednothing
   interval openinterval closedinterval leftopeninterval rightopeninterval varopeninterval varleftopeninterval
   varrightopeninterval integerinterval abs innerproduct integerpart norm set sequence tuple NAME
2   inherits: \setupmathfences
3   CONTENT

```

```

\fenced    [1...]    [...,2...,...]    {...}    {4...}
1   tupanddownarrows tupdownarrowsOPT tdownuparrows tuparrow tdownarrow NAME
2   inherits: \setupmathfences
3   CONTENT
4   CONTENT

```

```

\FENCE     [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

instances: parenthesis bracket brace ceiling floor interval openinterval closedinterval
leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
integerinterval abs innerproduct integerpart norm set sequence tuple

```

```

\abs       [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

```

```

\FENCE     [...,1...,...]    {2...}    {3...}
1   inherits: \setupOPTmathfences
2   CONTENT
3   CONTENT

```

```

\brace     [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

```

```

\bracket   [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

```

```

\ceiling   [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

```

```

\closedinterval  [...,1...,...]    {2...}
1   inherits: \setupmathfencesOPT
2   CONTENT

```

```

\floor     [...,1...,...]    {2...}
1   inherits: \setupOPTmathfences
2   CONTENT

```

```

\innerproduct  [...,1...,...]    {2...}
1   inherits: \setupmathfencesOPT
2   CONTENT

```

```

\integerinterval  [...,1...,...]    {2...}
1   inherits: \setupmathfencesOPT
2   CONTENT

```

$\backslash\mathrm{integerpart}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{interval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{leftopeninterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{norm}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{openinterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{parenthesis}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{rightopeninterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{sequence}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{set}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{tuple}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{varleftopeninterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{varopeninterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{varrightopeninterval}$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ 1 inherits: $\backslash\mathrm{setupmathfences}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{fetchallmarkings}$ $[\overset{1}{...}]$ $[\overset{2}{...}]$ 1 BESCHRIFTUNG 2 pagina NAME NUMMER
$\backslash\mathrm{fetchallmarks}$ $[\overset{*}{...}]$ * BESCHRIFTUNG

<pre> \fetchmark [...]¹ [...]² 1 BESCHRIFTUNG 2 primo ultimo corrente precedente successivo cima fondo implicito entrambi tutti first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchmarking [...]¹ [...]² [...]³ 1 BESCHRIFTUNG 2 pagina NAME NUMMER 3 primo ultimo corrente precedente successivo cima fondo implicito entrambi tutti first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemark [...]¹ [...]² 1 BESCHRIFTUNG 2 primo ultimo corrente precedente successivo cima fondo implicito entrambi tutti first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemarking [...]¹ [...]² [...]³ 1 BESCHRIFTUNG 2 pagina NAME NUMMER 3 primo ultimo corrente precedente successivo cima fondo implicito entrambi tutti first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchruntimecommand \...¹ {...}² 1 CSNAME 2 FILE </pre>
<pre> \fetchtwomarkings [...]¹ [...]² 1 BESCHRIFTUNG 2 pagina NAME NUMMER </pre>
<pre> \fetchtwomarks [...][*] * BESCHRIFTUNG </pre>
<pre> \fieldbody [...]¹ [...]²...,...] 1 NAME 2 inherits: \setupfieldbody </pre>
<pre> \fifthoffivearguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>
<pre> \fifthofsixarguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ {...}⁶ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT </pre>
<pre> \figuraesterna [...]¹ [...]² [...]³...,...] 1 FILE 2 NAME 3 inherits: \setupexternalfigure </pre>
<pre> \figurefilename </pre>
<pre> \figurefilepath </pre>
<pre> \figurefiletype </pre>

<code>\figurefullname</code>
<code>\figureheight</code>
<code>\figurenaturalheight</code>
<code>\figurenaturalwidth</code>
<code>\figuresymbol</code> $[...]$ $[...,\dots\frac{2}{\text{OPT}}...]$ 1 FILE NAME 2 inherits: \figuraesterna
<code>\figurewidth</code>
<code>\filbreak</code>
<code>\filename</code> $\{...\}$ * FILE
<code>\filledhboxb</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxc</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxg</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxk</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxm</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxr</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filledhboxy</code> $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1 TEXT 2 CONTENT
<code>\filler</code> $[...]$ * sim simbolo linea ampiezza spazio NAME
<code>\fillupto</code> $[...]$ $\{\overset{2}{...}\}$ 1 sim simbolo linea ampiezza spazio NAME 2 TEXT

\filterfromnext { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} { ⁵ ...} { ⁶ ...} { ⁷ ...} 1 NUMMER 2 NUMMER 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT 7 CONTENT
\filterfromvalue { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 NUMMER 3 NUMMER
\filterlist { ¹ ...} { ² ...} 1 NODE 2 LPATH
\filterpages [¹ ...] [..., ² ...] [..., ³ ...,...] 1 FILE 2 pari dispari NUMMER NUMMER:NUMMER 3 ampiezza = DIMENSION n = NUMMER category = NAME alternativa = a b implicito pagina
\filterreference { [*] ...} * implicito testo titolo numero pagina realpage
\finishregisterentry [¹ ...] [..., ² ...,...] [..., ³ ...,...] 1 NAME 2 etichetta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT alternativa = TEXT 3 KEY = VALUE
\firstcharacter
\firstcounter [¹ ...] [² ...] 1 NAME 2 NUMMER
\firstcountervalue [[*] ...] * NAME
\firstinlist [..., [*] ...] * BEFEHL
\firstoffivearguments { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} { ⁵ ...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
\firstoffourarguments { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT
\firstofoneargument { [*] ...} * TEXT

\firstofoneunexpanded {...} * TEXT
\firstofsixarguments {...} {...} {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\firstofthreearguments {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstofthreeunexpanded {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstoftwoarguments {...} {...} 1 TEXT 2 TEXT
\firstoftwounexpanded {...} {...} 1 TEXT 2 TEXT
\firstrealpage
\firstrealpagenumber
\firstsubcountervalue [...] ¹ [...] ² 1 NAME 2 NUMMER
\firstsubpagenumber
\firstuserpage
\firstuserpagenumber
\fitfieldframed [...] ¹ ... ^{OPT} ... {...} ² 1 inherits: \impostaincorniciato 2 CONTENT
\fittopbaselinegrid {...} * CONTENT
\flag {...} * NAME
\floatuserdataparameter {...} * KEY
\flushallmarginblocks [...] [*] * DIMENSION OPT

\fontchar {...} * NAME
\fontcharbyindex {...} * NUMMER
\fontclass
\fontclassname {...} {...} 1 NAME 2 FONT
\fontface
\fontfeaturelist [...] [...] 1 NAME 2 TEXT
\fontsize
\fontstyle
\forcecharacterstripping
\forcelocalfloats
\forgeteverypar
\forgetinitial
\forgetparagraphfreezing
\forgetparameters [...] [...,... ² ...,...] 1 TEXT 2 KEY = VALUE
\forgetparskip
\forgetparwrapper
\forgetragged
\forgetsidefloats
\forgettagging
\formula [..., ¹ ...] {...} 1 impaccato tight ^{OP} Centro profondita riga mezzariga -riga -mezzariga cornice piccolo DIMENSION 2 CONTENT
\foundbox {...} {...} 1 NAME 2 NAME

`\fourthoffivearguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT

`\fourthoffourarguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT

`\fourthofsixarguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $\{.^6.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\frameddimension` $\{.^*.\}$

* KEY

`\FRAMEDMATH` $[...^1...]$ $\{.^2.\}$

1 inherits: `\impostaincorniciato`
2 CONTENT

instances: `framedmath` `mathstrikeout` `mathcrossout`

`\framedmath` $[...^1...]$ $\{.^2.\}$

1 inherits: `\impostaincorniciato`
2 CONTENT

`\mathcrossout` $[...^1...]$ $\{.^2.\}$

1 inherits: `\impostaincorniciato`
2 CONTENT

`\mathstrikeout` $[...^1...]$ $\{.^2.\}$

1 inherits: `\impostaincorniciato`
2 CONTENT

`\framedparameter` $\{.^*.\}$

* KEY

`\FRACTION` $[...^1...]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

instances: `xfrac` `xxfrac` `frac` `tfrac` `sfrac` `dfrac` `binom` `dbinom` `tbinom` `cfrac` `splitfrac` `splitdffrac` `vfrac` `relfraction` `bartext` `leftarrowtext` `rightarrowtext` `twoheadleftarrowtext` `twoheadrightarrowtext` `reltext` `equaltext` `mapstotext` `hookleftarrowtext` `hookrightarrowtext` `leftharpoonowdowntext` `leftharpoonouptext` `rightharpoonowdowntext` `rightharpoonouptext` `rightoverleftarrowtext` `leftrightharpoonostext` `rightleftharpoonostext` `triplereltext` `leftrightarrowtext` `rightleftarrowtext` `Leftarrowtext` `Rightarrowtext` `Lefttrightarrowtext` `Rightleftarrowtext`

`\bartext` $[...^1...]$ $\{.^2.\}$ $\{.^3.\}$

1 inherits: `\setupmathfractions`
2 CONTENT
3 CONTENT

$\backslash\text{binom}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{cfrac}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{dbinom}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{dfrac}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{equaltext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{frac}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{hookleftarrowtext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{hookrightarrowtext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{Leftarrowtext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{Leftrightarrowtext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{leftarrowtext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{leftharpoonowdowntext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT
$\backslash\text{leftharpoonuptext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: $\backslash\text{setupmathfractions}^{\text{OPT}}$ 2 CONTENT 3 CONTENT

$\backslash\leftrightharpoonup\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslashleftrightharpoonup\text{stext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\mapsto\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightarrow\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightleftarrows\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\relfrac{}{}{}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\reltext{}{}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightarrow\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\righttharpoonup\text{down}\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\righttharpoonup\text{up}\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightleftarrows\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightleftharpoonup\text{stext}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT
$\backslash\rightoverleftarrow\text{text}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ $\{...\}^3$ 1 inherits: \setupmathfractions OPT 2 CONTENT 3 CONTENT

$\backslash\mathrm{sfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{splitdfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{splitfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{tbinom}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{tfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{triplereltext}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{twoheadleftarrowtext}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{twoheadrightarrowtext}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{vfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{xfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{xxfrac}$ [$\dots\frac{1}{\dots}\dots$] $\{\dots\}$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathfractions}$ 2 CONTENT 3 CONTENT
$\backslash\mathrm{freezeaveragecharacterwidth}$
$\backslash\mathrm{freezedimenmacro}$ $\backslash^1\dots$ $\backslash^2\dots$ 1 CSNAME 2 CSNAME
$\backslash\mathrm{freezemeasure}$ [$\dots^1$] [$\dots^2$] 1 NAME 2 DIMENSION

<code>\freezeparagraphproperties</code>
<code>\frenchspacing</code>
<code>\fromlinenote [.¹.] {..².}</code> 1 REFERENCE 2 TEXT
<code>\frozenhbox {..[*].}</code> * CONTENT
<code>\frule [*] .. \relax</code> * width _□ DIMENSION height _□ DIMENSION depth _□ DIMENSION radius _□ DIMENSION line _□ DIMENSION type _□ TEXT data _□ TEXT name _□ TEXT radius _□ DIMENSION corner _□ TEXT
<code>\fsp {..[*].}</code> * CHARACTER
<code>\GetPar</code>
<code>\GIORNOSETTIMANA {..[*].}</code> * NUMMER
<code>\GotoPar</code>
<code>\Greeknumerals {..[*].}</code> * NUMMER
<code>\gdefconvertedargument \..¹. {..².}</code> 1 CSNAME 2 TEXT
<code>\gdefconvertedcommand \..¹. \..².</code> 1 CSNAME 2 CSNAME
<code>\getboxfromcache {..¹.} {..².} ..³.</code> 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER
<code>\getboxllx ..[*].</code> * CSNAME NUMMER
<code>\getboxlly ..[*].</code> * CSNAME NUMMER
<code>\getbufferdata [..[*].]</code> * BUFFER OPT
<code>\getcommacommandsize [...[*],...]</code> * BEFEHL
<code>\getcommalistsize [...[*],...]</code> * BEFEHL
<code>\getdatavalue {..[*].}</code> * NAME

\getdayoftheweek {...} {...} {...} 1 NUMMER 2 NUMMER 3 NUMMER
\getdayspermonth {...} {...} 1 NUMMER 2 NUMMER
\getdefinedbuffer {...} * BUFFER
\getdocumentargument {...} * NAME
\getdocumentargumentdefault {...} {...} 1 NAME 2 TEXT
\getdocumentfilename {...} * NUMMER
\getdummyparameters [...,.. [*] ...,...] * KEY = VALUE
\getemptyparameters [... ¹ .] [...,.. ² ...,...] 1 TEXT 2 KEY = VALUE
\geteparameters [... ¹ .] [...,.. ² ...,...] 1 TEXT 2 KEY = VALUE
\getexpandedparameters [... ¹ .] [...,.. ² ...,...] 1 TEXT 2 KEY = VALUE
\getfiguredimensions [... ¹ .] [...,.. ² ...,...] 1 FILE 2 inherits: \setupexternalfigure OPT
\getfirstcharacter {...} * TEXT
\getfromcommacommand [..., ¹ ...] [... ² .] 1 BEFEHL 2 NUMMER
\getfromcommalist [..., ¹ ...] [... ² .] 1 BEFEHL 2 NUMMER
\getfromluatable \ ¹ ... {... ² .} 1 CSNAME 2 KEY NUMMER
\getglyphdirect {... ¹ .} {... ² .} 1 FONT 2 NUMMER CHARACTER

\getglyphstyled { ¹ ...} { ² ...} 1 FONT 2 NUMMER CHARACTER
\getgparameters [¹ ...] [..., ² ...,...] 1 TEXT 2 KEY = VALUE
\getinlineuserdata
\getlocalfloat { [*] ...} * NUMBER
\getlocalfloats
\getMPdata
\getMPdrawing
\getMPlayer [¹ ...] [..., ² ...,...] { ³ ...} 1 NAME 2 inherits: \impostaincorniciato 3 CONTENT
\getmessage { ¹ ...} { ² ...} 1 NAME 2 NAME NUMBER
\getnamedglyphdirect { ¹ ...} { ² ...} 1 FONT 2 NAME
\getnamedglyphdirectscaled { ¹ ...} { ² ...} { ³ ...} 1 NUMBER 2 FONT 3 NAME
\getnamedglyphstyled { ¹ ...} { ² ...} 1 FONT 2 NAME
\getnaturaldimensions ... * CSNAME NUMBER
\getnoflines { [*] ...} * DIMENSION
\getobject { ¹ ...} { ² ...} 1 NAME 2 NAME
\getobjectdimensions { ¹ ...} { ² ...} 1 NAME 2 NAME
\getobjectreference { ¹ ...} { ² ...} \ ³ ... { ⁴ ...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT

\getobjectreferencepage {...} {...} \... {...} 1 NAME 2 NAME 3 CSNAME 4 CONTENT
\getpaletsize [...] * NAME
\getparameters [...] 1 TEXT 2 KEY = VALUE
\getparwrapper {...} * NAME
\getprivatechar {...} * NAME
\getprivateslot {...} * NAME
\getrandomcount \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomdimen \... {...} {...} 1 CSNAME 2 DIMENSION 3 DIMENSION
\getrandomfloat \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomnumber \... {...} {...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomseed *... * CSNAME
\getraweparameters [...] 1 TEXT 2 KEY = VALUE
\getrawgparameters [...] 1 TEXT 2 KEY = VALUE
\getrawnoflines {...} * DIMENSION
\getrawparameters [...] 1 TEXT 2 KEY = VALUE

<pre> \getrawxparameters [...]¹ [...,...²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getreference [...]¹ [...]² 1 implicito testo titolo numero pagina realpage 2 REFERENCE </pre>
<pre> \getreferenceentry {...} * implicito testo titolo numero pagina realpage </pre>
<pre> \getroundednoflines {...} * DIMENSION </pre>
<pre> \getshapetext </pre>
<pre> \getsubstring {...}¹ {...}² {...}³ 1 NUMMER 2 NUMMER 3 TEXT </pre>
<pre> \gettokenlist [...] * NAME </pre>
<pre> \getuserdata </pre>
<pre> \getuvalue {...} * NAME </pre>
<pre> \getvalue {...} * NAME </pre>
<pre> \getvariable {...}¹ {...}² 1 NAME 2 KEY </pre>
<pre> \getvariabledefault {...}¹ {...}² {...}³ 1 NAME 2 KEY 3 BEFEHL </pre>
<pre> \getxparameters [...]¹ [...,...²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \giornosettimana {...} * NUMMER </pre>
<pre> \globaldisablemode [...;...] * NAME </pre>
<pre> \globalenablemode [...;...] * NAME </pre>
<pre> \globalletempty *.. * CSNAME </pre>
<pre> \globalpopbox ... * CSNAME NUMMER </pre>

```
\globalpopmacro \dots
* CSNAME
```

```
\globalpreventmode    [...;...]  
* NAME
```

```
\globalprocesscommalist    [...]    \^2...
1  BEFEHL
2  CSNAME
```

```
\globalpushbox      *
* CSNAME NUMBER
```

```
\globalpushmacro \*...
* CSNAME
```

`\globalpushreferenceprefix` `{...}` ... `\globalpopreferenceprefix`
`*` `+` `-` `TEXT`

```
\global\swapcounts \^1 \^2
1 CSNAME
2 CSNAME
```

```
\globalswapdimens \... \...
1 CSNAME
2 CSNAME
```

```
\globalswapmacros \... \...  
1 CSNAME  
2 CSNAME
```

```
\globalundefine    {...}
*    NAME
```

```
\glyphfontfile    {...}
*    FONT
```

`\glyphscaled` `{...}`
* `NUMMER`

```

\gobbledoubleempty    [...]    [...]
1    TEXT              OPT       OPT
2    TEXT

```

\gobbleeightarguments	{ ¹ ...}	{ ² ...}	{ ³ ...}	{ ⁴ ...}	{ ⁵ ...}	{ ⁶ ...}	{ ⁷ ...}	{ ⁸ ...}
1	CONTENT							
2	CONTENT							
3	CONTENT							
4	CONTENT							
5	CONTENT							
6	CONTENT							
7	CONTENT							
8	CONTENT							

```
\gobblefivearguments   {...}   {...}   {...}   {...}   {...}
1  CONTENT
2  CONTENT
3  CONTENT
4  CONTENT
5  CONTENT
```

1	TEXT
2	TEXT
3	TEXT
4	TEXT
5	TEXT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT

1	TEXT
2	TEXT
3	TEXT
4	TEXT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT
7	CONTENT
8	CONTENT
9	CONTENT

* CONTENT

* TEXT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT
7	CONTENT

* TEXT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT

`\graphicline` [¹...] [...,²...]

```

1  NAME                                OPT
2  s m a x h d o e c r t b T B DIMENSION NUMMER COLOR

```

\grassetto

\grassetto corsivo

\grassettoinclinato

`\grayvalue` `{...}`

* COLOR

```
\greedystring ... \at ... \to ... \and ...
```

1 TEXT

```

1      TEXT
2      TEXT

```

2	PERM
3	CSNAME

4 CSNAME

`\greeknumerals {...}`

* NUMMER

`\griglia` $[..,..*=..,..]$

```
* inherits: \basegridOPT
```

\grossofontdeltesto

`\groupedcommand` $\{\dots\}^1$ $\{\dots\}^2$

1 BEFEHL

1	BEFEHL
2	BEFEHL

`\groupedcommandcs` $\overset{1}{\dots}$ $\overset{2}{\dots}$

```

1 CSNAME

```

1	CSNAME
2	CSNAME

`\gsetboxllx` ¹ {²...}

1 CSNAME NUMMER

1	CDNAME NO.
2	DIMENSION

`\gsetboxlly` ¹ {²...}

1 CSNAME NUMMER

2 DIMENSION

`\gujaratinumerals {...}`

* NUMMER

`\gurmurkhinumerals {...}`

* NUMMER

\hairspace

\halflinestrut

\halfstrut

`\halfwaybox` `{...}`

* CONTENT

<code>\handlemissingcharacters</code>
<code>\handletokens ¹... \with ²...</code> 1 TEXT 2 CSNAME
<code>\hash</code>
<code>\hboxofvbox ¹...</code> * CSNAME NUMBER
<code>\hboxreference [...¹,...²] {...}</code> 1 REFERENCE 2 CONTENT
<code>\hboxBOX {...}</code> * CONTENT
<code>\hbreak</code>
<code>\hcontainer ¹... ²{...}</code> 1 TEXT OPT 2 CONTENT
<code>\hdofstring {...}</code> * TEXT
<code>\headhbox ¹... ²{...}</code> 1 TEXT OPT 2 CONTENT
<code>\headnumbercontent</code>
<code>\headnumberdistance</code>
<code>\headnumberwidth</code>
<code>\headreferenceattributes</code>
<code>\headsetupspacing</code>
<code>\headtextcontent</code>
<code>\headtextdistance</code>
<code>\headtextwidth</code>
<code>\headvbox ¹... ²{...}</code> 1 TEXT OPT 2 CONTENT
<code>\headwidth</code>
<code>\hebrewnumerals {...}</code> * NUMBER

\heightanddepthofstring {...} * TEXT
\heightofstring {...} * TEXT
\heightspanningtext {...} {...} {...} 1 TEXT 2 DIMENSION 3 FONT
\HELP [... ¹] {...} {...} 1 REFERENCE ^{OPT} 2 TEXT 3 TEXT instances: helptext
\helptext [... ¹] {...} {...} 1 REFERENCE OPT 2 TEXT 3 TEXT
\hexnumber {...} * NUMMER
\hexstringtonumber {...} * NUMMER
\hglue ... * DIMENSION
\hiddencitation [...] * REFERENCE
\hiddencite [...] * REFERENCE
\hidestacking [...,*,...] * NUMMER
\highlight [... ¹] {... ² } 1 NAME 2 TEXT
\HIGHLIGHT {...} * TEXT
\highordinalstr {...} * TEXT
\hilo [... ¹] {... ² } {... ³ } 1 sinistra of destra 2 CONTENT 3 CONTENT
\himilo {... ¹ } {... ² } {... ³ } 1 CONTENT 2 CONTENT 3 CONTENT

[...] NUMMER^{OPT}
[...] [...] [...] {...} 1 NAME OPT OPT 2 inherits: \setuphorizontalbox 3 CONTENT
[...] [...] inherits: \setuppositionbar
[...] inherits: \setuppositionbar
{...} CONTENT
[...] {...} 1 NAME 2 CONTENT
[...] [...] 1 DIMENSION 2 NUMMER
{...} CONTENT
[...] CSNAME NUMMER
[...] CONTENT
[...] [...] 1 NAME OPT OPT 2 piccolo medio grande normale implicito nessuno .5 1 2 3 speech menzione interquotation citazione sentence intersentence finale NAME
[...] TEXT
[...] TEXT
[...] TEXT
[...] [...] 1 CSNAME OPT 2 NUMMER

\hyphenatedfile {...} * FILE
\hyphenatedfilename {...} * TEXT
\hyphenatedhbox {...} * CONTENT
\hyphenatedpar {...} * TEXT
\hyphenatedurl {...} * TEXT
\hyphenatedword {...} * TEXT
\INRSTEX
\ibox {...} * CONTENT
\idxfromluatable \ ¹ ... ² ... 1 CSNAME 2 NUMMER
\ifassignment ¹ ... \else ² ... \fi 1 TRUE 2 FALSE
\ifcommandhandler \ ¹ ... {...} ³ ... \else ⁴ ... \fi 1 CSNAME 2 NAME 3 TRUE 4 FALSE
\ifinobject ¹ ... \else ² ... \fi 1 TRUE 2 FALSE
\ifinoutputstream ¹ ... \else ² ... \fi 1 TRUE 2 FALSE
\iflua {...} ² ... \else ³ ... \fi 1 TEXT 2 TRUE 3 FALSE
\ifparameters ¹ ... \else ² ... \fi 1 TRUE 2 FALSE
\iftrialtypesetting ¹ ... \else ² ... \fi 1 TRUE 2 FALSE

```
\ifxml {1...} {2...} ... \else ... \fi
1 NODE
2 LPATH
3 TRUE
4 FALSE
```

```
\ifxmlatt {1...} {2...} {3...} ... \else ... \fi
1 NODE
2 NAME
3 TEXT
4 TRUE
5 FALSE
```

```
\ifxmlatempty {1...} {2...} ... \else ... \fi
1 NODE
2 NAME
3 TRUE
4 FALSE
```

```
\ifxmlempty {1...} {2...} ... \else ... \fi
1 NODE
2 LPATH
3 TRUE
4 FALSE
```

```
\ifxmlselfempty {1...} {2...} ... \else ... \fi
1 NODE
2 LPATH
3 TRUE
4 FALSE
```

```
\ifxmltext {1...} {2...} ... \else ... \fi
1 NODE
2 LPATH
3 TRUE
4 FALSE
```

\ignoreimplicitspaces

```
\ignoretagsinexport [...*...]
* NAME
```

```
\ignorevalue {...}
* NAME
```

\ignoto

```
\im {...}
* CONTENT
```

```
\imposta [...]
* NAME
```

```
\impostaallineamento [...*...]
* ampio ampio squeeze fondo altezza profondita riga alto basso pedap flushright flushleft centro si no ampiezza
normale reimposta interno esterno flushinner flushouter sinistra destra center disattiva ultimo end capoverso
lefttoright righttoleft l2r r2l tabella lesshyphenation morehyphenation sospeso hangingboth nonsospeso hz fullhz
nohz sillabato nonsillabato collapsed notcollapsed explicit tollerante moltotollerante dilata extremestretch
finale 1*final 2*final 3*final 4*final more 1*more 2*more hangleft hangright flushforward flushbackward sempre
profile adatta noorphans keeporphans notwins keptwins notoddlers keptoddlers tight inclinato granular lesswidows
lessclubs lessbroken lessorphans lessorphans:2 lessorphans:3 lessorphans:4 defaultwidows defaultclubs defaultbroken
strictwidows strictwidows:2 strictwidows:3 strictwidows:4 strictclubs strictclubs:2 strictclubs:3 strictclubs:4
strictbroken defaultmath strictmath nonstrictmath implicito snapping nosnapping snapping:yes snapping:normal
snapping:0 snapping:1 snapping:2 snapping:0:10 snapping:1:10 snapping:2:10 snapping:2:20 snapping:1:top snapping:1:bottom
snapping:2:top snapping:2:bottom
```

```

\impostaambientefontdeltesto [...] [...] [...]
1 NAME OPT OPT
2 implicito DIMENSION
3 inherits: \definisciambientefontdeltesto

```

```

\impostaampiezzariga [...]
* piccolo medio grande DIMENSION

```

```

\impostabarrainterazione [...] [...]
1 NAME OPT
2 alternativa = a b c d e f g
  stato = inizia termina
  comando = CSNAME
  ampiezza = DIMENSION
  altezza = DIMENSION max ampio
  profondita = DIMENSION max
  distanza = DIMENSION
  passo = piccolo medio grande
  coloresfondo = COLOR
  stile = STYLE BEFEHL
  colore = COLOR
  colorecontrasto = COLOR
  simbolo = si no
  inherits: \impostaincorniciato

```

```

\impostablocco [...] [...]
1 NAME OPT
2 prima = BEFEHL
  dopo = BEFEHL
  sinistra = BEFEHL
  destra = BEFEHL
  alternativa = capoverso testo
  interno = BEFEHL
  setups = NAME
  allinea = inherits: \impostaallineamento
  stile = STYLE BEFEHL
  colore = COLOR

```

```

\impostabloccosezione [...] [...]
1 NAME OPT
2 pagina = inherits: \pagina
  prima = BEFEHL
  dopo = BEFEHL
  numero = si no

```

```

\impostabuffer [...] [...]
1 BUFFER OPT
2 define = si no
  prima = BEFEHL
  dopo = BEFEHL
  strip = si no

```

```

\impostacampi [...] [...] [...] [...]
1 reimposta etichetta cornice orizzontale verticale OPT OPT
2 inherits: \setupfieldtotalframed
3 inherits: \setupfieldlabelframed
4 inherits: \setupfieldcontentframed

```

```

\impostacampo [...] [...] [...] [...] [...]
1 NAME OPT OPT OPT OPT
2 reimposta etichetta cornice orizzontale verticale
3 inherits: \setupfieldtotalframed
4 inherits: \setupfieldlabelframed
5 inherits: \setupfieldcontentframed

```

\impostacapoversi [¹...] [²...,...] [³...,...]

1 NAME OPT OPT
2 ogni NUMBER
3 n = NUMBER
prima = BEFEHL
dopo = BEFEHL
ampiezza = DIMENSION
distanza = DIMENSION
altezza = DIMENSION adatta
cima = BEFEHL
fondo = BEFEHL
allinea = inherits: \impostaallineamento
interno = BEFEHL
comando = BEFEHL
linea = attivo disattivo
spessorelinea = DIMENSION
colorelinea = COLOR
stile = STYLE BEFEHL
colore = COLOR
direzione = normale invertito

\impostacapoversi [¹...] [²...,...]

1 NAME NAME:NUMBER OPT
2 n = NUMBER
prima = BEFEHL
dopo = BEFEHL
ampiezza = DIMENSION
distanza = DIMENSION
altezza = DIMENSION adatta
cima = BEFEHL
fondo = BEFEHL
allinea = inherits: \impostaallineamento
interno = BEFEHL
comando = BEFEHL
linea = attivo disattivo
spessorelinea = DIMENSION
colorelinea = COLOR
stile = STYLE BEFEHL
colore = COLOR

\impostacaption [¹...,...] [²...,...]

1 NAME OPT
2 suffix = BEFEHL
suffixseparator = BEFEHL
suffixstopper = BEFEHL
luogo = sinistra destra centro basso alto griglia righe sovrapponi interno esterno margineinterno
marginesterno marginesinistro marginedestro lefthanging righthanging sospendi cima fondo
dilata tollerante moltotollerante nessuno implicito
comando = \...#1
comandonumero = \...#1
comandotesto = \...#1
spazioprima = inherits: \rigovuoto
spaceinbetween = inherits: \rigovuoto
spaziodopo = inherits: \rigovuoto
distanza = DIMENSION
stiletesta = STYLE BEFEHL
coloretesta = COLOR
headseparator = TEXT
tra = BEFEHL
stile = STYLE BEFEHL
colore = COLOR
offsetcima = DIMENSION
offsetfondo = DIMENSION
numero = si no nessuno
group = TEXT
marginesinistro = DIMENSION
marginedestro = DIMENSION
margineinterno = DIMENSION
marginesterno = DIMENSION
allinea = inherits: \impostaallineamento
ampiezza = adatta max DIMENSION
ampiezzamin = adatta DIMENSION
ampiezzamax = DIMENSION
sospendi = si no
mode = NAME
inherits: \setupcounterinherits: \impostaincorniciato

\impostacaptions [...,¹...] [...,²...,...]

- 1 NAME OPT
- 2 inherits: \impostacaption

\impostacima [...¹] [...,²...,...]

- 1 testo margine bord^{OPT}
- 2 stato = inizia termina vuoto alto nessuno normale nomarcature NAME
- stile = STYLE BEFEHL
- colore = COLOR
- strut = si no
- n = NUMMER
- prima = BEFEHL
- dopo = BEFEHL
- testosinistro = TEXT
- testocentro = TEXT
- testodestro = TEXT
- stilesinistra = STYLE BEFEHL
- middlestyle = STYLE BEFEHL
- stiledestra = STYLE BEFEHL
- coloresinistra = COLOR
- middlecolor = COLOR
- coloredestra = COLOR
- ampiezza = DIMENSION
- ampiezzasinistra = DIMENSION
- middlewidth = DIMENSION
- ampiezzadestra = DIMENSION

\impostaclipping [...,^{*}...,...]

- * stato = inizia termina
- ampiezza = DIMENSION
- altezza = DIMENSION
- hoffset = DIMENSION
- voffset = DIMENSION
- x = NUMMER
- y = NUMMER
- nx = NUMMER
- ny = NUMMER
- sx = NUMMER
- sy = NUMMER
- offsetsinistro = DIMENSION
- offsetdestro = DIMENSION
- offsetcima = DIMENSION
- offsetfondo = DIMENSION
- mp = NAME
- n = NUMMER
- offset = DIMENSION

\impostacolonne [...,^{*}...,...]

- * inherits: \setupmixedcolumns

\impostacolore [...^{*}]

- * FILE

\impostacolori [...,^{*}...,...]

- * stato = inizia termina
- spot = si no
- espansione = si no
- fattore = si no
- rgb = si no
- cmypk = si no
- conversione = si no sempre
- pagecolormodel = auto nessuno NAME
- coloretesto = COLOR
- intent = overprint knockout nessuno

\impostacommento [...¹,...] [...²,...]

1 NAME OPT
2 stato = inizia termina nessuno
metodo = normale nascosto
simbolo = Comment Aiuto Insert Tasto Newparagraph Note Capoverso Default
ampiezza = adatta DIMENSION
altezza = adatta DIMENSION
profondita = adatta DIMENSION
titolo = TEXT
sottotitolo = TEXT
autore = TEXT
nx = NUMMER
ny = NUMMER
colore = COLOR
opzione = xml max
textlayer = NAME
luogo = bordosinistro bordodestro inmargine marginesinistro marginedestro testo alto nessuno
distanza = DIMENSION
spazio = si
buffer = BUFFER

\impostacommentopagina [...^{*},...]

* luogo = sinistra destra cima fondo nessuno
stato = inizia termina nessuno
offset = DIMENSION
distanza = DIMENSION
ampiezza = DIMENSION
altezza = DIMENSION

\impostadescrizioni [...¹,...] [...²,...]

1 NAME OPT
2 inherits: \setupdescription

\impostadimensionicarta [...¹,...] [...²,...]

1 NAME OPT
2 cima = BEFEHL
fondo = BEFEHL
sinistra = BEFEHL
destra = BEFEHL
metodo = normale nessuno NAME
scala = NUMMER
nx = NUMMER
ny = NUMMER
dx = DIMENSION
dy = DIMENSION
ampiezza = DIMENSION
altezza = DIMENSION
spaziocima = DIMENSION
backspace = DIMENSION
offset = DIMENSION
pagina = reimposta orizzontale riflesso negativo ruotato 90 180 270 NAME
carta = reimposta orizzontale riflesso negativo ruotato 90 180 270 NAME
opzione = adatta max
distanza = DIMENSION

\impostadimensionicarta [...¹,...] [...²,...]

1 reimposta orizzontale riflesso negativo ruotato 90⁴⁵180 270 NAME
2 reimposta orizzontale riflesso negativo ruotato 90 180 270 NAME

\impostaelementi [...¹,...] [...²,...]

1 NAME OPT
2 alternativa = sinistra destra cima fondo inmargine
ampiezzatesto = DIMENSION
ampiezza = DIMENSION
distanza = DIMENSION
simbolo = nessuno NAME
allinea = sinistra centro destra flushleft flushright interno esterno margine
textalign = sinistra centro destra flushleft flushright interno esterno
n = NUMMER
prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL


```

\impostaelencazioni [...] OPT [...]
1 NAME NAME:NUMMER
2 prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
primaditesta = BEFEHL
dopotesta = BEFEHL
testosinistro = BEFEHL
testodestro = BEFEHL
sinistra = BEFEHL
destra = BEFEHL
fattore = NUMMER
passo = DIMENSION
ampiezza = DIMENSION
distanza = DIMENSION
opzione = intro casuale continua impaccato autointro ampio testo prima dopo nobianco margine
inmargine almargine intesto headintext lento adatta nofit capoverso unito notjoinedup
vicino stopper unpacked ripeti norepeat invertito colonne sovrapponi uno due tre
quattro cinque six seven eight nine standard NUMMER*ampio NUMMER*vicino orizzontale
NAME
margine = si no standard DIMENSION
marginesinistro = si no standard DIMENSION
marginedestro = si no standard DIMENSION
distanzamarginesinistro = si no standard DIMENSION
distanzamarginedestro = si no standard DIMENSION
allinea = inherits: \impostaaallineamento
rientro = inherits: \impostarientro
inizia = NUMMER
symallinea = sinistra centro destra flushleft center flushright
simbolo = NAME
n = NUMMER
rientrasuccessivo = si no auto
interno = BEFEHL
comando = CSNAME
elementi = NUMMER
ampiezzamax = DIMENSION
itemalign = sinistra destra centro flushleft flushright interno esterno
alignsymbol = si no
distanzatesto = piccolo medio grande nessuno spazio DIMENSION
separatoretesto = BEFEHL
lasttextseparator = BEFEHL
mettistopper = si no schermo inline
stile = STYLE BEFEHL
colore = COLOR
stiletesta = STYLE BEFEHL
coloretesta = COLOR
stilemarcatura = STYLE BEFEHL
coloremarcatura = COLOR
stilesimbolo = STYLE BEFEHL
coloresimbolo = COLOR
griglia = inherits: \definegridsnapping
packcriterium = NUMMER
distanzacolonne = DIMENSION
inherits: \setupcounter

```

```

\impostaelenco    [...,1...]    [...,2...,...]
1  LISTE
2  stato          = inizia termina
    luogo         = nessuno qui
    type          = simple comando userdata
    criterio      = locale intro riferimento SECTIONBLOCK:riferimento tutti SECTIONBLOCK:tutti testo
                  SECTIONBLOCK:testo corrente SECTIONBLOCK:corrente qui precedente SECTIONBLOCK:precedente
                  componente ABSCHNITT SECTIONBLOCK:ABSCHNITT

    elenco        = NAME
    ampiezza      = adatta ampio DIMENSION
    altezza       = adatta ampio DIMENSION
    profondita   = adatta ampio DIMENSION
    simbolo       = uno due tre nessuno implicito
    etichetta     = si no nessuno NAME
    starter       = BEFEHL
    stopper       = BEFEHL
    comando       = \...#1#2#3
    comandonumero = \...#1
    comandotesto  = \...#1
    comandopagina = \...#1
    numeropagina  = si no sempre realpage
    numerotesta   = si no sempre
    prima         = BEFEHL
    dopo          = BEFEHL
    tra           = BEFEHL
    margine       = nessuno DIMENSION
    marginesinistro = DIMENSION
    marginedestro = DIMENSION
    distanza      = nessuno DIMENSION
    allineatitolo = si no
    numberalign   = sinistra destra centro flushleft flushright interno esterno
    allinea       = inherits: \impostaaallineamento
    sospendi      = si no
    sinistra      = BEFEHL
    destra        = BEFEHL
    interazione   = si no tutti numero testo titolo pagina numerosezione numeropagina
    limittext     = si no TEXT
    stile         = STYLE BEFEHL
    colore        = COLOR
    stilenumero   = STYLE BEFEHL
    colorenúmero  = COLOR
    stiletesto    = STYLE BEFEHL
    coloretesto   = COLOR
    stilepagina   = STYLE BEFEHL
    colorepagina  = COLOR
    riferimento   = NUMMER
    extras        = NAME
    order         = comando tutti titolo
    livelli       = NUMMER
    alternativa   = a b c d e f g sinistra destra cima fondo comando nessuno interactive capoverso orizzontale
                  verticale NAME
    ampiezzamax   = DIMENSION
    pageprefix    = si no
    pageprefixseparatorset = NAME
    pageprefixconversionset = NAME
    pageprefixset = NAME
    pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                  ABSCHNITT:tutti corrente
    pageprefixconnector = BEFEHL PROCESSOR->BEFEHL
    pageconversionset = NAME
    pagestarter   = BEFEHL PROCESSOR->BEFEHL
    pagestopper   = BEFEHL PROCESSOR->BEFEHL
    inherits: \setupcounterinherits: \impostaincorniciato

```

```

\impostaelencocombinato  [...1]  [...,2...,...]
1  LISTE
2  criterio      = locale intro riferimento SECTIONBLOCK:riferimento tutti SECTIONBLOCK:tutti testo SECTIONBLOCK:testo
                  corrente SECTIONBLOCK:corrente qui precedente SECTIONBLOCK:precedente componente ABSCHNITT SECTIONBLOCK:ABSCHNITT
    riferimento   = NUMMER
    extras        = NAME
    order         = comando tutti titolo
    alternativa   = a b c d e f g sinistra destra cima fondo comando nessuno interactive capoverso orizzontale verticale
                  NAME

```

```

\impostacombedlist  [...,*...,...]
* inherits: \impostaelencocombinato
instances: content

```

```
\impostaccontent    [...,*...,...]
* inherits: \impostaelencocombinato
```

```
\impostaaenumerazioni  [...,1...]  [...,...2...,...]
1  NAME                OPT
2  inherits: \setupenumeration
```

```
\impostafigureesterne  [...,1...]  [...,...2...,...]
1  NAME                OPT
2  inherits: \setupexternalfigure
```

```
\impostafondo  [...,1]  [...,...2...,...]
1  testo margine bordoOPT
2  stato          = inizia termina vuoto alto nessuno normale nomarcature NAME
   stile          = STYLE BEFEHL
   colore         = COLOR
   strut         = si no
   n              = NUMMER
   prima         = BEFEHL
   dopo          = BEFEHL
   testosinistro = TEXT
   testocentro  = TEXT
   testodestro   = TEXT
   stilesinistra = STYLE BEFEHL
   middlestyle   = STYLE BEFEHL
   stiledestra   = STYLE BEFEHL
   coloresinistra = COLOR
   middlecolor   = COLOR
   coloredestra  = COLOR
   ampiezza      = DIMENSION
   ampiezzasinistra = DIMENSION
   middlewidth   = DIMENSION
   ampiezzadestra = DIMENSION
```

```
\impostafontdeltesto  [...,*...]
* DIMENSION NAME globale reimpostaOPT mantieni x xx piccolo grande script scriptscript rm ss tt hw cg roman serif
  regolare sans sansserif supporto type teletype mono grafiamanuale calligrafico
```

```
\impostafoms  [...,*...,...]
* metodo = XML HTML PDF
  export  = si no
```

```

\impostaformule    [...,1...]    [...,2...,...]
1  NAME                OPT
2  luogo                = sinistra destra atleftmargin atrightmargin interno esterno
    allinea              = sinistra centro destra flushleft flushright inclinato
    separa                = si no riga NAME
    strut                 = si no
    numberstrut           = si no sempre
    sinistra              = BEFEHL
    destra                 = BEFEHL
    spazioprima           = nessuno inherits: \rigovuoto
    spaziodopo            = nessuno inherits: \rigovuoto
    spaceinbetween        = inherits: \impostaspaziobianco
    comandonumero         = \...#1
    stilenumero           = STYLE BEFEHL
    colorenúmero         = COLOR
    opzione               = impaccato tight centro profondita riga mezzariga -riga -mezzariga cornice piccolo
                           DIMENSION
    margine               = si no standard DIMENSION
    marginesinistro       = si no standard DIMENSION
    marginedestro         = si no standard DIMENSION
    distanzamargine       = numero DIMENSION
    distanzamarginesinistro = numero DIMENSION
    rightmargidistance    = numero DIMENSION
    alternativa           = implicito single multi NAME
    rientrasuccessivo     = si no auto
    griglia                = inherits: \snaptogrid
    referenceprefix        = + - TEXT
    numberthreshold       = DIMENSION
    order                  = invertito
    numberlocation        = sovraponi
    numbermethod           = down
    textmargin            = DIMENSION
    penalties              = NAME
    interlinea            = DIMENSION
    distanzatesto         = DIMENSION
    splitmethod           = primo ultimo entrambi
    setups                 = NAME
    snap                   = si no
    snapstep               = reimposta piccolo medio grande riga
    fonttesto              = inherits: \impostafontdeltesto
    stile                  = STYLE BEFEHL
    colore                 = COLOR
    functionstyle          = STYLE BEFEHL
    functioncolor          = COLOR
    ampiezza               = DIMENSION
    numberdistance         = DIMENSION
    numberstate            = auto
    mathematics            = NAME
    gridcorrection         = inherits: \setgridcorrection
    inherits: \setupcounter

```

```

\impostagruppocolonne  [...,1...]    [...,2...,...]
1  NAME                OPT
2  righe                = NUMMER
    n                    = NUMMER
    nsinistra            = NUMMER
    ndestra              = NUMMER
    stato                = inizia termina
    distanza              = DIMENSION
    ampiezza              = DIMENSION
    pagina                = inherits: \pagina
    ampiezzamax           = DIMENSION
    altezzamax           = DIMENSION
    limit                 = NUMMER
    language              = SPRACHE
    region                = NAME
    direzione             = normale invertito
    luogo                 = sinistra destra
    allinea               = inherits: \impostaallineamento
    inherits: \impostaincorniciato

```

```

\impostaincorniciato  [...,1...]  [...,2...,...]
1  NAME                      OPT
2  angolo                    = rettangolare rotondo NUMMER 1 r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr
                                rtl lbr rbl ltrb trbl rblt bltr
    angolocornice            = rettangolare rotondo NUMMER 1 r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr
                                rtl lbr rbl ltrb trbl rblt bltr
    angolosfondo             = rettangolare rotondo NUMMER 1 r b t lr rl tb bt rt tr rb br bl lb tl lt trb rtl tlb blt ltr
                                rtl lbr rbl ltrb trbl rblt bltr
    raggio                   = DIMENSION
    raggiocornice            = DIMENSION
    raggiosfondo             = DIMENSION
    profondita              = DIMENSION
    profonditacornice       = DIMENSION
    profonditasfondo        = DIMENSION
    colorecornice            = COLOR
    cornicecima              = attivo disattivo piccolo dash NAME
    cornicefondo             = attivo disattivo piccolo dash NAME
    cornicesinistra          = attivo disattivo piccolo dash NAME
    cornicedestra           = attivo disattivo piccolo dash NAME
    region                   = si no
    spessorelinea            = DIMENSION
    offsetcornice            = DIMENSION
    cornice                  = attivo disattivo sovrapponi piccolo dash closed nessuno
    sfondo                   = foreground colore NAME
    offsetsfondo             = cornice DIMENSION
    coloresfondo             = COLOR
    component                = NAME
    extras                   = BEFEHL
    foregroundstyle          = STYLE BEFEHL
    coloreprimopiano         = COLOR
    setups                   = NAME
    offset                   = implicito sovrapponi nessuno DIMENSION
    ampiezza                 = locale adatta max ampio fisso DIMENSION
    altezza                  = adatta max ampio DIMENSION
    altezzamin              = DIMENSION
    allinea                  = inherits: \impostaaallineamento
    strut                    = si no nessuno locale globale
    autostrut                = si no
    luogo                    = altezza profondita alto basso cima centro fondo riga pedap sospeso mantieni formula matematica
                                normale inline
    autoampiezza             = si no forza
    righe                    = NUMMER
    cima                     = BEFEHL
    fondo                    = BEFEHL
    rigovuoto                = si no
    profile                  = NAME
    vuoto                    = si no
    loffset                  = DIMENSION
    roffset                  = DIMENSION
    toffset                  = DIMENSION
    boffset                  = DIMENSION
    orientation              = NUMMER
    anchoring                = normale up down sinistra destra cima fondo NAME
    xanchor                  = DIMENSION
    yanchor                  = DIMENSION
    linedirection            = normale invertito
    dashstep                 = DIMENSION
    synchronize              = si no testo sfondo
    adaptive                 = si delay NUMMER
    freezespacing            = NUMMER

```

```

\impostainiziatermina  [...,1...]  [...,2...,...]
1  NAME                      OPT
2  prima                    = BEFEHL
    dopo                    = BEFEHL
    tra                     = BEFEHL
    setups                  = NAME
    sinistra                = BEFEHL
    destra                  = BEFEHL
    stile                   = STYLE BEFEHL
    colore                  = COLOR
    arguments               = si no

```

```

\impostainstestazione  [...]1  [...,...2...,...]
1  testo margine bordo      OPT
2  stato                   = inizia termina vuoto alto nessuno normale nomarcature NAME
   stile                   = STYLE BEFEHL
   colore                  = COLOR
   strut                   = si no
   n                       = NUMMER
   prima                   = BEFEHL
   dopo                    = BEFEHL
   testosinistro           = TEXT
   testocentro             = TEXT
   testodestro             = TEXT
   stilesinistra           = STYLE BEFEHL
   middlestyle             = STYLE BEFEHL
   stiledestra             = STYLE BEFEHL
   coloresinistra          = COLOR
   middlecolor             = COLOR
   coloredestra            = COLOR
   ampiezza                = DIMENSION
   ampiezzasinistra        = DIMENSION
   middlewidth             = DIMENSION
   ampiezzadestra          = DIMENSION

```

```

\impostainterazione  [...]1,...  [...,...2...,...]
1  NAME                   OPT
2  stato                  = inizia termina
   stile                  = STYLE BEFEHL
   colore                 = COLOR
   colorecontrasto        = COLOR
   titolo                 = TEXT
   sottotitolo            = COLOR
   autore                 = TEXT
   data                   = TEXT
   parolachiave           = TEXT
   focus                  = standard cornice ampiezza ampiezzamin altezza altezzamin adatta tight
   menu                   = attivo disattivo
   fieldlayer             = auto NAME
   calcola                 = REFERENCE
   click                  = si no
   display                = normale nuovo
   pagina                 = si no pagina nome auto
   azioneapri             = REFERENCE
   azionechiudi           = REFERENCE
   azioneapripagina       = REFERENCE
   azionechiudipagina     = REFERENCE
   setsimboli             = NAME
   altezza                = DIMENSION
   profondita            = DIMENSION
   focusoffset            = DIMENSION
   prefisso               = TEXT

```

```

\impostainterazione  [...]1
*  NAME              OPT

```

```

\impostainterlinea  [...]1,...  [...,...2...,...]
1  NAME                   OPT
2  riga                   = DIMENSION
   altezza                = NUMMER
   profondita            = NUMMER
   altezzamin            = NUMMER
   mindepth               = NUMMER
   distanza               = DIMENSION
   cima                   = NUMMER altezza
   fondo                  = NUMMER
   ncima                  = NUMMER
   dilata                 = NUMMER
   shrink                 = NUMMER

```

```

\impostainterlinea  [...]1,...
*  attivo disattivo reimposta OPTauto piccolo medio grande NUMMER DIMENSION

```

```

\impostainterlinea  [...]1
*  NAME

```

```
\impostalineemargine [.1] [...]
1  NUMBER OPT
2  inherits: \setupmarginrule
```

\impostalineenere [...,*=...]

```
*   ampiezza      = max DIMENSION
    altezza       = max DIMENSION
    profondita    = max DIMENSION
    distanza      = DIMENSION
    n              = NUMBER
    alternativa    = a b
    stile          = STYLE BEFEHL
    colore         = COLOR
    type           = mp si no
    mp             = NAME
    spessorelinea  = DIMENSION
    shrink         = DIMENSION
    dilata         = DIMENSION
    attivo         = DIMENSION
    disattivo      = DIMENSION
    snapping       = si normale 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom
```

\impostalineerimpimento [...,*=...]

```
*   prima         = BEFEHL
    dopo          = BEFEHL
    n              = NUMBER
    interlinea     = piccolo medio grande NUMBER
    distanza       = DIMENSION
    ampiezza       = adatta ampio DIMENSION
    separatore     = BEFEHL
    stile          = STYLE BEFEHL
    colore         = COLOR
```

\impostalineesottili [...,*=...]

```
*   altezza       = max DIMENSION
    profondita    = max DIMENSION
    sfondo         = colore
    cornice        = attivo disattivo
    spessorelinea  = DIMENSION
    alternativa    = a b c nessuno
    coloresfondo   = COLOR
    colore         = COLOR
    interlinea     = piccolo medio grande NUMBER
    prima          = BEFEHL
    dopo           = BEFEHL
    tra            = BEFEHL
    n              = NUMBER
    attivo         = DIMENSION
    disattivo      = DIMENSION
```

\impostalineetestto [...,*=...]

```
*   prima         = BEFEHL
    dopo          = BEFEHL
    tra           = BEFEHL
    spessorelinea  = DIMENSION
    luogo          = sinistra inmargine
    stile          = STYLE BEFEHL
    colore         = COLOR
    colorelinea    = COLOR
    ampiezza       = DIMENSION
    altezza        = DIMENSION
    distanza       = DIMENSION
    correzioneprofondita = attivo disattivo
    fonttesto      = inherits: \impostafontdeltesto
    attivo         = DIMENSION
    disattivo      = DIMENSION
```



```

\impostalingua [...] [...]
1  SPRACHE implicito OPT
2  implicito = SPRACHE
    stato = inizia termina
    data = inherits: \datadioggi
    time = inherits: \currenttime
    patterns = FILE
    lefthyphenmin = NUMBER
    righthyphenmin = NUMBER
    lefthyphenchar = NUMBER
    righthyphenchar = NUMBER
    explicitlefthyphenchar = NUMBER
    explicitrighthyphenchar = NUMBER
    setups = NAME
    spaziatura = ampio impaccato
    font = auto NAME
    bidi = sinistra destra l2r r2l
    testo = TEXT
    limittext = TEXT
    hyphen = TEXT
    compoundhyphen = TEXT
    leftcompoundhyphen = TEXT
    rightcompoundhyphen = TEXT
    menzionesinistra = BEFEHL
    menzionedestra = BEFEHL
    citazionesinistra = BEFEHL
    citazionedestra = BEFEHL
    leftspeech = BEFEHL
    rightspeech = BEFEHL
    frasesinistra = BEFEHL
    middlespeech = BEFEHL
    frasedestra = BEFEHL
    midsentence = BEFEHL
    sottofrasesinistra = BEFEHL
    sottofrasedestra = BEFEHL
    fattore = si no
    goodies = FILE

```

```

\impostamaiuscole [...] [...]
1  NAME OPT
2  category = NUMBER
    xscale = NUMBER
    yscale = NUMBER
    weight = NUMBER
    titolo = si no
    sc = si no
    stile = STYLE BEFEHL

```

```

\impostamakeup [...] [...]
1  NAME OPT
2  pagina = inherits: \pagina
    comando = BEFEHL
    ampiezza = DIMENSION
    altezza = DIMENSION
    allinea = inherits: \impostaaallineamento
    setups = NAME
    cima = BEFEHL
    fondo = BEFEHL
    prima = BEFEHL
    dopo = BEFEHL
    luogo = cima
    riferimento = REFERENCE
    statopagina = inizia termina
    statointestazione = inizia termina alto vuoto nessuno normale
    statopdp = inizia termina alto vuoto nessuno normale
    statocima = inizia termina alto vuoto nessuno normale
    statofondo = inizia termina alto vuoto nessuno normale
    statotesto = inizia termina alto vuoto nessuno normale
    doppiafaccia = si no vuoto
    stile = STYLE BEFEHL
    colore = COLOR
    etichetta = TEXT

```

\impostamarcatura [...,¹...] [...,²...]

1 BESCHRIFTUNG
2 stato = inizia termina
espansione = si no
separatore = BEFEHL
filtercommand = \...#1

\impostamenuinterazione [...,¹...] [...,²...]

1 NAME
2 alternativa = verticale orizzontale nascosto
category = NAME
offsetsinistro = sovrapponi cornice nessuno implicito DIMENSION
offsetdestror = sovrapponi cornice nessuno implicito DIMENSION
offsetcima = sovrapponi cornice nessuno implicito DIMENSION
offsetfondo = sovrapponi cornice nessuno implicito DIMENSION
ampiezzamax = DIMENSION
altezzamax = DIMENSION
itemalign = sinistra centro destra flushleft flushright basso alto pedap
stato = inizia vuoto locale
sinistra = BEFEHL
destra = BEFEHL
distanza = sovrapponi DIMENSION
prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
posizione = si no
centro = BEFEHL
stile = STYLE BEFEHL
colore = COLOR
stessapagina = si no vuoto nessuno normale implicito
colorecontrasto = COLOR
inherits: \impostaincorniciato

\impostamenzione [...,^{*}...]

* inherits: \setupdelimitedtext

\impostanotepdp [...,^{*}...]

* inherits: \setupnote

\impostanumerazionecapoversi [...,^{*}...]

* stato = inizia termina riga reimposta
distanza = DIMENSION
stile = STYLE BEFEHL
colore = COLOR

\impostanumerazionepagina [...,^{*}...]

* alternativa = facciasingola doppiafaccia
pagina = inherits: \pagina
strut = si no
comando = \...#1
sinistra = BEFEHL
destra = BEFEHL
stato = inizia termina
ampiezza = DIMENSION
luogo = intestazione piedipagina sinistra centro destra insinistra indestra margine inmarginem almarginem
bordomarginem nessuno
stile = STYLE BEFEHL
colore = COLOR

\impostanumerazionerighe [...,¹...] [...,²*,...]

1 NAME OPT
2 inizia = NUMBER
passo = NUMBER
metodo = pagina primo successivo
conversione = NAME
continua = si no
luogo = testo begin end implicito sinistra destra interno esterno insinistra indestra margine inmargine
distanza = DIMENSION
allinea = interno esterno flushleft flushright sinistra destra centro auto
comando = \...#1
sinistra = BEFEHL
destra = BEFEHL
margine = DIMENSION
ampiezza = margine DIMENSION
stile = STYLE BEFEHL
colore = COLOR

\impostanumeropagina [...,*...,...]

* viewerprefix = TEXT
stato = inizia termina nessuno mantieni vuoto
etichetta = TEXT
inherits: \setupcounter

\impostanumerosottopagina [...,*...,...]

* inherits: \setupcounter

\impostanumerotesta [...¹] [...²]

1 ABSCHNITT
2 [-+]NUMBER

\impostaoggettimmobili [...,¹...] [...,²*,...]

1 SINGULAR OPT
2 inherits: \impostaoggettomobile

```

\impostaoggettomobile [...] 1 [...] [...] 2 [...]
1 SINGULAR OPT
2 rientrasuccessivo = si no auto
   implicito         = inherits: \placefloat
   fallback          = inherits: \placefloat
   interno           = BEFEHL
   criterio          = DIMENSION
   metodo            = NUMBER
   sidemethod         = NUMBER
   textmethod        = NUMBER
   sidealign         = altezza profondita riga mezzariga griglia normale
   griglia           = inherits: \snaptogrid
   locale            = si no
   comando           = \...#1
   availablewidth    = DIMENSION
   availableheight   = DIMENSION
   ampiezzamin       = DIMENSION
   ampiezzamax       = DIMENSION
   luogo             = sinistra destra centro flushleft flushright center max interno esterno margineinterno
                     margineesterno bordointerno bordoesterno backspace cutspace marginesinistro marginedestro
                     bordosinistro bordodestro

   distanzamarginesinistro = DIMENSION
   distanzamarginedestro  = DIMENSION
   marginesinistro        = DIMENSION
   marginedestro          = DIMENSION
   margineinterno         = DIMENSION
   margineesterno        = DIMENSION
   bottombefore           = BEFEHL
   bottomafter            = BEFEHL
   espansione            = si no xml
   referenceprefix        = + - TEXT
   xmlsetup               = NAME
   catcodes               = NAME
   freeregion             = si no
   distanzacima           = DIMENSION NUMBER
   distanzafondo          = DIMENSION NUMBER
   spazioprima            = nessuno inherits: \rigovuoto
   spaziodopo             = nessuno inherits: \rigovuoto
   ampiezza               = DIMENSION
   altezza                = DIMENSION
   offset                 = DIMENSION nessuno sovrapponi
   spaziolateraleprima    = nessuno inherits: \rigovuoto
   spaziolateraledopo     = nessuno inherits: \rigovuoto
   spacebeforeside        = nessuno inherits: \rigovuoto
   spaceafterside         = nessuno inherits: \rigovuoto
   sidethreshold          = old dimension
   margine                = DIMENSION
   ncima                  = NUMBER
   nfondo                 = NUMBER
   passo                  = piccolo medio grande riga profondita
   nrighe                 = NUMBER
   cache                  = si no
   compress               = si no
   compressdistance       = DIMENSION
   inherits: \impostaincorniciato

```

```

\impostaordinamento [...] 1 [...] [...] 2 [...]
1 SINGULAR OPT
2 espansione = si no xml
   alternativa = primo ultimo normale NAME
   successivo  = BEFEHL
   comando     = \...#1#2#3
   comandotesto = \...#1
   synonymcommand = \...#1
   language    = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   metodo      = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   criterio    = corrente precedente locale testo tutti ABSCHNITT
   stile       = STYLE BEFEHL
   colore      = COLOR
   stiletesto  = STYLE BEFEHL
   coloretesto = COLOR
   stylesinonimi = STYLE BEFEHL
   coloresinonimi = COLOR
   prima       = BEFEHL
   dopo        = BEFEHL

```

```

\impostaoutput [...]
* implicito pdf lua json js mps nessuno vuoto

```

\impostaparranging [...,*,...]

* disattiva riflesso doppiafaccia negativo 90 180 270 reimposta sfondo normale 2*16 2*8 2*4 2*2 2**2 2SIDE 2TOP
2UP 2DOWN 2*4*2 2*2*4 2TOPSIDE 2*8*Z 2*6*Z 1*8 1*4 3SIDE TRYPTICHON ZFLYER-8 ZFLYER-10 ZFLYER-12 MAPFLYER-12
DOUBLEWINDOW 1*2-Conference 1*4-Conference 2*2*2 2*2*3 XY FLASHCARD NAME

\impostapdp [...¹...] [...,...²...,...]

1 testo margine boffo
2 stato = inizia termina vuoto alto nessuno normale nomarcature NAME
stile = STYLE BEFEHL
colore = COLOR
strut = si no
n = NUMMER
prima = BEFEHL
dopo = BEFEHL
testosinistro = TEXT
testocentro = TEXT
testodestro = TEXT
stilesinistra = STYLE BEFEHL
middlestyle = STYLE BEFEHL
stiledestra = STYLE BEFEHL
coloresinistra = COLOR
middlecolor = COLOR
coloredestra = COLOR
ampiezza = DIMENSION
ampiezzasinistra = DIMENSION
middlewidth = DIMENSION
ampiezzadestra = DIMENSION

\impostapiustretto [...¹,...] [...,...²...,...]

1 NAME OPT
2 sinistra = DIMENSION
centro = DIMENSION
destra = DIMENSION
implicito = [-+]sinistra [-+]centro [-+]destra NUMMER*sinistra NUMMER*centro NUMMER*destra reimposta
prima = BEFEHL
dopo = BEFEHL

\impostaposizionamento [...¹,...] [...,...²...,...]

1 NAME OPT
2 offset = si no
unita = ex em pt in cm mm sp bp pc dd cc nc
stato = inizia sovrapponi
xoffset = DIMENSION
yoffset = DIMENSION
xstep = assoluto relativo
ystep = assoluto relativo
xscale = NUMMER
yscale = NUMMER
xfactor = NUMMER
yfactor = NUMMER
fattore = NUMMER
scala = NUMMER

\impostaposizionamentoopposti [...,...^{*}...,...]

* stato = inizia termina
prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL

\impostaprogrammi [...,...^{*}...,...]

* stile = STYLE BEFEHL
colore = COLOR

```

\impostaregistro  [...1]  [...2...]
1  NAME NAME:NUMMER      OPT
2  referencemethod      = avanti
   espansione          = si no xml
   numeroproprio        = si no
   xmlsetup              = NAME
   alternativa          = a b A B
   metodo                = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   compress              = si no tutti impaccato testo
   check                 = si no
   criterio              = locale testo corrente precedente tutti ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter     = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper     = BEFEHL PROCESSOR->BEFEHL
   pageprefixset         = NAME
   pageprefixsegments    = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                           ABSCHNITT:tutti corrente
   pageprefixconnector   = BEFEHL
   pageprefix            = si no
   pageseparatorset      = NAME
   pageconversionset     = NAME
   pagestarter           = BEFEHL PROCESSOR->BEFEHL
   pagestopper           = BEFEHL PROCESSOR->BEFEHL
   pagesegments          = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti
   ampiezzamax           = DIMENSION
   indicatore            = si no
   prima                 = BEFEHL
   dopo                  = BEFEHL
   comando               = \...#1
   comandotesto          = \...#1
   deeptextcommand       = \...#1
   comandopagina         = \...#1
   distanza              = DIMENSION
   interazione           = testo numeropagina
   numeropagina          = si no
   simbolo               = a n nessuno 1 2 BEFEHL
   language               = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE
   stile                 = STYLE BEFEHL
   colore                = COLOR
   stiletesto            = STYLE BEFEHL
   coloretesto           = COLOR
   stilepagina           = STYLE BEFEHL
   colorepagina          = COLOR
   pageleft              = BEFEHL
   pageright             = BEFEHL
   n                      = NUMMER
   bilanciamento        = si no
   allinea               = inherits: \impostaaallineamento
   numberorder           = numeri
   pagemethod            = pagina capoverso

```

```

\impostaregistro  [...,1...]  [...,2...]  [...,3...,...]
1  NAME OPT OPT
2  NUMMER
3  referencemethod = avanti
   espansione = si no xml
   numeroproprio = si no
   xmlsetup = NAME
   alternativa = a b A B
   metodo = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   compress = si no tutti impaccato testo
   check = si no
   criterio = locale testo corrente precedente tutti ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
   pageprefixset = NAME
   pageprefixsegments = NUMBER NUMBER:NUMMER NUMBER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente

   pageprefixconnector = BEFEHL
   pageprefix = si no
   pageseparatorset = NAME
   pageconversionset = NAME
   pagestarter = BEFEHL PROCESSOR->BEFEHL
   pagestopper = BEFEHL PROCESSOR->BEFEHL
   pagesegments = NUMBER NUMBER:NUMMER NUMBER:* NUMMER:tutti
   ampiezzamax = DIMENSION
   indicatore = si no
   prima = BEFEHL
   dopo = BEFEHL
   comando = \...#1
   comandotesto = \...#1
   deeptextcommand = \...#1
   comandopagina = \...#1
   distanza = DIMENSION
   interazione = testo numeropagina
   numeropagina = si no
   simbolo = a n nessuno 1 2 BEFEHL
   language = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   stile = STYLE BEFEHL
   colore = COLOR
   stiletesto = STYLE BEFEHL
   coloretesto = COLOR
   stilepagina = STYLE BEFEHL
   colorepagina = COLOR
   pageleft = BEFEHL
   pageright = BEFEHL
   n = NUMBER
   bilanciamento = si no
   allinea = inherits: \impostaaallineamento
   numberorder = numeri
   pagemethod = pagina capoverso

```

```

\impostaREGISTER [...,1...] [...,2...,...]
1  NUMMER OPT
2  referencemethod = avanti
    espansione = si no xml
    numeroproprio = si no
    xmlsetup = NAME
    alternativa = a b A B
    metodo = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
    compress = si no tutti impaccato testo
    check = si no
    criterio = locale testo corrente precedente tutti ABSCHNITT
    pageprefixseparatorset = BEFEHL
    pageprefixconversionset = NAME
    pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
    pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
    pageprefixset = NAME
    pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente

    pageprefixconnector = BEFEHL
    pageprefix = si no
    pageseparatorset = NAME
    pageconversionset = NAME
    pagestarter = BEFEHL PROCESSOR->BEFEHL
    pagestopper = BEFEHL PROCESSOR->BEFEHL
    pagesegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti
    ampiezzamax = DIMENSION
    indicatore = si no
    prima = BEFEHL
    dopo = BEFEHL
    comando = \...#1
    comandotesto = \...#1
    deeptextcommand = \...#1
    comandopagina = \...#1
    distanza = DIMENSION
    interazione = testo numeropagina
    numeropagina = si no
    simbolo = a n nessuno 1 2 BEFEHL
    language = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
    stile = STYLE BEFEHL
    colore = COLOR
    stiletesto = STYLE BEFEHL
    coloretesto = COLOR
    stilepagina = STYLE BEFEHL
    colorepagina = COLOR
    pageleft = BEFEHL
    pageright = BEFEHL
    n = NUMMER
    bilanciamento = si no
    allinea = inherits: \impostaallineamento
    numberorder = numeri
    pagemethod = pagina capoverso

instances: index

```



```

\impostaindex    [...,1...]    [...,2...,...]
1  NUMMER          OPT
2  referencemethod = avanti
   espansione     = si no xml
   numeroproprio   = si no
   xmlsetup        = NAME
   alternativa     = a b A B
   metodo          = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   compress        = si no tutti impaccato testo
   check           = si no
   criterio        = locale testo corrente precedente tutti ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
   pageprefixset    = NAME
   pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente
   pageprefixconnector = BEFEHL
   pageprefix       = si no
   pageseparatorset = NAME
   pageconversionset = NAME
   pagestarter      = BEFEHL PROCESSOR->BEFEHL
   pagestopper      = BEFEHL PROCESSOR->BEFEHL
   pagesegments     = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti
   ampiezzamax      = DIMENSION
   indicatore       = si no
   prima            = BEFEHL
   dopo             = BEFEHL
   comando          = \...#1
   comandotesto     = \...#1
   deeptextcommand  = \...#1
   comandopagina    = \...#1
   distanza         = DIMENSION
   interazione      = testo numeropagina
   numeropagina     = si no
   simbolo          = a n nessuno 1 2 BEFEHL
   language         = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   stile            = STYLE BEFEHL
   colore           = COLOR
   stiletesto       = STYLE BEFEHL
   coloretesto      = COLOR
   stilepagina      = STYLE BEFEHL
   colorepagina     = COLOR
   pageleft         = BEFEHL
   pageright        = BEFEHL
   n                = NUMMER
   bilanciamento   = si no
   allinea          = inherits: \impostaallineamento
   numberorder      = numeri
   pagemethod       = pagina capoverso

```

```

\impostarientro  [...,*...]
*  [-+]piccolo [-+]medio [-97grande nessuno no non primo successivo si sempre mai dispari pari normale reimposta
   toggle DIMENSION NAME

```

```

\impostariferimento  [...,*...,...]
*  stato           = inizia termina
   espansione     = si no xml
   autofile        = si no
   export          = si no
   sinistra        = BEFEHL
   destra          = BEFEHL
   ampiezza        = DIMENSION
   doppiafaccia    = si no
   interazione     = etichetta testo simbolo tutti
   separatore      = BEFEHL
   prefisso        = + - TEXT
   labelalternative = inmarginésinistro inmarginèdestro inoutermargin ininnermargin inlatosinistro inlatodestro
                        inouteredge ininneredge atleftmargin atrightmargin insinistra indestra inouter ininner
                        inmarginè inother testoinmarginè NAME
   labelstyle      = STYLE BEFEHL
   labelcolor      = COLOR

```

```

\impostarighe      [...,1...]  [...,2...,...]
1  NAME              OPT
2  opzione           = impaccato
   prima             = BEFEHL
   dopo              = BEFEHL
   tra               = BEFEHL
   rientro           = inherits: \impostarientro
   allinea           = inherits: \impostaaallineamento
   spazio            = si attivo disattivo fisso implicito
   comando           = BEFEHL
   stile             = STYLE BEFEHL
   colore            = COLOR
   sinistra          = BEFEHL
   destra            = BEFEHL
   indentlist        = DIMENSION *
   keeptogether      = capoverso

```

```

\impostarigherimpimento  [...,*...,...]
*  prima             = BEFEHL
   dopo              = BEFEHL
   margine           = DIMENSION
   ampiezza          = DIMENSION
   distanza          = DIMENSION
   spessorelinea     = DIMENSION
   colore            = COLOR

```

```

\impostarigovuoto  [...,*...]
*  inherits: \rigovuoto  OPT

```

```

\impostarotazione  [...,*...,...]
*  luogo            = adatta ampio profondita alto centro implicito normale
   rotazione        = sinistra destra interno esterno NUMBER
   inherits: \impostaincorniciato

```

```

\impostaschermointerazione  [...,*...,...]
*  ampiezza         = adatta max tight DIMENSION
   altezza          = adatta max tight DIMENSION
   backspace        = DIMENSION
   horoffset        = DIMENSION
   veroffset        = DIMENSION
   spaziocima       = DIMENSION
   opzione          = adatta max facciasingola doppiafaccia segnalibro auto nessuno implicito fisso orizzontale portrait
                     pagina carta attachment layer titolo lefttoright righttoleft nomenubar
   copies           = NUMBER
   print            = LISTE
   attesa           = nessuno NUMBER

```

```

\impostasegnosillabazione  [...,*...,...]
*  segno            = normale ampio

```

```

\impostasetsimboli  [...]
*  NAME

```

```

\impostasfondi  [...,1...]  [...,2...]  [...,3...,...]
1  cima intestazione testo piedipagina fondo
2  bordosinistro marginesinistro testo marginedestro bordodestro
3  inherits: \impostaincorniciato

```

```

\impostasfondi  [...,1...]  [...,2...,...]
1  carta pagina paginasinistra paginadestra testo nascosto
2  stato          = inizia termina ripeti
   offset         = DIMENSION
   profondita    = DIMENSION
   inherits: \impostaincorniciato

```

\impostasfondo [...,¹...] [...,²...,...]

1 NAME OPT
2 stato = inizia termina
offsetsinistro = DIMENSION
offsetdestro = DIMENSION
offsetcima = DIMENSION
offsetfondo = DIMENSION
prima = BEFEHL
dopo = BEFEHL
inherits: \impostaincorniciato

\impostasinonimi [...,¹...] [...,²...,...]

1 SINGULAR OPT
2 espansione = si no xml
alternativa = primo ultimo normale NAME
successivo = BEFEHL
comando = \...#1#2#3
comandotesto = \...#1
synonymcommand = \...#1
language = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
metodo = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
criterio = corrente precedente locale testo tutti ABSCHNITT
stile = STYLE BEFEHL
colore = COLOR
stiletesto = STYLE BEFEHL
coloretesto = COLOR
stilesinonimi = STYLE BEFEHL
coloresinonimi = COLOR
sinistra = BEFEHL
destra = BEFEHL
prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
hyphens = si no
comando = \...#1#2#3

\impostasistema [...,^{*}...,...]

* n = NUMMER

\impostaspaziatura [...]

* fisso impaccato ampio fix^{OPT}:small broad:small

\impostaspaziobianco [...,^{*}...]

* fisso fisso flessibile riga mezz^{OPT}ariga quarterline nessuno piccolo medio grande implicito DIMENSION

\impostaspezzamentooggettomobile [...,^{*}...,...]

* prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
righe = auto NUMMER
conversione = NAME

\impostastrut [...]

* si no auto cap adat^{OPT}à riga implicito CHARACTER

\impostatabelle [...,^{*}...,...]

* ampiezzatesto = DIMENSION max
separa = si no ripeti auto
cornice = attivo disattivo
NL = inherits: \rigovuoto
VL = piccolo medio grande nessuno NUMMER
HL = piccolo medio grande nessuno NUMMER
distanza = piccolo medio grande nessuno
allinea = sinistra centro destra
comandi = BEFEHL
fonttesto = inherits: \impostafontdeltesto
spessorelinea = DIMENSION
altezza = strut NUMMER
profondita = strut NUMMER
openup = DIMENSION

```

\impostatabulato  [...1.]  [...2.]  [...,3...=...3...]
1  NAME          OPT      OPT
2  NAME
3  format        =  TEMPLATE nessuno
   prima         =  BEFEHL
   dopo          =  BEFEHL
   distanza      =  piccolo medio grande nessuno rigovuoto profondita griglia DIMENSION
   rigovuoto     =  preferenza stessapagina max forza enable disattiva nobianco impaccato dietro sovrapponi sempre
                  mantieni weak strong implicito prima tra dopo fisso flessibile nessuno piccolo medio grande
                  riga mezzariga halflinebefore halflineafter quarterline formula bianco altezza profondita
                  standard NUMMER*piccolo NUMMER*medio NUMMER*grande NUMMER*riga NUMMER*mezzariga NUMMER*quarterline
                  NUMMER*formula NUMMER*bianco NUMMER*altezza NUMMER*profondita category:NUMMER order:NUMMER
                  penalty:NUMMER DIMENSION NAME
   stiletesta    =  STYLE BEFEHL
   coloretesta   =  COLOR
   sfondo        =  NAME
   coloresfondo  =  COLOR
   foregroundstyle =  STYLE BEFEHL
   coloreprimopiano =  COLOR
   allinea       =  sinistra centro destra dimension
   linea         =  riga normale
   colorelinea   =  COLOR
   spessorelinea =  DIMENSION
   fonttesto     =  inherits: \impostafontdeltesto
   rientro       =  si no
   separa        =  si no ripeti auto
   unita         =  DIMENSION
   margine       =  DIMENSION
   interno       =  BEFEHL
   EQ            =  BEFEHL
   intestazione  =  si ripeti testo
   cornice       =  attivo disattivo
   titolo        =  TEXT
   kepttogether  =  si no
   dashstep      =  DIMENSION

```

```

\impostatavolozza  [...*.]
*  NAME

```

```

\impostatesta [...] 1 [...] [...] 2 [...]
1 ABSCHNITT OPT
2 frontpartlabel = NAME
  bodypartlabel = NAME
  appendixlabel = NAME
  backpartlabel = NAME
  espansione = si no xml
  catcodes = NAME
  sectionresetset = NAME
  sectionseparatorset = NAME
  sectionconversionset = NAME
  conversione = NAME
  sectionstarter = BEFEHL PROCESSOR->BEFEHL
  sectionstopper = BEFEHL PROCESSOR->BEFEHL
  sectionset = NAME
  sectionsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                    ABSCHNITT:tutti corrente
  referenceprefix = + - TEXT
  stile = STYLE BEFEHL
  colore = COLOR
  stiletesto = STYLE BEFEHL
  coloretesto = COLOR
  stilenumero = STYLE BEFEHL
  colorenúmero = COLOR
  accoppiamento = ABSCHNITT
  numeroproprio = si no
  beforesection = BEFEHL
  aftersection = BEFEHL
  insidesection = BEFEHL
  primaditesta = BEFEHL
  dopotesta = BEFEHL
  incrementanumero = si no elenco vuoto
  mettitesta = si no nascosto vuoto capoverso
  numero = si no
  pagina = inherits: \pagina
  marcatura = pagina reimposta nuovo
  intestazione = inizia termina alto nessuno normale vuoto nomarcature NAME
  testo = inizia termina alto nessuno normale vuoto nomarcature NAME
  piedipagina = inizia termina alto nessuno normale vuoto nomarcature NAME
  prima = BEFEHL
  dopo = BEFEHL
  tra = BEFEHL
  continua = si no
  allineatitolo = si no oggettomobile
  interlinea = NAME
  interazione = elenco riferimento
  internalgrid = NAME
  griglia = normale standard si rigido tollerante cima fondo entrambi ampio adatta primo ultimo alto
            uno basso nessuno riga strut box min max centro math math:riga math:mezzariga math:-line
            math:-halfline NAME
  allinea = inherits: \impostaallineamento
  tolleranza = inherits: \impostatolleranza
  strut = si no
  sospendi = riga ampio adatta nessuno NUMMER
  margine = DIMENSION
  rientrasuccessivo = si no auto
  alternativa = testo capoverso normale margine in margine cima centro fondo invertito testoinmargine NAME
  ampiezza = DIMENSION
  numberwidth = DIMENSION
  ampiezzatesto = DIMENSION
  distanza = DIMENSION
  distanzatesto = DIMENSION
  comandoprima = BEFEHL
  comandodopo = BEFEHL
  comando = \...#1#2
  comandotesto = \...#1
  deeptextcommand = \...#1
  comandonumero = \...#1
  deepnumbercommand = \...#1
  luogo = NAME
  criterio = rigido positivo tutti
  hidenummer = si no
  extradata = BEFEHL
  snapping = si normale 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom

```

```

\impostateste [...] 1 [...] [...] 2 [...]
1 ABSCHNITT OPT
2 inherits: \impostatesta

```

```

\impostatesticima  [1...] [2...] [3...] [4...] [5...]
1  testo margine bordo      OPT      OPT      OPT      OPT      OPT
2  data numeropagina BESCHRIFTUNG TEXT BEFEHL
3  data numeropagina BESCHRIFTUNG TEXT BEFEHL
4  data numeropagina BESCHRIFTUNG TEXT BEFEHL
5  data numeropagina BESCHRIFTUNG TEXT BEFEHL

```

```

\impostatestifondo  [1...] [2...] [3...] [4...] [5...]
1  testo margine bordo      OPT      OPT      OPT      OPT      OPT
2  data numeropagina BESCHRIFTUNG TEXT BEFEHL
3  data numeropagina BESCHRIFTUNG TEXT BEFEHL
4  data numeropagina BESCHRIFTUNG TEXT BEFEHL
5  data numeropagina BESCHRIFTUNG TEXT BEFEHL

```

```

\impostatestiincorniciati  [...,1...] [...,2...]
1  NAME                      OPT
2  inherits: \setupframedtext

```

```

\impostatestiintestazioni  [1...] [2...] [3...] [4...] [5...]
1  testo margine bordo      OPT      OPT      OPT      OPT      OPT
2  data numeropagina BESCHRIFTUNG TEXT BEFEHL
3  data numeropagina BESCHRIFTUNG TEXT BEFEHL
4  data numeropagina BESCHRIFTUNG TEXT BEFEHL
5  data numeropagina BESCHRIFTUNG TEXT BEFEHL

```

```

\impostatestipdp  [1...] [2...] [3...] [4...] [5...]
1  testo margine bordo      OPT      OPT      OPT      OPT      OPT
2  data numeropagina BESCHRIFTUNG TEXT BEFEHL
3  data numeropagina BESCHRIFTUNG TEXT BEFEHL
4  data numeropagina BESCHRIFTUNG TEXT BEFEHL
5  data numeropagina BESCHRIFTUNG TEXT BEFEHL

```

```

\impostatesto  [1...] [...,2...]
1  testo margine bordoOPT
2  stato          =  inizia termina vuoto alto nessuno normale nomarcature NAME
   stile          =  STYLE BEFEHL
   colore         =  COLOR
   strut          =  si no
   n              =  NUMBER
   prima          =  BEFEHL
   dopo           =  BEFEHL
   testosinistro  =  TEXT
   testocentro   =  TEXT
   testodestro    =  TEXT
   stilesinistra  =  STYLE BEFEHL
   middlestyle    =  STYLE BEFEHL
   stiledestra    =  STYLE BEFEHL
   coloresinistra =  COLOR
   middlecolor    =  COLOR
   coloredestra  =  COLOR
   ampiezza       =  DIMENSION
   ampiezzasinistra = DIMENSION
   middlewidth    =  DIMENSION
   ampiezzadestra =  DIMENSION

```

```

\impostaLABELtesto  [1...] [...,2...]
1  SPRACHE          OPT
2  KEY = VALUE
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

```

```

\impostabtxlabeltesto  [1...] [...,2...]
1  SPRACHE          OPT
2  KEY = VALUE

```

```

\impostaheadtesto  [1...] [...,2...]
1  SPRACHE          OPT
2  KEY = VALUE

```

2 KEY = VALUE

2 KEY = VALUE

2 KEY = VALUE

```
2 KEY = VALUE
```

2 KEY = VALUE

2 KEY = VALUE

2 KEY = VALUE

```
5 data numeropagina BESCHRIFTUNG TEXT BEFEHL
```

* orizzontale verticale moltorigido rigido tollerante moltotollerante spazio dilata

* reimposta auto inizia casuale NUMMER

```
setups      = NAME
```

```

\impostatyping [...] 1 [...] 2 [...]
1 NAME OPT
2 marginedispari = DIMENSION
  marginepari = DIMENSION
  margine = si no standard DIMENSION
  opzione = mp lua xml parsed-xml nested tex context nessuno NAME
  stile = STYLE BEFEHL
  colore = COLOR
  allinea = inherits: \impostaallineamento
  righe = si no normale sillabato
  spazio = attivo disattivo normale fisso dilata
  keeptogether = si no capoverso
  prima = BEFEHL
  dopo = BEFEHL
  strip = si no NUMBER
  range = NUMBER NAME
  tab = si no NUMBER
  capoverso = si no
  escape = si TEXT PROCESSOR->TEXT
  rientrasuccessivo = si no auto
  continua = si no
  inizia = NUMBER
  termina = NUMBER
  passo = NUMBER
  numerazione = file riga no
  rigovuoto = inherits: \rigovuoto
  fonttesto = inherits: \impostafontdeltesto

```

```

\impostaur1 [...] * [...]
* stile = STYLE BEFEHL
  colore = COLOR

```

```

\imposta {...}
* NAME

```

```

\in {...} 1 {...} 2 [...] 3 [...]
1 TEXT OPT
2 TEXT
3 REFERENCE

```

```

\inclinato

```

```

\inclinatograssetto

```

```

\includeMPOverlaydata

```

```

\includemenu [...]
* NAME

```

```

\includesvgbuffer [...] 1 [...] 2 [...] OPT [...]
1 BUFFER
2 offset = DIMENSION
  cache = si PATH

```

```

\includesvgfile [...] 1 [...] 2 [...] OPT [...]
1 FILE
2 offset = DIMENSION
  cache = si PATH

```

```

\includeversioninfo {...}
* NAME

```

```

\incorniciato [...] 1 [...] 2 {...}
1 inherits: \impostaincorniciato OPT
2 CONTENT

```


<code>\inhibitwhitespace</code>
<code>\initializeboxstack {...}</code> <code>* NAME</code>
<code>\inizia [...] ... \termina</code> <code>* NAME OPT</code>
<code>\iniziaalignment [...,*...] ... \terminaalignment</code> <code>* inherits: \impostaaallineamento</code>
<code>\iniziaallineacentro ... \terminaallineacentro</code>
<code>\iniziaallineadestra ... \terminaallineadestra</code>
<code>\iniziaallineasinistra ... \terminaallineasinistra</code>
<code>\iniziaallmodes [...,*...] ... \terminaallmodes</code> <code>* NAME</code>
<code>\iniziaalternate [...,*=...,...] ... \terminaalternate</code> <code>* testo = TEXT</code>
<code>\iniziaambiente [...] ... \terminaambiente</code> <code>* FILE *</code>
<code>\iniziaambientebloccosezione [...] ... \terminaambientebloccosezione</code> <code>* NAME</code>
<code>\iniziaambiente ... \terminaambiente</code> <code>* FILE *</code>
<code>\iniziaanchoring ... \terminaanchoring</code>
<code>\iniziaasciimode ... \terminaasciimode</code>
<code>\iniziaATTACHMENT [¹...] [...,²=...,...] ... \terminaATTACHMENT</code> <code>1 NAME OPT</code> <code>2 inherits: \setupattachment</code> <code>instances: attachment</code>
<code>\iniziaattachment [¹...] [...,²=...,...] ... \terminaattachment</code> <code>1 NAME OPT</code> <code>2 inherits: \setupattachment</code>
<code>\iniziabalancing [¹...] [²...] ... \terminabalancing</code> <code>1 NAME OPT</code> <code>2 NUMMER OPT</code>
<code>\iniziabar [...] ... \terminabar</code> <code>* NAME</code>
<code>\iniziabbordermatrix ... \terminabbordermatrix</code>

```
\iniziabitmapimage [...,..1...,...] ... \terminabitmapimage
* colore = rgb cmyk grigio
  ampiezza = DIMENSION
  altezza = DIMENSION
  x = NUMMER
  y = NUMMER
```

```
\iniziableading [...1.] [...,..2...,...] ... \terminableading
1 NAME OPT
2 inherits: \setupbleeding
```

```
\iniziabordermatrix ... \terminabordermatrix
```

```
\iniziaboxanchoring [...1.] ... \terminaboxanchoring
* + NAME
```

```
\iniziaboxexport [...,..1...,...] ... \terminaboxexport
* inherits: \setupboxexport OPT
```

```
\iniziabtxrenderingdefinitions [...1.] ... \terminabtxrenderingdefinitions
* NAME
```

```
\iniziabuffer [...1.] ... \terminabuffer
* NAME OPT
```

```
\iniziabUFFER ... \terminabUFFER
instances: hiding
```

```
\iniziahiding ... \terminahiding
```

```
\iniziacapoverso [...1.] [...,..2...,...] ... \terminacapoverso
1 NAME OPT OPT
2 inherits: \setupparagraph
```

```
\iniziasection [...,..1...,...] [...,..2...,...] ... \terminasection
1 titolo = TEXT OPT OPT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
  numeroproprio = TEXT
  placeholder = TEXT
2 KEY = VALUE
instances: part chapter section subsection subsubsection subsubsubsection
subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject
subsubsubsubsubject
```

```
\iniziachapter [...,..1...,...] [...,..2...,...] ... \terminachapter
1 titolo = TEXT OPT OPT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
  numeroproprio = TEXT
  placeholder = TEXT
2 KEY = VALUE
```

```

\iniziapart [...] 1 [...] 2 ... \terminapart
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasection [...] 1 [...] 2 ... \terminasection
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasubject [...] 1 [...] 2 ... \terminasubject
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasubsection [...] 1 [...] 2 ... \terminasubsection
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasubsubject [...] 1 [...] 2 ... \terminasubsubject
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsection [...] 1 [...] 2 ... \terminasubsubsection
1  titolo      = TEXTOPT
    segnalibro = TEXT
    marcatura  = TEXT
    elenco     = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsubject    [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminasubsubsubject
1  titolo               = TEXT
    segnalibro          = TEXT
    marcatura           = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT
    numeroproprio       = TEXT
    placeholder         = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsubsection [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminasubsubsubsection
1  titolo               = TEXT
    segnalibro          = TEXT
    marcatura           = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT
    numeroproprio       = TEXT
    placeholder         = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsubsubject [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminasubsubsubsubject
1  titolo               = TEXT
    segnalibro          = TEXT
    marcatura           = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT
    numeroproprio       = TEXT
    placeholder         = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsubsubsection [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminasubsubsubsubsection
1  titolo               = TEXT
    segnalibro          = TEXT
    marcatura           = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT
    numeroproprio       = TEXT
    placeholder         = TEXT
2  KEY = VALUE

```

```

\iniziasubsubsubsubsubject [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminasubsubsubsubsubject
1  titolo               = TEXT
    segnalibro          = TEXT
    marcatura           = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT
    numeroproprio       = TEXT
    placeholder         = TEXT
2  KEY = VALUE

```

```

\iniziatile    [...,\stackrel{1}{=}\dots]    [...,\stackrel{2}{=}\dots] ... \terminatile
1  titolo       = TEXT
    segnalibro  = TEXT
    marcatura   = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
    numeroproprio = TEXT
    placeholder = TEXT
2  KEY = VALUE

```

```

\iniziacatcodetable \*... ... \terminacatcodetable
*  CSNAME

```

```

\iniziacentraligned ... \terminacentraligned

```

<pre> \iniziacharacteralign [...,\stackrel{*}{=}\dots] ... \terminacharacteralign * inherits: \setupcharacteralign </pre>
<pre> \iniziacharacteralign [...] ... \terminacharacteralign * TEXT number->TEXT text->TEXT ^{OPT} </pre>
<pre> \iniziacharactertable [...] ... \terminacharactertable * NAME </pre>
<pre> \iniziacheckedfences ... \terminacheckedfences </pre>
<pre> \iniziachemical [¹...] [...,\stackrel{2}{=}\dots] ... \terminachemical 1 NAME ^{OPT} ^{OPT} 2 inherits: \setupchemical </pre>
<pre> \iniziachemicalformula ... \terminachemicalformula </pre>
<pre> \iniziachemistry [...,\stackrel{*}{=}\dots] ... \terminachemistry * inherits: \setupchemistry ^{OPT} </pre>
<pre> \iniziaclipeffect ... \terminaclipeffect </pre>
<pre> \iniziacclipframed [...,\stackrel{*}{=}\dots] ... \terminacclipframed * inherits: \impostaincorniciat^{OPT} </pre>
<pre> \iniziacodatabella [...] ... \terminacodatabella * NAME </pre>
<pre> \iniziacodatabulato [...] ... \terminacodatabulato * NAME ^{OPT} </pre>
<pre> \iniziacollect ... \terminacollect </pre>
<pre> \iniziacollecting ... \terminacollecting </pre>
<pre> \iniziacolore [...] ... \terminacolore * COLOR </pre>
<pre> \iniziacolorintent [...] ... \terminacolorintent * knockout overprint nessuno </pre>
<pre> \iniziacoloronly [...] ... \terminacoloronly * COLOR </pre>
<pre> \iniziacolorset [...] ... \terminacolorset * NAME </pre>
<pre> \iniziacolumnset [¹...] [...,\stackrel{2}{=}\dots] ... \terminacolumnset 1 NAME ^{OPT} 2 inherits: \impostagruppocolonne </pre>
<pre> \iniziacolumnsethspan {¹...} {²...} ... \terminacolumnsethspan 1 NUMMER 2 NUMMER </pre>

<pre> \iniziacolumnsetsheet [...] [...] [...] ... \terminacolumnsetsheet 1 NAME OPT OPT 2 NUMMER 3 pagina </pre>
<pre> \iniziacolumnsetsheetdelayed [...] [...] ... \terminacolumnsetsheetdelayed 1 NAME OPT 2 NUMMER </pre>
<pre> \iniziacolumnsetspan [...] [...] [...] ... \terminacolumnsetspan 1 NAME OPT 2 inherits: \setcolumnset </pre>
<pre> \iniziacolumnsetspanwidth {...} ... \terminacolumnsetspanwidth * NUMMER </pre>
<pre> \iniziacolumnsetspreadsheets [...] [...] ... \terminacolumnsetspreadsheets 1 NAME OPT 2 NUMMER </pre>
<pre> \iniziacOLUMNSET [...] [...] [...] ... \terminacOLUMNSET * inherits: \impostagruppocolofine </pre>
<pre> \iniziacomination [...] [...] [...] [...] [...] ... \terminacomination 1 NAME OPT OPT 2 inherits: \setupcombination </pre>
<pre> \iniziacomination [...] [...] [...] [...] [...] ... \terminacomination 1 NAME OPT OPT 2 N*M </pre>
<pre> \iniziacommentopagina ... \terminacommentopagina </pre>
<pre> \iniziacomment [...] [...] [...] [...] [...] [...] ... \terminacomment 1 TEXT OPT OPT 2 inherits: \impostacommento instances: comment </pre>
<pre> \iniziacomment [...] [...] [...] [...] [...] [...] ... \terminacomment 1 TEXT OPT OPT 2 inherits: \impostacommento </pre>
<pre> \iniziacomparingtext [...] [...] [...] [...] [...] [...] ... \terminacomparingtext * reimposta NAME </pre>
<pre> \iniziacomponenet [...] [...] [...] [...] [...] [...] ... \terminacomponenet * FILE * </pre>
<pre> \iniziacomponenet \terminacomponenet * FILE * </pre>
<pre> \iniziacodecontextcode ... \terminacodecontextcode </pre>
<pre> \iniziacodecontextdefinitioncode ... \terminacodecontextdefinitioncode </pre>
<pre> \iniziactxfuction \terminactxfuction * NAME </pre>

<pre> \iniziactxfuctiondefinition .* ... \terminactxfuctiondefinition * NAME </pre>
<pre> \iniziacurrentcolor ... \terminacurrentcolor </pre>
<pre> \iniziacurrentlistentrywrapper ... \terminacurrentlistentrywrapper </pre>
<pre> \iniziadelimited [...¹] [...²] [...,³...] ... \terminadelimited 1 NAME OPT OPT 2 SPRACHE 3 inherits: \iniziapiustretto </pre>
<pre> \iniziadelimitedtext [...¹] [...²] [...,³...] ... \terminadelimitedtext 1 NAME OPT OPT 2 SPRACHE 3 inherits: \iniziapiustretto </pre>
<pre> \iniziADELIMITEDTEXT [...¹] [...,²...] ... \terminaDELIMITEDTEXT 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto instances: quotation quote blockquote speech aside </pre>
<pre> \iniziaaaside [...¹] [...,²...] ... \terminaaaside 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto </pre>
<pre> \iniziablockquote [...¹] [...,²...] ... \terminablockquote 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto </pre>
<pre> \iniziaquotation [...¹] [...,²...] ... \terminaquotation 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto </pre>
<pre> \iniziquote [...¹] [...,²...] ... \terminaquote 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto </pre>
<pre> \iniziaspeech [...¹] [...,²...] ... \terminaspeech 1 SPRACHE OPT OPT 2 inherits: \iniziapiustretto </pre>
<pre> \iniziADESCRIZIONE [...,[*]...] ... \terminaDESCRIZIONE * titolo = TEXT OPT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT </pre>
<pre> \iniziADESCRIZIONE [...,¹...] {...²} ... \terminaDESCRIZIONE 1 REFERENCE OPT OPT 2 TEXT </pre>
<pre> \iniziadisplaymath ... \terminadisplaymath </pre>
<pre> \iniziadmath ... \terminadmath </pre>
<pre> \iniziadocument [...¹] [...,²...] ... \terminadocument 1 NAME OPT OPT 2 inherits: \setupdocument </pre>


```
\iniziadocument  [...]1  [...]2... \terminadocument
```

```
\iniziaeffect    [...] ... \terminaeffect
*    interno esterno entrambi normale nascosto clip dilata NAME
```

```
\iniziaEFFECT ... \terminaEFFECT
```

```

\iniziaelement  [...]1  [...,...2...,...] ... \terminaelement
1  NAME
2  KEY = VALUE

```

```
\iniziaelemento    [...,*...] ... \terminaelemento
*  REFERENCE              OPT
```

```
\iniziaembeddedxtable    [...,*=*,...] ... \terminaembeddedxtable
* inherits: \setupxtable      OPT
```

```
\iniziaembeddedxtable [...] ... \terminaembeddedxtable
* NAME OPT
```

```

\iniziaENUMERAZIONE    [...,*=...,...] ... \terminaENUMERAZIONE
*   titolo              = TEXT
    segnalibro          = TEXT
    elenco              = TEXT
    riferimento         = REFERENCE
    referencetext       = TEXT

```

```
\iniziaENUMERAZIONE    [...1;...]    {...2} ... \terminaENUMERAZIONE
1  REFERENCE
2  TEXT
```

```
\iniziaexceptions    [...] ... \terminaexceptions
* SPRACHE            OPT
```

`\iniziaexpanded ... \terminaexpanded`

```
\iniziaexpandedcollect ... \terminaexpandedcollect
```

```
\iniziaextendedcatcodetable    \... ... \terminaextendedcatcodetable
* CSNAME
```

```
\iniziaexternalfigurecollection    [...] ... \terminaexternalfigurecollection
* NAME
```

```
\iniziafacingfloat    [...] ... \terminafacingfloat
*    NAME
```

```
\iniziafigura    [..]    [..]    [...,3...,...] ... \terminafigura
1  NAME
2  FILE
3  inherits: \figuraesterna
```

```
\iniziafisso    [...] ... \terminafisso
*    basso centro altoOPT pedap implicito
```

<pre> \iniziafittingpage [...¹] [...,²...,...] ... \terminafittingpage 1 NAME 2 inherits: \setupfittingpage </pre>	
<pre> \iniziaFITTINGPAGE [...,[*]...,...] ... \terminaFITTINGPAGE * inherits: \setupfittingpage instances: TEXpage MPpage </pre>	
<pre> \iniziaMPpage [...,[*]...,...] ... \terminaMPpage * inherits: \setupfittingpage </pre>	
<pre> \iniziaTEXpage [...,[*]...,...] ... \terminaTEXpage * inherits: \setupfittingpage </pre>	
<pre> \iniziafloatcombination [...,[*]...,...] ... \terminafloatcombination * inherits: \setupcombination </pre>	
<pre> \iniziafloatcombination [...[*]] ... \terminafloatcombination * N*M NAME </pre>	
<pre> \iniziaFLOAttesto [...,¹,...] [...,²,...] {...³.} ... \terminaFLOAttesto 1 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT instances: chemical figure table intermezzo graphic </pre>	
<pre> \iniziachemicaltesto [...,¹,...] [...,²,...] {...³.} ... \terminachemicaltesto 1 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT </pre>	
<pre> \iniziafiguretesto [...,¹,...] [...,²,...] {...³.} ... \terminafiguretesto 1 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT </pre>	
<pre> \iniziagraphictesto [...,¹,...] [...,²,...] {...³.} ... \terminagraphictesto 1 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rlbt fxbt fixd append 2 REFERENCE 3 TEXT </pre>	

```
\iniziaintermezzotesto [...] [...] {...} ... \terminaintermezzotesto
1 separa keep together sempre sinistraOPT destra internoOPT esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordosinistro bordodestro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [-+] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [-+] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rltb fxbt fixd append
2 REFERENCE
3 TEXT
```

```
\iniziatabletesto [...] [...] {...} ... \terminatabletesto
1 separa keep together sempre sinistraOPT destra internoOPT esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordosinistro bordodestro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [-+] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [-+] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rltb fxbt fixd append
2 REFERENCE
3 TEXT
```

```
\iniziafont [...] ... \terminafont
* FONT OPT
```

```
\iniziafontclass [...] ... \terminafontclass
* ogni NAME
```

```
\iniziafontsolution [...] ... \terminafontsolution
* NAME
```

```
\iniziaformula [...] ... \terminaformula
* impaccato tight centro OPTprofondita riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
```

```
\iniziaformulacombination [...] ... \terminaformulacombination
* inherits: \setupcombination OPT
```

```
\iniziaformulacombination [...] ... \terminaformulacombination
* N*M OPT
```

```
\iniziaformula [...] ... \terminaformula
* inherits: \impostafornule OPT
```

```
\iniziaFORMULAformula [...] ... \terminaFORMULAformula
* impaccato tight centro profonditaOPT riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
instances: sp sd mp md
```

```
\iniziaFORMULAformula [...] ... \terminaFORMULAformula
* inherits: \impostafornule OPT
instances: sp sd mp md
```

```
\iniziamdformula [...] ... \terminamdformula
* inherits: \impostafornule OPT
```

```
\iniziampformula [...] ... \terminampformula
* inherits: \impostafornule OPT
```

```
\iniziasdformula [...] ... \terminasdformula
* inherits: \impostafornule OPT
```

```
\iniziaspformula [...] ... \terminaspformula
* inherits: \impostafornule OPT
```

<code>\iniziandformula [...,*...] ... \terminandformula</code> * impaccato tight centro profondità^{OPT} riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
<code>\iniziampformula [...,*...] ... \terminampformula</code> * impaccato tight centro profondità riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
<code>\iniziasdformula [...,*...] ... \terminasdformula</code> * impaccato tight centro profondità^{OPT} riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
<code>\iniziaspformula [...,*...] ... \terminaspformula</code> * impaccato tight centro profondità^{OPT} riga mezzariga -riga -mezzariga cornice piccolo DIMENSION
<code>\iniziaformule [...,*...] ... \terminaformule</code> * + - REFERENCE^{OPT}
<code>\iniziaframedcell [...,*...] ... \terminaframedcell</code> * inherits: \impostaincorniciat^{OPT}
<code>\iniziaframedcontent [...*] ... \terminaframedcontent</code> * NAME disattivo^{OPT}
<code>\iniziaframedrow [...,*...] ... \terminaframedrow</code> * inherits: \impostaincorniciat^{OPT}
<code>\iniziaframedtable [...*] [...*] ... \terminaframedtable</code> 1 NAME^{OPT} 2 inherits: \impostaincorniciato^{OPT}
<code>\iniziagraphicgroup ... \terminagraphicgroup</code>
<code>\iniziagridcorrection [...*] ... \terminagridcorrection</code> * reimposta [+]_T [+]_L [+]_H [[#]]_Q [+]_Z [+]_I
<code>\iniziagridsnapping [...*] ... \terminagridsnapping</code> * normale standard si rigido tollerante^{OPT} cima fondo entrambi ampio adatta primo ultimo alto uno basso nessuno riga strut box min max centro math:riga math:mezzariga math:-line math:-halflin NAME
<code>\iniziagridsnapping [...,*...] ... \terminagridsnapping</code> * inherits: \definegridsnapping^{OPT}
<code>\iniziahangrange ... \terminahangrange</code>
<code>\iniziahangrangestep ... \terminahangrangestep</code>
<code>\iniziahboxestohbox ... \terminahboxestohbox</code>
<code>\iniziahboxregister ... \terminahboxregister</code> * CSNAME NUMBER
<code>\iniziaHELP [...*] ... \terminaHELP</code> * REFERENCE^{OPT} instances: helptext
<code>\iniziahelptext [...*] ... \terminahelptext</code> * REFERENCE^{OPT}
<code>\iniziahhiddencontent ... \terminahhiddencontent</code>

<pre> \iniziahighlight [...] ... \terminahighlight * NAME </pre>
<pre> \iniziahorizontalbox [¹...] [²...,...²...,...] ... \terminahorizontalbox 1 NAME OPT OPT 2 inherits: \setuphorizontalbox </pre>
<pre> \iniziahyphenation [...*,...] ... \terminahyphenation * original tex implicit hyphenate expanded traditional nessuno </pre>
<pre> \iniziaimage [...,*...,...] ... \terminaimage * descriptiontext = TEXT^{OPT} * alternativetext = TEXT </pre>
<pre> \iniziaimath ... \terminaimath </pre>
<pre> \iniziaimpaccato [...*] ... \terminaimpaccato * rigovuoto OPT </pre>
<pre> \iniziaincorniciato [¹...] [²...,...²...,...] ... \terminaincorniciato 1 NAME OPT OPT 2 inherits: \impostaincorniciato </pre>
<pre> \iniziaindentedtext [...*] ... \terminaindentedtext * NAME </pre>
<pre> \iniziaINDENTEDTEXT ... \terminaINDENTEDTEXT </pre>
<pre> \iniziainstallaligncommand [...] ... \terminainstallaligncommand * NAME </pre>
<pre> \iniziainterazione [...*] ... \terminainterazione * nascosto NAME </pre>
<pre> \iniziainterface .* ... \terminainterface * tutti SPRACHE </pre>
<pre> \iniziaintertext ... \terminaintertext </pre>
<pre> \iniziaitemgroup [¹...] [²...,...²...] [³...,...³...,...] ... \terminaitemgroup 1 NAME OPT OPT OPT 2 inherits: \setupitemgroup 3 inherits: \setupitemgroup </pre>
<pre> \iniziaITEMGROUPtable [...,¹...,...] [...,²...,...²...,...] ... \terminaITEMGROUPtable 1 inherits: \setupitemgroup OPT OPT 2 inherits: \setupitemgroup instances: itemize </pre>
<pre> \iniziaitemizetable [...,¹...,...] [...,²...,...²...,...] ... \terminaitemizetable 1 inherits: \setupitemgroup OPT OPT 2 inherits: \setupitemgroup </pre>
<pre> \iniziaITEMGROUP [...,¹...,...] [...,²...,...²...,...] ... \terminaITEMGROUP 1 inherits: \setupitemgroup OPT OPT 2 inherits: \setupitemgroup instances: itemize </pre>

$$\backslash\mathrm{iniziaitemize} \quad [\dots,\overset{1}{\dots}] \quad [\dots,\overset{2}{\dots},\dots] \quad \dots \quad \backslash\mathrm{terminaitemize}$$

```
\iniziaJScore      1      2      3 ... \terminaJScore
```

```
\iniziaJSreamble      1      2      3 ... \terminaJSreamble
```

```
\iniziaknockout ... \terminaknockout
```

```
\inicialanguageoptions [...] ... \terminalanguageoptions
```

```
\inizialayout [...] ... \terminalayout
```

`\inizialinealignment` [...] ... `\terminalinealignment`

\iniziallineamargine [...] ... \terminalineamargine

```
\inizialineamargine    [...,.*=.,...] ... \terminalineamargine
```

```
\inizialineatesto {...} ... \terminalineatesto
```

```
\inizialinecorrection [...] ... \terminalinecorrection
```

```
\inizialinefiller  [...]  [...,\dots^2\dots] ... \terminalinefiller
```

`\inizialinenumbering` [¹...] [²...,..₂...,..] ... `\terminalinenumbering`

```
\inizialinenumbering [...] [...] ... \terminalinenumbering
```

```
\inizialinetable ... \terminalinetable
```

```
\inicialinetablebody ... \terminalinetablebody
```

```
\inizialinetablecell    [...,*=...,...] ... \terminalinetablecell
```

<code>\inizialinetablehead ... \terminalinetablehead</code>
<code>\inizialingua [...] ... \terminalingua</code> <code>* SPRACHE</code>
<code>\iniziallocalbox [...] ... \terminallocalbox</code> <code>* NAME</code>
<code>\iniziallocalboxrange [...] ... \terminallocalboxrange</code> <code>* NAME</code>
<code>\iniziallocalfootnotes ... \terminallocalfootnotes</code>
<code>\iniziallocalheadsetup ... \terminallocalheadsetup</code>
<code>\iniziallocallinecorrection [...,*,...] ... \terminallocallinecorrection</code> <code>* rigovuoto inherits: \rigovuoto OPT</code>
<code>\iniziallocalnotes [...,*,...] ... \terminallocalnotes</code> <code>* NAME</code>
<code>\iniziallocalsetups [...] ... \terminallocalsetups</code> <code>* NAME</code>
<code>\iniziallocalsetups ...* ... \terminallocalsetups</code> <code>* NAME</code>
<code>\inizialua ... \terminalua</code>
<code>\inizialuacode ... \terminaluacode</code>
<code>\inizialuaparameterset [...] ... \terminaluaparameterset</code> <code>* NAME</code>
<code>\inizialuasetups [...] ... \terminaluasetups</code> <code>* NAME</code>
<code>\inizialuasetups ...* ... \terminaluasetups</code> <code>* NAME</code>
<code>\iniziaMPclip {...} ... \terminaMPclip</code> <code>* NAME</code>
<code>\iniziaMPcode {...} ... \terminaMPcode</code> <code>* metafun minifun extra^{OPT}fun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun</code>
<code>\iniziaMPcode [...,*=,...] ... \terminaMPcode</code> <code>* instance = meta^{OPT}fun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun</code> <code> stacking = TEXT</code> <code> descriptiontext = TEXT</code> <code> alternativetext = TEXT</code>
<code>\iniziaMPdefinitions {...} ... \terminaMPdefinitions</code> <code>* metafun minifun extrafun les^{OPT}sfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun</code>

<pre> \iniziaMPdrawing [...] ... \terminaMPdrawing * - OPT </pre>
<pre> \iniziaMPenvironment [...] ... \terminaMPenvironment * reimposta globale + OPT </pre>
<pre> \iniziaMPextensions {...,*,...} ... \terminaMPextensions * metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \iniziaMPimage [...,*=...,...] ... \terminaMPimage * descriptiontext = TEXT OPT alternativetext = TEXT </pre>
<pre> \iniziaMPinclusions [.1.] {...} ... \terminaMPinclusions 1 + OPT 2 metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun </pre>
<pre> \iniziaMPinitializations ... \terminaMPinitializations </pre>
<pre> \iniziaMPoverlaydata ... \terminaMPoverlaydata </pre>
<pre> \iniziaMPpositiongraphic {...} {...,*,...} ... \terminaMPpositiongraphic 1 NAME OPT 2 KEY </pre>
<pre> \iniziaMPpositionmethod {...} ... \terminaMPpositionmethod * NAME </pre>
<pre> \iniziaMPrun {...} ... \terminaMPrun * NAME OPT </pre>
<pre> \iniziameakeup [...] [...,*=...,...] ... \terminameakeup 1 NAME OPT 2 inherits: \impostameakeup </pre>
<pre> \iniziaMAKEUPmakeup [...,*=...,...] ... \terminaMAKEUPmakeup * inherits: \impostameakeup instances: standard page text middle </pre>
<pre> \iniziamidlemakeup [...,*=...,...] ... \terminamidlemakeup * inherits: \impostameakeup OPT </pre>
<pre> \iniziapagemakeup [...,*=...,...] ... \terminapagemakeup * inherits: \impostameakeup OPT </pre>
<pre> \iniziastandardmakeup [...,*=...,...] ... \terminastandardmakeup * inherits: \impostameakeup OPT </pre>
<pre> \iniziatextmakeup [...,*=...,...] ... \terminatextmakeup * inherits: \impostameakeup OPT </pre>
<pre> \iniziamarginblock [...] ... \terminamarginblock * NAME OPT </pre>
<pre> \iniziamediacontent [...] ... \terminamediacontent * reimposta tutti NAME OPT </pre>

<pre> \iniziamarkpages [...] ... \terminamarkpages * NAME </pre>
<pre> \iniziamatematica [...] ... \terminamatematica * implicito i:default i:half i:tight i:fixed NAME </pre>
<pre> \iniziaMATHALIGNMENT [...] ... \terminaMATHALIGNMENT * inherits: \setupmathalignment OPT instances: align mathalignment </pre>
<pre> \iniziaalign [...] ... \terminaalign * inherits: \setupmathalignment OPT </pre>
<pre> \iniziamathalignment [...] ... \terminamathalignment * inherits: \setupmathalignment OPT </pre>
<pre> \iniziaMATHCASES [...] ... \terminaMATHCASES * inherits: \setupmathcases OPT instances: cases mathcases </pre>
<pre> \iniziacases [...] ... \terminacases * inherits: \setupmathcases OPT </pre>
<pre> \iniziamathcases [...] ... \terminamathcases * inherits: \setupmathcases OPT </pre>
<pre> \iniziamathexport [...] ... \terminamathexport * inherits: \setupmathexport OPT </pre>
<pre> \iniziamathfenced [...] ... \terminamathfenced 1 parenthesis bracket brace angle doubleangle bar doublebar triplebar solidus floor ceiling moustache uppercorner lowercorner group openbracket nothing mirroredparenthesis mirroredbracket mirroredbrace mirroredangle mirroreddoubleangle mirroredbar mirroreddoublebar mirroredtriplebar mirroredsolidus mirroredfloor mirroredceiling mirroredmoustache mirroreduppercorner mirroredlowercorner mirroredgroup mirroredopenbracket mirrorednothing interval openinterval leftopeninterval rightopeninterval NAME 2 inherits: \setupmathfences </pre>
<pre> \iniziaMATHMATRIX [...] ... \terminaMATHMATRIX * inherits: \setupmathmatrix OPT instances: matrix mathmatrix thematrix </pre>
<pre> \iniziamathmatrix [...] ... \terminamathmatrix * inherits: \setupmathmatrix OPT </pre>
<pre> \iniziamatrix [...] ... \terminamatrix * inherits: \setupmathmatrix OPT </pre>
<pre> \iniziathematrix [...] ... \terminathematrix * inherits: \setupmathmatrix OPT </pre>
<pre> \iniziamathmeaning ... \terminamathmeaning </pre>
<pre> \iniziamathmode ... \terminamathmode </pre>

```
\iniziaMATHOPERATOR [...] \terminaMATHOPERATOR
* inherits: \setupmathoperatorsOPT
instances: integral iintegral iintegral iiiintegral int iint iint iiiint oint oint oiiint
intc ointc aointc sumint barint doublebarint slashint aodownintc rectangularpoleintc
semicirclepoleintc circlepoleoutsideintc circlepoleinsideintc squareintc hookleftarrowint
timesint capint cupint upperint lowerint sum blackboardsum modtwosum prod coprod bigwedge
bigvee bigcap bigcup bigodot bigoplus bigotimes bigodot biguplus bigsqcap bigsqcup bigtimes
leftouterjoin rightouterjoin fullouterjoin bigbottom bigtop bigsolidus bigreversesolidus
bigdoublewedge bigdoublevee
```

```
\iniziaaodownintc [...] \terminaaodownintc
* inherits: \setupmathoperatorsOPT
```

```
\iniziaaointc [...] \terminaaointc
* inherits: \setupmathoperatorsOPT
```

```
\iniziabarint [...] \terminabarint
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigbottom [...] \terminabigbottom
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigcap [...] \terminabigcap
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigcup [...] \terminabigcup
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigdoublevee [...] \terminabigdoublevee
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigdoublewedge [...] \terminabigdoublewedge
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigodot [...] \terminabigodot
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigoplus [...] \terminabigoplus
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigotimes [...] \terminabigotimes
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigreversesolidus [...] \terminabigreversesolidus
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigsolidus [...] \terminabigsolidus
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigsqcap [...] \terminabigsqcap
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigsqcup [...] \terminabigsqcup
* inherits: \setupmathoperatorsOPT
```

```
\iniziabigtimes [...] \terminabigtimes
* inherits: \setupmathoperatorsOPT
```

$\backslash$ iniziabigtop [...] ... $\backslash$ terminabigtop * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziabigudot [...] ... $\backslash$ terminabigudot * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziabiguplus [...] ... $\backslash$ terminabiguplus * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziabigvee [...] ... $\backslash$ terminabigvee * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziabigwedge [...] ... $\backslash$ terminabigwedge * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziablackboardsum [...] ... $\backslash$ terminablackboardsum * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziacapint [...] ... $\backslash$ terminacapint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziacirclepoleinsideintc [...] ... $\backslash$ terminacirclepoleinsideintc * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziacirclepoleoutsideintc [...] ... $\backslash$ terminacirclepoleoutsideintc * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziacoprod [...] ... $\backslash$ terminacoprod * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziacupint [...] ... $\backslash$ terminacupint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziadoublebarint [...] ... $\backslash$ terminadoublebarint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziafullouterjoin [...] ... $\backslash$ terminafullouterjoin * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziahookleftarrowint [...] ... $\backslash$ terminahookleftarrowint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziainiiint [...] ... $\backslash$ terminainiiint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziainiiintegral [...] ... $\backslash$ terminainiiintegral * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziainiint [...] ... $\backslash$ terminainiint * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziainiintegral [...] ... $\backslash$ terminainiintegral * inherits: \setupmathoperators ^{OPT}
$\backslash$ iniziainint [...] ... $\backslash$ terminainint * inherits: \setupmathoperators ^{OPT}

$\backslash$ iniziainintegral [...,\dots] ... \terminaiintegral * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaint [...,\dots] ... \terminaint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaintc [...,\dots] ... \terminaintc * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziainintegral [...,\dots] ... \terminainintegral * inherits: \setupmathoperator ^{OPT}
$\backslash$ inizialeftouterjoin [...,\dots] ... \terminaleftouterjoin * inherits: \setupmathoperator ^{OPT}
$\backslash$ inizialowerint [...,\dots] ... \terminalowerint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziamodtwosum [...,\dots] ... \terminamodtwosum * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaoiiint [...,\dots] ... \terminaoiiint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaooint [...,\dots] ... \terminaooint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaooint [...,\dots] ... \terminaooint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaoointc [...,\dots] ... \terminaoointc * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaprod [...,\dots] ... \terminaprod * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziarectangularpoleintc [...,\dots] ... \terminarectangularpoleintc * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziarihtouterjoin [...,\dots] ... \terminarihtouterjoin * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziasemicirclepoleintc [...,\dots] ... \terminasemicirclepoleintc * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziaslashint [...,\dots] ... \terminaslashint * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziasquareintc [...,\dots] ... \terminasquareintc * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziasum [...,\dots] ... \terminasum * inherits: \setupmathoperator ^{OPT}
$\backslash$ iniziasumint [...,\dots] ... \terminasumint * inherits: \setupmathoperator ^{OPT}

<pre> \iniziatesint [...,*=...,...] ... \terminatesint * inherits: \setupmathoperator^{OPT} </pre>
<pre> \iniziauupperint [...,*=...,...] ... \terminauupperint * inherits: \setupmathoperator^{OPT} </pre>
<pre> \iniziaMATHSIMPLEALIGN [...,*=...,...] ... \terminaMATHSIMPLEALIGN * inherits: \setupmathsimplealign^{OPT} instances: equationsystem lequationsystem reequationsystem </pre>
<pre> \iniziaequationsystem [...,*=...,...] ... \terminaequationsystem * inherits: \setupmathsimplealign^{OPT} </pre>
<pre> \inizialequationsystem [...,*=...,...] ... \terminalequationsystem * inherits: \setupmathsimplealign^{OPT} </pre>
<pre> \iniziarequationsystem [...,*=...,...] ... \terminarequationsystem * inherits: \setupmathsimplealign^{OPT} </pre>
<pre> \iniziamathstyle [...,*=...,...] ... \terminamathstyle * schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande NAME </pre>
<pre> \iniziamatrices [...,*=...,...] ... \terminamatrices * inherits: \setupmathmatrix^{OPT} </pre>
<pre> \iniziamatrixanchors ... \terminamatrixanchors </pre>
<pre> \iniziamaxaligned ... \terminamaxaligned </pre>
<pre> \iniziamenuinterattivo [...] ... \terminamenuinterattivo * NAME </pre>
<pre> \iniziamettiformula [...,*=¹...,...]{...²} ... \terminamettiformula 1 titolo = TEXT^{OPT} riferimento = + - REFERENCE^{OPT} segnalibro = TEXT elenco = TEXT suffix = TEXT 2 TEXT </pre>
<pre> \iniziamettiformula [...,*=...,...] ... \terminamettiformula * + - REFERENCE^{OPT} </pre>
<pre> \iniziamiddlealigned ... \terminamiddlealigned </pre>
<pre> \iniziamixedcolumns [...,¹...][...,...²...,...] ... \terminamixedcolumns 1 NAME^{OPT} 2 inherits: \setupmixedcolumns^{OPT} </pre>
<pre> \iniziaMIXEDCOLUMNS [...,*=...,...] ... \terminaMIXEDCOLUMNS * inherits: \setupmixedcolumns^{OPT} instances: itemgroupcolumns boxedcolumns columns </pre>
<pre> \iniziaboxedcolumns [...,*=...,...] ... \terminaboxedcolumns * inherits: \setupmixedcolumns^{OPT} </pre>
<pre> \iniziacolumns [...,*=...,...] ... \terminacolumns * inherits: \setupmixedcolumns^{OPT} </pre>

<pre> \iniziaitemgroupcolumns [...] ... \terminaitemgroupcolumns * inherits: \setupmixedcolumns OPT </pre>
<pre> \iniziamode [...] ... \terminamode * NAME </pre>
<pre> \iniziamodeset [...] ¹ [...] {...} ... \terminamodeset 1 NAME implicito 2 CONTENT </pre>
<pre> \iniziamodule [...] ... \terminamodule * FILE </pre>
<pre> \iniziamoduletestsection ... \terminamoduletestsection </pre>
<pre> \iniziamodule ...* ... \terminamodule * FILE </pre>
<pre> \iniziamulticolumns [...] ... \terminamulticolumns * inherits: \setupmulticolumns OPT </pre>
<pre> \inizianamedformula [...] [...] ² [...] ... \terminanamedformula 1 NAME OPT 2 impaccato tight centro profondita riga mezzariga -riga -mezzariga cornice piccolo DIMENSION </pre>
<pre> \inizianamedformula [...] [...] ² [...] ... \terminanamedformula 1 NAME OPT 2 inherits: \impostaformule </pre>
<pre> \inizianamedmatrix [...] [...] ² [...] {...} ... \terminanamedmatrix 1 NAME OPT 2 inherits: \setupmathmatrix 3 CONTENT </pre>
<pre> \inizianamednotation [...] [...] ² [...] ... \terminanamednotation 1 NAME OPT 2 REFERENCE </pre>
<pre> \inizianamednotation [...] [...] ² [...] ... \terminanamednotation 1 NAME OPT 2 titolo = TEXT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT </pre>
<pre> \inizianamedsection [...] [...] ² [...] [...] ³ [...] ... \terminanamedsection 1 ABSCHNITT OPT OPT 2 titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT 3 KEY = VALUE </pre>
<pre> \inizianamedsubformulas [...] ¹ [...] {...} ... \terminanamedsubformulas 1 + - REFERENCE OPT 2 TEXT </pre>

```
\inizianamedtyping [...] [...] ... \terminanamedtyping
1 NAME
2 inherits: \impostatyping
```

```
\inizianamedtyping [...] [...] ... \terminanamedtyping
1 NAME
2 continua
```

```
\inizianarrower [...] ... \terminanarrower
* [-+]sinistra [-+]centro OPTdestra NUMMER*sinistra NUMMER*centro NUMMER*destra reimposta invertito
```

```
\iniziaNARROWER [...] ... \terminaNARROWER
* [-+]sinistra [-+]centro OPTdestra NUMMER*sinistra NUMMER*centro NUMMER*destra reimposta invertito
```

```
\inizianegativo ... \terminanegativo
```

```
\inizianicelyfilledbox [...] ... \terminanicelyfilledbox
* ampiezza = DIMENSION
  altezza = DIMENSION
  offset = DIMENSION
  strut = si no
```

```
\inizianointerference ... \terminanointerference
```

```
\inizianotallmodes [...] ... \terminanotallmodes
* NAME
```

```
\iniziaNOTE [...] ... \terminaNOTE
* REFERENCE
instances: footnote endnote mathnote publicationnote
```

```
\iniziaNOTE [...] ... \terminaNOTE
* titolo = TEXTOPT
  segnalibro = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
instances: footnote endnote mathnote publicationnote
```

```
\iniziaendnote [...] ... \terminaendnote
* titolo = TEXTOPT
  segnalibro = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
```

```
\iniziafootnote [...] ... \terminafootnote
* titolo = TEXTOPT
  segnalibro = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
```

```
\iniziamathnote [...] ... \terminamathnote
* titolo = TEXTOPT
  segnalibro = TEXT
  elenco = TEXT
  riferimento = REFERENCE
  referencetext = TEXT
```

<pre> \iniziapublicationnote [...,*=...,...] ... \terminapublicationnote * titolo = TEXT OPT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT </pre>
<pre> \iniziaendnote [...,*...] ... \terminaendnote * REFERENCE OPT </pre>
<pre> \iniziafootnote [...,*...] ... \terminafootnote * REFERENCE OPT </pre>
<pre> \iniziamathnote [...,*...] ... \terminamathnote * REFERENCE OPT </pre>
<pre> \iniziapublicationnote [...,*...] ... \terminapublicationnote * REFERENCE OPT </pre>
<pre> \inizianotext ... \terminanotext </pre>
<pre> \inizianotmode [...,*...] ... \terminanotmode * NAME </pre>
<pre> \iniziaopposto ... \terminaopposto </pre>
<pre> \iniziaoutputstream [...*] ... \terminaoutputstream * NAME </pre>
<pre> \iniziaoutputsubstream [...*] ... \terminaoutputsubstream * NAME </pre>
<pre> \iniziaoverlayMPgraphic {...*} ... \terminaoverlayMPgraphic * NAME </pre>
<pre> \iniziaoverprint ... \terminaoverprint </pre>
<pre> \iniziaPDFalternativetext {...*} ... \terminaPDFalternativetext * TEXT </pre>
<pre> \iniziaPDFhighlight [...¹] [...²] ... \terminaPDFhighlight 1 NAME OPT 2 TEXT </pre>
<pre> \iniziapageblock [...*] ... \terminapageblock * NAME </pre>
<pre> \iniziapagecolumns [...,*=...,...] ... \terminapagecolumns * inherits: \setuppagecolumns OPT </pre>
<pre> \iniziaPAGECOLUMNS ... \terminaPAGECOLUMNS </pre>
<pre> \iniziapagecolumns [...*] ... \terminapagecolumns * NAME OPT </pre>
<pre> \iniziapagefigure [...¹] [...,*=²...,...] ... \terminapagefigure 1 FILE OPT 2 offset = implicito sovrapponi nessuno DIMENSION </pre>

\iniziapagelayout [...] ... \terminapagelayout
 * pagina paginasinistra paginadestra

\iniziapar [¹...] [²...,...²...,...] ... \terminapar
 1 NAME OPT OPT
 2 inherits: \setupparagraph

\iniziaparagraphs [...] ... \terminaparagraphs
 * NAME

\iniziaparagraphscell ... \terminaparagraphscell

\iniziaparagraphshape [...] ... \terminaparagraphshape
 * NAME

\iniziaPARAGRAPHS ... \terminaPARAGRAPHS

\iniziaPARALLEL ... \terminaPARALLEL

\iniziaparbuilder [...] ... \terminaparbuilder
 * implicito oneline basic NAME

\iniziapatterns [¹...] ... \terminapatterns
 * SPRACHE OPT

\iniziaplacefloat [¹...] [²...,...²...,...] [³...,...³...,...] ... \terminaplacefloat
 1 SINGULAR
 2 titolo = TEXT
 segnalibro = TEXT
 marcatura = TEXT
 elenco = TEXT
 luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
 inmargine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
 bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
 alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
 margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
 paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr lrtb fxtb
 btlr lrbt btrl rlbt fxbt fixd append
 riferimento = REFERENCE
 referencetext = TEXT
 3 KEY = VALUE

\iniziaplacefloattext [¹...] [²...,...²...,...] [³...,...³...,...] ... \terminaplacefloattext
 1 NAME
 2 titolo = TEXT
 segnalibro = TEXT
 marcatura = TEXT
 elenco = TEXT
 luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
 inmargine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
 bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
 alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
 margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
 paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr lrtb fxtb
 btlr lrbt btrl rlbt fxbt fixd append
 riferimento = REFERENCE
 referencetext = TEXT
 3 KEY = VALUE

```

\iniziamettiFLOATtesto    [...,\stackrel{1}{=}\dots,...]    [...,\stackrel{2}{=}\dots,...] ... \terminamettiFLOATtesto
1  titolo                = TEXT
   segnalibro            = TEXT
   marcatura             = TEXT
   elenco                = TEXT
   luogo                 = separa keep together sempre sinistra destra interno esterno backspace cutspace in sinistra in destra
                           in margine in margine sinistro in margine destro in bordo sinistro in bordo destro in margine interno in margine esterno
                           in bordo interno in bordo esterno testo opposto reimposta altezza profondita [-+] riga mezzariga griglia
                           alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                           margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                           paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                           tblr lrtb tblr rltb fxtb fixd append
   riferimento           = REFERENCE
   referencetext         = TEXT
2  KEY = VALUE
instances: chemical figure table intermezzo graphic

```

```

\iniziamettichemicaltesto [...,\stackrel{1}{=}\dots,...]    [...,\stackrel{2}{=}\dots,...] ... \terminamettichemicaltesto
1  titolo                = TEXT
   segnalibro            = TEXT
   marcatura             = TEXT
   elenco                = TEXT
   luogo                 = separa keep together sempre sinistra destra interno esterno backspace cutspace in sinistra in destra
                           in margine in margine sinistro in margine destro in bordo sinistro in bordo destro in margine interno in margine esterno
                           in bordo interno in bordo esterno testo opposto reimposta altezza profondita [-+] riga mezzariga griglia
                           alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                           margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                           paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                           tblr lrtb tblr rltb fxtb fixd append
   riferimento           = REFERENCE
   referencetext         = TEXT
2  KEY = VALUE

```

```

\iniziamettifiguretesto  [...,\stackrel{1}{=}\dots,...]    [...,\stackrel{2}{=}\dots,...] ... \terminamettifiguretesto
1  titolo                = TEXT
   segnalibro            = TEXT
   marcatura             = TEXT
   elenco                = TEXT
   luogo                 = separa keep together sempre sinistra destra interno esterno backspace cutspace in sinistra in destra
                           in margine in margine sinistro in margine destro in bordo sinistro in bordo destro in margine interno in margine esterno
                           in bordo interno in bordo esterno testo opposto reimposta altezza profondita [-+] riga mezzariga griglia
                           alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                           margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                           paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                           tblr lrtb tblr rltb fxtb fixd append
   riferimento           = REFERENCE
   referencetext         = TEXT
2  KEY = VALUE

```

```

\iniziamettigraphictesto [...,\stackrel{1}{=}\dots,...]    [...,\stackrel{2}{=}\dots,...] ... \terminamettigraphictesto
1  titolo                = TEXT
   segnalibro            = TEXT
   marcatura             = TEXT
   elenco                = TEXT
   luogo                 = separa keep together sempre sinistra destra interno esterno backspace cutspace in sinistra in destra
                           in margine in margine sinistro in margine destro in bordo sinistro in bordo destro in margine interno in margine esterno
                           in bordo interno in bordo esterno testo opposto reimposta altezza profondita [-+] riga mezzariga griglia
                           alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                           margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                           paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                           tblr lrtb tblr rltb fxtb fixd append
   riferimento           = REFERENCE
   referencetext         = TEXT
2  KEY = VALUE

```

```

\iniziamettiintermezzotesto  [...,..1...,...]  [...,..2...,...] ... \terminamettiintermezzotesto
1  titolo                    = TEXT
    segnalibro               = TEXT
    marcatura                = TEXT
    elenco                   = TEXT
    luogo                    = separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra
                                immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
                                bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
                                alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                                margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                                paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                                tblr lrtb tblr rltb fxtb fixd append
    riferimento              = REFERENCE
    referencetext            = TEXT
2  KEY = VALUE

```

```

\iniziamettitabletesto  [...,..1...,...]  [...,..2...,...] ... \terminamettitabletesto
1  titolo                    = TEXT
    segnalibro               = TEXT
    marcatura                = TEXT
    elenco                   = TEXT
    luogo                    = separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra
                                immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
                                bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
                                alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                                margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                                paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                                tblr lrtb tblr rltb fxtb fixd append
    riferimento              = REFERENCE
    referencetext            = TEXT
2  KEY = VALUE

```

```

\iniziamettiFLOAT  [...,..1...,...]  [...,..2...,...] ... \terminamettiFLOAT
1  titolo                    = TEXT
    segnalibro               = TEXT
    marcatura                = TEXT
    elenco                   = TEXT
    luogo                    = separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra
                                immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
                                bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
                                alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                                margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                                paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                                tblr lrtb tblr rltb fxtb fixd append
    riferimento              = REFERENCE
    referencetext            = TEXT
2  KEY = VALUE

```

instances: chemical figure table intermezzo graphic

```

\iniziamettichemical  [...,..1...,...]  [...,..2...,...] ... \terminamettichemical
1  titolo                    = TEXT
    segnalibro               = TEXT
    marcatura                = TEXT
    elenco                   = TEXT
    luogo                    = separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra
                                immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
                                bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
                                alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
                                margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
                                paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
                                tblr lrtb tblr rltb fxtb fixd append
    riferimento              = REFERENCE
    referencetext            = TEXT
2  KEY = VALUE

```

```

\iniziamettifigure [...] 1 [...] 2 ... \terminamettifigure
1 titolo = TEXT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
    immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
    bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
    alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
    margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
    paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
    tblr lrbt btrl rlbt fxbt fixd append
  riferimento = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\iniziamettigraphic [...] 1 [...] 2 ... \terminamettigraphic
1 titolo = TEXT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
    immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
    bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
    alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
    margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
    paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
    tblr lrbt btrl rlbt fxbt fixd append
  riferimento = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\iniziamettiintermezzo [...] 1 [...] 2 ... \terminamettiintermezzo
1 titolo = TEXT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
    immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
    bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
    alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
    margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
    paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
    tblr lrbt btrl rlbt fxbt fixd append
  riferimento = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\iniziamettitable [...] 1 [...] 2 ... \terminamettitable
1 titolo = TEXT
  segnalibro = TEXT
  marcatura = TEXT
  elenco = TEXT
  luogo = separa keeptogether sempre sinistra destra interno esterno backspace cutspace insinistra indestra
    immagine marginesinistro marginedestro bordosinistro bordodestro margineinterno margineesterno
    bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia
    alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza
    margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra
    paginadestra capoverso daqualcheparte effective intestazione piedipagina tblr lrtb tblr rltb fxtb
    tblr lrbt btrl rlbt fxbt fixd append
  riferimento = REFERENCE
  referencetext = TEXT
2 KEY = VALUE

```

```

\iniziaplacepairedbox [...] 1 [...] 2 ... \terminaplacepairedbox
1 NAME
2 inherits: \setuppairedbox

```

```

\iniziamettiPAIREDBOX [...] * ... \terminamettiPAIREDBOX
* inherits: \setuppairedbox
instances: legend

```

\iniziamettilegend [...] ... \terminamettilegend * inherits: \setuppairedbox OPT
\iniziapositioning [¹ ...] [...] ... \terminapositioning 1 NAME OPT OPT 2 inherits: \impostaposizionamento
\iniziapositionoverlay {...} ... \terminapositionoverlay * NAME
\iniziapositivo ... \terminapositivo
\iniziaposporre [...] ... \terminaposporre * [-+]NUMBER OPT
\iniziapostponingnotes ... \terminapostponingnotes
\iniziaprerollpageblock [...] ... \terminaprerollpageblock * NAME
\iniziaprocessassignmentcommand [...] ... \terminaprocessassignmentcommand * KEY = VALUE
\iniziaprocessassignmentlist [...] ... \terminaprocessassignmentlist * KEY = VALUE
\iniziaprocesscommacommand [...] ... \terminaprocesscommacommand * BEFEHL
\iniziaprocesscommalist [...] ... \terminaprocesscommalist * BEFEHL
\iniziaprodotto [...] ... \terminaprodotto * FILE *
\iniziaprodotto \terminaprodotto * FILE *
\iniziaprofile [...] ... \terminaprofile * NAME OPT
\iniziaprofile [...] ... \terminaprofile * inherits: \setupprofile OPT
\iniziaproFILE [...] ... \terminaproFILE * NAME OPT
\iniziaproFILE [...] ... \terminaproFILE * inherits: \setupprofile OPT
\iniziaprogetto [...] ... \terminaprogetto * FILE *
\iniziaprogetto \terminaprogetto * FILE *
\iniziaprotectedcolors ... \terminaprotectedcolors

```
\iniziapubblicazione      [...]1    [...,...2...,...] ... \terminapubblicazione
1   NAME                    OPT
2   tag                     = REFERENCE
   category                 = TEXT
   k                        = REFERENCE
   t                        = TEXT
```

\iniziarrandomized ... \terminarrandomized

```
\iniziarrowsetups    [...] ... \terminarawsetups
*   NAME
```

```
\iniziawsetups      ... .. \terminawsetups
*   NAME
```

```
\iniziareadingfile ... \terminareadingfile
```

```
\iniziaregime [...] ... \terminaregime
* inherits: \enableregime
```

```
\iniziareusableMPgraphic {...} {...2,...} ... \terminareusableMPgraphic
1 NAME
2 KEY
```

```
\iniziaringa [...]
* REFERENCE
```

```
\iniziaLINES    [...,*...,...] ... \terminaLINES
* inherits: \impostarigheOPT
instances: lines
```

```
\inizialines    [...,..*=..,..] ... \terminalines
* inherits: \impostarigheOPT
```

```
\iniciarows    [. . .]    [...,..2... ..] ... \terminarows
1  NAME                OPT
2  inherits: \setuprows
```

```
\iniziaROWS    [...,..*=..,..] ... \terminaROWS
* inherits: \setuprows OPT
```

```
\iniziaryby    [...] ... \terminaryby
*   NAME
```

```
\iniziascript    [...] ... \terminascript
*   hangul hanzi nihongo ethiopic thai tibetan test NAME
```

```
\iniziasectionblock    [1...]    [...,2...,...] ... \terminasectionblock
1  NAME
2  segnalibro = TEXT
   inherits: \impostabloccosezione
```

```
\iniziaSECTIONBLOCK    [...,*=,...] ... \terminaSECTIONBLOCK
*   segnalibro = TEXT                                     OPT
    inherits: \impostabloccosezione
instances: frontmatter bodymatter appendices backmatter
```

```
\iniziaappendices      [...,.*,...] ... \terminaappendices
*   segnalibro = TEXT      OPT
    inherits: \impostabloccosezione
```

```
\iniziabackmatter [...*...] ... \terminabackmatter
* segnalibro = TEXTOPT
inherits: \impostabloccosezione
```

```
\iniziabodymatter [...*...] ... \terminabodymatter
* segnalibro = TEXTOPT
inherits: \impostabloccosezione
```

```
\iniziafrontmatter [...*...] ... \terminafrontmatter
* segnalibro = TEXTOPT
inherits: \impostabloccosezione
```

```
\iniziasectionlevel [...1...] [...2...] [...3...] ... \terminasectionlevel
1 NAMEOPT
2 titolo = TEXTOPT
segnalibro = TEXT
marcatura = TEXT
elenco = TEXT
riferimento = REFERENCE
referencetext = TEXT
numeroproprio = TEXT
placeholder = TEXT
3 KEY = VALUE
```

```
\iniziasetcolumnset [...*...] ... \terminasetcolumnset
* c = NUMBER
r = NUMBER
nc = NUMBER
nr = NUMBER
metodo = qui fisso cima fondo tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt
opzione = pagina
ncima = NUMBER
nfondo = NUMBER
```

```
\iniziasetcolumnsetsheet [...] ... \terminasetcolumnsetsheet
* NUMMER
```

```
\iniziasetcolumnsetsht [...*...] ... \terminasetcolumnsetsht
* c = NUMBEROPT
r = NUMBER
nc = NUMBER
nr = NUMBER
metodo = qui fisso cima fondo tblr lrtb tblr rltb btlr lrbt btrl rlbt fxtb fxbt
opzione = pagina
ncima = NUMBER
nfondo = NUMBER
```

```
\iniziasetups [...] ... \terminasetups
* NAME
```

```
\iniziasetups ... ... \terminasetups
* NAME
```

```
\iniziasfondo [...*...] ... \terminasfondo
* inherits: \impostasfondoOPT
```

```
\iniziasFONDO [...*...] ... \terminaSFONDO
* inherits: \impostasfondoOPT
instances: sfondo
```

```
\iniziashadow [...] ... \terminashadow
* NAME
```

```
\iniziashadow [...*...] ... \terminashadow
* inherits: \setupshadow
```

<pre> \iniziashapedparagraph [...,..[*]...,...] ... \terminashapedparagraph * inherits: \setupshapedparagraph ^{OPT} </pre>
<pre> \iniziashapetext [...] ... \terminashapetext * NAME </pre>
<pre> \iniziashift [...] ... \terminashift * NAME </pre>
<pre> \iniziashift [...,..[*]...,...] ... \terminashift * inherits: \setupshift </pre>
<pre> \iniziashowbalancepoints [...,..[*]...,...] ... \terminashowbalancepoints * opzione = margine simple ^{OPT} livello = NUMMER elenco = TEXT offset = DIMENSION </pre>
<pre> \iniziashowbreakpoints [...,..[*]...,...] ... \terminashowbreakpoints * opzione = margine simple ^{OPT} livello = NUMMER elenco = TEXT offset = DIMENSION </pre>
<pre> \iniziashowrivers [...,..[*]...,...] ... \terminashowrivers * margine = DIMENSION ^{OPT} passo = DIMENSION altezza = DIMENSION profondita = DIMENSION spaceinbetween = DIMENSION criterio = NUMMER opzione = test </pre>
<pre> \iniziasidebar [...¹] [...,..²...,...] ... \terminasidebar 1 NAME ^{OPT} 2 inherits: \setupsidebar </pre>
<pre> \iniziasimplecolumns [...,..[*]...,...] ... \terminasimplecolumns * n = NUMMER ^{OPT} ampiezza = DIMENSION distanza = DIMENSION righe = NUMMER </pre>
<pre> \iniziasospeso [...,..¹...,...] {...²} ... \terminasospeso 1 inherits: \setuphanging ^{OPT} 2 CONTENT </pre>
<pre> \iniziasospeso [...¹] {...²} ... \terminasospeso 1 sinistra destra ^{OPT} 2 CONTENT </pre>
<pre> \iniziasovrapponi ... \terminasovrapponi </pre>
<pre> \iniziaspecialitem [...¹] [...,..²...,...] ... \terminaspecialitem 1 elemento ^{OPT} 2 REFERENCE ^{OPT} </pre>
<pre> \iniziaspecialitem [...] ... \terminaspecialitem * sotto its no </pre>
<pre> \iniziaspecialitem [...¹] {...²} ... \terminaspecialitem 1 sim corse mar txt 2 TEXT </pre>

\iniziasplittext ... \terminasplittext
\iniziaspread ... \terminaspread
\iniziastacking [...] ... \terminastacking * NUMMER
\iniziastackingsteps [...,*,...] ... \terminastackingsteps * NUMMER
\iniziaSTACKING [...] ... \terminaSTACKING * NUMMER
\iniziaSTARTSTOP ... \terminaSTARTSTOP
\iniziaSTARTSTOP [...,*,...] ... \terminaSTARTSTOP * inherits: \impostainiziatermina
\iniziastaticMPfigure {...} ... \terminastaticMPfigure * NAME
\iniziastaticMPgraphic {... ¹ } {..., ² ...} ... \terminastaticMPgraphic 1 NAME 2 KEY
\iniziastretto [... ¹] [..., ² ...,...] ... \terminastretto 1 NAME 2 inherits: \impostapiustretto
\iniziastretto [..., ¹ ...,...] [..., ² ...,...] ... \terminastretto 1 inherits: \impostapiustretto 2 [-+]sinistra [-+]centro [-+]destra NUMMER*sinistra NUMMER*centro NUMMER*destra reimposta invertito
\iniziastretto [... ¹] [..., ² ...,...] ... \terminastretto 1 NAME 2 [-+]sinistra [-+]centro [-+]destra NUMMER*sinistra NUMMER*centro NUMMER*destra reimposta invertito
\iniziastrictinspectnextcharacter ... \terminastrictinspectnextcharacter
\iniziastyle [...,*,...,...] ... \terminastyle * inherits: \setupstyle
\iniziastyle [...] ... \terminastyle * NAME FONT
\iniziaSTYLE ... \terminaSTYLE
\iniziasubcolumnset [... ¹] [..., ² ...,...] ... \terminasubcolumnset 1 NAME 2 inherits: \setupsubcolumnset
\iniziasubcolumnsetgroup [... ¹] [..., ² ...,...] ... \terminasubcolumnsetgroup 1 NAME 2 inherits: \setupsubcolumnset
\iniziasubformulas [...,*,...] ... \terminasubformulas * + - REFERENCE

<code>\iniziasubjectlevel</code> [¹...] [²...,...²...,...] [³...,...³...,...] ... <code>\terminasubjectlevel</code> 1 NAME OPT OPT OPT 2 titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT numeroproprio = TEXT placeholder = TEXT 3 KEY = VALUE
<code>\iniziasubnumberinghere</code> ... <code>\terminasubnumberinghere</code>
<code>\iniziasubparagraph</code> ... <code>\terminasubparagraph</code>
<code>\iniziasubsentence</code> ... <code>\terminasubsentence</code>
<code>\iniziasubstack</code> ... <code>\terminasubstack</code>
<code>\iniziasymbolset</code> [¹...] [²...,...²...,...] ... <code>\terminasymbolset</code> 1 NAME OPT 2 font = FONT
<code>\iniziasynchronizing</code> ... <code>\terminasynchronizing</code>
<code>\iniziaTABLE</code> [[*]...,...[*]...,...] ... <code>\terminaTABLE</code> * inherits: <code>\setupTABLE</code> OPT
<code>\iniziaTABLEbody</code> [[*]...,...[*]...,...] ... <code>\terminaTABLEbody</code> * inherits: <code>\setupTABLE</code> OPT
<code>\iniziaTABLEfoot</code> [[*]...,...[*]...,...] ... <code>\terminaTABLEfoot</code> * inherits: <code>\setupTABLE</code> OPT
<code>\iniziaTABLEhead</code> [[*]...,...[*]...,...] ... <code>\terminaTABLEhead</code> * inherits: <code>\setupTABLE</code> OPT
<code>\iniziaTABLEnext</code> [[*]...,...[*]...,...] ... <code>\terminaTABLEnext</code> * inherits: <code>\setupTABLE</code> OPT
<code>\iniziatabella</code> [¹...] [²...,...²...,...] ... <code>\terminatabella</code> 1 TEMPLATE OPT 2 inherits: <code>\impostatabelle</code>
<code>\iniziatabella</code> [¹...] [²...,...²...,...] ... <code>\terminatabella</code> 1 NAME OPT 2 inherits: <code>\impostatabelle</code>
<code>\iniziatabelle</code> [[*]...] ... <code>\terminatabelle</code> * TEMPLATE
<code>\iniziatabelle</code> [[*]...] ... <code>\terminatabelle</code> * NAME
<code>\iniziatabulato</code> [¹...] [²...,...²...,...] ... <code>\terminatabulato</code> 1 TEMPLATE OPT OPT 2 inherits: <code>\impostatabulato</code>

\iniziaTABULATE [¹...] [...²...] ... \terminaTABULATE 1 NAME OPT OPT 2 inherits: \impostatabulato instances: legend fact
\iniziafact [¹...] [...²...] ... \terminaifact 1 NAME OPT OPT 2 inherits: \impostatabulato
\inizialegend [¹...] [...²...] ... \terminalegend 1 NAME OPT OPT 2 inherits: \impostatabulato
\iniziatesta [...¹...] {...²} ... \terminatesta 1 REFERENCE OPT 2 TEXT
\iniziatestatabella [...[*]] ... \terminatestatabella * NAME
\iniziatestatabulato [...[*]] ... \terminatestatabulato * NAME OPT
\iniziatesto ... \terminatesto
\iniziatestoaiuto [...[*]] ... \terminatestoaiuto * REFERENCE OPT
\inizialABELtesto [¹...] [...²] ... \terminalABELtesto 1 SPRACHE OPT 2 KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
\iniziabtxlabeltesto [¹...] [...²] ... \terminabtxlabeltesto 1 SPRACHE OPT 2 KEY
\iniziaheadtesto [¹...] [...²] ... \terminaheadtesto 1 SPRACHE OPT 2 KEY
\inizialabeltesto [¹...] [...²] ... \terminalabeltesto 1 SPRACHE OPT 2 KEY
\iniziamathlabeltesto [¹...] [...²] ... \terminamathlabeltesto 1 SPRACHE OPT 2 KEY
\iniziaoperatorotestto [¹...] [...²] ... \terminaoperatorotestto 1 SPRACHE OPT 2 KEY
\iniziaprefixtesto [¹...] [...²] ... \terminaprefixtesto 1 SPRACHE OPT 2 KEY
\iniziasuffixtesto [¹...] [...²] ... \terminasuffixtesto 1 SPRACHE OPT 2 KEY

<pre> \inizia>taglabeltesto [...] [...] ... \termina>taglabeltesto 1 SPRACHE OPT 2 KEY </pre>
<pre> \inizia>unittesto [...] [...] ... \termina>unittesto 1 SPRACHE OPT 2 KEY </pre>
<pre> \inizia>FRAMEDTEXT [...] [...] ... \termina>FRAMEDTEXT 1 sinistra destra centro nessuno OPT 2 inherits: \setupframedtext instances: framedtext </pre>
<pre> \inizia>framedtext [...] [...] ... \termina>framedtext 1 sinistra destra centro nessuno OPT 2 inherits: \setupframedtext </pre>
<pre> \inizia>texcode ... \termina>texcode </pre>
<pre> \inizia>texdefinition .1 .2 .3 ... \termina>texdefinition 1 spaces nospaces globale tollerante frozen permanent instance mutable immutable protetto semiprotected unexpanded expanded singleempty doubleempty tripleempty quadrupleempty quintupleempty sextupleempty singleargument doubleargument tripleargument quadrupleargument quintupleargument sextupleargument 2 NAME 3 TEMPLATE </pre>
<pre> \inizia>textbackground [...] [...] ... \termina>textbackground 1 NAME 2 inherits: \setuptextbackground </pre>
<pre> \inizia>textbackgroundmanual ... \termina>textbackgroundmanual </pre>
<pre> \inizia>TEXTBACKGROUND [...] ... \termina>TEXTBACKGROUND * inherits: \setuptextbackground OPT </pre>
<pre> \inizia>textcolor [...] ... \termina>textcolor * COLOR </pre>
<pre> \inizia>textcolorintent ... \termina>textcolorintent </pre>
<pre> \inizia>TEXTDISPLAY [...] ... \termina>TEXTDISPLAY * inherits: \setuptextdisplay OPT instances: textdisplay </pre>
<pre> \inizia>texdisplay [...] ... \termina>texdisplay * inherits: \setuptextdisplay OPT </pre>
<pre> \inizia>textflow [...] ... \termina>textflow * NAME </pre>
<pre> \inizia>tokenlist [...] ... \termina>tokenlist * NAME </pre>
<pre> \inizia>tokens [...] ... \termina>tokens * NAME </pre>
<pre> \inizia>transliteration [...] [...] ... \termina>transliteration 1 NAME 2 inherits: \setuptransliteration </pre>

<pre> \iniziatransparent [...] ... \terminatransparent * COLOR </pre>
<pre> \iniziatypescript [...] ¹ [...] ² [...] ³ [...] ... \terminatypescript 1 serif sans mono math handwriting calligraphy ^{OPT} 2 NAME 3 dimensione nome </pre>
<pre> \iniziatypescriptcollection [...] ... \terminatypescriptcollection * NAME </pre>
<pre> \iniziaTYPING [...] [*] [...] ... \terminaTYPING * inherits: \impostatyping ^{OPT} instances: typing LUA MP PARSEDXML TEX XML </pre>
<pre> \iniziaTYPING [...] [*] [...] ... \terminaTYPING * continua ^{OPT} instances: typing LUA MP PARSEDXML TEX XML </pre>
<pre> \iniziaLUA [...] [*] [...] ... \terminaLUA * continua ^{OPT} </pre>
<pre> \iniziaMP [...] [*] [...] ... \terminaMP * continua ^{OPT} </pre>
<pre> \iniziaPARSEDXML [...] [*] [...] ... \terminaPARSEDXML * continua ^{OPT} </pre>
<pre> \iniziaTEX [...] [*] [...] ... \terminaTEX * continua ^{OPT} </pre>
<pre> \iniziatyping [...] [*] [...] ... \terminatyping * continua ^{OPT} </pre>
<pre> \iniziaXML [...] [*] [...] ... \terminaXML * continua ^{OPT} </pre>
<pre> \iniziaLUA [...] [*] [...] ... \terminaLUA * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziaMP [...] [*] [...] ... \terminaMP * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziaPARSEDXML [...] [*] [...] ... \terminaPARSEDXML * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziaTEX [...] [*] [...] ... \terminaTEX * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziatyping [...] [*] [...] ... \terminatyping * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziaXML [...] [*] [...] ... \terminaXML * inherits: \impostatyping ^{OPT} </pre>
<pre> \iniziauniqueMPgraphic { ¹ } { [...] ² } ... \terminauniqueMPgraphic 1 NAME 2 KEY </pre>

<pre> \iniziauniqueMPpagegraphic {...} {...,²...} ... \terminauniqueMPpagegraphic 1 NAME 2 KEY </pre>
<pre> \iniziaunpacked ... \terminaunpacked </pre>
<pre> \iniziausableMPgraphic {...} {...,²...} ... \terminausableMPgraphic 1 NAME 2 KEY </pre>
<pre> \iniziauseMPgraphic {...} {...,²...} ... \terminauseMPgraphic 1 NAME 2 KEY </pre>
<pre> \iniziausemathstyleparameter *... ... \terminausemathstyleparameter * CSNAME </pre>
<pre> \iniziauserdata [...¹] [...,²...,...] ... \terminauserdata 1 NAME 2 KEY = VALUE </pre>
<pre> \iniziaUSERDATA [...,[*]...,...] ... \terminaUSERDATA * KEY = VALUE </pre>
<pre> \iniziausingbtxsconfiguration [...] ... \terminausingbtxsconfiguration * NAME </pre>
<pre> \iniziavaia [...] ... \terminavaia * REFERENCE </pre>
<pre> \iniziavboxregister .* ... \terminavboxregister * CSNAME NUMBER </pre>
<pre> \iniziavboxtohbox ... \terminavboxtohbox </pre>
<pre> \iniziavboxtohboxseparator ... \terminavboxtohboxseparator </pre>
<pre> \iniziaverticalbox [...¹] [...,²...,...] ... \terminaverticalbox 1 NAME 2 inherits: \setupverticalbox </pre>
<pre> \iniziaviewerlayer [...] ... \terminaviewerlayer * NAME </pre>
<pre> \iniziaVIEWERLAYER ... \terminaVIEWERLAYER </pre>
<pre> \iniziavtopregister .* ... \terminavtopregister * CSNAME NUMBER </pre>
<pre> \iniziaxcell [...¹] [...,²...,...] ... \terminaxcell 1 NAME 2 nx = NUMBER ny = NUMBER nc = NUMBER nr = NUMBER inherits: \setupxtable </pre>

<pre> \iniziacellgroup [...] [...] ... \terminacellgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \iniziacolumn [...] [...] ... \terminacolumn * inherits: \setupxtable OPT </pre>
<pre> \iniziacolumn [...] ... \terminacolumn * NAME OPT </pre>
<pre> \iniziagroup [...] [...] ... \terminagroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \iniziaxmldisplayverbatim [...] ... \terminaxmldisplayverbatim * NAME </pre>
<pre> \iniziaxmlinlineverbatim [...] ... \terminaxmlinlineverbatim * NAME </pre>
<pre> \iniziaxmlraw ... \terminaxmlraw </pre>
<pre> \iniziaxmlsetups [...] ... \terminaxmlsetups * NAME </pre>
<pre> \iniziaxmlsetups \terminaxmlsetups * NAME </pre>
<pre> \iniziaxrow [...] [...] ... \terminaxrow 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \iniziaxrowgroup [...] [...] ... \terminaxrowgroup 1 NAME OPT OPT 2 inherits: \setupxtable </pre>
<pre> \iniziatable [...] [...] ... \terminatable * inherits: \setupxtable OPT </pre>
<pre> \iniziatablebody [...] [...] ... \terminatablebody * inherits: \setupxtable OPT </pre>
<pre> \iniziatablebody [...] ... \terminatablebody * NAME OPT </pre>
<pre> \iniziatablefoot [...] [...] ... \terminatablefoot * inherits: \setupxtable OPT </pre>
<pre> \iniziatablefoot [...] ... \terminatablefoot * NAME OPT </pre>
<pre> \iniziatablehead [...] [...] ... \terminatablehead * inherits: \setupxtable OPT </pre>
<pre> \iniziatablehead [...] ... \terminatablehead * NAME OPT </pre>

```
\iniziaxtablenext    [...,*=...,...] ... \terminaxtablenext
* inherits: \setupxtable          OPT
```

```
\iniziatablenext    [...] ... \terminatablenext
*   NAME                OPT
```

```
\iniziaXTABLE    [...,*=..,..] ... \terminaXTABLE
* inherits: \setupxtable OPT
```

```
\iniziatable [...] ... \terminatable
* NAME OPT
```

```
\inlinebar    [...]1    {...}2
1  NAME
2  CONTENT
```

```
\inlinebuffer    [...,*...]
*  BUFFER                OPT
```

`\inlinedbox` `{...}`
* CONTENT

`\inlinemath` `{...}`

* CONTENT

`\inlinemathematics` `{...}`
* CONTENT

```
\inlinemessage    {...}
* TEXT
```

```
\inlineordisplaymath    {...}    {...}
1  CONTENT
2  CONTENT
```

```
\inlineprettyprintbuffer    {...}    {...}
```

```
1  BUFFER
```

```
2  mp lua xml parsed-xml nested tex context nessuno NAME
```

\inlinerange [..]
* REFERENCE

\innerflushshapebox

```
\input    {...}
* FILE
```

`\inputfilebarename`

\inputfilesuffix

```
\inputgivenfile    {...}
*    FILE
```


<pre> \input ... * FILE </pre>
<pre> \inriga {¹...} [²...] 1 TEXT OPT 2 REFERENCE </pre>
<pre> \insertblankafter [...*...] * inherits: \rigovuoto </pre>
<pre> \insertblankbefore [...*...] * inherits: \rigovuoto </pre>
<pre> \insertlineafter {.*} * CONTENT </pre>
<pre> \insertlinebefore {.*} * CONTENT </pre>
<pre> \insertpages [¹...] [...,²...] [...,³...,...] 1 FILE 2 NUMBER 3 ampiezza = DIMENSION n = NUMBER category = NAME alternativa = a b implicito pagina </pre>
<pre> \inspectluatable \.* * CSNAME </pre>
<pre> \installactionhandler {.*} * NAME </pre>
<pre> \installactivecharacter .* * CHARACTER </pre>
<pre> \installaligncommand {¹...} {²...} 1 NAME 2 CONTENT </pre>
<pre> \installalingua [¹...] [...,²...,...] 1 NAME 2 inherits: \impostalingua </pre>
<pre> \installalingua [¹...] [²...] 1 NAME 2 SPRACHE </pre>
<pre> \installanddefineactivecharacter .¹... {²...} 1 CHARACTER 2 BEFEHL </pre>
<pre> \installattributestack \.* * CSNAME </pre>
<pre> \installautocommandhandler \.¹... {²...} \.³... 1 CSNAME 2 NAME 3 CSNAME </pre>

\installautosetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installbasicautosetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installbasicparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installbottomframerenderer { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installcommalistprocessor { ¹ ...} \ ² ... 1 NAME 2 CSNAME
\installcommalistprocessorcommand { ¹ ...} \ ² ... 1 NAME 2 CSNAME
\installcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installcorenamespace { [*] ...} * NAME
\installctxfunction \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installctxscanner \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installdefinehandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installdefinitionset \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdefinitionsetmember \ ¹ ... { ² ...} \ ³ ... { ⁴ ...} 1 CSNAME 2 NAME 3 CSNAME 4 NAME
\installdirectcommandhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME

\installdirectparametersethandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installdirectstyleandcolorhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installframedautocommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installframedcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installglobalmacrostack *... * CSNAME
\installinheritedframed { [*] ...} * NAME
\installleftframerenderer { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installlocalcurrenthandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installmacrostack *... * CSNAME
\installnamespace { [*] ...} * NAME
\installoutputroutine \ ¹ ... { ² ...} 1 CSNAME 2 BEFEHL
\installpagearrangement ¹ ... { ² ...} 1 NAME 2 BEFEHL
\installparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installparameterhashhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installparametersethandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME

\installparentinjector \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installprotectedctxfunction \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installprotectedctxscanner \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\installrightframerenderer { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installrootparameterhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installsetuponlycommandhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installshipoutmethod { ¹ ...} { ² ...} 1 NAME 2 BEFEHL
\installsimplecommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installsimpleframedcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installstyleandcolorhandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installstylisticautosetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installswitchcommandhandler \ ¹ ... { ² ...} \ ³ ... 1 CSNAME 2 NAME 3 CSNAME
\installswitchsetuphandler \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\installtexdirective { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 BEFEHL 3 BEFEHL

\installtexttracker {...} {...} {...} 1 NAME 2 BEFEHL 3 BEFEHL
\installtopframerenderer {...} {...} 1 NAME 2 BEFEHL
\installunitsseparator {...} {...} 1 NAME 2 BEFEHL
\installunitsspace {...} {...} 1 NAME 2 BEFEHL
\installversioninfo {...} {...} 1 NAME 2 BEFEHL
\INSTANCEparameter {...} * KEY
\integerrounding {...} * NUMMER
\intertext {...} * TEXT
\interwordspaceafter
\interwordspacebefore
\interwordspaces {...} * NUMMER
\interwordspacesafter {...} * NUMMER
\interwordspacesbefore {...} * NUMMER
\intorno [...] * REFERENCE
\invokepagehandler {...} {...} 1 normale nessuno NAME 2 CONTENT
\italiccorrection
\italicface
\itemtag [...,*...] * REFERENCE OPT
\jobfilename

<code>\jobfilesuffix</code>
<code>\justimages</code>
<code>\kannadanumerals {...}</code> <code>* NUMMER</code>
<code>\kap {...}</code> <code>* TEXT</code>
<code>\keephyphensequences</code>
<code>\keeplinestogether {...}</code> <code>* NUMMER</code>
<code>\keeporphans</code>
<code>\keeptoddlers</code>
<code>\keeptwins</code>
<code>\keepunwantedspaces</code>
<code>\kerncharacters [.¹.] {..².}</code> <code>1 NUMMER OPT</code> <code>2 TEXT</code>
<code>\koreancirclednumerals {...}</code> <code>* NUMMER</code>
<code>\koreannumerals {...}</code> <code>* NUMMER</code>
<code>\koreannumeralsc {...}</code> <code>* NUMMER</code>
<code>\koreannumeralsp {...}</code> <code>* NUMMER</code>
<code>\koreanparentnumerals {...}</code> <code>* NUMMER</code>
<code>\LAMSTEX</code>
<code>\LATEX</code>
<code>\LamSTeX</code>
<code>\LaTeX</code>
<code>\Lettera {...}</code> <code>* NUMMER</code>
<code>\Lettere {...}</code> <code>* NUMMER</code>

<code>\LMTX</code>
<code>\LUAJITTEX</code>
<code>\LUAMETATEX</code>
<code>\LUATEX</code>
<code>\Lua</code>
<code>\LuajitTeX</code>
<code>\LuaMetaTeX</code>
<code>\LuaTeX</code>
<code>\LABELlingua</code> instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
<code>\btxlabellingua</code>
<code>\headlingua</code>
<code>\labellingua</code>
<code>\mathlabellingua</code>
<code>\operatorlingua</code>
<code>\prefixlingua</code>
<code>\suffixlingua</code>
<code>\taglabellingua</code>
<code>\unitlingua</code>
<code>\LABELtexts</code> $\{.^1..\}$ $\{.^2..\}$ 1 KEY 2 TEXT instances: head label mathlabel
<code>\headtexts</code> $\{.^1..\}$ $\{.^2..\}$ 1 KEY 2 TEXT
<code>\labeltexts</code> $\{.^1..\}$ $\{.^2..\}$ 1 KEY 2 TEXT
<code>\mathlabeltexts</code> $\{.^1..\}$ $\{.^2..\}$ 1 KEY 2 TEXT

\languageCharacters {...} * NUMMER
\languagecharacters {...} * NUMMER
\languagecharwidth {...} * SPRACHE
\lastcounter [...] 1 NAME 2 NUMMER
\lastcountervalue [...] * NAME
\lastdigit {...} * NUMMER
\lastlinewidth
\lastnaturalboxdp
\lastnaturalboxht
\lastnaturalboxwd
\lastparwrapper {...} * NAME
\lastpredefinedsymbol
\lastrealpage
\lastrealpagenumber
\lastsubcountervalue [...] 1 NAME 2 NUMMER
\lastsubpagenumber
\lasttwodigits {...} * NUMMER
\lastunitstring
\lastuserpage
\lastuserpagenumber
\lateluacode {...} * BEFEHL

$\backslash\text{layeredtext}$ $[...,\overset{1}{=}\dots]$ $[...,\overset{2}{=}\dots]$ $\{\overset{3}{\dots}\}$ $\{\overset{4}{\dots}\}$ 1 inherits: \setuplayer OPT OPT 2 inherits: \setuplayeredtext 3 TEXT 4 CONTENT
$\backslash\text{layerheight}$
$\backslash\text{layerwidth}$
$\backslash\text{lbox}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{lchexnumber}$ $\{\overset{*}{\dots}\}$ * NUMMER
$\backslash\text{lchexnumbers}$ $\{\overset{*}{\dots}\}$ * NUMMER
$\backslash\text{leftbottombox}$ $\{\overset{*}{\dots}\}$ * CONTENT
$\backslash\text{leftbox}$ $\{\overset{*}{\dots}\}$ * CONTENT
$\backslash\text{lefthbox}$ $\{\overset{*}{\dots}\}$ * CONTENT
$\backslash\text{leftLABELtesto}$ $\{\overset{*}{\dots}\}$ * KEY instances: head label mathlabel
$\backslash\text{leftheadtesto}$ $\{\overset{*}{\dots}\}$ * KEY
$\backslash\text{leftlabeltesto}$ $\{\overset{*}{\dots}\}$ * KEY
$\backslash\text{leftmathlabeltesto}$ $\{\overset{*}{\dots}\}$ * KEY
$\backslash\text{leftline}$ $\{\overset{*}{\dots}\}$ * CONTENT
$\backslash\text{lefttorrighthbox}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{lefttorrightvbox}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{lefttorrightvtop}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT

<code>\letfromCOMANDOparameter \.^.. {...}</code> 1 CSNAME 2 KEY
<code>\letgvalue {...} \.^..</code> 1 NAME 2 CSNAME
<code>\letgvalueempty {...}</code> * NAME
<code>\letgvaluerelax {...}</code> * NAME
<code>\lettera {...}</code> * NUMMER
<code>\letterampersand</code>
<code>\letterat</code>
<code>\letterbackslash</code>
<code>\letterbar</code>
<code>\letterbgroup</code>
<code>\letterclosebrace</code>
<code>\lettercolon</code>
<code>\letterdollar</code>
<code>\letterdoublequote</code>
<code>\lettere {...}</code> * NUMMER
<code>\letteregroup</code>
<code>\letterescape</code>
<code>\letterexclamationmark</code>
<code>\letterhash</code>
<code>\letterhat</code>
<code>\letterhyphen</code>
<code>\letterleftbrace</code>
<code>\letterleftbracket</code>

\limitatetext { ¹ ...} { ² ...} { ³ ...} 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
\limitatetext { ¹ ...} { ² ..., ² ...} { ³ ...} 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
\lineanera [..., [*] ...,...] * inherits: \impostalin ^{OPT} enere
\lineasottile
\lineatesto [¹ ...] { ² ...} 1 cima centro fondo ^{OPT} 2 TEXT
\linebox { [*] ...} * CONTENT
\lineenere [..., [*] ...,...] * inherits: \impostalin ^{OPT} enere
\lineeriempimento [..., ¹ ...,...] { ² ...} { ³ ...} 1 inherits: \impostalin ^{OPT} eriempimento 2 TEXT 3 TEXT
\linesottili [..., [*] ...,...] * inherits: \impostalin ^{OPT} esottili
\linefillerhbox [¹ ...] ² ... { ³ ...} 1 NAME 2 TEXT 3 CONTENT
\linefillervbox [¹ ...] ² ... { ³ ...} 1 NAME 2 TEXT 3 CONTENT
\linefillervtop [¹ ...] ² ... { ³ ...} 1 NAME 2 TEXT 3 CONTENT
\LINENOTE { [*] ...} * TEXT instances: linenote
\linenote { [*] ...} * TEXT
\linespanningtext { ¹ ...} { ² ...} { ³ ...} 1 TEXT 2 DIMENSION 3 FONT

<pre> \lingua [...] * SPRACHE </pre>
<pre> \linguaprincipale [...] * SPRACHE </pre>
<pre> \LANGUAGE </pre>
<pre> \listcitation [...] [...] 1 riferimento = REFERENCE^{PT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \listcitation [...] [...] 1 implicito category ^{PT}entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \listcitation [...] [...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \listcite [...] [...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \listcite [...] [...] 1 implicito category ^{PT}entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \listcite [...] [...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \listnamespaces </pre>
<pre> \literalmode </pre>

\llap {...} * CONTENT
\loadanyfile [...] * FILE
\loadanyfileonce [...] * FILE
\loadbtxdefinitionfile [...] * FILE
\loadbtxreplacementfile [...] * FILE
\loadcldfile [...] * FILE
\loadcldfileonce [...] * FILE
\loadfontgoodies [...] * FILE
\loadluafile [...] * FILE
\loadluafileonce [...] * FILE
\loadspellchecklist [...] [...] 1 NAME 2 FILE
\loadtexfile [...] * FILE
\loadtexfileonce [...] * FILE
\loadtypescriptfile [...] * FILE
\localanchorx {...} 1 NAME 2 NUMMER 3 NUMMER
\localanchory {...} 1 NAME 2 NUMMER 3 NUMMER
\localbox [...] {...} 1 NAME 2 CONTENT

<code>\localframed</code> ¹ [...] [..., ² ...,...] { ³ ...} 1 NAME 2 inherits: \impostaincorniciato 3 CONTENT
<code>\localframedwithsettings</code> ¹ [...] [..., ² ...,...] { ³ ...} 1 NAME 2 inherits: \impostaincorniciato 3 CONTENT
<code>\localhsize</code>
<code>\localmargintext</code> ¹ [...] { ² ...} 1 NAME 2 CONTENT
<code>\localpopbox</code> ... * CSNAME NUMBER
<code>\localpopmacro</code> *... * CSNAME
<code>\localpushbox</code> ... * CSNAME NUMBER
<code>\localpushmacro</code> *... * CSNAME
<code>\localundefine</code> {*...} * NAME
<code>\locatedfilepath</code>
<code>\locatefilepath</code> {*...} * FILE
<code>\locfilename</code> {*...} * FILE
<code>\loggingall</code>
<code>\lomihi</code> { ¹ ...} { ² ...} { ³ ...} 1 CONTENT 2 CONTENT 3 CONTENT
<code>\lowerbox</code> { ¹ ...} \ ² ... { ³ ...} 1 DIMENSION 2 CSNAME 3 CONTENT
<code>\lowercased</code> {*...} * TEXT
<code>\lowercasestring</code> ¹ ... \to \ ² ... 1 TEXT 2 CSNAME
<code>\lowercasing</code>

<code>\lowerlefthdoubleninequote</code>
<code>\lowerleftsingleninequote</code>
<code>\lowerrighthdoubleninequote</code>
<code>\lowerrightsingleninequote</code>
<code>\LOWHIGH [¹...] {²...} {³...}</code> 1 sinistra destra ^{OPT} 2 CONTENT 3 CONTENT
<code>\LOWMIDHIGH {¹...} {²...} {³...}</code> 1 CONTENT 2 CONTENT 3 CONTENT
<code>\lrbtbox {¹...} {²...} {³...} {⁴...} {⁵...}</code> 1 DIMENSION 2 DIMENSION 3 DIMENSION 4 DIMENSION 5 CONTENT
<code>\ltop .¹... {²...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\ltrhbox .¹... {²...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\ltrtext {[*]...}</code> * CONTENT
<code>\ltrvbox .¹... {²...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\ltrvtop .¹... {²...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\luacode {[*]...}</code> * BEFEHL
<code>\luaconditional \[*]...</code> * CSNAME
<code>\luaenvironment [*]...</code> * FILE
<code>\luaexpanded {[*]...}</code> * BEFEHL
<code>\luaexpr [¹...] {²...}</code> 1 TEXT ^{OPT} 2 CONTENT

\luafunction {...} * BEFEHL
\luajitTeX
\luamajorversion
\luametaTeX
\luaminorversion
\luaparameterset {...} {...} 1 NAME 2 CONTENT
\luasetup {...} * NAME
\luaTeX
\luaversion
\lunghezzaelenco
\MESE {...} * NUMMER
\METAFONT
\METAFUN
\METAPOST
\MetaFont
\MetaFontLogo
\MetaFun
\MetaPost
\MetaPostLogo
\MKII
\MKIV
\MKIX
\MKLX
\MKVI
\MKXI

<code>\MKXL</code>
<code>\MONTHLONG {...}</code> <code>* NUMBER</code>
<code>\MONTHSHORT {...}</code> <code>* NUMBER</code>
<code>\MPanchor {...}</code> <code>* NAME</code>
<code>\MPbetex {...}</code> <code>* NAME</code>
<code>\MPc {...}</code> <code>* NAME</code>
<code>\MPcode [^{1..}] {^{2..}}</code> <code>1 metafun minifun^{9PF} extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost</code> <code>2 doublepost binarypost decimalpost simplefun</code> <code>2 CONTENT</code>
<code>\MPcolor {...}</code> <code>* COLOR</code>
<code>\MPcoloronly {...}</code> <code>* COLOR</code>
<code>\MPcolumn {...}</code> <code>* NAME</code>
<code>\MPd {...}</code> <code>* NAME</code>
<code>\MPdpar \^{1..} {^{2..}}</code> <code>1 CSNAME</code> <code>2 KEY</code>
<code>\MPdrawing {...}</code> <code>* CONTENT</code>
<code>\MPfontsizehskip {...}</code> <code>* FONT</code>
<code>\MPgetmultipars {^{1..}} {^{2..}}</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\MPgetmultishape {^{1..}} {^{2..}}</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\MPgetposboxes {...,^{1..},...} {^{2..}}</code> <code>1 NAME</code> <code>2 NAME</code>
<code>\MPh {...}</code> <code>* NAME</code>

\MPII
\MPIV
\MPinclusions [¹ ...] { ² ...} { ³ ...} 1 + OPT OPT 2 metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun 3 CONTENT
\MPLX
\MPleftskip {...} * NAME
\MPl1 {...} * NAME
\MPlr {...} * NAME
\MPls {...} * NAME
\MPMI
\MPML
\MPmenubuttons {...} * NAME
\MPn {...} * NAME
\MPnpar \ ¹ ... { ² ...} 1 CSNAME 2 KEY
\MPOptions {...} * COLOR
\MPOverlayanchor {...} * NAME
\MPP {...} * NAME
\MPPage {...} * NAME
\MPPardata {...} * NAME
\MPPplus { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 NUMMER 3 CONTENT

$$\backslash\mathrm{MP}_{\mathrm{pos}} \quad \{.\dots\}$$

* NAME

$$\backslash MPpositiongraphic \quad \{\dots\} \quad \{\dots,\dots^2\dots,\dots\}$$

1 NAME

2 KEY = VALUE

$$\backslash \text{MPposset} \quad \{ \dots \}$$

* NAME

$$\backslash\mathrm{MPr} \quad \{.\!.\!.^*\}$$

* NAME

$$\backslash\mathrm{MPrawvar} \quad \{.^1..\} \quad \{.^2..\}$$

1 NAME

2 KEY

`\MPregion` $\{.\dots\}^*$

* NAME

`\MPrest` $\{ \dots \}^1$ $\{ \dots \}^2$

1 NAME

2 CONTENT

`\MPrightskip` `{...}`

* NAME

`\MPrs` `{...}`

* NAME

$$\backslash\text{MPspar} \quad \backslash.^1\ldots \quad \{.^2\ldots\}$$

1 CSNAME

2 KEY

`\MPstring` `{...}`

* NAME

`\MPtext` `{...}`

* NAME

`\MPtransparency` `{...}`

* COLOR

$$\backslash\mathrm{MPu1} \quad \{.\!.\!.^*\}$$

* NAME

$$\backslash\text{MPur} \quad \{.\dots\}$$

* NAME

\MPVI

$$\backslash \text{MP}_V \quad \{ \cdot \cdot \cdot \}^1 \quad \{ \cdot \cdot \cdot \}^2 \quad \{ \cdot \cdot \cdot \}^3$$

1 NAME

1	NAME
2	NUMMER

3 CONTENT

$$\backslash\mathrm{MPvar}\quad \{.\!.\!.^*\}$$

* KEY

\MPvariable {...} * KEY
\MPvv {...} {...} 1 NAME 2 CONTENT
\MPw {...} * NAME
\MPwhd {...} * NAME
\MPXL
\MPx {...} * NAME
\MPxy {...} * NAME
\MPxywhd {...} * NAME
\MPy {...} * NAME
\m [...] {...} 1 impl ^{OPT} to i:default i:half i:tight i:fixed NAME 2 CONTENT
\maiuscoletto {...} * TEXT
\maiuscolo {...} * TEXT
\makecharacteractive ... * CHARACTER
\makerawcommalist [... ¹ ,...] \ ² 1 BEFEHL 2 CSNAME
\makestrutofbox ... * CSNAME NUMBER
\malayalamnumerals {...} * NUMBER
\mapfontsize [...] [²] [³] 1 NAME 2 DIMENSION 3 DIMENSION
\mappedfontsize {...} {...} 1 NAME 2 DIMENSION

`\marcatura` (¹...,¹...) (²...,²...) [³...]

1 POSITION
2 POSITION
3 REFERENCE

`\margindata` [¹...] [...,²...,²...] [...,³...,³...] {...⁴}

1 NAME
2 riferimento = REFERENCE
inherits: \setupmargindata
3 inherits: \setupmarginframed
4 CONTENT

`\MARGINDATA` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

instances: inleftmargin inrightmargin inoutermargin ininnermargin inleftedge inrightedge
inouteredge ininneredge atleftmargin atrightmargin inleft inright inouter ininner inmargin
inother margintext

`\atleftmargin` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\atrightmargin` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininner` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininneredge` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\ininnermargin` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inleft` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

`\inleftedge` [...,¹...,¹...] [...,²...,²...] {...³}

1 riferimento = REFERENCE
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

<pre> \inleftmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inotherr [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inouter [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inouteredge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inoutermargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inright [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inrightedge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \inrightmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \margintext [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {...} 1 riferimento = REFERENCE^{OPT} inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT </pre>
<pre> \markanchor {...} {...} {...} 1 NAME 2 NUMMER 3 NUMMER </pre>

$\backslash$ markcontent [...] ¹ {...} ² 1 reimposta tutti NAME 2 CONTENT
$\backslash$ markedpages [...] * NAME
$\backslash$ marker {...} * NAME
$\backslash$ markinjector [...] * NAME
$\backslash$ markpage [...] ¹ [...] ² ,... ^{OPT} 1 NAME 2 [-+]NUMBER
$\backslash$ markreferencepage
$\backslash$ mat {...} * CONTENT
$\backslash$ matematica [...] ¹ {...} ² 1 implicito i:default i:half i:tight i:fixed NAME 2 CONTENT
$\backslash$ matematica [...] ¹ ,... ² {...} ³ 1 inherits: \setupmatematica 2 CONTENT
$\backslash$ math [...] ¹ {...} ² 1 implicito i:default i:half i:tight i:fixed NAME 2 CONTENT
$\backslash$ MATHACCENT [...] ¹ ,... ² {...} ³ 1 inherits: \setupmathaccents 2 CONTENT instances: grave acute hat tilde bar breve dot ddot overhook ring check overleftharpoon overrightharpoon dddot dddd dot widegrave wideacute widehat widetilde widebar widebreve widedot wideddot widening widecheck widedddot vec wideoverleftharpoon wideoverrightharpoon wideoverleftarrow wideoverrightarrow wideoverleftrightharpoon conjugate closure wideundertilde wideunderbar wideunderleftrightharpoon wideunderrightharpoon wideunderleftharpoon wideunderleftarrow wideunderrightarrow
$\backslash$ acute [...] ¹ ,... ² {...} ³ 1 inherits: \setupmathaccents 2 CONTENT
$\backslash$ bar [...] ¹ ,... ² {...} ³ 1 inherits: \setupmathaccents 2 CONTENT
$\backslash$ breve [...] ¹ ,... ² {...} ³ 1 inherits: \setupmathaccents 2 CONTENT
$\backslash$ check [...] ¹ ,... ² {...} ³ 1 inherits: \setupmathaccents 2 CONTENT

$\backslash\mathrm{closure}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{conjugate}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{ddddot}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{dddot}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{ddot}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{dot}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{grave}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{hat}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{overhook}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{overleftharpoon}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{overrightharpoon}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{ring}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{tilde}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{vec}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT
$\backslash\mathrm{wideacute}$ $[\dots\overset{1}{=}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\mathrm{setupmathaccents}^{\mathrm{OPT}}$ 2 CONTENT

$\backslash\text{widebar}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widebreve}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widecheck}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widedddot}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideddot}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widedot}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widegrave}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widehat}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideoverleftarrow}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideoverlefttharpoon}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideoverleftrightharpoon}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideoverrightarrow}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{wideoverrightarrowtharpoon}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widering}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT
$\backslash\text{widetilde}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\text{setupmathaccents}^{\text{OPT}}$ 2 CONTENT

$\wideunderbar$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ 2 CONTENT
$\wideunderleftarrow$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\wideunderleftharpoonup$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\wideunderleftrightharpoonup$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\wideunderrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\wideunderrightharpoonup$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\wideundertilde$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathaccents}$ $\text{\scriptsize OPT}$ 2 CONTENT
$\text{\MATHANNOTATION}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathannotation}$ $\text{\scriptsize OPT}$ 2 TEXT instances: mathannotation
$\text{\mathannotation}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\text{\setupmathannotation}$ $\text{\scriptsize OPT}$ 2 TEXT
$\text{\mathbf}$
$\text{\mathbi}$
$\text{\mathbb}$
$\text{\mathbox}$ $\{...\}$ * CONTENT
$\text{\mathboxanchored}$ $[...\overset{1}{.}]$ $\{...\overset{2}{.}\}$ $\{...\overset{3}{.}\}$ 1 nucleus $\text{\scriptsize OPT}$ 2 TEXT 3 NAME NUMBER
$\text{\mathbs}$
$\text{\mathcellanchored}$ $\{...\}$ * NAME NUMBER
$\text{\MATHCOMMAND}$ $\{...\overset{1}{.}\}$ $\{...\overset{2}{.}\}$ 1 TEXT $\text{\scriptsize OPT}$ $\text{\scriptsize OPT}$ 2 TEXT

<code>\mathdefault</code>
<code>\MATHDELIMITED [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT instances: ddotmarked barmarked hatmarked checkmarked brevemarked ringmarked tildemarked dddotmarked daggermarked ddaggermarked astmarked starmarked primed doubleprimed tripleprimed quadrupleprimed reverseprimed doublereverseprimed triplereverseprimed
<code>\astmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\barmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\brevemarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\checkmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\daggermarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\ddaggermarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\ddotmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\dotmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\doubleprimed [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\doublereverseprimed [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited OPT 2 CONTENT
<code>\hatmarked [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\primed [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT
<code>\quadrupleprimed [...,\stackrel{1}{=}\dots] {\stackrel{2}{...}}</code> 1 inherits: \setupmathdelimited 2 CONTENT

$\backslash\text{reverseprimed}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{ringmarked}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{starmarked}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{tildemarked}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{tripleprimed}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{triplereverseprimed}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathdelimited}$ 2 CONTENT
$\backslash\text{mathdelimiter}$ $[...]^{1}$ $[...]^{2}$ 1 NAME 2 NUMMER
$\backslash\text{mathdelimiter}$ $[...]^{1}$ $[...,\overset{2}{=},...]$ 1 NAME 2 inherits: $\backslash\text{setupmathdelimiters}$
$\backslash\text{mathdelimiter}$ $[...]^{*}$ * NUMMER
$\backslash\text{mathdelimiter}$ $[...,\overset{*}{=},...]$ * inherits: $\backslash\text{setupmathdelimiters}$
$\backslash\text{mathdigits}$ $\{...\}^{*}$ * TEXT
$\backslash\text{mathdouble}$ $[...]^{1}$ $\{...\}^{2}$ $\{...\}^{3}$ $\{...\}^{4}$ 1 entrambi vfenced 2 NUMMER 3 TEXT 4 TEXT
$\backslash\text{MATHDOUBLEEXTENSIBLE}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT instances: doublebar doublebrace doubleparent doublebracket overbarunderbar overbraceunderbrace overparentunderparent overbracketunderbracket
$\backslash\text{doublebar}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT
$\backslash\text{doublebrace}$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\backslash\text{setupmathstackers}$ 2 TEXT

`\doublebracket` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\doubleparent` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\overbarunderbar` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\overbraceunderbrace` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\overbracketunderbracket` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\overparentunderparent` [$\dots\stackrel{1}{=}\dots$] $\{\dots\}$

1 inherits: $\text{\setupmathstackers}$ ^{OPT}
2 TEXT

`\MATHDOUBLE` $\{\dots\}$

* TEXT

`\MATHEXTENSIBLE` [$\overset{1}{\cdot}$] $\{\overset{2}{\cdot}\}$ $\{\overset{3}{\cdot}\}$

1 invertito matematica ~~testo~~ chemistry^{OPT}
2 TEXT
3 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xlongleftarrow xlongrightarrow
xlongleftrightharrow xLeftarrow xRightarrow xLeftrightharrow xtwoheadleftarrow
xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow xleftharpoondown xleftharpoonup
xrightharpoondown xrightharpoonup xrightoverleftarrow xleftoverrightarrow xleftrightharpoons
xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharrow mLeftarrow
mRightarrow mLeftrightharrow mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow
mhookrightarrow mleftharpoondown mleftharpoonup mrightharpoondown mrightharpoonup
mrightoverleftarrow mleftoverrightarrow mleftrightharpoons mrightleftharpoons mtriplerel
trel tequal tmapsto tleftarrow trightarrow tleftrightharrow tLeftarrow tRightarrow
tLeftrightharrow ttwoheadleftarrow ttwoheadrightarrow tmapsto thookleftarrow thookrightarrow
tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup trightoverleftarrow
tleftoverrightarrow tleftrightharpoons trightleftharpoons ttriplerel creturns cgives
cmesomeric cequilibrium cleaningright cleaningleft clongreturns clonggives clongmesomeric
clongequilibrium clongcleaningright clongcleaningleft

`\MATHEXTENSIBLE` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xlongleftarrow xlongrightarrow
xlongleftrightharrow xLeftarrow xRightarrow xLeftrightharrow xtwoheadleftarrow
xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow xleftharpoondown xleftharpoonup
xrightharpoondown xrightarpoonup xrightoverleftarrow xleftoverrightarrow xleftrightharpoons
xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharrow mLeftarrow
mRightarrow mLeftrightharrow mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow
mhookrightarrow mleftharpoondown mleftharpoonup mrightharpoondown mrightharpoonup
mrightoverleftarrow mleftoverrightarrow mleftrightharpoons mrightleftharpoons mtriplerel
trel tequal tmapsto tleftarrow trightarrow tleftrightharrow tLeftarrow tRightarrow
tLeftrightharrow ttwoheadleftarrow ttwoheadrightarrow tmapsto thookleftarrow thookrightarrow
tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup ttrightoverleftarrow
tleftoverrightarrow tleftrightharpoons trightleftharpoons ttriplerel creturns cgives
cmesomeric cequilibrium cleaningright cleaningleft clongreturns clonggives clongmesomeric
clongequilibrium clongcleaningright clongcleaningleft

`\cequilibrium` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\cgives` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\cleaningleft` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\cleaningright` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\clongequilibrium` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\clonggives` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\clongcleaningleft` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

`\clongcleaningright` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

OPT

2 TEXT

3 TEXT

`\clongmesomeric` $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$

1 inherits: \setupmathstackers^{OPT}

OPT

OPT

2 TEXT

3 TEXT

$\backslash\clongreturns$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\cmesomeric$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\creturns$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mequal$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mhookleftarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mhookrightarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mLeftarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mLeftrightarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mleftarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mleftharpoonowdown$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mleftharpoonoup$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mleftoverrightarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT
$\backslash\mleftrightarrow$ $[...,\overset{1}{=},...]$ $\{\overset{2}{...}\}$ $\{\overset{3}{...}\}$ 1 inherits: $\backslash\text{setupmathstackers}$^{OPT} 2 TEXT 3 TEXT

$\mleftrightharpoons$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mmapsto$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrel$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightharpoondown$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightharpoonup$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightharpoons$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightrightarrows$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mrightarrowleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mtriplelrel$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mtwoheadleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\mtwoheadrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT
$\tequal$ $[...,\overset{1}{=},...]$ $\{\dots\}$ $\{\dots\}$
1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT

```
\thookleftarrow [\dots\stackrel{1}{=}\dots] \{\dots\} \{\dots\}
1 inherits: \setupmathstackersOPT OPT OPT
2 TEXT
3 TEXT
```

```
\thookrightarrow [...] \stackrel{1}{=} [...] \{...\}^2 \{...\}^3
1 inherits: \setupmathstackersOPT
2 TEXT
3 TEXT
```

```

\tLeftarrow [...] \stackrel{1}{=} [...] \{...\}^{2} \{...\}^{3}
1 inherits: \setupmathstackers
2 TEXT
3 TEXT

```

$$\xrightarrow[\text{inherits: \texttt{\textbackslash setupmathstackers}^{\text{OPT}}}]{{\dots}^1{\dots}} \quad \{{\dots}^2\} \quad \{{\dots}^3\}$$

```

\leftarrow [...] \overset{1}{=} [...] \{...\}^2 \{...\}^3
1 inherits: \setupmathstackers
2 TEXT
3 TEXT

```

$$\left\lfloor \dots \right\rfloor \quad \left[\dots, \dots, \overset{1}{\dots}, \dots \right] \quad \left\{ \overset{2}{\dots} \right\} \quad \left\{ \overset{3}{\dots} \right\}$$
$$\leftarrow \left[\dots, \overset{1}{=} \dots, \dots \right] \quad \left\{ \overset{2}{\dots} \right\} \quad \left\{ \overset{3}{\dots} \right\}$$

```
\leftoverrightarrow [...] {\stackrel{1}{...}} {\stackrel{2}{...}} {\stackrel{3}{...}}
```

```
1 inherits: \setupmathstackers OPT OPT OPT
```

```
2 TEXT
```

```
3 TEXT
```

$$\leftarrow \dots \overset{1}{=} \dots \rightarrow \quad \{\dots\}^2 \quad \{\dots\}^3$$

```
\lefttrightharpoons [...] {\overset{1}{...}} {\overset{2}{...}} {\overset{3}{...}}
1 inherits: \setupmathstackers OPT OPT OPT
2 TEXT
3 TEXT
```

```
\tmapsto [...] 1 {...} {...}
1 inherits: \setupmathstackers OPT OPT
2 TEXT
3 TEXT
```

$$\rightarrow [\dots \stackrel{1}{=} \dots] \quad \{\dots\}^2 \quad \{\dots\}^3$$

```

1 inherits: \setupmathstackers
2 TEXT
3 TEXT

```

```
\trrel    [...1...2] {3...} {4...}
1 inherits: \setupmathstackers OPT OPT
2 TEXT
3 TEXT
```

$\rightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\downarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\uparrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\rightleftarrows$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\rightarrowleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\rel$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\twoheadleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\twoheadrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\xequal$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\hookrightarrowleftarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\hookrightarrowrightarrow$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\xleftarrow{\hspace{1cm}}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT
$\xleftrightarrow{\hspace{1cm}}$ $[...,\overset{1}{=},...]$ $\{\dots\}^2$ $\{\dots\}^3$
1 inherits: \setupmathstackers ^{OPT} 2 TEXT 3 TEXT

```
\xleftarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT
2 TEXT
3 TEXT
```

```
\xleftharpoondown [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xleftharpoonup [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xleftoverrightarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xleftrightarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xleftrightharpoons [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xlongleftarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xlongleftrightharrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xlongrightarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xmapsto [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xrightarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xrel [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

```
\xrightarrow [...,\stackrel{1}{=},...] {\stackrel{2}{...}} {\stackrel{3}{...}}
1 inherits: \setupmathstacks OPT OPT OPT
2 TEXT
3 TEXT
```

$\xrightarrow[\text{down}]{\dots}$ <pre> \xrightharpoonupdown [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xrightarrow[\text{up}]{\dots}$ <pre> \xrightharpoonupup [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \xrightleftharpoons [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xrightarrow[\text{left}]{\dots}$ <pre> \xrightrightarrows [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xrightarrow[\text{right}]{\dots}$ <pre> \xleftarrow[\text{right}]{\dots} [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xrightarrow[\text{left}]{\dots}$ <pre> \xtwoheadleftarrow [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\xrightarrow[\text{right}]{\dots}$ <pre> \xtwoheadrightarrow [...] {\dots} {\dots} 1 inherits: \setupmathstackers OPT OPT OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \cequilibrium [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \cgives [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \cleaningleft [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \cleaningright [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \clongequilibrium [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>
$\rightleftharpoons$ <pre> \clonggives [...] {\dots} {\dots} 1 invertito matematica testo chemistry OPT 2 TEXT 3 TEXT </pre>

$\backslash\text{clongcleaningleft}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{clongcleaningright}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{clongmesomeric}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{clongreturns}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{cmesomeric}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{creturns}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mequal}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mhookleftarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mhookrightarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mLeftarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mLeftrightarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mleftarrow}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT
$\backslash\text{mleftharpoonup}$ $[^1..]$ $\{^2..\}$ $\{^3..\}$ 1 invertito matematica $\overset{\text{OPT}}{\text{testo}}$ $\overset{\text{OPT}}{\text{chemistry}}$ OPT 2 TEXT 3 TEXT

`\mleftharpoonup` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mleftoverrightarrow` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mleftrightharpoonup` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mleftrightharpoons` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mmapsto` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mRightarrow` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrel` [...] {...} {...}

1 invertito ^{OPT}matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrightarrow` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrightharpoonowdown` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrightharpoonup` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrightharpoonuleft` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mrightoverleftarrow` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

`\mtriplerel` [...] {...} {...}

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

$\twoheadleftarrow$ <pre> [...]{...}{...} 1 invertito matematica testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\twoheadrightarrow$ <pre> [...]{...}{...} 1 invertito matematica testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tequal$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry 2 TEXT 3 TEXT </pre>
$\thookleftarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry 2 TEXT 3 TEXT </pre>
$\thookrightarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry 2 TEXT 3 TEXT </pre>
$\tleftarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tleftrightarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tleftarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tlefttharpoonup$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tlefttharpoonup$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tleftoverrightarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tleftrightarrow$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>
$\tlefttrightharpoons$ <pre> [...]{...}{...} 1 invertito matematica^{OPT}testo^{OPT}chemistry^{OPT} 2 TEXT 3 TEXT </pre>

$\backslash\mathrm{tmapsto} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trel} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightharpoondown} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightharpoonup} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightleftharpoons} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{trightoverleftarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{ttriplelrel} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{twoheadleftarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{twoheadrightarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{xequal} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT
$\backslash\mathrm{xhookleftarrow} \quad [^1...] \quad \{^2...\} \quad \{^3...\}$ 1 invertito matematica testo chemistry 2 TEXT 3 TEXT

```
\hookrightarrow [1..] {2..} {3..}
```

```
1 invertito matematica testo chemistry
```

```
2 TEXT
```

```
3 TEXT
```

```
\xrightarrow{[.1.]}{.2.}{.3.}
```

1 invertito matematica ^{OPT} testo Chemistry ^{OPT}

2 TEXT

3 TEXT

```
\xLefttrightarrow [^.]{.^}{.^}
1 invertito matematica testo chemistry
2 TEXT
3 TEXT
```

```
\xleftarrow{[...]} {...} {...}
```

```
1 invertito matematica OPT testo Chemistry OPT
```

```
2 TEXT
```

```
3 TEXT
```

```
\xleftarrowpoondown [1] {2} {3}
```

1 invertito matematica test^{OPT} chemistry^{OPT}

2 TEXT

3 TEXT

```
\xleftarrowpoonup [^{.1}] {\^{.2}} {\^{.3}}
```

```
1 invertito matematica OPTtesto chemistry OPT
```

```
2 TEXT
```

```
3 TEXT
```

```
\leftoverrightarrow      [.^1.]   {.^2.}   {.^3.}
1  invertito matematica testo chemistry
2  TEXT
3  TEXT
```

```
\xleftarrow{...} {\dots} {\dots}
```

```
1 invertito matematica testo chemistry
```

```
2 TEXT
```

```
3 TEXT
```

```
\xleftarightharpoons[1]{2}3
1 invertito matematica testo ChemistryOPT
2 TEXT
3 TEXT
```

```
\xlongleftarrow[1]{2}{3}
```

1 invertito matematica ^{OPT}testo chemistry ^{OPT}

2 TEXT

3 TEXT

```
\xlongleftarrow{[.]}{\text{.}^2}{\text{.}^3}
```

1 invertito matematica testo chemistry

2 TEXT

3 TEXT

```
\xlongrightarrow[...]{...}{...}
```

```
1 invertito matematica OPTtesto chemistry OPT
```

```
2 TEXT
```

```
3 TEXT
```

```
\xmapsto [1] [2] [3]
1 invertito matematica testo chemistry
2 TEXT
3 TEXT
```

```
\xrightarrow [...]{...}{...}
1 invertito matematicaOPT testo chemiOPTstry
2 TEXT
3 TEXT
```

```
\xrel [...]{...}{...}
1 invertitoOPT matematicaOPT testo chemiOPTstry
2 TEXT
3 TEXT
```

```
\xrightarrow [...]{...}{...}
1 invertito matematicaOPT testo chemiOPTstry
2 TEXT
3 TEXT
```

```
\xrightarrow[\downarrow]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\uparrow]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\leftrightharpoons]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\leftarrow]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\relax]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\twoheadleftarrow]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\xrightarrow[\twoheadrightarrow]{...}{...}{...}
1 invertito matematica testo chemiOPTstryOPT
2 TEXT
3 TEXT
```

```
\mathfiller {...}
* NUMBER
```

```
\MATHFILLER
instances: relfill equalfill leftarrowfill rightarrowfill twoheadleftarrowfill
twoheadrightarrowfill mapstofill leftharpoondownfill leftharpoonupfill rightharpoondownfill
rightharpoonupfill rightoverleftarrowfill leftoverrightarrowfill triplerefill
leftrightarrowfill Leftarrowfill Rightarrowfill Leftrightarrowfill Rightleftarrowfill
```

```
\equalfill
```

```
\Leftarrowfill
```

<code>\Leftrightarrowfill</code>
<code>\leftarrowfill</code>
<code>\leftharpoondownfill</code>
<code>\leftharpoonupfill</code>
<code>\leftoverrightarrowfill</code>
<code>\leftrightarrowfill</code>
<code>\mapsto</code>
<code>\rightarrowfill</code>
<code>\rightleftarrowfill</code>
<code>\relax</code>
<code>\rightarrowfill</code>
<code>\rightharpoondownfill</code>
<code>\rightharpoonupfill</code>
<code>\rightoverleftarrowfill</code>
<code>\triplerelax</code>
<code>\twoheadleftarrowfill</code>
<code>\twoheadrightarrowfill</code>
<code>\mathfraktur</code>
<code>\MATHFRAMED</code> $[...,\overset{1}{...},...]$ $\{...\overset{2}{...}\}$ 1 inherits: <code>\setupmathframed</code> 2 CONTENT instances: <code>mframed inmframed mcfamed mtfamed</code>
<code>\inmframed</code> $[...,\overset{1}{...},...]$ $\{...\overset{2}{...}\}$ 1 inherits: <code>\setupmathframed</code> 2 CONTENT
<code>\mcfamed</code> $[...,\overset{1}{...},...]$ $\{...\overset{2}{...}\}$ 1 inherits: <code>\setupmathframed</code> 2 CONTENT
<code>\mframed</code> $[...,\overset{1}{...},...]$ $\{...\overset{2}{...}\}$ 1 inherits: <code>\setupmathframed</code> 2 CONTENT

$\backslash\mathrm{mtframed}$ $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: $\backslash\mathrm{setupmath}$ PF framed 2 CONTENT
$\backslash\mathrm{MATHFUNCTION}$ instances: arccos arcsin arctan arccosh arcsinh arctanh acos asin atan arg cosh cos coth cot csc deg det dim erf erfc erfi exp gcd hom inf inv injlim ker lg liminf limsup lim ln log median max min mod projlim Pr sec sinh sin sup tanh tan diff adj coker neg
$\backslash\mathrm{acos}$
$\backslash\mathrm{adj}$
$\backslash\mathrm{arccos}$
$\backslash\mathrm{arccosh}$
$\backslash\mathrm{arcsin}$
$\backslash\mathrm{arcsinh}$
$\backslash\mathrm{arctan}$
$\backslash\mathrm{arctanh}$
$\backslash\mathrm{arg}$
$\backslash\mathrm{MATHFUNCTION}$ $\{...\}$ * CONTENT instances: adjoint orthogonalcomplement transpose derivative secondderivative thirdderivative fourthderivative preimage inverse
$\backslash\mathrm{adjoint}$ $\{...\}$ * CONTENT
$\backslash\mathrm{derivative}$ $\{...\}$ * CONTENT
$\backslash\mathrm{fourthderivative}$ $\{...\}$ * CONTENT
$\backslash\mathrm{inverse}$ $\{...\}$ * CONTENT
$\backslash\mathrm{orthogonalcomplement}$ $\{...\}$ * CONTENT
$\backslash\mathrm{preimage}$ $\{...\}$ * CONTENT
$\backslash\mathrm{secondderivative}$ $\{...\}$ * CONTENT
$\backslash\mathrm{thirdderivative}$ $\{...\}$ * CONTENT

$\backslash\text{transpose}$ {...} * CONTENT
$\backslash\text{asin}$
$\backslash\text{atan}$
$\backslash\text{coker}$
$\backslash\text{cos}$
$\backslash\text{cosh}$
$\backslash\text{cot}$
$\backslash\text{coth}$
$\backslash\text{csc}$
$\backslash\text{deg}$
$\backslash\text{det}$
$\backslash\text{diff}$
$\backslash\text{dim}$
$\backslash\text{erf}$
$\backslash\text{erfc}$
$\backslash\text{erfi}$
$\backslash\text{exp}$
$\backslash\text{gcd}$
$\backslash\text{hom}$
$\backslash\text{inf}$
$\backslash\text{injl}\text{im}$
$\backslash\text{inv}$
$\backslash\text{ker}$
$\backslash\text{lg}$
$\backslash\text{lim}$
$\backslash\text{liminf}$

<code>\limsup</code>
<code>\ln</code>
<code>\log</code>
<code>\max</code>
<code>\median</code>
<code>\min</code>
<code>\mod</code>
<code>\neg</code>
<code>\Pr</code>
<code>\projlim</code>
<code>\sec</code>
<code>\sin</code>
<code>\sinh</code>
<code>\sup</code>
<code>\tan</code>
<code>\tanh</code>
<code>\mathGreeknumerals {...}</code> <code>* NUMMER</code>
<code>\mathgreeknumerals {...}</code> <code>* NUMMER</code>
<code>\mathgroupedcommandcs \{...\}</code> <code>* CSNAME</code>
<code>\mathit</code>
<code>\mathitalic</code>
<code>\mathlimop {...}</code> <code>* CONTENT</code>
<code>\MATHMATRIX [...,\overset{1}{...},...] {...}^2</code> <code>1 inherits: \setupmathmatrix</code> <code>2 CONTENT</code> <code>instances: matrix bmatrix pmatrix vmatrix vvmatrix vvvmatrix gmatrix bracedmatrix thematrix</code>

$\backslash\mathbf{matrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{bracematrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{gmatrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{matrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{pmatrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{thematrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{vmatrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{vvmatrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{vvvmatrix}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathmatrix}$ 2 CONTENT
$\backslash\mathbf{mathnesting}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 NUMBER 2 CONTENT
$\backslash\mathbf{MATHNESTING}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathnesting}$ 2 CONTENT instances: mathtogether mathloose
$\backslash\mathbf{mathloose}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathnesting}$ 2 CONTENT
$\backslash\mathbf{mathtogether}$ [$\dots\overset{1}{=}\dots$] $\{\dots\}$ 1 inherits: $\backslash\mathbf{setupmathnesting}$ 2 CONTENT
$\backslash\mathbf{mathnolop}$ $\{\dots\}$ * CONTENT
$\backslash\mathbf{mathop}$ $\{\dots\}$ * CONTENT
$\backslash\mathbf{mathopdolimits}$ $\{\dots\}$ * CONTENT

$\backslash\text{MATHOPERATOR}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT instances: integral iintegral iintegral iiiintegral int iint iint iiiint oint oint oiiint intc ointc aointc sumint barint doublebarint slashint aodownintc rectangularpoleintc semicirclepoleintc circlepoleoutsideintc circlepoleinsideintc squareintc hookleftarrowint timesint capint cupint upperint lowerint sum blackboardsum modtwosum prod coprod bigwedge bigvee bigcap bigcup bigodot bigoplus bigotimes bigudot biguplus bigsqcap bigsqcup bigtimes leftouterjoin rightouterjoin fullouterjoin bigbottom bigtop bigsolidus bigreversesolidus bigdoublewedge bigdoublevee
$\backslash\text{aodownintc}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{aointc}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{barint}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigbottom}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigcap}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigcup}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigdoublevee}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigdoublewedge}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigodot}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigoplus}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigotimes}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT
$\backslash\text{bigreversesolidus}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT OPT 2 CONTENT
$\backslash\text{bigsolidus}$ $[\dots\frac{1}{2}\dots]$ $\{\dots\}$ 1 inherits: $\backslash\text{setupmathoperators}$ OPT 2 CONTENT

$\backslash\mathbf{bigcap}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigcup}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigtimes}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigtop}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigdot}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigplus}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigvee}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{bigwedge}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{blackboardsum}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{capint}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{circlepoleinsideintc}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{circlepoleoutsideintc}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{coprod}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{cupint}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT
$\backslash\mathbf{doublebarint}$ $[...,\overset{1}{=},...]$ $\{\dots\}$
1 inherits: $\backslash\mathbf{setupmathoperators}$ OPT 2 CONTENT

$\backslash\mathrm{fullouterjoin} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{hookleftarrowint} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{iiiint} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{iiiintegral} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{iiint} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{iiintegral} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{int} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{integral} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{int} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{intc} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{integral} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{leftouterjoin} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{lowerint} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{modtwosum} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT
$\backslash\mathrm{oiint} \quad [\dots,\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\mathrm{setupmathoperators}$ ^{OPT} OPT 2 CONTENT

$\oint$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\oint$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\ointc$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\prod$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\rectangularpoleintc}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT OPT 2 CONTENT
$\text{\rightouterjoin}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\semicirclepoleintc}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT OPT 2 CONTENT
$\text{\slashint}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\squareintc}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT OPT 2 CONTENT
$\sum$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\sumint$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\timesint}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\upperint}$ $[...^1...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathoperators}$ OPT 2 CONTENT
$\text{\mathopnolimits}$ $\{...\}$ * CONTENT
$\text{\mathoptext}$ $\{...\}$ * TEXT
$\text{\mathopwithlimits}$ $\{...\}^1$ $\{...\}^2$ 1 CONTENT 2 CONTENT

$\backslash$ MATHORNAMENT {...} * CONTENT
$\backslash$ mathortext {...} {...} 1 TEXT 2 TEXT
$\backslash$ mathover [... ¹ ... ² ... ³ ... ⁴ ...] {...} 1 cima vfenced OPT OPT 2 inherits: \setupmathstackers 3 NUMMER 4 TEXT
$\backslash$ MATHOVEREXTENSIBLE [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT instances: overleftarrow overrightarrow overleftrightarrow overtwoheadleftarrow overtwoheadrightarrow overlefttailarrow overrighttailarrow overleftbararrow overrightbararrow overlefthookarrow overrighthookarrow overleftharpoonup overleftharpoondown overleftharpoonup overleftharpoondown overrightarrow overleftarrow overleftrightarrow overleftbararrow overrightbararrow overbar overbrace overparent overbracket
$\backslash$ overbar [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overbrace [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overbracket [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overLeftarrow [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overLeftbararrow [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overLeftrightarrow [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overleftarrow [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overleftbararrow [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overleftharpoondown [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT
$\backslash$ overleftharpoonup [... ¹ ... ² ...] {...} 1 inherits: \setupmathstackers OPT 2 TEXT

$$\overleftarrow{\hspace{0.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\hspace{0.5cm}}\}$$
$$\overleftrightarrow{\hspace{1cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{\}$$
$$\overleftarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$
$$\overparent{[\dots,\dots\overset{1}{=}\dots,\dots]}\{\dots\overset{2}{\}}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\dots\overset{1}{=}\dots\dots] \quad \{\overset{2}{\dots}\}$$
$$\backslash\overrightharpoonup\text{tharpoonupdown} \quad [\dots\dots\overset{1}{=}\dots\dots] \quad \{\overset{2}{\dots}\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\dots\overset{1}{=}\dots\dots] \quad \{\overset{2}{\dots}\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\overset{2}{\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots,\dots\overset{1}{=}\dots,\dots] \quad \{\overset{2}{\dots}\}$$
$$\overrightarrow{\hspace{1.5cm}} \quad [\dots\overset{1}{=}\dots] \quad \{\dots\}$$
$$\mathop{\mathrm{vertext}}\limits^1[\dots]\mathop{\mathrm{vertext}}\limits^2\{\dots\}\mathop{\mathrm{vertext}}\limits^3\{\dots\}$$

$\overline{\text{TEXT}}$ $\overbrace{\text{TEXT}}$ $\overparent{\text{TEXT}}$ $\overbracket{\text{TEXT}}$
$\overbar{\text{TEXT}}$ $\overbrace{\text{TEXT}}$
$\overbracket{\text{TEXT}}$ $\overbrace{\text{TEXT}}$
$\overbracket{\text{TEXT}}$ $\overbrace{\text{TEXT}}$
$\overparent{\text{TEXT}}$ $\overbrace{\text{TEXT}}$
$\overline{\text{TEXT}}$ interiorset
interiorset TEXT
$\mathcal{QED}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$
$\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$ $\sqrt[n]{\text{TEXT}}$

$\sqrt[n]{}$ <code>\rannuity</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathfradical OPT 2 TEXT 3 CONTENT
$\sqrt[n]{}$ <code>\rbannuity</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathfradical OPT 2 TEXT 3 CONTENT
$\sqrt[n]{}$ <code>\rlannuity</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathfradical OPT 2 TEXT 3 CONTENT
$\sqrt[n]{}$ <code>\rlbannuity</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathfradical OPT 2 TEXT 3 CONTENT
$\sqrt[n]{}$ <code>\root</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
$\sqrt[n]{}$ <code>\sqrt</code> $[...,\overset{1}{=},...]$ $[...]$ $\{...\}$ 1 inherits: \setupmathradical OPT 2 TEXT 3 CONTENT
<code>\mathrm</code>
<code>\mathrowanchored</code> $\{...\}$ * NAME NUMBER
<code>\mathscript</code>
$\sqrt[n]{}$ <code>\MATHSIMPLEALIGN</code> $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: \setupmathsimplealign OPT 2 CONTENT instances: equationsystem lequationsystem reequationsystem
$\sqrt[n]{}$ <code>\equationsystem</code> $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: \setupmathsimplealign OPT 2 CONTENT
$\sqrt[n]{}$ <code>\lequationsystem</code> $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: \setupmathsimplealign OPT 2 CONTENT
$\sqrt[n]{}$ <code>\requationsystem</code> $[...,\overset{1}{=},...]$ $\{...\}$ 1 inherits: \setupmathsimplealign OPT 2 CONTENT
<code>\mathsl</code>
<code>\mathss</code>

```
\mathstacker [...]{...}{...}{...}{...}
1 invertito matematicaOPT testo chemistry
2 NUMMER
3 TEXT
4 TEXT
```

```
\mathsync {...}{...}
1 NAME
2 NUMMER
```

```
\mathtext ... {...}
1 TEXT OPT
2 TEXT
```

```
\mathtextauto {...}{...}
1 TEXT
2 TEXT
```

```
\MATHTEXT {...}
* TEXT
instances: mathtext mathtexttf mathtextit mathtextsl mathtextbf mathtextbi mathtextbs
mathword mathwordtf mathwordit mathwordsl mathwordbf mathwordbi mathwordbs mathsplit
mathsplittf mathsplitit mathsplitsl mathsplitbf mathsplitbi mathsplitbs
```

```
\mathsplit {...}
* TEXT
```

```
\mathsplitbf {...}
* TEXT
```

```
\mathsplitbi {...}
* TEXT
```

```
\mathsplitbs {...}
* TEXT
```

```
\mathsplitit {...}
* TEXT
```

```
\mathsplitsl {...}
* TEXT
```

```
\mathsplittf {...}
* TEXT
```

```
\mathtext {...}
* TEXT
```

```
\mathtextbf {...}
* TEXT
```

```
\mathtextbi {...}
* TEXT
```

```
\mathtextbs {...}
* TEXT
```

```
\mathtextit {...}
* TEXT
```

$\backslash\mathtextsl$ {...} * TEXT
$\backslash\mathtexttf$ {...} * TEXT
$\backslash\mathword$ {...} * TEXT
$\backslash\mathwordbf$ {...} * TEXT
$\backslash\mathwordbi$ {...} * TEXT
$\backslash\mathwordbs$ {...} * TEXT
$\backslash\mathwordit$ {...} * TEXT
$\backslash\mathwordsl$ {...} * TEXT
$\backslash\mathwordtf$ {...} * TEXT
$\backslash\mathtf$
$\backslash\mathtriplet$ [¹ ...] { ² ...} { ³ ...} { ⁴ ...} 1 NAME OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT
$\backslash\MATHTRIPLET$ [¹ ...] { ² ...} { ³ ...} { ⁴ ...} 1 NAME OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT
$\backslash\mathtt$
$\backslash\mathunder$ [¹] [..., ² ...,...] { ³ ...} { ⁴ ...} 1 fondo vfenced OPT OPT OPT OPT 2 inherits: \setupmathstackers 3 NUMMER 4 TEXT
$\backslash\MATHUNDEREXTENSIBLE$ [..., ¹ ...,...] { ² ...} 1 inherits: \setupmathstackers OPT 2 TEXT instances: underleftarrow underrightarrow underleftrightarrow undertwoheadleftarrow undertwoheadrightarrow underlefttailarrow underrighttailarrow underleftbararrow underrightbararrow underlefthookarrow underriighthookarrow underleftharpoonup underleftharpoondown underleftharpoonup underRightarrow underLeftarrow underLeftrightarrow underLeftbararrow underRightbararrow underbar underbrace underparent underbracket

$\underbar$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underbrace$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underbracket$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftbararrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftrightharpoonarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftbararrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftharpoonowdown$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftharpoonoup$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underlefthookarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underleftrightharpoonarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underlefttailarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underparent$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT
$\underrightarrow$ $[...,\overset{1}{=},...]$ $\{...\}^2$ 1 inherits: $\text{\setupmathstackers}^{\text{OPT}}$ 2 TEXT

$\underrightarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightbararrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightharpoonowdown{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrightharpoonoup{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrighthookarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\underrighttailarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\undertwoheadleftarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\undertwoheadrightarrow{...}$ 1 inherits: \setupmathstackers ^{OPT} 2 TEXT
$\mathundertext{...}$ 1 fondo ^{OPT} 2 TEXT 3 TEXT
$\mathundertexttextensibile{...}$ 1 TEXT 2 TEXT instances: underbartext underbracetext underparenttext underbrackettext
$\underbartext{...}$ 1 TEXT 2 TEXT
$\underbracetext{...}$ 1 TEXT 2 TEXT
$\underbrackettext{...}$ 1 TEXT 2 TEXT
$\underparenttext{...}$ 1 TEXT 2 TEXT

$\backslash$ MATHUNDER {...} * TEXT
$\backslash$ MATHUNSTACKED instances: impliedby implies iff impliesby And
$\backslash$ And
$\backslash$ iff
$\backslash$ impliedby
$\backslash$ implies
$\backslash$ impliesby
$\backslash$ mathupright
$\backslash$ math [... ¹ ... ² ...] {...} 1 inherits: \setupmathematics 2 CONTENT
$\backslash$ matrix {...} * CONTENT
$\backslash$ maxaligned {...} * CONTENT
$\backslash$ mbinsync {... ¹ } {... ² } 1 NAME 2 NUMMER
$\backslash$ mbox {...} * CONTENT
$\backslash$ measure {...} * NAME
$\backslash$ measured {...} * NAME
$\backslash$ medbreak
$\backslash$ medskip
$\backslash$ medspace
$\backslash$ menuinterattivo [... ¹] [... ² ... ^{OPT} ...] 1 NAME 2 inherits: \impostamenuinterazione
$\backslash$ mese {...} * NUMMER
$\backslash$ message {...} * TEXT

$\backslash$ mettielenco [... ¹ ,...] [... ² ,...] 1 LISTE 2 inherits: \impostaelenco
$\backslash$ mettielencocombinato [... ¹] [... ² ,...] 1 LISTE 2 inherits: \impostaelencocombinato
$\backslash$ mettiCOMBINEDLIST [... [*] ,...] * inherits: \impostaelencocombinato instances: content
$\backslash$ metticontent [... [*] ,...] * inherits: \impostaelencocombinato
$\backslash$ mettifiancoafianco {...} {...} 1 CONTENT 2 CONTENT
$\backslash$ mettiformula [... ¹ ,...] {... ² } 1 + - REFERENCE 2 TEXT
$\backslash$ mettiingriglia [... ¹] {... ² } 1 normale standard si rigido tollerante cima fondo entrambi ampio adatta primo ultimo alto uno basso nessuno riga strut box min max centro math:riga math:mezzariga math:-line math:-halfline NAME 2 CONTENT
$\backslash$ mettiingriglia [... ¹ ,...] {... ² } 1 inherits: \definegridsnapping 2 CONTENT
$\backslash$ mettinotepdp [... [*] ,...] * inherits: \setupnote
$\backslash$ mettinotepdplocali [... [*] ,...] * inherits: \setupnote
$\backslash$ mettinumeropagina
$\backslash$ mettiregistro [... ¹] [... ² ,...] 1 NAME 2 inherits: \impostaregistro
$\backslash$ mettiREGISTER [... [*] ,...] * inherits: \impostaregistro instances: index
$\backslash$ mettiindex [... [*] ,...] * inherits: \impostaregistro
$\backslash$ mettisignalibro [... ¹ ,...] [... ² ,...] [... ³ ,...] 1 ABSCHNITT LISTE 2 ABSCHNITT LISTE 3 inherits: \setupbookmark
$\backslash$ mettisottoformula [... ¹ ,...] {... ² } 1 + - REFERENCE 2 TEXT

$\backslash$ mettianosullaltro $\{.^1.\}$ $\{.^2.\}$ 1 CONTENT 2 CONTENT
$\backslash$ mfence ... * $\backslash$ vert $\backslash$ singleverticalbar $\backslash$ doubleverticalbar $\backslash$ tripleverticalbar $\backslash$ mvert $\backslash$ mVert
$\backslash$ mfunction $[...,.^1...]$ $[.^2.]$ 1 inherits: $\backslash$ setupmathfunctions 2 NAME
$\backslash$ mfunctionlabeltext $\{.^*\}$ * NAME
$\backslash$ mfunction $[...,.^1...]$ $\{.^2.\}$ 1 inherits: $\backslash$ setupmathfunctions 2 NAME
$\backslash$ mhbox $\{.^*\}$ * CONTENT
$\backslash$ middlealigned $\{.^*\}$ * CONTENT
$\backslash$ middlebox $\{.^*\}$ * CONTENT
$\backslash$ middleparbox $[.^1.]$ $\{.^2.\}$ 1 globale OPT 2 CONTENT
$\backslash$ midhbox $\{.^*\}$ * CONTENT
$\backslash$ midsubsentence
$\backslash$ minimalhbox $.^1$ $\{.^2.\}$ 1 TEXT OPT 2 CONTENT
$\backslash$ mixedcaps $\{.^*\}$ * TEXT
$\backslash$ mkvibuffer $[.^*]$ * BUFFER OPT
$\backslash$ mkvibuffer $\{.^*\}$ * BUFFER
$\backslash$ moduleparameter $\{.^1.\}$ $\{.^2.\}$ 1 FILE 2 KEY
$\backslash$ molecule $\{.^*\}$ * CONTENT
$\backslash$ mono

<code>\monograssetto</code>
<code>\mononormal</code>
<code>\monthlong {...}</code> <code>* NUMMER</code>
<code>\monthshort {...}</code> <code>* NUMMER</code>
<code>\mordsync {...} {...}</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\morehyphens</code>
<code>\mostraambientefontdeltesto [...,*,...]</code> <code>* inherits: \impostafontdeltesto</code>
<code>\mostracolore [...]</code> <code>* COLOR</code>
<code>\mostracornice [...,¹,...] [...,²,...]</code> <code>1 cima intestazione testo^{OPT}piedipagina fondo</code> <code>2 bordosinistro marginesinistro testo marginedestro bordodestro</code>
<code>\mostrafontdeltesto [...,*,...]</code> <code>* inherits: \impostafontdeltesto</code>
<code>\mostragriglia [...,*,...]</code> <code>* reimposta fondo cima nessuno tutti righe cornice nonumber destra sinistra esterno interno colonne</code>
<code>\mostragruppocolori [...¹] [...,²,...]</code> <code>1 NAME</code> <code>2 orizzontale verticale numero valore nome</code>
<code>\mostraimpostazioni [...,*,...]</code> <code>* pt bp cm mm dd cc pc nd nc sp^{OPT}in</code>
<code>\mostralyout [...,*,...]</code> <code>* pt bp cm mm dd cc pc^{OPT}hd nc sp in NUMMER</code>
<code>\mostramakeup [...]</code> <code>* reimposta boxes make^{OPT}up tutti hbox vbox vtop kern glue penalty fontkern strut whatsit glyph simple simplehbox simplevbox simplevtop user math corsivo origin discretionary expansion riga spazio profondita marginkern mathkern dir par mathglue mark insert boundary vkern hkern vglue hglue vpenalty hpenalty</code>
<code>\mostrasetsimboli [...]</code> <code>* NAME</code>
<code>\mostrastampa [...,¹,...] [...,²,...] [...,³,...,...]</code> <code>1 inherits: \impostadimens^{OPT}ioncarta</code> <code>2 inherits: \impostadimens^{OPT}ioncarta</code> <code>3 inherits: \impostalayout</code>
<code>\mostrastruts</code>

$\backslash$ mostratavolozza [¹ ...] [² ...;...] 1 NAME OPT 2 orizzontale verticale numero valore nome
$\backslash$ movedownsidefloat [...;...] * [-+]riga [-+]2*line [-+]sospendi
$\backslash$ movesidefloat [...;...] * [-+]riga [-+]2*line [-+]sospendi
$\backslash$ movesidefloat [...;... [*] ...] * x = DIMENSION y = DIMENSION
$\backslash$ mparagraph [...;... ¹ ...] {... ² } 1 inherits: \impostainco ^{OPT} fniciato 2 CONTENT
$\backslash$ mplocation {...} * sinistra destra interno esterno
$\backslash$ mprandomnumber
$\backslash$ mrelsync {... ¹ } {... ² } 1 NAME 2 NUMMER
$\backslash$ mscaledtext {...} * CONTENT
$\backslash$ mstack {...;...} * TEXT
$\backslash$ mtext {...} * CONTENT
$\backslash$ mtp {...} * CONTENT
$\backslash$ mx
$\backslash$ mxx
$\backslash$ m [...;... ¹ ...] {... ² } 1 inherits: % ² Setupmathematics 2 CONTENT
$\backslash$ NormalizeFontHeight \ ¹ ... {... ² } {... ³ } {... ⁴ } 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
$\backslash$ NormalizeFontWidth \ ¹ ... {... ² } {... ³ } {... ⁴ } 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT

\NormalizeTextHeight {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT
\NormalizeTextWidth {...} {...} {...} 1 FONT 2 DIMENSION 3 TEXT
\Numeri {...} * NUMMER
\Numeriromani {...} * NUMMER
\namedanchorbox {...} * NAME
\namedboxanchor {...} * NAME NUMMER
\namedCOMANDOhash {...} * NAME
\namedCOMANDOp parameter {...} {...} 1 NAME 2 KEY
\namedgoto [... ¹] {... ² } [... ³] 1 NAME 2 CONTENT 3 REFERENCE
\namedheadnumber {...} * ABSCHNITT
\namedstructureheadlocation {...} * ABSCHNITT
\namedstructureuservariable {... ¹ } {... ² } 1 ABSCHNITT 2 KEY
\namedstructurevariable {... ¹ } {... ² } 1 ABSCHNITT 2 KEY
\namedtaggedlabeltexts {... ¹ } {... ² } {... ³ } {... ⁴ } {... ⁵ } 1 NAME 2 NAME 3 NAME 4 NAME 5 CONTENT
\namespacedboxanchor {...} * NAME NUMMER
\nascondiblocchi [... ¹ ,...] [... ² ,...] 1 NAME 2 NAME OPT

<code>\naturalhbox</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalhpack</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturaltpack</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalvbox</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalvcenter</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalvpack</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalvtop</code>	$\dots$	$\{ \dots \}$
1 TEXT	OPT	
2 CONTENT		
<code>\naturalwd</code>	$\dots$	
* CSNAME NUMBER		
<code>\negatecolorbox</code>	$\dots$	
* CSNAME NUMBER		
<code>\negated</code>	$\{ \dots \}$	
* TEXT		
<code>\negemspace</code>		
<code>\negenspace</code>		
<code>\negthinspace</code>		
<code>\newattribute</code>	$\dots$	
* CSNAME		
<code>\newboundary</code>	$\dots$	
* CSNAME		
<code>\newcatcodetable</code>	$\dots$	
* CSNAME		
<code>\newcounter</code>	$\dots$	
* CSNAME		
<code>\newevery</code>	$\dots$	$\dots$
1 CSNAME		
2 CSNAME		

<code>\newfrenchspacing</code>
<code>\newluatable *..</code> <code>* CSNAME</code>
<code>\newmode {...}</code> <code>* NAME</code>
<code>\newrepeatablerandom \¹.. {²..}</code> <code>1 CSNAME</code> <code>2 NUMMER</code>
<code>\newsignal *..</code> <code>* CSNAME</code>
<code>\newsystemmode {...}</code> <code>* NAME</code>
<code>\nextbox</code>
<code>\nextboxdp</code>
<code>\nextboxht</code>
<code>\nextboxhtdp</code>
<code>\nextboxwd</code>
<code>\nextcounter [¹..] [²..]</code> <code>1 NAME</code> <code>2 NUMMER</code> OPT
<code>\nextcountervalue [[*]..]</code> <code>* NAME</code>
<code>\nextdepth</code>
<code>\nextparagraphs</code>
<code>\successivoPARAGRAPHS</code>
<code>\nextrealpage</code>
<code>\nextrealpagenumber</code>
<code>\nextsubcountervalue [¹..] [²..]</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\nextsubpagenumber</code>
<code>\nextuserpage</code>
<code>\nextuserpagenumber</code>

<code>\nientedimensioni {...}</code> * CONTENT
<code>\nientelineecimafondo</code>
<code>\nientelineintestazionepd</code>
<code>\nientespazio</code>
<code>\nientespaziobianco</code>
<code>\nm {...}</code> * CONTENT
<code>\noapostrophes</code>
<code>\nobar {...}</code> * CONTENT
<code>\nobigmath</code>
<code>\nobreak</code>
<code>\nocap {...}</code> * TEXT
<code>\nocasing {...}</code> * CONTENT
<code>\nocharacteralign</code>
<code>\nocitation [...]</code> * REFERENCE
<code>\nocitation {...}</code> * REFERENCE
<code>\nocite [...]</code> * REFERENCE
<code>\nocite {...}</code> * REFERENCE
<code>\nodepthstrut</code>
<code>\nodetostring \¹... {²...}</code> 1 CSNAME 2 CONTENT
<code>\noexplicithyphens</code>
<code>\nofdetachedinsertions ...</code> * NUMMER
<code>\noffigurepages</code>

<code>\noflines</code>
<code>\noflinesinbox ...</code> <code>* CSNAME NUMBER</code>
<code>\noflocalfloats</code>
<code>\nohbreak</code>
<code>\noheightstrut</code>
<code>\nohyphencollapsing</code>
<code>\nohyphens</code>
<code>\noindentation</code>
<code>\noitaliccorrection</code>
<code>\noitem</code>
<code>\nokerning</code>
<code>\noleftkerning</code>
<code>\noleftligaturing</code>
<code>\noligaturing</code>
<code>\nonfrenchspacing</code>
<code>\nonmathematics {...}</code> <code>* CONTENT</code>
<code>\nonpenalizedspacing</code>
<code>\nonvalidassignment {...}</code> <code>* TEXT</code>
<code>\noorphans</code>
<code>\norightkerning</code>
<code>\norightligaturing</code>
<code>\normalboldface</code>
<code>\normale</code>
<code>\normalframedwithsettings [...¹...²] {...}</code> <code>1 inherits: \impostaincorniciato</code> <code>2 CONTENT</code>
<code>\normalitalicface</code>

<code>\normalizebodyfontsize \¹... {²...}</code> 1 CSNAME 2 DIMENSION
<code>\normalizedfontsize</code>
<code>\normalizefontdepth \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontheight \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontline \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontwidth \¹... {²...} {³...} {⁴...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizetextdepth {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextheight {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextline {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextwidth {¹...} {²...} {³...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalslantedface</code>
<code>\normaltypeface</code>
<code>\nota [¹...] [²...]</code> 1 NAME OPT 2 REFERENCE
<code>\NOTE [...,¹...] {²...}</code> 1 REFERENCE OPT 2 TEXT instances: footnote endnote mathnote publicationnote


```

\NOTE    [...,.*,...]
*   titolo      = TEXT
    segnalibro  = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT
instances: footnote endnote mathnote publicationnote

```

```

\endnote    [...,.*,...]
*   titolo      = TEXT
    segnalibro  = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT

```

```

\footnote    [...,.*,...]
*   titolo      = TEXT
    segnalibro  = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT

```

```

\mathnote    [...,.*,...]
*   titolo      = TEXT
    segnalibro  = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT

```

```

\publicationnote [...,.*,...]
*   titolo      = TEXT
    segnalibro  = TEXT
    elenco      = TEXT
    riferimento = REFERENCE
    referencetext = TEXT

```

```

\endnote    [...,1...] {..2.}
1  REFERENCE      OPT
2  TEXT

```

```

\footnote    [...,1...] {..2.}
1  REFERENCE      OPT
2  TEXT

```

```

\mathnote    [...,1...] {..2.}
1  REFERENCE      OPT
2  TEXT

```

```

\publicationnote [...,1...] {..2.}
1  REFERENCE      OPT
2  TEXT

```

```

\notesymbol    [...,1] [...,2]
1  NAME          OPT
2  REFERENCE

```

```

\notoddlers

```

```

\notragged

```

```

\notwins

```

```

\novbreak

```

<code>\ntimes {...} {...}</code> 1 TEXT 2 NUMMER
<code>\numberhere [...,*,...]</code> * titolo = TEXT OPT riferimento = + - REFERENCE segnalibro = TEXT elenco = TEXT suffix = TEXT
<code>\numberhere [...,*,...]</code> * + - REFERENCE OPT
<code>\numberofpoints {...}</code> * DIMENSION
<code>\numeri {...}</code> * NUMMER
<code>\numeriromani {...}</code> * NUMMER
<code>\numeroformula [...,*,...]</code> * REFERENCE OPT
<code>\numeropagina</code>
<code>\numeropaginacompleto</code>
<code>\numerotesta [...¹...] [...²...]</code> 1 ABSCHNITT OPT 2 precedente corrente successivo primo ultimo
<code>\numerotestacorrente</code>
<code>\obeydepth</code>
<code>\objectdepth</code>
<code>\objectheight</code>
<code>\objectmargin</code>
<code>\objectreference {...¹} {...²}</code> 1 NAME 2 NAME
<code>\objectreferencepage {...¹} {...²}</code> 1 NAME 2 NAME
<code>\objectwidth</code>
<code>\obox {...}</code> * CONTENT

* NUMMER

* NUMMER

```
1 inherits: \setupoffsetOPT
2 CONTENT
```

```
1 inherits: \setupoffsetbox
2 CSNAME
3 CONTENT
```

* NUMMER

```
* +line -line flushleft flushright normale NAME
```

```
* inherits: \setuptoolchain
```

\optionalword

* NUMMER

* TEXT

```
1  alternativa = a b
   inherits: \setupcollector
2  stile = STYLE BEFEHL
   colore = COLOR
   inherits: \impostaincorniciato
3  TEXT
4  CONTENT
```

```
1  NAME
2  TEXT
3  CONTENT
```

```
1  alternativa = a b
   inherits: \setupplayer
2  inherits: \setupplayeredtext
3  TEXT
4  CONTENT
```

```

1  TEXT
2  CONTENT

```

\outputfilename

* NAME

<code>\outputstreamcopy</code> [...] * NAME
<code>\outputstreamunvbox</code> [...] * NAME
<code>\outputstreamunvcopy</code> [...] * NAME
<code>\over</code> [...] * REFERENCE
<code>\overlayanchorbox</code> {...} * NAME
<code>\overlaybutton</code> [...] * REFERENCE
<code>\overlaybutton</code> {...} * REFERENCE
<code>\overlaycolor</code>
<code>\overlaydepth</code>
<code>\overlayfigure</code> {...} * FILE
<code>\overlayheight</code>
<code>\overlayimage</code> {...} * FILE
<code>\overlaylinecolor</code>
<code>\overlaylinewidth</code>
<code>\overlayoffset</code>
<code>\overlayrollbutton</code> [¹ ...] [² ...] 1 REFERENCE 2 REFERENCE
<code>\overlaywidth</code>
<code>\overloaderror</code>
<code>\overset</code> {... ¹ } {... ² } 1 TEXT 2 TEXT
<code>\PAROLA</code> {...} * TEXT
<code>\PAROLE</code> {...} * TEXT

\Parola {...} * TEXT
\Parole {...} * TEXT
\PDFcolor {...} * NAME
\PDFETEX
\PDFhighlight [...] 1 NAME 2 TEXT 3 TEXT
\PDFTEX
\Periodic {...} * TEXT
\PICTEX
\PiCTeX
\PointsToBigPoints {...} \^2.. 1 DIMENSION 2 CSNAME
\PointsToReal {...} \^2.. 1 DIMENSION 2 CSNAME
\PointsToWholeBigPoints {...} \^2.. 1 DIMENSION 2 CSNAME
\PPCHTEX
\PPCHTeX
\PRAGMA
\PtToCm {...} * DIMENSION
\pagearea [...] 1 cima intestazione testo piedipagina^p^fondo 2 testo margine bordo 3 sinistra destra testosinistro middletext testodestro
\pageblockrealpage {...} * NAME
\pagebreak [...;...] * vuoto intestazione^p^fiedipagina dummy cornice NUMMER +NUMMER implicito reimposta disattiva si no makeup rigovuoto preferenza grandepreferenza sinistra destra pari dispari quadruplo ultimo ultimapagina inizia termina xy note NAME

\pagefigure [...]¹ [...,...²...,...] 1 FILE OPT 2 offset = implicito sovrapponi nessuno DIMENSION
\pageinjection [...]¹ [...,...²...,...] 1 NAME OPT OPT 2 KEY = VALUE
\pageinjection [...,...¹...,...] 1 inherits: \setuppageinjection² OPT 2 KEY = VALUE
\pagelayout [...] * pagina paginasinistra paginadestra
\pagestaterealpage {...}¹ {...}² 1 NAME 2 NAME NUMBER
\pagestaterealpageorder {...}¹ {...}² 1 NAME 2 NAME NUMBER
\pagina [...]*,...] * inherits: \pagebreak
\paletsize
\PARAGRAPHS
\parbreak
\PARINSERT [...,...¹...,...] 1 inherits: \setupparinsert² {...} 2 CONTENT instances: leftparinsert rightparinsert
\leftparinsert [...,...¹...,...] 1 inherits: \setupparinsert² {...} 2 CONTENT
\rightparinsert [...,...¹...,...] 1 inherits: \setupparinsert² {...} 2 CONTENT
\parola {...} * TEXT
\paroladestra [...]¹ {...}² 1 destra DIMENSION OPT 2 CONTENT
\pbsp
\pdfactualtext {...}¹ {...}² 1 CONTENT 2 TEXT

<pre> \pdfalternativetext {...} {...} 1 CONTENT 2 TEXT </pre>
<pre> \pdfbackendactualtext {...} {...} 1 CONTENT 2 TEXT </pre>
<pre> \pdfbackendalternativetext {...} {...} 1 CONTENT 2 TEXT </pre>
<pre> \pdfbackendcurrentresources </pre>
<pre> \pdfbackendsetcatalog {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetcolorspace {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsettextgstate {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetinfo {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetname {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetpageattribute {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetpageresource {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetpagesattribute {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetpattern {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfbackendsetshade {...} {...} 1 NAME 2 TEXT </pre>
<pre> \pdfcolor {...} * NAME </pre>
<pre> \pdfTeX </pre>
<pre> \pdfsetuserdata </pre>

<code>\pdfTeX</code>
<code>\ped {...}</code> <code>* CONTENT</code>
<code>\pedap [...]¹ {...}² {...}³</code> <code>1 sinistra destra</code> <code>2 CONTENT</code> <code>3 CONTENT</code>
<code>\LOW {...}</code> <code>* CONTENT</code> <code>instances: unitslow</code>
<code>\unitslow {...}</code> <code>* CONTENT</code>
<code>\penalizedspacing</code>
<code>\percent</code>
<code>\percentdimen {...}¹ {...}²</code> <code>1 DIMENSION CSNAME</code> <code>2 DIMENSION NUMBER%</code>
<code>\periodic {...}</code> <code>* TEXT</code>
<code>\perlungo {...}</code> <code>* NAME</code>
<code>\permitcaretescape</code>
<code>\permitcircumflexescape</code>
<code>\permitspacesbetweengroups</code>
<code>\persiandecimals {...}</code> <code>* NUMMER</code>
<code>\persiannumerals {...}</code> <code>* NUMMER</code>
<code>\phantom {...}</code> <code>* CONTENT</code>
<code>\phantombox [...,...[*]...,...]</code> <code>* ampiezza = DIMENSION</code> <code> altezza = DIMENSION</code> <code> profondita = DIMENSION</code>
<code>\piccolo</code>
<code>\piccolocorsivo</code>
<code>\piccolocorsivograssetto</code>

<code>\piccolofontdelcorpo</code>
<code>\piccolograssetto</code>
<code>\piccolograssetto corsivo</code>
<code>\piccolograssetto inclinato</code>
<code>\piccoloinclinato</code>
<code>\piccoloinclinatograssetto</code>
<code>\piccolonormale</code>
<code>\piccolotype</code>
<code>\pickupgroupedcommand {¹...} {²...} {³...}</code> 1 BEFEHL 2 BEFEHL 3 BEFEHL
<code>\pickupgroupedcommandcs \¹... \²... \³...</code> 1 CSNAME 2 CSNAME 3 CSNAME
<code>\pickupparinsert</code>
<code>\placeattachments</code>
<code>\placebalancing [¹...] [...,²...,...]</code> 1 NAME 2 inherits: \setupbalancing OPT
<code>\placebtxrendering [¹...] [...,²...,...]</code> 1 NAME 2 inherits: \setupbtxrendering OPT
<code>\placecitation [...]</code> * REFERENCE
<code>\placecomments</code>
<code>\placecurrentformulanumber</code>
<code>\placedbox {[*]...}</code> * CONTENT
<code>\placefloat [¹] [...,²...] [...,³...] {⁴...} {⁵...}</code> 1 SINGULAR 2 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra inmargine marginesterno marginedestro bordosinistro bordodestro margineinterno margineesterno bordointerno bordoesterno testo opposto reimposta altezza profondita [-+]riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+]sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrft btrl rlbt fxbt fixd append 3 REFERENCE 4 TEXT 5 CONTENT

`\placefloatcaption` [...]¹ [...,...]² [...,...]³

1 NAME
2 titolo = TEXT
segnalibro = TEXT
marcatura = TEXT
elenco = TEXT
riferimento = REFERENCE
referencetext = TEXT
3 KEY = VALUE

`\placefloatplaceholder`

`\placefloatwithsetups` [...]¹ [...,...]² [...,...]³ {...}⁴ {...}⁵

1 NAME
2 separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [--] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [--] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rlbt fxbt fixd append
3 REFERENCE
4 TEXT
5 CONTENT

`\mettiFLOAT` [...]¹ [...,...]² {...}³ {...}⁴

1 separa keep together ^{OPT}sempre ^{OPT}sinistra ^{OPT}destra interno esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [--] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [--] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rlbt fxbt fixd append
2 REFERENCE
3 TEXT
4 CONTENT

instances: chemical figure table intermezzo graphic

`\mettichemical` [...]¹ [...,...]² {...}³ {...}⁴

1 separa keep together ^{OPT}sempre ^{OPT}sinistra ^{OPT}destra interno esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [--] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [--] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rlbt fxbt fixd append
2 REFERENCE
3 TEXT
4 CONTENT

`\mettigure` [...]¹ [...,...]² {...}³ {...}⁴

1 separa keep together ^{OPT}sempre ^{OPT}sinistra ^{OPT}destra interno esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [--] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [--] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rlbt fxbt fixd append
2 REFERENCE
3 TEXT
4 CONTENT

`\mettigraphic` [...]¹ [...,...]² {...}³ {...}⁴

1 separa keep together ^{OPT}sempre ^{OPT}sinistra ^{OPT}destra interno esterno backspace cutspace insinistra indestra in margine
margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno
testo opposto reimposta altezza profondita [--] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante
90 180 270 nonumber nessuno locale qui forza margine [--] sospendi sospeso alto entrambi centro offset cima fondo
auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr
rltb fxtb btlr lrbt btrl rlbt fxbt fixd append
2 REFERENCE
3 TEXT
4 CONTENT

\mettiintermezzo [...,¹...] [...,²...] {...} {...} 1 separa keep together sempre^{OPT} sinistra^{OPT} destra^{OPT} interno esterno backspace cutspace insinistra indestra in margine margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno testo opposto reimposta altezza profondita [-+] riga mezza riga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina pagina sinistra pagina destra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\mettitable [...,¹...] [...,²...] {...} {...} 1 separa keep together^{OPT} sempre sinistra^{OPT} destra^{OPT} interno esterno backspace cutspace insinistra indestra in margine margin sinistro margin destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno testo opposto reimposta altezza profondita [-+] riga mezza riga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina pagina sinistra pagina destra capoverso da qualche parte effective intestazione piedipagina tblr lrtb tblr rltb fxtb btlr lrbt btrl rltb fxbt fixd append 2 REFERENCE 3 TEXT 4 CONTENT
\placeframed [...¹] [...,²...,...] {...} 1 NAME^{OPT} 2 inherits: \impostaincorniciato 3 CONTENT
\placehelp
\placeholder [...] * NAME
\placeinitial [...] * NAME^{OPT}
\placelayer [...] * NAME
\placelayeredtext [...¹] [...,²...,...] [...,³...,...] {...⁴} {...⁵} 1 NAME 2 inherits: \setuplayer 3 inherits: \setuplayeredtext 4 TEXT 5 CONTENT
\placelistofFLOATS [...,[*]...,...] * inherits: \impostaelenco^{OPT} instances: chemicals figures tables intermezzi graphics
\placelistofchemicals [...,[*]...,...] * inherits: \impostaelenco^{OPT}
\placelistoffigures [...,[*]...,...] * inherits: \impostaelenco^{OPT}
\placelistofgraphics [...,[*]...,...] * inherits: \impostaelenco^{OPT}
\placelistofintermezzi [...,[*]...,...] * inherits: \impostaelenco^{OPT}
\placelistoftables [...,[*]...,...] * inherits: \impostaelenco^{OPT}

<code>\placelistofpublications</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> 1 NAME OPT OPT 2 inherits: \setupbtxrendering
<code>\placelistofsorts</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> 1 SINGULAR OPT 2 inherits: \impostaaordinamento
<code>\placelistofSORTS</code> [*]<code>[...,...=...,...]</code> * inherits: \impostaaordinamento^{OPT} instances: logos
<code>\placelistoflogos</code> [*]<code>[...,...=...,...]</code> * inherits: \impostaaordinamento^{OPT}
<code>\placelistofsynonyms</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> 1 SINGULAR OPT 2 inherits: \impostasinonimi
<code>\placelistofSYNONYMS</code> [*]<code>[...,...=...,...]</code> * inherits: \impostasinonimi^{OPT} instances: abbreviations
<code>\placelistofabbreviations</code> [*]<code>[...,...=...,...]</code> * inherits: \impostasinonimi^{OPT}
<code>\placelocalnotes</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> 1 NAME OPT 2 inherits: \setupnote
<code>\placement</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> ³<code>{...}</code> 1 NAME OPT 2 inherits: \setupplacement 3 CONTENT
<code>\PLACEMENT</code> ¹<code>[...,...=...,...]</code> ²<code>{...}</code> 1 inherits: \setupplacement^{OPT} 2 CONTENT
<code>\placenamefloat</code> ¹<code>[...]</code> ²<code>[...]</code> 1 NAME 2 REFERENCE
<code>\placenameformula</code> ¹<code>[...,...]</code> ²<code>{...}</code> ³<code>{...}</code> 1 + - REFERENCE OPT OPT 2 TEXT 3 TEXT
<code>\placenotes</code> ¹<code>[...,...]</code> ²<code>[...,...=...,...]</code> 1 NAME OPT 2 inherits: \setupnote
<code>\placepairedbox</code> ¹<code>[...]</code> ²<code>[...,...=...,...]</code> ³<code>{...}</code> ⁴<code>{...}</code> 1 NAME OPT 2 inherits: \setuppairedbox 3 CONTENT 4 TEXT

<code>\mettiPAIREDBOX</code> [...,.. ¹ ...,...] {...} {...} 1 inherits: \setuppairedbox OPT 2 CONTENT 3 TEXT instances: legend
<code>\mettilegend</code> [...,.. ¹ ...,...] {...} {...} 1 inherits: \setuppairedbox 2 CONTENT 3 TEXT
<code>\placeparallel</code> [...] ¹ [...,.. ² ...] [...,.. ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupparallel OPT
<code>\placerawheaddata</code> [...] * ABSCHNITT
<code>\placerawheadnumber</code> [...] * ABSCHNITT
<code>\placerawheadtext</code> [...] * ABSCHNITT
<code>\placerawlist</code> [...] ¹ [...,.. ² ...,...] 1 LISTE 2 inherits: \impostaelenco OPT
<code>\placereadingwindow</code> [...] ¹ [...] ² 1 NAME 2 NAME OPT
<code>\placesavedfloat</code> [...] ¹ [...] ² [...,.. ³ ...,...] 1 NAME 2 REFERENCE 3 titolo = TEXT segnalibro = TEXT marcatura = TEXT elenco = TEXT luogo = separa keep together sempre sinistra destra interno esterno backspace cutspace insinistra indestra in margine margine sinistro margine destro bordo sinistro bordo destro margine interno margine esterno bordo interno bordo esterno testo opposto reimposta altezza profondita [-+] riga mezzariga griglia alto basso adatta tight tollerante moltotollerante 90 180 270 nonumber nessuno locale qui forza margine [-+] sospendi sospeso alto entrambi centro offset cima fondo auto pagina paginasinistra paginadestra capoverso da qualche parte effective intestazione piedipagina tblr lr tb tblr lr tb fxtb btlr lr bt btrl rl bt fxbt fixd append riferimento = REFERENCE referencetext = TEXT
<code>\placesynchronize</code> [...] ¹ [...,.. ² ...,...] 1 NAME 2 inherits: \setupsynchronize OPT
<code>\plainmatrix</code> {...} * CONTENT
<code>\popattribute</code> *... * CSNAME
<code>\popmacro</code> *... * CSNAME

<code>\popmode</code> [...] * NAME
<code>\popsystemmode</code> {...} * NAME
<code>\positionoverlay</code> {...} * NAME
<code>\positionregionoverlay</code> {...¹} {...²} 1 NAME 2 NAME
<code>\posizionanumerotesta</code> [...] * ABSCHNITT
<code>\posizionatestotesta</code> [...] * ABSCHNITT
<code>\posizione</code> [...,¹...,...] (...²,...) {...³} 1 inherits: \impostapozizionamento 2 POSITION 3 CONTENT
<code>\postponenotes</code>
<code>\predefinedfont</code> [...] * FONT
<code>\predefinefont</code> [...¹] [...²] 1 NAME 2 FONT
<code>\predefinesymbol</code> [...] * NAME
<code>\prefixedpagenumber</code>
<code>\prendibuffer</code> [...,[*]...] OPT * BUFFER
<code>\prendiBUFFER</code>
<code>\prendimarcatura</code> [...¹] [...²] [...³] OPT OPT 1 BESCHRIFTUNG 2 pagina NAME NUMMER 3 primo ultimo corrente precedente successivo cima fondo implicito entrambi tutti first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
<code>\prependetoks</code> ...¹ \to \...² 1 BEFEHL 2 CSNAME
<code>\prependgvalue</code> {...¹} {...²} 1 NAME 2 BEFEHL
<code>\prependhiddenbackground</code> {...,[*]...} * NAME

<pre> \prependtocommalist {...} \^{.2}... 1 TEXT 2 CSNAME </pre>
<pre> \prependtoks ... \to \^{.2}... 1 BEFEHL 2 CSNAME </pre>
<pre> \prependtoksonce ... \to \^{.2}... 1 BEFEHL 2 CSNAME </pre>
<pre> \prependvalue {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \prerollblank [...,*...] * inherits: \rigovuoto </pre>
<pre> \prerolledpages [...,*...] * NAME </pre>
<pre> \presetdocument [...^{.1}] [...,...^{.2}...,...] 1 NAME 2 inherits: \setupdocument </pre>
<pre> \presetfieldsymbols [...,*...] * NAME </pre>
<pre> \presetLABELtesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \presetbtxlabeltesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetheadtesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetlabeltesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetmathlabeltesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetoperatortesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetprefixtesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetsuffixtesto [...^{.1}] [...,...^{.2}...,...] 1 SPRACHE 2 KEY = VALUE </pre>

<pre> \presettaglabeltesto [...] [...,..²...,..] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetunittesto [...] [...,..²...,..] 1 SPRACHE 2 KEY = VALUE </pre>
<pre> \presetmathematics [...,*...] * NAME </pre>
<pre> \pretocommalist {..¹.} \..². 1 TEXT 2 CSNAME </pre>
<pre> \prettyprintbuffer {..¹.} {..².} 1 BUFFER 2 mp lua xml parsed-xml nested tex context nessuno NAME </pre>
<pre> \prevcounter [...] [..².] 1 NAME 2 NUMMER </pre>
<pre> \prevcountervalue [..[*].] * NAME </pre>
<pre> \preventmode [...,*...] * NAME </pre>
<pre> \precedenteCOMANDO </pre>
<pre> \prevrealpage </pre>
<pre> \prevrealpagenumber </pre>
<pre> \prevsubcountervalue [..¹.] [..².] 1 NAME 2 NUMMER </pre>
<pre> \prevsubpage </pre>
<pre> \prevsubpagenumber </pre>
<pre> \prevuserpage </pre>
<pre> \prevuserpagenumber </pre>
<pre> \primasottopagina </pre>
<pre> \privatecharacter {..[*].} * NAME </pre>
<pre> \privatecharactercode {..[*].} * NAME </pre>
<pre> \procent </pre>


```

1  BEFEHL
2  APPLY

```

```
1 BEFEHL
2 APPLY
```

```
1  TEXT
2  CSNAME
```

```

1  KEY  =  VALUE
2  CSNAME

```

```

1  KEY  =  VALUE
2  CSNAME

```

1	NAME
2	CSNAME

* CSNAME

* COLOR

```

1  BEFEHL
2  CSNAME

```

```

1  BEFEHL
2  CSNAME

```

```
1 BEFEHL
2 CSNAME
```

1	NAME
2	CSNAME

```
1  FILE
2  NAME
3  NAME
```

* FILE

* FILE

* FILE

* FILE

2 APPLY

\processinsertions

2 CSNAME

2 CSNAME

* BUFFER

* FILE

4 CSNAME

* NAME

* FILE

3 BEFEHL

2 CSNAME

3 CSNAME BEFEHL

* BUFFER

* BUFFER

<pre> \processtokens {...} {...} {...} {...} {...} 1 BEFEHL 2 BEFEHL 3 BEFEHL 4 BEFEHL 5 TEXT </pre>
<pre> \processuntil *. * CSNAME </pre>
<pre> \processxmlbuffer {...} * NAME </pre>
<pre> \processxmlfile {...} * FILE </pre>
<pre> \processxtablebuffer [...] * NAME OPT </pre>
<pre> \processyear {...} {...} {...} {...} 1 NUMBER 2 BEFEHL 3 BEFEHL 4 BEFEHL </pre>
<pre> \prodotto [...] * FILE </pre>
<pre> \prodotto ... * FILE </pre>
<pre> \profiledbox [...] [...,...²...,...] {...} 1 nessuno fisso rigido halfixed quarterfixed eightsfixed NAME 2 inherits: \setupprofile 3 CONTENT </pre>
<pre> \profilegivenbox {...} ... 1 nessuno fisso rigido halfixed quarterfixed eightsfixed NAME 2 CSNAME NUMBER </pre>
<pre> \progetto [...] * FILE </pre>
<pre> \progetto ... * FILE </pre>
<pre> \programma [...] * NAME </pre>
<pre> \pseudoMixedCapped {...} * TEXT </pre>
<pre> \pseudoSmallCapped {...} * TEXT </pre>
<pre> \pseudoSmallcapped {...} * TEXT </pre>
<pre> \pseudosmallcapped {...} * TEXT </pre>

<code>\pulsante</code> [...,¹...,...] {...} [...] 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\pulsantemenu</code> [...,¹...,...] {...} {...} 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\pulsantemenu</code> [...]¹ [...,²...,...] {...} {...} 1 NAME 2 inherits: \impostamenuinterazione 3 TEXT 4 REFERENCE
<code>\BUTTON</code> [...,¹...,...] {...} [...] 1 inherits: \setupbutton 2 TEXT 3 REFERENCE instances: button
<code>\pulsantinterazione</code> [...,¹...,...] [...,²,...] 1 inherits: \impostabarrainterazione 2 pagina sottopagina REFERENCE
<code>\punti</code> [...]¹ * NUMMER
<code>\punti</code> [...,¹...,...] * inherits: \setupperiods
<code>\purenumber</code> {...} * NUMMER
<code>\pusharrangedpages</code> ... <code>\poparrangedpages</code>
<code>\pushattribute</code> *... * CSNAME
<code>\pushbar</code> [...]¹ ... <code>\popbar</code> * NAME
<code>\pushbutton</code> [...]¹ [...]² 1 NAME 2 REFERENCE
<code>\pushcatcodetable</code> ... <code>\popcatcodetable</code>
<code>\pushcolore</code> [...]¹ ... <code>\popcolore</code> * COLOR
<code>\pushendofline</code> ... <code>\popendofline</code>
<code>\pushglobalsetups</code> ... <code>\popglobalsetups</code>
<code>\pushindentation</code> ... <code>\popindentation</code>
<code>\pushlocalanchors</code> ... <code>\poplocalanchors</code>

<code>\pushMPdrawing ... \popMPdrawing</code>
<code>\pushmacro *...</code> <code>* CSNAME</code>
<code>\pushmathstyle ... \popmathstyle</code>
<code>\pushmode [...]</code> <code>* NAME</code>
<code>\pushoutputstream [...]</code> <code>* NAME</code> OPT
<code>\pushoverloadmode ... \popoverloadmode</code>
<code>\pushpath [...] ... \poppath</code> <code>* PATH</code>
<code>\pushpunctuation ... \poppunctuation</code>
<code>\pushrandomseed ... \poprandomseed</code>
<code>\pushreferenceprefix {...} ... \popreferenceprefix</code> <code>* + - TEXT</code>
<code>\pushsfondo [...] ... \popsfondo</code> <code>* NAME</code>
<code>\pushsystemmode {...}</code> <code>* NAME</code>
<code>\putboxincache {...} {...} ...</code> 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER
<code>\putnextboxincache {...} {...} \... {...}</code> 1 NAME 2 NUMMER TEXT 3 CSNAME 4 CONTENT
<code>\qedhere [...]</code> <code>* sinistra destra^{OPT} prima dopo tra</code>
<code>\qqquad</code>
<code>\qrcode [...,*,*,*,*]</code> <code>* testo = TEXT</code> <code> ampiezza = DIMENSION</code> <code> buffer = NAME</code> <code> colore = COLOR</code>
<code>\quad</code>
<code>\quads [...]</code> <code>* NUMBER</code> OPT

\qualcheriga [...] * REFERENCE
\quarterstrut
\quitcommalist
\quitprevcommalist
\quittypescriptscanning
\ReadFile {...} * FILE
\raggedbottom
\raggedcenter
\raggedleft
\raggedright
\raggedslanted
\raggedwidecenter
\raisebox {...} \^{.2} {...} {...} 1 DIMENSION 2 CSNAME 3 CONTENT
\randomizetext {...} * TEXT
\randomnumber {...} {...} 1 NUMMER 2 NUMMER
\rawcounter [...^{.1}] [...^{.2}] 1 NAME OPT 2 NUMMER
\rawcountervalue [...^{.}] * NAME
\rawdate [...^{.},...] * inherits: \datadioggi
\rawdoifelseinset {...} {...^{.2},...} {...} {...} 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\rawdoifinset {...} {...^{.2},...} {...} 1 TEXT 2 TEXT 3 TRUE

<pre> \rawdoifinsetelse {...} {...,²...} {...³} {...⁴} 1 TEXT 2 TEXT 3 TRUE 4 FALSE </pre>
<pre> \rawgetparameters [...¹] [...,²...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \rawMPdata </pre>
<pre> \rawmathematics {...} * CONTENT </pre>
<pre> \rawparagraphshape {...} * NAME </pre>
<pre> \rawprocessaction [...¹] [...,²=>...,...] 1 BEFEHL 2 APPLY </pre>
<pre> \rawprocesscommacommand [...,¹...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \rawprocesscommalist [...,¹...] \²... 1 BEFEHL 2 CSNAME </pre>
<pre> \rawstructurelistuservariable {...} * KEY </pre>
<pre> \rawsubcountervalue [...¹] [...²] 1 NAME 2 NUMBER </pre>
<pre> \rbox ...¹ {...²} 1 TEXT^{OPT} 2 CONTENT </pre>
<pre> \readfile {...¹} {...²} {...³} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \readfixfile {...¹} {...²} {...³} {...⁴} 1 PATH 2 FILE 3 TRUE 4 FALSE </pre>
<pre> \readjobfile {...¹} {...²} {...³} 1 FILE 2 TRUE 3 FALSE </pre>
<pre> \readlocfile {...¹} {...²} {...³} 1 FILE 2 TRUE 3 FALSE </pre>

\readsetfile {...} {...} {...} {...} 1 PATH 2 FILE 3 TRUE 4 FALSE
\readsysfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE
\readtexfile {...} {...} {...} 1 FILE 2 TRUE 3 FALSE
\realpagenumber
\realSmallCapped {...} * TEXT
\realSmallcapped {...} * TEXT
\realsmallcapped {...} * TEXT
\recursedepth
\recurselevel
\recursestring
\redoconvertfont
\referencecolumnnumber
\REFERENCEFORMAT {...} {...} [...] 1 TEXT 2 TEXT 3 REFERENCE OPT OPT
\referencepagedetail
\referencepagestate
\referenceprefix
\referencerealpage
\referencesymbol
\referencewildcard
\referring (... ¹ ,...) (... ² ,...) [... ³] 1 POSITION 2 POSITION 3 REFERENCE

<pre> \registerattachment [...]¹ [...,...²...,...] 1 NAME 2 inherits: \setupattachment </pre>
<pre> \registerboxanchor </pre>
<pre> \registerctxluafile {...}¹ {...}² 1 FILE 2 NUMMER </pre>
<pre> \registerexternalfigure [...]¹ [...]² [...,...³...,...]³ 1 FILE 2 NAME 3 inherits: \setupexternalfigure </pre>
<pre> \registerfallbackfont [...]¹ [...,²...,...] 1 serif sans mono 2 FONT </pre>
<pre> \registerfiguremask [...]¹ {...}² 1 NAME 2 CONTENT </pre>
<pre> \registerfigurerange [...]¹ {...}² 1 NAME 2 CONTENT </pre>
<pre> \registerfontclass {...} * NAME </pre>
<pre> \registerhyphenationexception [...]¹ [...]² 1 SPRACHE 2 TEXT </pre>
<pre> \registerhyphenationpattern [...]¹ [...]² 1 SPRACHE 2 TEXT </pre>
<pre> \registermathfunction [...][*] * NAME </pre>
<pre> \registermathsymbol [...]¹ [...]² [...]³ [...]⁴ 1 NAME 2 SPRACHE 3 NAME 4 TEXT </pre>
<pre> \registermenubuttons [...]¹ [...]² 1 NAME 2 TEXT </pre>
<pre> \registeroverloads [...][*] * NAME </pre>
<pre> \registerparwrapper {...}¹ {...}² {...}³ 1 NAME 2 CONTENT 3 CONTENT </pre>

<pre> \registerparwrapperreverse {...} {...} {...} 1 NAME 2 CONTENT 3 CONTENT </pre>
<pre> \registerpattern [...¹.] [...,...²...,...] {...³.} 1 NAME OPT OPT 2 nome = NAME ampiezza = auto DIMENSION altezza = auto DIMENSION hoffset = auto -auto DIMENSION voffset = auto -auto DIMENSION 3 CONTENT </pre>
<pre> \registersort [...¹.] [...².] 1 SINGULAR 2 NAME </pre>
<pre> \registersortpage [...¹.] [...².] 1 SINGULAR 2 NAME </pre>
<pre> \registersynonym [...¹.] [...².] 1 SINGULAR 2 NAME </pre>
<pre> \registertopcontent [...¹.] \...² {...³.} 1 NUMBER 2 CSNAME 3 CONTENT </pre>
<pre> \registerunit [...¹.] [...,...²...,...] 1 prefix unita operatOff suffix simbolo packaged 2 KEY = VALUE </pre>
<pre> \registerunitshortcut [...¹.] [...,...²...,...] 1 prefix unita operator suffix simbolo packaged 2 KEY = VALUE </pre>
<pre> \REGISTER [...¹.] {...+...²+...} 1 TEXT PROCESSOR²TEXT 2 INDEX instances: index </pre>
<pre> \index [...¹.] {...+...²+...} 1 TEXT PROCESSOR->TEXT 2 INDEX </pre>
<pre> \REGISTER [...¹.] {...².} {...+...³+...} 1 TEXT PROCESSOR²TEXT 2 TEXT 3 INDEX instances: index </pre>
<pre> \index [...¹.] {...².} {...+...³+...} 1 TEXT PROCESSOR->TEXT 2 TEXT 3 INDEX </pre>
<pre> \regolare </pre>
<pre> \reimpostamarcatura [...[*].] * BESCHRIFTUNG </pre>

\relatemarking [^1..] [^2..] 1 BESCHRIFTUNG 2 BESCHRIFTUNG
\relateparameterhandlers {^1..} {^2..} {^3..} {^4..} 1 NAME 2 NAME 3 NAME 4 NAME
\relateparameterhandlersbyns \^1.. {^2..} \^3.. {^4..} 1 CSNAME 2 NAME 3 CSNAME 4 NAME
\relaxvalueifundefined {^*..} * NAME
\remainingcharacters
\removebottomthings
\removedepth
\removefromcommalist {^1..} \^2.. 1 TEXT 2 CSNAME
\removelastskip
\removelastspace
\removemarkedcontent [^*..] * NAME
\removemissingcharacters
\removepunctuation
\removesubstring .^1.. \from .^2.. \to \^3.. 1 TEXT 2 TEXT 3 CSNAME
\removetoks .^1.. \from \^2.. 1 BEFEHL 2 CSNAME
\removeunwantedspaces
\reorderfloats [...^*,...] * NAME
\repeathead [^*..] * ABSCHNITT
\replacefeature [^*..] * NAME

<pre> \replacefeature {...} * NAME </pre>
<pre> \replaceincommalist \¹... {²...} 1 CSNAME 2 NUMMER </pre>
<pre> \replacemissingcharacters </pre>
<pre> \replaceword [¹...] [²] [³] 1 NAME OPT 2 TEXT 3 TEXT </pre>
<pre> \rescan {...} * CONTENT </pre>
<pre> \rescanwithsetup {¹...} {²...} 1 NAME 2 CONTENT </pre>
<pre> \reservecolumnset </pre>
<pre> \resetalignmentcharacter </pre>
<pre> \resetallattributes </pre>
<pre> \resetalternate </pre>
<pre> \resetandaddfeature [...] * NAME </pre>
<pre> \resetandaddfeature {...} * NAME </pre>
<pre> \resetbar </pre>
<pre> \resetboxesincache {...} * NAME </pre>
<pre> \resetbreakpoints </pre>
<pre> \resetbuffer [...] * BUFFER </pre>
<pre> \resetcharacteralign </pre>
<pre> \resetcharacterkerning </pre>
<pre> \resetcharacterspacing </pre>
<pre> \resetcharacterstripping </pre>
<pre> \resetcollector [...] * NAME </pre>

<pre> \reimpostacomando parameter {...} * KEY </pre>
<pre> \resetcomparingtext </pre>
<pre> \resetcounter [...] [...²] 1 NAME OPT 2 NUMBER </pre>
<pre> \resetctxscanner *... * CSNAME </pre>
<pre> \resetdigitsmanipulation </pre>
<pre> \resetdirection </pre>
<pre> \resetdummyparameter {...} *... 1 KEY 2 CSNAME </pre>
<pre> \resetexpansion </pre>
<pre> \resetextrafontkerns </pre>
<pre> \resetfeature </pre>
<pre> \resetflag {...} * NAME </pre>
<pre> \resetfontcolorscheme </pre>
<pre> \resetfontfallback [...] [...²] 1 NAME OPT 2 FONT </pre>
<pre> \resetfontsolution </pre>
<pre> \resethyphenationfeatures </pre>
<pre> \resetinjector [...] * NAME </pre>
<pre> \resetinteractionmenu [...] * NAME </pre>
<pre> \resetitaliccorrection </pre>
<pre> \resetlayer [...] * NAME </pre>
<pre> \resetlineprofile </pre>
<pre> \resetlistsynonyms [...] * SINGULAR </pre>

<pre>\resetlocalbox [...] * NAME</pre>
<pre>\resetlocalfloats</pre>
<pre>\resetlocalshowmakeup</pre>
<pre>\resetMPdrawing</pre>
<pre>\resetMPenvironment</pre>
<pre>\resetMPinstance [...] * NAME</pre>
<pre>\resetMPOverlaydata</pre>
<pre>\resetmacros [...*,...] * NAME CSNAME</pre>
<pre>\resetmarker [...] * NAME</pre>
<pre>\resetmode {...} * NAME</pre>
<pre>\resetoverloads</pre>
<pre>\resetpagenumber</pre>
<pre>\resetparallel [...]¹ [...]²,...] 1 NAME OPT 2 NAME tutti</pre>
<pre>\resetpath</pre>
<pre>\resetpenalties *.. * CSNAME</pre>
<pre>\resetperiodkerning</pre>
<pre>\resetprofile</pre>
<pre>\resetrecurselevel</pre>
<pre>\resetreference [...] * NAME</pre>
<pre>\resetreplacements</pre>
<pre>\resetscript</pre>
<pre>\resetsetups [...] * NAME</pre>

\resetshownsynonyms [...] * SINGULAR
\resetsubpagenumber
\resetsymbolset
\resetsynchronizemarking [...] * BESCHRIFTUNG
\resetsynonyms [...] * SINGULAR
\resetsynonymsprogress [...] * SINGULAR
\resetsystemmode {...} * NAME
\resettimer
\resettokenlist [...] * NAME
\resettrackers
\resettransliteration
\resettrialtypesetting
\resetusedsortings [...] * SINGULAR
\resetusedsynonyms [...] * SINGULAR
\resetuserpagenumber
\resetvalue {...} * NAME
\resetvisualizers
\reshapebox {...} * BEFEHL
\resolvedglyphdirect {...} {...} 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
\resolvedglyphstyled {...} {...} 1 FONT 2 e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME

<pre> \restartcounter [...] [...] [...] 1 NAME 2 NUMMER 3 NUMMER </pre>
<pre> \restorebox {...} {...} 1 NAME 2 NAME </pre>
<pre> \restorecatcodes </pre>
<pre> \restorecounter [...] * NAME </pre>
<pre> \restorecurrentattributes {...} * NAME </pre>
<pre> \restoreendofline </pre>
<pre> \restoreglobalbodyfont </pre>
<pre> \retestfeature </pre>
<pre> \reusableMPgraphic {...} {...,...²...,...} 1 NAME 2 KEY = VALUE </pre>
<pre> \reusableMPgraphic [...,...¹...,...] {...} 1 instance = metafun^{OPT}minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT 2 NAME </pre>
<pre> \reuseMPgraphic {...} {...,...²...,...} 1 NAME 2 KEY = VALUE </pre>
<pre> \reuseMPgraphic [...,...¹...,...] {...} 1 instance = metafun^{OPT}minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT 2 NAME </pre>
<pre> \reuserandomseed </pre>
<pre> \reversehbox .¹... {...} 1 TEXT 2 CONTENT </pre>
<pre> \reversehpack .¹... {...} 1 TEXT 2 CONTENT </pre>
<pre> \reversetpack .¹... {...} 1 TEXT 2 CONTENT </pre>

<code>\rightbox {...}</code> * CONTENT
<code>\righthbox {...}</code> * CONTENT
<code>\rightLABELtesto {...}</code> * KEY instances: head label mathlabel
<code>\rightheadtesto {...}</code> * KEY
<code>\rightlabeltesto {...}</code> * KEY
<code>\rightmathlabeltesto {...}</code> * KEY
<code>\rightline {...}</code> * CONTENT
<code>\rightorleftpageaction {...} {...}</code> 1 BEFEHL 2 BEFEHL
<code>\rightpageorder</code>
<code>\rightparbox [...]¹ {...}</code> 1 globale ^{OPT} 2 CONTENT
<code>\rightskipadaption</code>
<code>\rightsubguillemot</code>
<code>\righttopleft</code>
<code>\righttopleftthbox ...¹ {...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\righttopleftvbox ...¹ {...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\righttopleftvtop ...¹ {...}</code> 1 TEXT ^{OPT} 2 CONTENT
<code>\righttopbox {...}</code> * CONTENT
<code>\rigovuoto [...]*,...]</code> * preferenza stessapagina max forza enable disattiva nobianco impaccato dietro sovrapponi sempre mantieni weak strong implicito prima tra dopo fisso flessibile nessuno piccolo medio grande riga mezzariga halflinbefore halflinaafter quarterline formula bianco altezza profondita standard NUMMER*piccolo NUMMER*medio NUMMER*grande NUMMER*riga NUMMER*mezzariga NUMMER*quarterline NUMMER*formula NUMMER*bianco NUMMER*altezza NUMMER*profondita category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME

<code>\rlap {...}</code> * CONTENT
<code>\robustaddtocommalist {¹...} \²...</code> 1 TEXT 2 CSNAME
<code>\robustdoifelseinset {¹...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustdoifinsetelse {¹...} {²...,...} {³...} {⁴...}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustpretocommalist {¹...} \²...</code> 1 TEXT 2 CSNAME
<code>\rollbutton [...,¹...¹...,...] ²... [...³...]</code> 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\rollbutton [...¹...] [...,²...²...,...] ³... [...⁴...]</code> 1 NAME OPT OPT 2 inherits: \impostamenuinterazione 3 TEXT 4 REFERENCE
<code>\roman</code>
<code>\rootCOMANDOparameter {...}</code> * KEY
<code>\rtlhbox ¹... {²...}</code> 1 TEXT OPT 2 CONTENT
<code>\rtltext {...}</code> * CONTENT
<code>\rtlvbox ¹... {²...}</code> 1 TEXT OPT 2 CONTENT
<code>\rtlvtop ¹... {²...}</code> 1 TEXT OPT 2 CONTENT
<code>\rtop ¹... {²...}</code> 1 TEXT OPT 2 CONTENT
<code>\ruby [...¹...] {²...} {³...}</code> 1 NAME OPT 2 TEXT 3 TEXT

\ruledddbox ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledddpack ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledhbox ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledhpack ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledmbox {...}		
*	CONTENT	
\ruledtpack ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledvbox ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledvpack ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\ruledvtop ¹ ... { ² ...}		
1	TEXT	OPT
2	CONTENT	
\runbuffer [¹ ...] [² ...]		
1	BUFFER	OPT
2	NAME	
\runMPbuffer [... [*] ...] ^{OPT}		
*	NAME	
\runninghbox {...}		
*	CONTENT	
\ruota [..., ¹ ...,...] { ² ...}		
1	inherits: \impostarotazione	
2	CONTENT	
\russianNumerals {...}		
*	NUMMER	
\russiannumerals {...}		
*	NUMMER	
\ScaledPointsToBigPoints { ¹ ...} \ ² ...		
1	DIMENSION	
2	CSNAME	

```

1  DIMENSION
2  CSNAME

```

* TEXT

* NUMMER

* FILE

\sans

\sansnormal

\sansserif

```

1  NAME
2  NAME
3  CONTENT

```

```

1  NAME                OPT          OPT          OPT
2  FILE
3  dataset  =  NAME
      type   =  bib lua xml
      file   =  FILE
      criterio = tutti testo intro riferimento corrente qui precedente locale componente SECTIONBLOCK:tutti SECTIONBLOCK:riferimento
      opzione = SECTIONBLOCK:corrente SECTIONBLOCK:precedente

```

```
1 BUFFER OPT  
2 inherits: \setupsavebuffer
```

```
1  BUFFER
2  FILE
```

\savecolore ... \restorecolore

* NAME

* NAME

```
* inherits: \setupmathexport OPT
```

* CSNAME

* CONTENT

<pre> \scala [...]¹ [...,...²...,...]² {...}³ 1 NAME OPT OPT 2 inherits: \setupscale 3 CONTENT </pre>
<pre> \scaps {...} * TEXT </pre>
<pre> \schermo [...,*...] * inherits: \pagin^{OPT} </pre>
<pre> \SCRIPT instances: hangul hanzi nihongo ethiopic thai latin test </pre>
<pre> \ethiopic </pre>
<pre> \hangul </pre>
<pre> \hanzi </pre>
<pre> \latin </pre>
<pre> \nihongo </pre>
<pre> \test </pre>
<pre> \thai </pre>
<pre> \scrividentroelenco [...]¹ [...,...²...,...]² {...}³ 1 LISTE OPT 2 inherits: \impostaelenco 3 BEFEHL </pre>
<pre> \scriviinelenco [...]¹ [...,...²...,...]² {...}³ {...}⁴ 1 LISTE OPT 2 inherits: \impostaelenco 3 NUMMER 4 TEXT </pre>
<pre> \secondoffivearguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT </pre>
<pre> \secondoffourarguments {...}¹ {...}² {...}³ {...}⁴ 1 TEXT 2 TEXT 3 TEXT 4 TEXT </pre>
<pre> \secondofsixarguments {...}¹ {...}² {...}³ {...}⁴ {...}⁵ {...}⁶ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT </pre>

<code>\secondofthreearguments {...} {...} {...}</code> 1 TEXT 2 TEXT 3 TEXT
<code>\secondofthreeunexpanded {...} {...} {...}</code> 1 TEXT 2 TEXT 3 TEXT
<code>\secondoftwoarguments {...} {...}</code> 1 TEXT 2 TEXT
<code>\secondoftwounexpanded {...} {...}</code> 1 TEXT 2 TEXT
<code>\vediREGISTER [...] {...+...+...} {...}</code> 1 TEXT PROCESSOR->TEXT ^{OPT} 2 INDEX 3 TEXT PROCESSOR->TEXT instances: index
<code>\vediindex [...] {...+...+...} {...}</code> 1 TEXT PROCESSOR->TEXT ^{OPT} 2 INDEX 3 TEXT PROCESSOR->TEXT
<code>\segnalibro [...] {...}</code> 1 ABSCHNITT LISTE ^{OPT} 2 TEXT
<code>\select {...} {...} {...} {...} {...} {...}</code> 1 NAME ^{OPT} 2 CONTENT ^{OPT} 3 CONTENT ^{OPT} 4 CONTENT ^{OPT} 5 CONTENT ^{OPT} 6 CONTENT ^{OPT}
<code>\seleZIONAblocchi [...,¹...] [...,²...] [...,³₌...,...]</code> 1 NAME ^{OPT} 2 NAME ^{OPT} 3 criterio = testo ABSCHNITT ^{OPT}
<code>\serializecommalist [...,*...]</code> * BEFEHL
<code>\serializedcommalist</code>
<code>\serif</code>
<code>\serifbold</code>
<code>\serifnormal</code>
<code>\setalignmentcharacter</code>
<code>\setalignmentswitch {...}</code> * sinistra centro destra

<code>\setalternate {...}</code> * TEXT
<code>\setanchorbox [¹...] [²..._{OPT}...] \³... {⁴...}</code> 1 NAME 2 inherits: \setupboxanchor 3 CSNAME 4 CONTENT
<code>\setautopagestaterealpageno {...}</code> * NAME
<code>\setbar [...]</code> * NAME
<code>\setbigbodyfont</code>
<code>\setboxanchor [¹...] [²...] [³..._{OPT}...] {⁴...}</code> 1 NAME 2 NAME 3 inherits: \setupboxanchorcontent 4 CONTENT
<code>\setboxllx ¹... {²...}</code> 1 CSNAME NUMBER 2 DIMENSION
<code>\setboxlly ¹... {²...}</code> 1 CSNAME NUMBER 2 DIMENSION
<code>\setbreakpoints [...]</code> * reimposta NAME
<code>\setbuffer [...] ... \endbuffer</code> * NAME
<code>\setcapstrut</code>
<code>\setcatcodetable \...</code> * CSNAME
<code>\setcharacteralign {¹...} {²...}</code> 1 NUMBER 2 TEXT number->TEXT text->TEXT
<code>\setcharacteraligndetail {¹...} {²...} {³...} {⁴...}</code> 1 NUMBER 2 TEXT number->TEXT text->TEXT 3 DIMENSION 4 DIMENSION
<code>\setcharactercasing [...]</code> * reimposta PAROLA parola Parola Parole maiuscolo Maiuscolo casuale mixed camel Camel cap Cap
<code>\setcharactercleaning [...]</code> * reimposta 1
<code>\setcharacterkerning [...]</code> * reimposta NAME


```
* reimposta NAME
```

```
* reimposta 1
```

* TEXT

```

1 NAME OPT
2 inherits: \setupcollector
3 CONTENT
```

```
*  black bw grigio rgb cmyk tutti nessuno
```

```

1  c      =  NUMBER
   r      =  NUMBER
   nc     =  NUMBER
   nr     =  NUMBER
   metodo =  qui fisso cima fondo tblr lrtb tbrl rltb btlr lrbt btrl rlbt fxtb fxbr
   opzione = pagina
   ncima  =  NUMBER
   nfondo =  NUMBER
2  CONTENT

```

1 KEY
2 CONTENT

```
* reimposta NAME
```

```

1  NAME                                OPT
2  NUMMER
3  NUMMER

```

1	NAME	OPT
2	NUMMER	
3	TEXT	

```
1  NAME
2  NUMMER
```

* NAME

* NAME

```

1  NAME
2  NAME
3  KEY  =  VALUE

```

```

1  NAME
2  NUMMER

```

\setdate [...,*=...,...] * d = NUMBER m = NUMBER y = NUMBER
\setdefaultpenalties
\setdigitsmanipulation [...] * reimposta NUMBER
\setdirection [...] * NUMBER
\setdirectsymbolicfont {...} * FONT
\setdocumentargument {...} {...} 1 NAME 2 TEXT
\setdocumentargumentdefault {...} {...} 1 NAME 2 TEXT
\setdocumentfilename {...} {...} 1 NUMBER 2 TEXT
\setdummyparameter {...} {...} 1 KEY 2 BEFEHL
\setelementbackendtag [...] [...] 1 NAME 2 BlockQuote Caption Code Div Formula H L Lbl LBody LI Link P Quote Reference Sect Span Table TBODY TD TFOOT TH THEAD TOC TOCI TR
\setelementexporttag [...] [...] ² [...] 1 NAME 2 export nature pdf 3 inline schermo mixed
\setelementexporttag [...] ¹ [...] ² [...] ³ 1 NAME 2 nature 3 inline schermo mixed
\setelementexporttag [...] ¹ [...] ² [...] ³ 1 NAME 2 pdf 3 BlockQuote Caption Code Div Formula H L Lbl LBody LI Link P Quote Reference Sect Span Table TBODY TD TFOOT TH THEAD TOC TOCI TR
\setelementnature [...] ¹ [...] ² 1 NAME 2 inline schermo mixed
\setemeasure {...} ¹ {...} ² 1 NAME 2 DIMENSION

<code>\setevalue {...} {...}</code> 1 NAME 2 CONTENT
<code>\setevariable {...} {...} {...}</code> 1 NAME 2 KEY 3 VALUE
<code>\setevariables [...]¹ [...,...²...,...]</code> 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE
<code>\setexcept [...]¹ {...}</code> 1 sinistra destra ^{OPT} 2 CONTENT
<code>\setexpandedCOMANDOparameter {...} {...}</code> 1 KEY 2 CONTENT
<code>\setexpandeddummysparameter {...} {...}</code> 1 KEY 2 BEFEHL
<code>\setexpansion [...][*]</code> ^{OPT} * NAME
<code>\setextrafontkerns [...]</code> * nessuno min max mixed reimp ^{OPT} osta
<code>\setfirstline [...][*]</code> ^{OPT} * NAME
<code>\setfirstpasscharacteralign</code>
<code>\setflag {...}</code> * NAME
<code>\setfont ...</code> * FONT
<code>\setfontcolorscheme [...]</code> * NAME
<code>\setfontfeature {...}</code> * NAME
<code>\setfontsolution [...][*]</code> * NAME
<code>\setfontstrut</code>
<code>\setfractions</code>
<code>\setglobalscript [...][*]</code> * hangul hanzi nihongo ethiopic thai test NAME

<pre> \setgmeasure {...} {...} 1 NAME 2 DIMENSION </pre>
<pre> \setgvalue {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setgvariable {...} {...} {...} 1 NAME 2 KEY 3 VALUE </pre>
<pre> \setgvariables [...]¹ [...,...²...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \sethboxregister ...¹ {...}² 1 CSNAME NUMMER 2 CONTENT </pre>
<pre> \sethyphenatedurlafter {...} * TEXT </pre>
<pre> \sethyphenatedurlbefore {...} * TEXT </pre>
<pre> \sethyphenatedurlnormal {...} * TEXT </pre>
<pre> \sethyphenationfeatures [...,*...] * NAME reimposta^{OPT} </pre>
<pre> \setinitial [...]¹ [...,...²...,...] 1 NAME^{OPT} 2 inherits: \setupinitial^{OPT} </pre>
<pre> \setinjector [...]¹ [...,...²...] [...]³ 1 NAME 2 NUMMER 3 BEFEHL </pre>
<pre> \setinteraction [...][*] * nascosto NAME </pre>
<pre> \setinterfacecommand {...}¹ {...}² 1 NAME 2 NAME </pre>
<pre> \setinterfaceconstant {...}¹ {...}² 1 NAME 2 NAME </pre>
<pre> \setinterfaceelement {...}¹ {...}² 1 NAME 2 NAME </pre>

<pre> \setinterfacemessage {...} {...} {...} 1 NAME 2 titolo NAME NUMMER 3 TEXT </pre>
<pre> \setinterfacevariable {...} {...} 1 NAME 2 NAME </pre>
<pre> \setinternalrendering [...] [...] {...} 1 NAME 2 auto embed 3 CONTENT </pre>
<pre> \setitaliccorrection [...] * si no reimposta piccolo medio grande </pre>
<pre> \setJSreamble {...} {...} 1 NAME 2 CONTENT </pre>
<pre> \setlayer [...] [...²] [...,³...,...] {...⁴} 1 NAME OPT OPT 2 sinistra destra pari dispari 3 inherits: \setuplayer 4 CONTENT </pre>
<pre> \setlayerframed [...¹] [...,²...,...] [...,³...,...] {...⁴} 1 NAME OPT OPT 2 inherits: \setuplayer 3 inherits: \impostaincorniciato 4 CONTENT </pre>
<pre> \setlayerframed [...¹] [...,²...,...] {...³} 1 NAME OPT 2 inherits: \setuplayerinherits: \impostaincorniciato 3 CONTENT </pre>
<pre> \setlayertext [...] [...,²...,...] [...,³...,...] {...⁴} 1 NAME OPT OPT 2 inherits: \setuplayer 3 allinea = inherits: \impostaallineamento ampiezza = DIMENSION stile = STYLE BEFEHL colore = COLOR 4 TEXT </pre>
<pre> \setlinefiller [...] * filler NAME </pre>
<pre> \setlineprofile [...] * NAME </pre>
<pre> \setlocalalignanchor {...} {...} 1 NAME 2 NUMMER 3 NUMMER 4 r destra c m centro </pre>
<pre> \setlocalanchoring </pre>
<pre> \setlocalhsize [...] * [-+]DIMENSION OPT </pre>

<code>\setlocalmarkanchor</code> $\{.^1.\}$ $.^2.$ $.^3.$ 1 NAME 2 NUMMER 3 NUMMER
<code>\setlocalscript</code> $[.^*.]$ * hangul hanzi nihongo ethiopic thai test NAME
<code>\setlocalshowmakeup</code>
<code>\setlocalsyncanchor</code> $\{.^1.\}$ $.^2.$ $.^3.$ 1 NAME 2 NUMMER 3 NUMMER
<code>\setluatable</code> $\backslash.^1.$ $\{.^2.\}$ 1 CSNAME 2 CONTENT
<code>\setMPplayer</code> $[.^1.]$ $[.^2.]$ $[.^3.^4.^5.^6.^7.^8.^9.^{10}.]$ $\{.^4.\}$ 1 NAME 2 NAME 3 inherits: \setupplayer 4 CONTENT
<code>\setMPpositiongraphic</code> $\{.^1.\}$ $\{.^2.\}$ $\{.^3.^4.^5.^6.^7.^8.^9.^{10}.]$ 1 NAME 2 NAME 3 KEY = VALUE
<code>\setMPpositiongraphicrange</code> $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.^5.^6.^7.^8.^9.^{10}.]$ 1 NAME 2 NAME 3 NAME 4 KEY = VALUE
<code>\setMPtext</code> $\{.^1.\}$ $\{.^2.\}$ 1 NAME 2 TEXT
<code>\setMPvariable</code> $[.^1.]$ $[.^2.^3.]$ 1 NAME 2 KEY = VALUE
<code>\setMPvariables</code> $[.^1.]$ $[.^2.^3.^4.^5.^6.^7.^8.^9.^{10}.]$ 1 NAME 2 KEY = VALUE
<code>\setmainbodyfont</code>
<code>\setmainlineprofile</code>
<code>\setmainparbuilder</code> $[.^*.]$ * implicito oneline basic NAME
<code>\setmarker</code> $[.^1.]$ $[.^2.]$ 1 NAME 2 NUMMER
<code>\setmarking</code> $[.^1.]$ $\{.^2.\}$ 1 BESCHRIFTUNG 2 TEXT

<pre> \setmathgroupset [...*] * NAME </pre>
<pre> \setmathmatrixanchoring [...*] * si entrambi </pre>
<pre> \setmathstyle {...,*} * schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande NAME </pre>
<pre> \setmeasure {...¹} {...²} 1 NAME 2 DIMENSION </pre>
<pre> \setmessagetext {...¹} {...²} 1 NAME 2 NAME NUMBER </pre>
<pre> \setmode {...*} * NAME </pre>
<pre> \setmxscale </pre>
<pre> \setmxxscale </pre>
<pre> \setnostrut </pre>
<pre> \setnote [...¹] [...,²...] {...³} 1 NAME 2 REFERENCE 3 TEXT </pre>
<pre> \setnotetext [...¹] [...,²...] {...³} 1 NAME 2 REFERENCE 3 TEXT </pre>
<pre> \setnotetext [...¹] [...,²≡...,...] 1 NAME 2 titolo = TEXT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT </pre>
<pre> \setnote [...¹] [...,²≡...,...] 1 NAME 2 titolo = TEXT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT </pre>
<pre> \setobject {...¹} {...²} \...³ {...⁴} 1 NAME 2 NAME 3 CSNAME 4 CONTENT </pre>
<pre> \setoldstyle </pre>
<pre> \setoverloads [...*] * NAME </pre>

\setpagelooseness [...] * NUMBER
\setpagelooseness [...,... [*] ...,...] * righe = DIMENSION altezza = DIMENSION dilata = DIMENSION shrink = DIMENSION
\setpagereference { ¹ ...} {..., ² ...} 1 NAME 2 REFERENCE
\setpagestate [... ¹] [... ²] 1 NAME OPT 2 NAME NUMBER
\setpagestaterealpageno { ¹ ...} {... ² } 1 NAME 2 NAME NUMBER
\setparagraphfreezing
\setparagraphshape [...] * NAME
\setpenalties \ ¹ ... {... ² } {... ³ } 1 CSNAME 2 NUMBER 3 NUMBER
\setpercentdimen {... ¹ } {... ² } 1 DIMENSION CSNAME 2 DIMENSION NUMBER%
\setperiodkerning [...] * reimposta NAME
\setposition {...} * NAME
\setpositionbox {... ¹ } \ ² ... {... ³ } 1 NAME 2 CSNAME 3 CONTENT
\setpositiondata {... ¹ } {... ² } {... ³ } {... ⁴ } 1 NAME 2 DIMENSION 3 DIMENSION 4 DIMENSION
\setpositiondataplus {... ¹ } {... ² } {... ³ } {... ⁴ } {..., ⁵ ...} 1 NAME 2 DIMENSION 3 DIMENSION 4 DIMENSION 5 TEXT
\setpositiononly {...} * NAME


```
\setpositionplus    {...}    {...,2...}    \3...    {4...}
1  NAME
2  TEXT
3  CSNAME
4  CONTENT
```

```
\setpositionstrut    {...}
*  NAME
```

```
\setprofile    [...]
*  nessuno fisso rigido halffixed quarterfixed eightsfixed NAME
```

```
\setrandomseed    {...}
*  NUMMER
```

```
\setreference    [...,1...]    [...,2...,...]
1  REFERENCE
2  KEY = VALUE
```

```
\setreferencedobject    {1...}    {2...}    \3...    {4...}
1  NAME
2  NAME
3  CSNAME
4  CONTENT
```

```
\setregisterentry    [1...]    [...,2...,...]    [...,3...,...]
1  NAME
2  etichetta      = NAME
   keys           = TEXT PROCESSOR->TEXT
   entries        = TEXT PROCESSOR->TEXT
   processors     = PROCESSOR
   keys:1         = TEXT
   keys:2         = TEXT
   keys:3         = TEXT
   entries:1      = TEXT
   entries:2      = TEXT
   entries:3      = TEXT
   alternativa    = TEXT
   processors:1   = PROCESSOR
   processors:2   = PROCESSOR
   processors:3   = PROCESSOR
3  KEY = VALUE
```

```
\setreplacements    [1...]    [2...]
1  reimposta NAME
2  NAME
```

```
\setrigidcolumnbalance    ...
*  CSNAME NUMMER
```

```
\setrigidcolumnhsize    {1...}    {2...}    {3...}
1  DIMENSION
2  DIMENSION
3  NUMMER
```

```
\setscaleddirectsymbolicfont    {1...}    {2...}    {3...}
1  DIMENSION
2  NUMMER
3  FONT
```

```
\setscaledstyledsymbolicfont    {1...}    {2...}    {3...}
1  DIMENSION
2  NUMMER
3  FONT
```

<pre> \setscript [...] * hangul hanzi nihongo ethiopic thai test NAME </pre>
<pre> \setsecondpasscharacteralign </pre>
<pre> \setsectionblock [...] [...,...²...,...] 1 NAME 2 segnalibro = TEXT </pre>
<pre> \setsimplecolumnshsize [...,...[*]...,...] * n = NUMMER ampiezza = DIMENSION distanza = DIMENSION righe = NUMMER </pre>
<pre> \setsmallbodyfont </pre>
<pre> \setsmallcaps </pre>
<pre> \setstackbox {...} {...²} {...³} 1 NAME 2 NAME 3 CONTENT </pre>
<pre> \setstructurepageregister [...] [...,...²...,...] [...,...³...,...] 1 NAME 2 etichetta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT processors = PROCESSOR keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativa = TEXT processors:1 = PROCESSOR processors:2 = PROCESSOR processors:3 = PROCESSOR 3 KEY = VALUE </pre>
<pre> \setstrut </pre>
<pre> \setstyledsymbolicfont {...} * FONT </pre>
<pre> \setsuperiors </pre>
<pre> \setsystemmode {...} * NAME </pre>
<pre> \settabular </pre>
<pre> \settaggedmetadata [...,...[*]...,...] * KEY = VALUE </pre>
<pre> \settestcrlf </pre>

```

\settext    [...]1    [...]2    [...]3    [...]4    [...]5
1   cima intestazione testo piedipaginaOPT fondoOPT
2   testo margine bordo
3   sinistra centro destra
4   data numeropagina BESCHRIFTUNG TEXT BEFEHL
5   data numeropagina BESCHRIFTUNG TEXT BEFEHL

```

```

\settightobject    {...}1    {...}2    \...3    {...}4
1   NAME
2   NAME
3   CSNAME
4   CONTENT

```

```

\settightreferencedobject    {...}1    {...}2    \...3    {...}4
1   NAME
2   NAME
3   CSNAME
4   CONTENT

```

```

\settightstrut

```

```

\settightunreferencedobject    {...}1    {...}2    \...3    {...}4
1   NAME
2   NAME
3   CSNAME
4   CONTENT

```

```

\settokenlist    [...]1    {...}2
1   NAME
2   TEXT

```

```

\settransliteration    [...]*
*   NAME

```

```

\settransliteration    {...}*
*   NAME

```

```

\settrialtypesetting

```

```

\setuevalue    {...}1    {...}2
1   NAME
2   CONTENT

```

```

\setugvalue    {...}1    {...}2
1   NAME
2   CONTENT

```

```

\setunreferencedobject    {...}1    {...}2    \...3    {...}4
1   NAME
2   NAME
3   CSNAME
4   CONTENT

```

\setupadaptive [...¹,...] [...²,...]

1 NAME OPT
2 setups = NAME
foregroundstyle = STYLE BEFEHL
coloreprimopiano = COLOR
strut = si no
metodo = NUMMER
colore = COLOR
alternativa = NAME
spessorelinea = DIMENSION
margine = DIMENSION
dilata = DIMENSION
shrink = DIMENSION
luogo = sinistra destra

\setupalignpass [...]

* nessuno granular decent quality NAME

\setupalternativestyles [...^{*},...]

* metodo = normale auto

\setupattachment [...¹,...] [...²,...]

1 NAME OPT
2 titolo = TEXT
sottotitolo = TEXT
autore = TEXT
file = FILE
nome = NAME
buffer = BUFFER
type = NAME
stato = inizia termina
metodo = normale nascosto
simbolo = Graph Paperclip Pushpin Default
ampiezza = adatta DIMENSION
altezza = adatta DIMENSION
profondita = adatta DIMENSION
colore = COLOR
textlayer = NAME
luogo = bordosinistro bordodestro inmargin marginesinistro marginedestro testo alto nessuno
distanza = DIMENSION

\setupattachments [...¹,...] [...²,...]

1 NAME OPT
2 inherits: \setupattachment

\setupbackend [...^{*},...]

* export = si FILE
xhtml = FILE
file = FILE
intent = Coated_FOGRA39(ISO_12647-2:2004) GRACoL2006_Coated1v2.icc ISO_Coated_v2_300%(ECI) ISO_Coated_v2(ECI)
ISOnewspaper26v4 ISOnewspaper26v4_gr ISO_Uncoated ISO_Uncoated_Yellowish ISO_Web_Coated Japan_Color_2001_Coated
Japan_Color_2002_Newspaper Japan_Web_Coated(Ad) SNAP_2007 SWOP2006_Coated3v2.icc SWOP2006_Coated5v2.icc
Uncoated_FOGRA29(ISO_12647-2:2004) Web_Coated_FOGRA28(ISO_12647-2:2004) PSR_LWC_PLUS_V2_PT PSR_LWC_STD_V2_PT
PSR_SC_PLUS_V2_PT PSR_SC_STD_V2_PT PSRgravureMF
spazio = si no
hyphen = si no
xmpfile = FILE
format = version implicito PDF/X-1a:2001 PDF/X-1a:2003 PDF/X-3:2002 PDF/X-3:2003 PDF/X-4 PDF/X-4p PDF/X-5g
PDF/X-5pg PDF/X-5n PDF/A-1a:2005 PDF/A-1b:2005 PDF/A-2a PDF/A-3a PDF/UA-1
livello = NUMMER
opzione = sempre mai
profile = FILE

\setupbalancing [...¹,...] [...²,...]

1 NAME OPT
2 distanza = DIMENSION
altezza = DIMENSION
prima = BEFEHL
dopo = BEFEHL
setups = NAME
allinea = inherits: \impostaallineamento

\setupbar [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  colore               = COLOR
   continua            = si no tutti sempre
   vuoto               = si no
   unita               = ex em pt in cm mm sp bp pc dd cc nc
   order              = foreground sfondo
   spessorelinea       = DIMENSION
   metodo             = NUMMER
   offset             = NUMMER DIMENSION
   altezza            = DIMENSION
   profondita        = DIMENSION
   dy                 = NUMMER
   max                = NUMMER
   foregroundstyle     = STYLE BEFEHL
   coloreprimopiano   = COLOR
   mp                 = NAME
   sinistra           = TEXT
   destra             = TEXT
   ripeti             = si no
   testo              = TEXT
```

\setupbars [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  inherits: \setupbar
```

\setupbleeding {...,¹...} [...,²...,...]

```
1  NAME                OPT
2  define              = si no
   ampiezza           = DIMENSION
   altezza            = DIMENSION
   offset             = DIMENSION
   hoffset            = DIMENSION
   voffset            = DIMENSION
   luogo              = t b l r bl lb br rb tl lt tr rt
   dilata             = si no
   pagina             = si no
```

\setupbookmark [...,^{*}...,...]

```
*  forza               = si no
   numero              = si no
   numberseparatorset  = NAME
   numberconversionset = NAME
   numberstarter       = BEFEHL
   numberstopper       = BEFEHL
   numbersegments      = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente
   sectionblock        = si no
```

\setupboxanchor [...,^{*}...,...]

```
*  xoffset = DIMENSION
   yoffset = DIMENSION
   target  = riga altezza profondita sinistra left,height left,top left,depth left,bottom destra right,height
            right,top right,depth right,bottom centro middle,height middle,top middle,depth middle,bottom middle,left
            middle,right
   source  = riga altezza profondita sinistra left,height left,top left,depth left,bottom destra right,height
            right,top right,depth right,bottom centro middle,height middle,top middle,depth middle,bottom middle,left
            middle,right
```

```

\setupboxanchorcontent  [...,1...]  [...,2...]
1  NAME                      OPT
2  xoffset      = DIMENSION
   yoffset      = DIMENSION
   angolo       = riga altezza profondita sinistra left,height left,top left,depth left,bottom destra right,height
                  right,top right,depth right,bottom centro middle,height middle,top middle,depth middle,bottom
                  middle,left middle,right
   luogo        = riga altezza profondita sinistra left,height left,top left,depth left,bottom destra right,height
                  right,top right,depth right,bottom centro middle,height middle,top middle,depth middle,bottom
                  middle,left middle,right
   distanza     = DIMENSION
   dash         = NUMBER
   freccia       = si no invertito entrambi
   alternativa   = sinistra centro destra cima fondo
   testo        = TEXT
   spessorelinea = DIMENSION
   colorelinea   = COLOR
   mp           = NAME
   pagina       = si no

```

```

\setupboxexport  [...,*...]
*  buffer = NAME
   file   = FILE

```

```

\setupbtx  [...]1  [...,2...]
1  NAME                      OPT
2  specification  = implicito apa aps NAME
   dataset        = implicito NAME
   comando        = \...#1
   sinistra       = BEFEHL
   destra         = BEFEHL
   authorconversion = normale normalshort normalinverted invertedshort short
   etallimit      = NUMBER
   etaldisplay    = NUMBER
   etaloption     = ultimo
   stopper        = initials
   interazione    = inizia termina numero testo pagina tutti
   alternativa    = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore
                  authoryears authornum authoryear
   sorttype       = normale invertito
   compress       = si no
   implicito      = implicito NAME
   stile          = STYLE BEFEHL
   colore         = COLOR

```

```

\setupbtxdataset  [...,1...]  [...,2...]
1  NAME                      OPT
2  language = SPRACHE

```

```

\setupbtxlist  [...]1  [...,2...]
1  NAME                      OPT
2  inherits: \impostaelenco

```

```

\setupbtxregister  [...,1...]  [...,2...]
1  NAME                      OPT
2  stato          = inizia termina
   dataset        = NAME
   field          = keyword range numeropagina autore
   register       = NAME
   metodo         = once
   alternativa    = normalshort invertedshort
   stile          = STYLE BEFEHL
   colore         = COLOR

```

\setupbtxrendering [¹...,...] [²...,...]

1 NAME OPT
2 statotesto = inizia termina
statopagina = inizia termina
separatore = BEFEHL
criterio = precedente cite qui tutti nessuno
filter = TEXT
specification = NAME
titolo = TEXT
prima = BEFEHL
dopo = BEFEHL
dataset = NAME
metodo = dataset etichetta forza locale globale nessuno
sorttype = short dataset elenco riferimento usato implicito cite indiceanalitico
ripeti = si no
group = NAME
numerazione = si no num indiceanalitico tag short pagina
file = FILE

\setupbtx [...]

* NAME

\setupbutton [¹...,...] [²...,...]

1 NAME OPT
2 stato = inizia termina
stessapagina = si no vuoto nessuno normale implicito
stile = STYLE BEFEHL
colore = COLOR
colorecontrasto = COLOR
alternativa = nascosto
inherits: \impostaincorniciato

\setupcharacteralign [...^{*}...,...]

* ampiezzasinistra = DIMENSION
ampiezzadestra = DIMENSION
leftsample = TEXT
rightsample = TEXT
character = TEXT number->TEXT text->TEXT

\setupcharacterkerning [¹...,...] [²...,...]

1 NAME OPT
2 fattore = max NUMMER
ampiezza = DIMENSION
features = NAME
stile = STYLE BEFEHL
colore = COLOR

\setupcharacterspacing [¹...] [²...] [...³...,...]

1 NAME OPT
2 NUMMER
3 sinistra = NUMMER
destra = NUMMER
alternativa = 0 1
language = SPRACHE

```

\setupchemical    [...,1...]    [...,2...,...]
1  NAME                      OPT
2  strut                  = si no auto cap adatta riga implicito CHARACTER
    ampiezza              = adatta nessuno NUMMER
    altezza               = adatta nessuno NUMMER
    sinistra              = adatta nessuno NUMMER
    destra                = adatta nessuno NUMMER
    cima                  = adatta nessuno NUMMER
    fondo                 = adatta nessuno NUMMER
    scala                 = piccolo medio grande normale NUMMER
    rotazione             = NUMMER
    symallinea            = auto
    asse                  = attivo disattivo
    colorecornice         = COLOR
    spessorelinea        = DIMENSION
    offset                = DIMENSION
    unita                 = DIMENSION
    fattore               = NUMMER
    cornice               = attivo disattivo
    colorelinea          = COLOR
    fonttesto             = inherits: \impostafontdeltesto
    dimensione           = piccolo medio grande
    stile                 = STYLE BEFEHL
    colore                = COLOR

```

```

\setupchemicalframed [...,1...]    [...,2...,...]
1  NAME                      OPT
2  inherits: \impostaincorniciato

```

```

\setupchemistry    [...,1...]    [...,2...,...]
1  NAME                      OPT      OPT
2  spaziatura        = inherits: \setupmathspacing
    scala            = NUMMER
    filter           = si no

```

```

\setupcollector    [...,1...]    [...,2...,...]
1  NAME                      OPT
2  rotazione         = sinistra destra interno esterno NUMMER
    angolo           = sinistra centro destra cima fondo
    x                = DIMENSION
    y                = DIMENSION
    hoffset          = DIMENSION
    voffset          = DIMENSION
    luogo            = sinistra centro destra cima fondo riga l c r m t b g
    stato            = inizia termina

```

```

\setupcolumnsetarea [...,1...]    [...,2...,...]
1  NAME                      OPT
2  type              = sheet
    sheet            = NUMMER
    stato            = ripeti termina
    x                = NUMMER
    y                = NUMMER
    nx               = NUMMER
    ny               = NUMMER
    testo            = TEXT
    ampiezza         = DIMENSION
    altezza          = DIMENSION
    clipoffset       = DIMENSION
    offsetsinistro   = DIMENSION
    offsetdestro     = DIMENSION
    stile            = STYLE BEFEHL
    colore           = COLOR
    inherits: \impostaincorniciato

```

```

\setupcolumnsetareatext [...1]    [...2]
1  NAME
2  TEXT

```



```
\setupcolumnsetlines    [...1]    [...2]    [...3]    [...4]
1  NAME
2  NUMMER
3  NUMMER
4  NUMMER
```

```
\setupcolumnsetspan    [...1,...]    [...2,...2,...]
1  NAME
2  n      = NUMMER
    prima = BEFEHL
    dopo  = BEFEHL
    stile = STYLE BEFEHL
    colore = COLOR
    inherits: \impostaincorniciato
```

```
\setupcolumnsetstart    [...1]    [...2]    [...3]    [...4]
1  NAME
2  NUMMER
3  NUMMER
4  NUMMER
```

```
\setupcombination    [...1,...]    [...2,...2,...]
1  NAME
2  nx      = NUMMER
    ny      = NUMMER
    ampiezza = adatta DIMENSION
    altezza  = adatta DIMENSION
    luogo    = sinistra centro destra cima fondo
    distanza = DIMENSION
    alternativa = etichetta testo
    allinea   = inherits: \impostaallineamento
    continua  = si no
    prima     = BEFEHL
    dopo      = BEFEHL
    tra       = BEFEHL
    stile     = STYLE BEFEHL
    colore    = COLOR
    metodo    = formula
    strut     = si no
```

```
\impostaCOMANDO    [...1,...]    [...2,...2,...]
1  NAME
2  KEY = VALUE
```

```
\setupcomparingtext    [...1,...]    [...2,...2,...]
1  NAME
2  metodo = lettera parola
    colore = COLOR
```

```

\setupcounter    [...,1...]    [...,2...,...]
1  NAME          OPT
2  inizia        = NUMBER
   numero        = NUMBER
   counter       = NAME
   metodo        = pagina
   stato         = inizia termina
   modo          = bypagina byblock bytesto bytesta byABSCHNITT
   prefisso      = si no
   prefixseparatorset = NAME
   prefixconversion = NAME
   prefixconversionset = NAME
   prefixstarter = BEFEHL PROCESSOR->BEFEHL
   prefixstopper = BEFEHL PROCESSOR->BEFEHL
   prefixset      = NAME
   prefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                   ABSCHNITT:tutti corrente
   numberorder   = invertito
   numberseparatorset = NAME
   numberconversion = NAME
   numberconversionset = NAME
   numberstarter = BEFEHL PROCESSOR->BEFEHL
   numberstopper = BEFEHL PROCESSOR->BEFEHL
   numbersegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tutti
   type          = primo precedente successivo ultimo numero
   criterio      = rigido positivo tutti
   prefixconnector = BEFEHL PROCESSOR->BEFEHL

```

```

\setupcurrentCOMANDO    [...,*...,...]
* KEY = VALUE

```

```

\setupdataset    [...,1...]    [...,2...,...]
1  NAME          OPT
2  attesa = si no

```

```

\setupdelimitedtext    [...,1...]    [...,2...,...]
1  NAME NAME:NUMBER    OPT
2  prima               = BEFEHL
   dopo                = BEFEHL
   language            = locale globale SPRACHE
   metodo              = font testo capoverso
   ripeti              = si no
   luogo               = testo capoverso margine
   sinistra            = BEFEHL
   centro              = BEFEHL
   destra              = BEFEHL
   nextleft            = BEFEHL
   nextright           = BEFEHL
   spazioprima         = inherits: \rigovuoto
   spaziodopo          = inherits: \rigovuoto
   marginesinistro     = si no standard DIMENSION
   marginedestro       = si no standard DIMENSION
   rientro             = inherits: \impostarientro
   rientrasuccessivo   = si no auto
   stile               = STYLE BEFEHL
   colore              = COLOR
   stilesimbolo        = STYLE BEFEHL
   coloresimbolo       = COLOR
   allinea             =

```

```

\setupdescription [...1,...] [...2,...]
1 NAME OPT
2 titolo = si no
define = si no
livello = NUMMER
testo = TEXT
headcommand = \...#1
prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
alternativa = sinistra destra inmarginde insinistra indestra margine marginesinistro marginedestro margineinterno
               margineesterno vicino sospeso cima vuoto comando NAME
allinea = inherits: \impostaallineamento
headalign = inherits: \impostaallineamento
rientro = inherits: \impostarientro
display = si no
rientrasuccessivo = si no auto
ampiezza = adatta ampio riga DIMENSION
distanza = nessuno DIMENSION
dilata = NUMMER
shrink = NUMMER
sospendi = adatta ampio nessuno margine NUMMER
closesymbol = BEFEHL
closecommand = \...#1
espansione = si no xml
referenceprefix = + - TEXT
campione = TEXT
margine = si no standard DIMENSION
stile = STYLE BEFEHL
colore = COLOR
stiletesta = STYLE BEFEHL
coloretesta = COLOR
allineatitolo = si no
headindenting = si no
attesa = testo

```

```

\setupdirections [...*,...]
* bidi = attivo disattivo locale globale
metodo = uno due implicito
fences = si no
break = entrambi prima

```

```

\setupdocument [...1,...] [...2,...]
1 NAME OPT
2 prima = BEFEHL
dopo = BEFEHL
metadata:author = TEXT
metadata:title = TEXT
metadata:subject = TEXT
metadata:keywords = TEXT
KEY = VALUE

```

```

\setupeffect [...1,...] [...2,...]
1 NAME OPT
2 metodo = nessuno comando
dilata = NUMMER
spessorelinea = DIMENSION
alternativa = normale interno esterno entrambi nascosto clip dilata

```

```

\setupenumeration    [...,1...]    [...,2≡...,...]
1  NAME              OPT
2  titolo             = si no
    numero            = si no
    comandonumero     = \...#1
    stilenumero       = STYLE BEFEHL
    colorenúmero      = COLOR
    distanzatitolo    = DIMENSION
    stiletitolo       = STYLE BEFEHL
    coloretitolo      = COLOR
    titlecommand      = \...#1
    titleleft         = BEFEHL
    titleright        = BEFEHL
    sinistra          = BEFEHL
    destra            = BEFEHL
    simbolo           = BEFEHL
    starter            = BEFEHL
    stopper           = BEFEHL
    accoppiamento     = NAME
    counter           = NAME
    define            = si no
    etichetta         = NAME
    livello           = NUMMER
    testo             = TEXT
    headcommand       = \...#1
    prima             = BEFEHL
    dopo              = BEFEHL
    tra               = BEFEHL
    alternativa       = sinistra destra inmargine insinistra indestra margine marginesinistro marginedestro margineinterno
                        margineesterno vicino sospeso cima vuoto comando NAME
    allinea           = inherits: \impostaallineamento
    headalign         = inherits: \impostaallineamento
    rientro           = inherits: \impostarientro
    display           = si no
    rientrasuccessivo = si no auto
    ampiezza          = adatta ampio riga DIMENSION
    distanza          = nessuno DIMENSION
    dilata            = NUMMER
    shrink            = NUMMER
    sospendi          = adatta ampio nessuno margine NUMMER
    closesymbol       = BEFEHL
    closecommand      = \...#1
    espansione       = si no xml
    referenceprefix   = + - TEXT
    campione          = TEXT
    margine           = si no standard DIMENSION
    stile             = STYLE BEFEHL
    colore            = COLOR
    stiletesta        = STYLE BEFEHL
    coloretesta       = COLOR
    allineatitolo     = si no
    headindenting     = si no
    attesa            = testo
    inherits: \setupcounter

```

```

\setupenv    [...,*...,...]
*  set      = BEFEHL
    reset   = BEFEHL
    KEY     = VALUE

```

```

\setupexpansion    [...,1...]    [...,2≡...,...]
1  NAME              OPT
2  passo             = NUMMER
    dilata           = NUMMER
    shrink           = NUMMER

```

```
\setupexport      [...,*=...,...]
*   allinea       = flushleft centro flushright normale
fonttesto        = DIMENSION
ampiezza         = DIMENSION
titolo           = TEXT
sottotitolo      = TEXT
autore           = TEXT
alternativa       = html div
properties        = si no
hyphen           = si no
cssfile          = FILE
primapagina      = FILE
ultimapagina     = FILE
```

```

\setupexternalfigure [...] 1 [...] 2 [...]
1  NAME                                OPT
2  ampiezza                = DIMENSION
   altezza                = DIMENSION
   etichetta              = NAME
   pagina                  = NUMMER
   oggetto                = si no
   prefisso                = TEXT
   metodo                  = pdf mps jpg png jp2 jbig svg eps gif tif mov buffer tex cld auto
   controlli              = si no
   anteprima              = si no
   mask                    = nessuno NAME
   risoluzione            = NUMMER
   colore                  = COLOR
   cmyk                    = si no auto
   gray                    = si no auto
   arguments               = TEXT
   ripeti                  = si no
   fattore                 = adatta ampio max auto implicito
   hfactor                 = adatta ampio max auto implicito
   wfactor                 = adatta ampio max auto implicito
   ampiezzamax             = DIMENSION
   altezzamax             = DIMENSION
   equalwidth              = DIMENSION
   equalheight            = DIMENSION
   scala                   = NUMMER
   xscale                  = NUMMER
   yscale                  = NUMMER
   s                       = NUMMER
   sx                      = NUMMER
   sy                      = NUMMER
   righe                   = NUMMER
   luogo                   = locale globale implicito
   directory               = PATH
   opzione                 = test cornice vuoto
   coloreprimopiano       = COLOR
   reset                   = si no
   sfondo                  = colore foreground NAME
   cornice                 = attivo disattivo
   coloresfondo            = COLOR
   xmax                    = NUMMER
   ymax                    = NUMMER
   cornici                 = attivo disattivo
   interazione             = si tutti nessuno riferimento layer segnalibro
   fonttesto               = DIMENSION
   comment                 = BEFEHL TEXT
   dimensione              = nessuno media crop trim art
   cache                   = PATH
   resources               = PATH
   display                 = FILE
   conversione             = TEXT
   order                   = LISTE
   crossreference          = si no NUMMER
   transform               = auto NUMMER
   userpassword            = TEXT
   ownerpassword           = TEXT
   orientation             = NUMMER
   compact                 = si no merge tikz NAME
   metadata                = si no pagina document
   defaultwidth            = DIMENSION
   defaultheight          = DIMENSION
   range                   = nessuno NAME

```

\setupfacingfloat [...,¹...] [...,²...,...]

1 NAME OPT
2 tra = BEFEHL
pagina = inherits: \pagina
spaceinbetween = inherits: \rigovuoto
stile = STYLE BEFEHL
colore = COLOR
ampiezza = adatta cornice DIMENSION
inherits: \impostaincorniciato

\setupfieldbody [...,¹...] [...,²...,...]

1 NAME OPT
2 category = NAME
inherits: \setupfieldcategory

\setupfieldcategory [...,¹...] [...,²...,...]

1 NAME OPT
2 inizia = NUMMER
stile = STYLE BEFEHL
colore = COLOR
type = radio sotto testo riga push check signature
values = TEXT
implicito = TEXT
colorecornicecampo = COLOR
coloresfondocampo = COLOR
ampiezza = DIMENSION
altezza = DIMENSION
profondita = DIMENSION
allinea = sinistra centro destra flushleft center flushright
n = NUMMER
simbolo = NAME
fieldlayer = NAME
opzione = solalettura richiestp protetto ordinato nondisponibile nocheck fisso file nascosto stampabile auto
clickdentro = REFERENCE
clickfuori = REFERENCE
entraregione = REFERENCE
esciregione = REFERENCE
dopotasto = REFERENCE
format = REFERENCE
verifica = REFERENCE
calcola = REFERENCE
focusin = REFERENCE
focusout = REFERENCE
openpage = REFERENCE
closepage = REFERENCE

\setupfieldcontentframed [...,¹...] [...,²...,...]

1 NAME OPT
2 inherits: \impostaincorniciatoinherits: \setupfieldcategory

\setupfieldlabelframed [...,¹...] [...,²...,...]

1 NAME OPT
2 inherits: \impostaincorniciato

\setupfieldtotalframed [...,¹...] [...,²...,...]

1 NAME OPT
2 prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
distanza = DIMENSION
alternativa = reimposta etichetta cornice orizzontale verticale
inherits: \impostaincorniciato

`\setupfiller` [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  marginesinistro    = DIMENSION
   marginedestro     = DIMENSION
   sinistra           = BEFEHL
   destra             = BEFEHL
   alternativa        = simbolo dilata linea spazio
   metodo             = locale globale centro ampio
   ampiezza           = DIMENSION
   altezza            = DIMENSION
   profondita        = DIMENSION
   offset             = DIMENSION
   distanza           = DIMENSION
   allinea            = sinistra destra centro flushleft flushright interno esterno
   simbolo            = BEFEHL
   stile              = STYLE BEFEHL
   colore             = COLOR
```

`\setupfirstline` [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  n                   = NUMMER
   alternativa        = implicito riga parola
   stile              = STYLE BEFEHL
   colore             = COLOR
```

`\setupfittingpage` [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  statopagina        = inizia termina
   comando            = \...#1
   margine            = pagina
   scala              = NUMMER
   carta              = auto implicito NAME
   instance           = metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost
                       nofun scaledpost doublepost binarypost decimalpost simplefun
   stacking           = TEXT
   etichetta          = TEXT
   inherits:          \impostaincorniciato
```

`\setupfloatframed` [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  inherits:          \impostaincorniciato
```

`\setupfontexpansion` [...¹] [...,²...,...]

```
1  NAME
2  vector             = NAME
   fattore            = NUMMER
   dilata             = NUMMER
   shrink             = NUMMER
   passo              = NUMMER
```

`\setupfontprotrusion` [...¹] [...,²...,...]

```
1  NAME
2  vector             = NAME
   fattore            = NUMMER
   sinistra           = NUMMER
   destra             = NUMMER
```

`\setupfonts` [...,^{*}...,...]

```
*  language          = no auto
   serif             = FONT
   sans              = FONT
   mono              = FONT
```

`\setupfontsolution` [...,¹...] [...,²...,...]

```
1  NAME                OPT
2  goodies            = FILE
   solution           = NAME
   less              = NAME
   more              = NAME
   metodo            = preroll separa normale invertito casuale
   criterio           = NUMMER
```

\setupformula [...¹,...] [...²,...]

- 1 NAME OPT
- 2 inherits: \impostastruttura

\setupformulaframed [...¹,...] [...²,...]

- 1 NAME OPT
- 2 inherits: \impostaincorniciato

\setupframedcontent [...¹,...] [...²,...]

- 1 NAME OPT
- 2 sinistra = BEFEHL
- destra = BEFEHL
- offsetsinistro = DIMENSION
- offsetdestra = DIMENSION
- offsetcima = DIMENSION
- offsetfondo = DIMENSION
- correzioneriga = si no
- inherits: \impostaincorniciato

\setupframedtable [...¹,...] [...²,...]

- 1 NAME OPT
- 2 prima = BEFEHL
- dopo = BEFEHL
- tra = BEFEHL
- distanza = DIMENSION
- inherits: \impostaincorniciato

\setupframedtablecolumn [...¹,...] [...²,...] [...³,...]

- 1 NAME OPT
- 2 NUMMER ogni
- 3 inherits: \impostaincorniciato

\setupframedtablerow [...¹,...] [...²,...] [...³,...]

- 1 NAME OPT
- 2 NUMMER ogni
- 3 inherits: \impostaincorniciato

\setupframedtext [...¹,...] [...²,...]

- 1 NAME OPT
- 2 sinistra = BEFEHL
- destra = BEFEHL
- interno = BEFEHL
- luogo = sinistra destra centro nessuno
- correzioneprofondita = attivo disattivo
- fonttesto = inherits: \impostafontdeltesto
- rientro = inherits: \impostarienro
- stile = STYLE BEFEHL
- colore = COLOR
- inherits: \impostaincorniciatoinherits: \setupplacement

\setupglobalreferenceprefix [...^{*},...]

- * + - TEXT

\setuphanging [...^{*},...]

- * distanza = DIMENSION
- n = NUMBER
- offsetcima = DIMENSION
- offsetfondo = DIMENSION
- luogo = sinistra destra

\setupheadalternative [...¹,...] [...²,...]

- 1 NAME OPT
- 2 alternativa = orizzontale verticale daqualcheparte
- renderingsetup = NAME

\setuphelp [...¹,...] [...²,...]

- 1 NAME OPT
- 2 inherits: \impostaincorniciato

`\setuphigh` [...,¹...] [...,²...,...]

1 NAME OPT
2 distanza = DIMENSION
 up = DIMENSION
 stile = STYLE BEFEHL
 colore = COLOR

`\setuphighlight` [...,¹...] [...,²...,...]

1 NAME OPT
2 comando = si no
 language = SPRACHE
 stile = STYLE BEFEHL
 colore = COLOR

`\setuphorizontalbox` [...,¹...] [...,²...,...]

1 NAME OPT OPT
2 ampiezza = max locale DIMENSION
 dilata = DIMENSION
 direzione = normale invertito lefttoright righttoleft
 xoffset = DIMENSION
 yoffset = DIMENSION
 stile = STYLE BEFEHL
 colore = COLOR
 sinistra = BEFEHL
 destra = BEFEHL
 strut = si no

`\setuphyphenation` [...,^{*}...,...]

* metodo = original tex implicito hyphenate expanded traditional nessuno
 hyphens = si no

`\setupindentedtext` [...,¹...] [...,²...,...]

1 NAME OPT
2 prima = BEFEHL
 dopo = BEFEHL
 distanza = DIMENSION
 campione = TEXT
 testo = TEXT
 ampiezza = adatta ampio DIMENSION
 separatore = BEFEHL
 stile = STYLE BEFEHL
 colore = COLOR
 stiletesta = STYLE BEFEHL
 coloretesta = COLOR

`\setupinitial` [...,¹...] [...,²...,...]

1 NAME OPT
2 n = NUMBER
 m = NUMBER
 prima = BEFEHL
 distanza = DIMENSION
 hoffset = DIMENSION
 voffset = riga DIMENSION
 stile = STYLE BEFEHL
 colore = COLOR
 font = FONT
 testo = TEXT
 luogo = margine testo
 metodo = primo ultimo auto nessuno
 continua = si no

`\setupinsertion` [...,¹...] [...,²...,...]

1 NAME OPT
2 luogo = pagina testo colonne firstcolumn lastcolumn
 anchoring = auto

`\setupitaliccorrection` [...^{*}...]

* inherits: \setitaliccorrection

```

\setupitemgroup    [...1...]    [...,2...]    [...,3...]    [...,4...,...]
1  NAME
2  ogni NUMMER
3  intro nointro casuale continua impaccato autointro ampio testo prima dopo nobianco margine inmargine almargine
   intesto headintext lento adatta nofit capoverso unito notjoinedup vicino stopper nostopper unpacked ripeti norepeat
   invertito colonne sovrapponi uno due tre quattro cinque six seven eight nine standard NUMMER*ampio NUMMER*vicino
   orizzontale NAME
4  prima = BEFEHL
   dopo  = BEFEHL
   tra   = BEFEHL
   primaditesta = BEFEHL
   dopotesta = BEFEHL
   testosinistro = BEFEHL
   testodestro = BEFEHL
   sinistra = BEFEHL
   destra = BEFEHL
   fattore = NUMMER
   passo = DIMENSION
   ampiezza = DIMENSION
   distanza = DIMENSION
   margine = si no standard DIMENSION
   marginesinistro = si no standard DIMENSION
   marginedestro = si no standard DIMENSION
   distanzamarginesinistro = si no standard DIMENSION
   distanzamarginedestro = si no standard DIMENSION
   allinea = inherits: \impostaallineamento
   rientro = inherits: \impostarientro
   inizia = NUMMER
   symallinea = sinistra centro destra flushleft center flushright
   simbolo = NAME
   n = NUMMER
   rientrasuccessivo = si no auto
   interno = BEFEHL
   comando = CSNAME
   elementi = NUMMER
   ampiezzamax = DIMENSION
   itemalign = sinistra destra centro flushleft flushright interno esterno
   alignsymbol = si no
   distanzatesto = piccolo medio grande nessuno spazio DIMENSION
   separatoretesto = BEFEHL
   lasttextseparator = BEFEHL
   mettistopper = si no schermo inline
   stile = STYLE BEFEHL
   colore = COLOR
   stiletesta = STYLE BEFEHL
   coloretesta = COLOR
   stilemarcatura = STYLE BEFEHL
   coloremarcatura = COLOR
   stilesimbolo = STYLE BEFEHL
   coloresimbolo = COLOR
   griglia = inherits: \definegridsnapping
   packcriterium = NUMMER
   distanzacolonne = DIMENSION
   inherits: \setupcounter

```

```

\setupitemgroup [...,1...] [...,2...,...]
1 NAME NAME:NUMBER OPT
2 prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
primaditesta = BEFEHL
dopotesta = BEFEHL
testosinistro = BEFEHL
testodestro = BEFEHL
sinistra = BEFEHL
destra = BEFEHL
fattore = NUMMER
passo = DIMENSION
ampiezza = DIMENSION
distanza = DIMENSION
opzione = intro casuale continua impaccato autointro ampio testo prima dopo nobianco margine
immargine al margine intesto headintext lento adatta nofit capoverso unito notjoinedup
vicino stopper unpacked ripeti norepeat invertito colonne sovrapponi uno due tre
quattro cinque six seven eight nine standard NUMMER*ampio NUMMER*vicino orizzontale
NAME
margine = si no standard DIMENSION
marginesinistro = si no standard DIMENSION
marginedestro = si no standard DIMENSION
distanzamarginesinistro = si no standard DIMENSION
distanzamarginedestro = si no standard DIMENSION
allinea = inherits: \impostaallineamento
rientro = inherits: \impostarientro
inizialine = NUMMER
symallinea = sinistra centro destra flushleft center flushright
simbolo = NAME
n = NUMMER
rientrasuccessivo = si no auto
interno = BEFEHL
comando = CSNAME
elementi = NUMMER
ampiezzamax = DIMENSION
itemalign = sinistra destra centro flushleft flushright interno esterno
alignsymbol = si no
distanzatesto = piccolo medio grande nessuno spazio DIMENSION
separatoretesto = BEFEHL
lasttextseparator = BEFEHL
mettistopper = si no schermo inline
stile = STYLE BEFEHL
colore = COLOR
stiletesta = STYLE BEFEHL
coloretesta = COLOR
stilemarcatura = STYLE BEFEHL
coloremarcatura = COLOR
stilesimbolo = STYLE BEFEHL
coloresimbolo = COLOR
griglia = inherits: \definegridsnapping
packcriterium = NUMMER
distanzacolonne = DIMENSION
inherits: \setupcounter

```

```

\impostaITEMGROUP [...] [...] [...]
1 ogni NUMMER OPT OPT OPT
2 intro nointro casuale continua impaccato autointro ampio testo prima dopo nobianco margine in margine al margine
intesto headintext lento adatta nofit capoverso unito notjoinedup vicino stopper nostopper unpacked ripeti norepeat
invertito colonne sovrapponi uno due tre quattro cinque six seven eight nine standard NUMMER*ampio NUMMER*vicino
orizzontale NAME
3 prima = BEFEHL
dopo = BEFEHL
tra = BEFEHL
primaditesta = BEFEHL
dopotesta = BEFEHL
testosinistro = BEFEHL
testodestro = BEFEHL
sinistra = BEFEHL
destra = BEFEHL
fattore = NUMMER
passo = DIMENSION
ampiezza = DIMENSION
distanza = DIMENSION
margine = si no standard DIMENSION
marginesinistro = si no standard DIMENSION
marginedestro = si no standard DIMENSION
distanzamarginesinistro = si no standard DIMENSION
distanzamarginedestro = si no standard DIMENSION
allinea = inherits: \impostaallineamento
rientro = inherits: \impostarientro
inizia = NUMMER
symallinea = sinistra centro destra flushleft center flushright
simbolo = NAME
n = NUMMER
rientrasuccessivo = si no auto
interno = BEFEHL
comando = CSNAME
elementi = NUMMER
ampiezzamax = DIMENSION
itemalign = sinistra destra centro flushleft flushright interno esterno
alignsymbol = si no
distanzatesto = piccolo medio grande nessuno spazio DIMENSION
separatoretesto = BEFEHL
lasttextseparator = BEFEHL
mettistopper = si no schermo inline
stile = STYLE BEFEHL
colore = COLOR
stiletesta = STYLE BEFEHL
coloretesta = COLOR
stilemarcatura = STYLE BEFEHL
coloremarcatura = COLOR
stilesimbolo = STYLE BEFEHL
coloresimbolo = COLOR
griglia = inherits: \definegridsnapping
packcriterium = NUMMER
distanzacolonne = DIMENSION
inherits: \setupcounter
instances: itemize

```

```

\impostaitemize   [...] 1 [...] 2 [...] 3 [...]
1 ogni NUMMER      OPT      OPT      OPT
2 intro nointro casuale continua impaccato autointro ampio testo prima dopo nobianco margine in margine al margine
  intesto headintext lento adatta nofit capoverso unito notjoinedup vicino stopper nostopper unpacked ripeti norepeat
  invertito colonne sovrapponi uno due tre quattro cinque six seven eight nine standard NUMMER*ampio NUMMER*vicino
  orizzontale NAME
3 prima            = BEFEHL
  dopo             = BEFEHL
  tra              = BEFEHL
  primaditesta     = BEFEHL
  dopotesta        = BEFEHL
  testosinistro    = BEFEHL
  testodestro      = BEFEHL
  sinistra         = BEFEHL
  destra           = BEFEHL
  fattore          = NUMMER
  passo            = DIMENSION
  ampiezza         = DIMENSION
  distanza         = DIMENSION
  margine          = si no standard DIMENSION
  marginesinistro  = si no standard DIMENSION
  marginedestro    = si no standard DIMENSION
  distanzamarginesinistro = si no standard DIMENSION
  distanzamarginedestro = si no standard DIMENSION
  allinea          = inherits: \impostaallineamento
  rientro          = inherits: \impostarientro
  inizia           = NUMMER
  symallinea       = sinistra centro destra flushleft center flushright
  simbolo          = NAME
  n                = NUMMER
  rientrasuccessivo = si no auto
  interno          = BEFEHL
  comando          = CSNAME
  elementi         = NUMMER
  ampiezzamax      = DIMENSION
  itemalign        = sinistra destra centro flushleft flushright interno esterno
  alignsymbol      = si no
  distanzatesto    = piccolo medio grande nessuno spazio DIMENSION
  separatoretesto  = BEFEHL
  lasttextseparator = BEFEHL
  mettistopper     = si no schermo inline
  stile            = STYLE BEFEHL
  colore           = COLOR
  stiletesta       = STYLE BEFEHL
  coloretesta      = COLOR
  stilemarcatura   = STYLE BEFEHL
  coloremarcatura  = COLOR
  stilesimbolo     = STYLE BEFEHL
  coloresimbolo    = COLOR
  griglia          = inherits: \definegridsnapping
  packcriterium    = NUMMER
  distanzacolonne  = DIMENSION
  inherits: \setupcounter

```

```

\setuplabel    [...,1...]    [...,2...,...]
1  NAME                OPT
2  titolo              = si no
   numero              = si no
   comandonumero       = \...#1
   distanzatitolo      = DIMENSION
   stiletitolo         = STYLE BEFEHL
   coloretitolo        = COLOR
   titlecommand        = \...#1
   titleleft          = BEFEHL
   titleright         = BEFEHL
   sinistra           = BEFEHL
   destra             = BEFEHL
   simbolo            = BEFEHL
   starter            = BEFEHL
   stopper            = BEFEHL
   accoppiamento      = NAME
   counter            = NAME
   livello            = NUMMER
   testo              = TEXT
   headcommand        = \...#1
   prima             = BEFEHL
   dopo              = BEFEHL
   tra               = BEFEHL
   alternativa        = sinistra destra inmargine insinistra indestra margine marginesinistro marginedestro margineinterno
                       margineesterno vicino sospeso cima vuoto comando intesto NAME
   allinea            = inherits: \impostaallineamento
   headalign          = inherits: \impostaallineamento
   rientro            = inherits: \impostarientro
   display            = si no
   rientrasuccessivo  = si no auto
   ampiezza           = adatta ampio riga DIMENSION
   distanza           = nessuno DIMENSION
   dilata             = NUMMER
   shrink            = NUMMER
   sospendi          = adatta ampio nessuno margine NUMMER
   closesymbol       = BEFEHL
   closecommand      = \...#1
   espansione        = si no xml
   referenceprefix    = + - TEXT
   campione          = TEXT
   margine           = si no standard DIMENSION
   stile             = STYLE BEFEHL
   colore            = COLOR
   stiletesta        = STYLE BEFEHL
   coloretesta       = COLOR
   allineatitolo     = si no
   headindenting     = si no
   attesa           = testo
   inherits: \setupcounter

```

```

\setuplayer    [...,1...]    [...,2...,...]
1  NAME                OPT
2  stato              = inizia termina continua successivo ripeti
   opzione            = test
   pagina            = NUMMER
   ampiezza          = DIMENSION
   altezza          = DIMENSION
   region            = NAME
   rotazione         = sinistra destra interno esterno NUMMER
   posizione         = si no sovrapponi
   hoffset           = max DIMENSION
   voffset           = max DIMENSION
   offset            = DIMENSION
   dx               = DIMENSION
   dy               = DIMENSION
   sx               = NUMMER
   sy               = NUMMER
   x                = DIMENSION
   y                = DIMENSION
   angolo            = sinistra centro destra cima fondo
   luogo            = griglia sinistra centro destra cima fondo riga l c r m t b g
   riga             = NUMMER
   colonna          = NUMMER
   direzione        = normale invertito
   doppiafaccia     = si no
   metodo           = adatta sovrapponi
   ripeti           = si
   preimpostato     = lefttop righttop leftbottom rightbottom centro middletop middlebottom middleleft middleright
                       lefttopleft lefttopright NAME

```

```

\setuplayeredtext    [...,1...]    [...,2...,...]
1  NAME              OPT
2  stile    =  STYLE BEFEHL
   colore   =  COLOR
   inherits: \impostaincorniciato

```

```

\setuplayouttext    [...1]    [...2]    [...,3...,...]
1  cima intestazione testo piedipaginaOPT fondo
2  testo margine bordo
3  stato          =  inizia termina vuoto alto nessuno normale nomarcature NAME
   stile          =  STYLE BEFEHL
   colore         =  COLOR
   strut         =  si no
   n              =  NUMMER
   prima         =  BEFEHL
   dopo          =  BEFEHL
   testosinistro =  TEXT
   testocentro  =  TEXT
   testodestro   =  TEXT
   stilesinistra =  STYLE BEFEHL
   middlestyle   =  STYLE BEFEHL
   stiledestra   =  STYLE BEFEHL
   coloresinistra =  COLOR
   middlecolor   =  COLOR
   coloredestra  =  COLOR
   ampiezza      =  DIMENSION
   ampiezzasinistra = DIMENSION
   middlewidth   =  DIMENSION
   ampiezzadestra =  DIMENSION

```

```

\setuplinefiller    [...,1...]    [...,2...,...]
1  NAME              OPT
2  luogo            =  sinistra destra entrambi
   scope           =  sinistra destra locale globale
   mp              =  NAME
   altezza         =  DIMENSION
   profondita     =  DIMENSION
   distanza        =  DIMENSION
   threshold       =  DIMENSION
   spessorelinea   =  DIMENSION
   prima          =  BEFEHL
   dopo           =  BEFEHL
   colore          =  COLOR
   stiletesto      =  STYLE BEFEHL
   coloretesto     =  COLOR
   allinea         =  inherits: \impostaallineamento

```

```

\setuplinefillers    [...,1...]    [...,2...,...]
1  NAME              OPT
2  inherits: \setuplinefiller

```

```

\setuplinenote    [...,1...]    [...,2...,...]
1  NAME              OPT
2  compress          =  si no
   compressmethod    =  separator stopper spazio
   compressseparator =  BEFEHL
   compressdistance  =  DIMENSION
   compressstopper   =  BEFEHL
   inherits: \setupnote

```

```

\setuplineprofile    [...,1...]    [...,2...,...]
1  NAME              OPT
2  passo            =  DIMENSION
   fattore          =  NUMMER
   metodo           =  a
   capoverso        =  si no

```

\setuplinetable [¹...] [²...] [...,³...,...]

```

1  r c                OPT      OPT
2  dispari pari intestazione NUMMER
3  righe              = adatta NUMMER
   prima              = BEFEHL
   dopo               = BEFEHL
   tra                = BEFEHL
   dilata             = si no DIMENSION
   ampiezzamax        = adatta DIMENSION
   nsinistra          = NUMMER
   n                  = NUMMER
   ripeti             = si no
   nx                 = NUMMER
   ampiezza           = DIMENSION
   altezza            = adatta riga DIMENSION
   distanza           = DIMENSION
   offsetsinistro     = DIMENSION
   offsetdestro       = DIMENSION
   allinea            = inherits: \impostaallineamento
   sfondo             = colore
   coloresfondo       = COLOR
   xheight            = max DIMENSION
   xdepth             = max DIMENSION
   stile              = STYLE BEFEHL
   colore             = COLOR

```

\setuplistalternative [...,¹...] [...,²...,...]

```

1  NAME                OPT
2  prima               = BEFEHL
   dopo               = BEFEHL
   comando            = \...#1#2#3
   renderingsetup     = NAME
   ampiezza           = DIMENSION
   distanza           = DIMENSION
   dilata             = DIMENSION
   filler             = BEFEHL

```

\setuplistextra [...,¹...] [...,²...,...]

```

1  NAME                OPT
2  prima = BEFEHL
   dopo = BEFEHL

```

\setuplocalboxes [...,¹...] [...,²...,...]

```

1  NAME                OPT      OPT
2  comando            = BEFEHL
   ripeti             = si no
   luogo              = sinistra destra centro testosinistro testodestro
   ampiezza           = DIMENSION
   distanza           = DIMENSION
   stile              =
   colore             = COLOR

```

\setuplocalfloats [...,^{*}...,...]

```

*  prima = BEFEHL
   dopo  = BEFEHL
   tra   = BEFEHL

```

\setuplocalinterlinespace [...,¹...] [...,²...,...]

```

1  NAME                OPT
2  inherits: \impostainterlinea

```

\setuplocalinterlinespace [...,^{*}...]

```

*  attivo disattivo reimposta auto piccolo medio grande NUMMER DIMENSION

```

\setuplocalinterlinespace [...]

```

*  NAME

```



```
\setuplow  [...] [1...] [2...,...]
1  NAME          OPT
2  distanza = DIMENSION
    down      = DIMENSION
    stile     = STYLE BEFEHL
    colore    = COLOR
```

```
\setuplowhigh  [1...] [2...,...]
1  NAME          OPT
2  distanza = DIMENSION
    up       = DIMENSION
    down     = DIMENSION
    stile    = STYLE BEFEHL
    colore   = COLOR
```

```
\setuplowmidhigh  [1...] [2...,...]
1  NAME          OPT
2  up      = DIMENSION
    down   = DIMENSION
    stile  = STYLE BEFEHL
    colore = COLOR
```

```
\setupMPgraphics  [...,*,...]
*  colore = locale globale
    mpy    = FILE
```

```
\setupMPinstance  [1...] [2...,...]
1  NAME          OPT
2  format          = metafun minifun mpost
    initializations = si no
    setups          = NAME
    stiletesto      = STYLE BEFEHL
    coloretesto     = COLOR
    extensions      = si no
    metodo          = binary decimal double scaled posit interval implicito
```

```
\setupMPpage  [...,*,...]
*  inherits: \setupfittingpage
```

```
\setupMPvariables  [1...] [2...,...]
1  NAME          OPT
2  KEY = VALUE
```

```
\setupmarginblock  [1...] [2...,...]
1  NAME          OPT
2  stato      = inizia termina
    ampiezza  = DIMENSION
    prima     = BEFEHL
    dopo      = BEFEHL
    tra       = BEFEHL
    allinea   = inherits: \impostaallineamento
    stile     = STYLE BEFEHL
    colore    = COLOR
    cima      = BEFEHL
    fondo     = BEFEHL
    luogo     = sinistra destra centro inmargin
    sinistra  = BEFEHL
    destra    = BEFEHL
```

```

\setupmargindata [...] 1 [...] 2 [...]
1 NAME OPT
2 strut = si no auto cap adatta riga implicito CHARACTER
   comando = \...#1
   ampiezza = DIMENSION
   allinea = inherits: \impostaallineamento
   anchor = region testo
   luogo = sinistra destra interno esterno
   metodo = cima riga primo profondita altezza
   category = implicito bordo
   scope = locale globale
   opzione = testo capoverso
   margine = locale normale margine bordo
   distanza = DIMENSION
   hoffset = DIMENSION
   voffset = DIMENSION
   dy = DIMENSION
   spaziofondo = DIMENSION
   threshold = DIMENSION
   riga = NUMMER
   stack = si continua
   stile = STYLE BEFEHL
   colore = COLOR

```

```

\setupmarginframed [...] 1 [...] 2 [...]
1 NAME OPT
2 inherits: \impostaincorniciato

```

```

\setupmarginrule [1...] [2...]
1 NUMMER OPT
2 inherits: \setupsidebar

```

```

\setupmathaccent [...] 1 [...] 2 [...]
1 NAME OPT OPT
2 inherits: \setupmathaccents

```

```

\setupmathaccents [...] 1 [...] 2 [...]
1 NAME OPT OPT
2 mathstyle = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
   scala = si no mantieni
   plugin = mp
   mp = NAME
   colore = COLOR
   coloretesto = COLOR
   symbolcolor = COLOR
   allinea = centro
   dilata = si no
   shrink = si no
   snap = si
   alignsymbol = si no
   offset = auto
   i = auto

```

```

\setupmathalignment [...1,...] [...2,...]
1 NAME OPT
2 n = NUMBER
m = NUMBER
distanza = DIMENSION
numero = auto
numberdistance = DIMENSION
separatore = TEXT
allinea = sinistra centro destra flushleft flushright normale auto NUMBER:sinistra NUMBER:centro
NUMBER:destra NUMBER:flushleft NUMBER:flushright
luogo = cima center fondo sinistra centro destra impaccato unpacked formula
snapping = si normale 0 1 2 0:10 1:10 2:10 2:20 1:top 1:bottom 2:top 2:bottom
mathstyle = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
stiletesto = STYLE BEFEHL
textstyle:NUMBER = STYLE BEFEHL
coloretesto = COLOR
textcolor:NUMBER = COLOR
testo = TEXT
text:NUMBER = TEXT
fences = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle
solidus ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis
mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle
mirreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner
mirroredlowercorner mirroredgroup mirroredopenbracket interval openinterval closedinterval
leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
integerinterval tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct
integerpart norm set sequence tuple
adaptive = si no
spaceinbetween = inherits: \impostaspaziobianco
riferimento = + - REFERENCE
suffix = TEXT
numberthreshold = DIMENSION
spessorelinea = DIMENSION
colorelinea = COLOR
toffset = DIMENSION
boffset = DIMENSION

```

```

\setupmathannotation [...1,...] [...2,...]
1 NAME OPT
2 cima = TEXT
fondo = TEXT
strut = si no
mathclass = tutti begin end unset ordinary operator binary relation open close punctuation variable active
interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
differential exponential integral ellipsis function digit division factorial wrapped construct
dimension unary textpunctuation unspaced experimental fake numbergroup continuation

```

```

\setupmathcases [...1,...] [...2,...]
1 NAME OPT
2 sinistra = BEFEHL
destra = BEFEHL
strut = si no
mathstyle = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
distanza = DIMENSION
numberdistance = DIMENSION
simplecommand = NAME
testosinistro = TEXT
testodestro = TEXT
marginesinistro = DIMENSION
marginedestro = DIMENSION
fences = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle
solidus ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis
mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle
mirreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner
mirroredlowercorner mirroredgroup mirroredopenbracket interval openinterval closedinterval
leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
integerinterval tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct
integerpart norm set sequence tuple
spaceinbetween = inherits: \impostaspaziobianco

```

`\setupmathdelimited` [...,¹...] [...,²...] [...,²...]

```

1 NAME
2 define = si no
  strut = si no altezza profondita math
  marginesinistro = DIMENSION
  marginedestro = DIMENSION
  alternativa = implicito normale
  symbolcolor = COLOR
  altezza = DIMENSION
  profondita = DIMENSION
  offsetcima = DIMENSION
  offsetfondo = DIMENSION
  source = NAME
  dimensione = NUMMER
  sinistra = NUMMER
  destra = NUMMER
  mathmeaning = TEXT
  colore = COLOR
  coloretesto = COLOR

```

`\setupmathdelimiter` [...,¹...] [...,²...] [...,²...]

```

1 NAME
2 define = si no
  fattore = NUMMER
  offsetsinistro = DIMENSION
  offsetdestro = DIMENSION
  exact = si no
  asse = si no
  altezza = DIMENSION
  profondita = DIMENSION
  simbolo = NUMMER

```

`\setupmathematics` [...,¹...] [...,²...] [...,²...]

```

1 NAME
2 openup = si no
  setsimboli = blackboard-to-bold mikael's-favourites NAME
  functionstyle = STYLE BEFEHL
  compact = si no
  allinea = l2r lefttoright r2l righttleft
  sygreek = normale corsivo nessuno
  lcgreek = normale corsivo nessuno
  ucgreek = normale corsivo nessuno
  italics = si no
  autopunctuation = si no tutti comma yes,semicolon comma,semicolon all,semicolon
  setups = NAME
  stilettesto = STYLE BEFEHL
  coloretesto = COLOR
  functioncolor = COLOR
  integral = orizzontale verticale auto autolimits limits nolimits
  stylealternative = NAME
  implicito = normale corsivo
  collapsing = 0 1 2 3 implicito tex elenco tutti nessuno reimposta
  kernpairs = si no
  mathconstants = corsivo upright
  differentiald = corsivo upright
  exponentiale = corsivo upright
  imaginaryi = corsivo upright
  imaginaryj = corsivo upright
  constantpi = corsivo upright
  snap = si no
  distanzatesto = DIMENSION
  threshold = nessuno piccolo medio grande DIMENSION
  mathstyle = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
  colore = COLOR
  autospacing = si no
  autonumbers = si no NUMMER
  autofencing = si no
  hz = si no
  alignscripts = si no sempre vuoto
  interscriptfactor = NUMMER
  autointervals = si no
  limitstretch = si no
  domain = implicito chemistry
  snapping = reimposta riga piccolo medio grande

```

```
*  buffer   =  NAME
   file     =  FILE
   n        =  NUMMER
   opzione  =  ascii
```

```
1 NAME OPT
2 inherits: \setupmathfences
```

```

1  NAME                                OPT
2  define                             = si no
   sinistra                          = NUMMER
   centro                            = NUMMER
   destra                            = NUMMER
   mathstyle                         = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
   colore                           = COLOR
   coloresinistra                    = COLOR
   middlecolor                       = COLOR
   coloredestra                     = COLOR
   symbolcolor                       = COLOR
   stato                             = auto
   metodo                           = auto
   dimensione                       = grande Big bigg Bigg NUMMER
   fattore                          = nessuno fisso forza dimensione auto NUMMER
   overflow                          = no auto
   mathclass                         = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                                   interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                                   differential exponential integral ellipsis function digit division factorial wrapped construct
                                   dimension unary textpunctuation unspaced experimental fake numbergroup continuation
   altezza                          = DIMENSION
   profondita                       = DIMENSION
   plugin                            = mp
   mp                                = NAME
   displayfactor                     = NUMMER
   inlinefactor                      = NUMMER
   mathmeaning                       = TEXT
   spaziocima                        = DIMENSION
   spaziofondo                       = DIMENSION
   snap                              = si no
   alternativa                       = piccolo grande
   setups                            = NAME
   source                            = NUMMER
   leftsource                        = NUMMER
   middlesource                      = NUMMER
   rightsource                       = NUMMER
   stilesinistra                     = STYLE BEFEHL
   stiledestra                       = STYLE BEFEHL
   leftclass                         = NUMMER
   middleclass                       = NUMMER
   rightclass                        = NUMMER
   distanza                          = DIMENSION
   testo                             = si no

```

```
1 NAME OPT
2 inherits: \setupmathfractions
```

```

\setupmathfractions [...1,...] [...2,...]
1 NAME OPT
2 distanzacima = DIMENSION
  distanzafondo = DIMENSION
  margine = DIMENSION
  colore = COLOR
  coloretesto = COLOR
  symbolcolor = COLOR
  topcolor = COLOR
  bottomcolor = COLOR
  strut = si no tight testo math
  alternativa = interno esterno entrambi
  linea = si no auto nascosto simbolo
  sinistra = NUMMER
  destra = NUMMER
  centro = NUMMER
  simbolo = NUMMER
  spessorelinea = font DIMENSION
  mathstyle = STYLE BEFEHL
  mathnumeratorstyle = STYLE BEFEHL
  mathdenominatorstyle = STYLE BEFEHL
  distanza = no nessuno cima fondo entrambi sovrapponi DIMENSION
  threshold = DIMENSION
  inlinethreshold = auto NUMMER
  displaythreshold = auto NUMMER
  fences =
  mathmeaning = binom limits
  mathclass = tutti begin end unset ordinary operator binary relation open close punctuation variable
              active interno under over fraction radical centro prime accent fenced ghost vcenter
              explicit imaginary differential exponential integral ellipsis function digit division
              factorial wrapped construct dimension unary textpunctuation unspaced experimental fake
              numbergroup continuation
  hfactor = NUMMER
  metodo = orizzontale verticale riga
  plugin = mp
  mp = NAME
  vfactor = NUMMER
  source = NAME
  topalign = sinistra destra centro flushleft flushright split:flushleft split:flushright
  bottomalign = sinistra destra centro flushleft flushright split:flushleft split:flushright

```

```

\setupmathframed [...1,...] [...2,...]
1 NAME OPT
2 mathstyle = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
  mathclass = tutti begin end unset ordinary operator binary relation open close punctuation variable active
              interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
              differential exponential integral ellipsis function digit division factorial wrapped construct
              dimension unary textpunctuation unspaced experimental fake numbergroup continuation
  inherits: \impostaincorniciato

```

```

\setupmathfunction [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupmathfunctions

```

```

\setupmathfunctions [...1,...] [...2,...]
1 NAME OPT
2 colore = COLOR
  stile = STYLE BEFEHL
  class = tutti begin end unset ordinary operator binary relation open close punctuation variable active
          interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
          differential exponential integral ellipsis function digit division factorial wrapped construct
          dimension unary textpunctuation unspaced experimental fake numbergroup continuation
  sinistra = BEFEHL
  destra = BEFEHL
  mathlimits = si no auto
  metodo = limits
  comando = \...#1

```

```

\setupmathmatrix    [...,1...]    [...,2...,...]
1  NAME              OPT
2  sinistra          = BEFEHL
   destra            = BEFEHL
   strut              = si no NUMMER
   allinea           = sinistra centro destra flushleft flushright normale auto NUMMER:sinistra NUMMER:centro NUMMER:destra
                        NUMMER:flushleft NUMMER:flushright
   mathstyle          = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
   distanza           = DIMENSION
   simplecommand       = TEXT
   luogo              = cima fondo alto basso pedap center normale
   spessorelinea       = DIMENSION
   colorelinea         = COLOR
   moffset             = DIMENSION
   toffset             = DIMENSION
   boffset            = DIMENSION
   marginesinistro     = DIMENSION
   marginedestro       = DIMENSION
   fences              = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle
                        solidus ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis
                        mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle
                        mirroreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner
                        mirroredlowercorner mirroredgroup mirroredopenbracket interval openinterval closedinterval
                        leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
                        integerinterval tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct
                        integerpart norm set sequence tuple
   bordosinistro       = nessuno DIMENSION
   bordodestro         = nessuno DIMENSION
   azione              = transpose negate scale

```

```

\setupmathnesting    [...,1...]    [...,2...,...]
1  NAME              OPT
2  sinistra          = BEFEHL
   destra            = BEFEHL
   displayfactor      = NUMMER
   inlinefactor        = NUMMER

```

```

\setupmathoperator    [...,1...]    [...,2...,...]
1  NAME              OPT
2  inherits: \setupmathoperators

```

```

\setupmathoperators    [...,1...]    [...,2...,...]
1  NAME              OPT
2  mathclass          = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                        interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                        differential exponential integral ellipsis function digit division factorial wrapped construct
                        dimension unary textpunctuation unspaced experimental fake numbergroup continuation
   symbolcolor         = COLOR
   metodo              = orizzontale verticale auto autolimits limits nolimits
   dimensione          = auto DIMENSION
   cima                = TEXT
   topcolor             = COLOR
   fondo               = TEXT
   bottomcolor          = COLOR
   coloretesto          = COLOR
   colore              = COLOR
   colorenúmero         = COLOR
   sinistra            = NUMMER

```

```

\setupmathornament    [...,1...]    [...,2...,...]
1  NAME              OPT
2  alternativa        = mp
   colore              = COLOR
   mppoffset           = DIMENSION
   mp                  = NAME

```

`\setupmathradical` $[...,\overset{1}{...}]$ $[...,\overset{2}{...},...]$

```

1  NAME
2  colore           = COLOR
   coloretesto      = COLOR
   colorenúmero     = COLOR
   symbolcolor      = COLOR
   plugin           = mp
   mp               = NAME
   sinistra         = NUMMER
   destra           = NUMMER
   cima             = NUMMER
   n                = TEXT
   altezza          = nessuno DIMENSION
   profondita      = nessuno DIMENSION
   mindepth         = DIMENSION
   marginesinistro  = DIMENSION
   marginedestro    = DIMENSION
   linea            = si no simbolo fondo
   source           = NAME
   mathstyle        = schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande
   strut           = si no altezza profondita math

```

`\setupmathsimplealign` $[...,\overset{1}{...}]$ $[...,\overset{2}{...},...]$

```

1  NAME
2  strut           = si no
   allinea         = normale flushright sinistra destra flushleft centro NUMMER:normale NUMMER:flushright NUMMER:sinistra
                     NUMMER:destra NUMMER:flushleft NUMMER:centro
   luogo           = cima fondo center center sinistra destra impaccato formula
   distanza        = math DIMENSION
   spaceinbetween  = inherits: \impostaspaziobianco
   marginesinistro = DIMENSION
   marginedestro   = DIMENSION
   sinistra        = BEFEHL
   destra          = BEFEHL
   fences          = cases sesac tekcarb parenthesis bracket brace bar doublebar triplebar angle doubleangle
                     solidus ceiling floor moustache uppercorner lowercorner group openbracket mirroredparenthesis
                     mirroredbracket mirroredbrace mirroredbar mirroreddoublebar mirroredtriplebar mirroredangle
                     mirroreddoubleangle mirroredsolidus mirroredceiling mirroredfloor mirroredmoustache mirroreduppercorner
                     mirroredlowercorner mirroredgroup mirroredopenbracket interval openinterval closedinterval
                     leftopeninterval rightopeninterval varopeninterval varleftopeninterval varrightopeninterval
                     integerinterval tupanddownarrows tupdownarrows tdownuparrows tuparrow tdownarrow abs innerproduct
                     integerpart norm set sequence tuple
   testo           = TEXT
   distanzatesto   = DIMENSION
   alternativa     = equationsystem
   simplecommand   = NAME

```

`\setupmathspacing` $[.^.]$

* normale tight lento stretto ampio less more chemistry NAME


```

\setupmathstackers [...1,...] [...2,...]
1  NAME                      OPT
2  cima                      = TEXT
    fondo                    = TEXT
    sinistra                  = BEFEHL
    destra                    = BEFEHL
    topcommand                = \...#1
    bottomcommand            = \...#1
    middlecommand            = \...#1
    topstyle                  = STYLE BEFEHL
    bottomstyle               = STYLE BEFEHL
    middlestyle               = STYLE BEFEHL
    topcolor                  = COLOR
    bottomcolor               = COLOR
    middlecolor               = COLOR
    topalign                  = sinistra destra centro flushleft flushright interno esterno
    bottomalign               = sinistra destra centro flushleft flushright interno esterno
    plugin                    = mp
    mp                        = NAME
    mpheight                  = DIMENSION
    mpdepth                   = DIMENSION
    mpoffset                  = DIMENSION
    colore                    = COLOR
    symbolcolor               = COLOR
    offsetcima                = DIMENSION
    hoffset                   = DIMENSION
    voffset                   = DIMENSION
    altezzamin                = DIMENSION
    mindepth                  = DIMENSION
    mathclass                 = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                                interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                                differential exponential integral ellipsis function digit division factorial wrapped construct
                                dimension unary textpunctuation unspaced experimental fake numbergroup continuation

    offset                    = min max normale
    luogo                     = cima fondo alto basso centro NUMMER
    strut                     = si no
    alternativa               = normale implicito mp
    ampiezzamin               = DIMENSION
    distanza                  = DIMENSION
    order                     = normale invertito
    mathlimits                = si no
    lt                         = DIMENSION
    rt                         = DIMENSION
    lb                         = DIMENSION
    rb                         = DIMENSION
    shrink                     = si no
    dilata                     = si no
    campione                  = NUMMER

```

```

\setupmathstyle [...*...]
* schermo testo script scriptscript cramped uncramped normale impaccato piccolo grande NAME

```

```

\setupmathtext [...1,...] [...2,...]
1  NAME                      OPT
2  alternativa               = separa parola
    stile                    = STYLE BEFEHL
    colore                   = COLOR
    class                    = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                                interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                                differential exponential integral ellipsis function digit division factorial wrapped construct
                                dimension unary textpunctuation unspaced experimental fake numbergroup continuation

    leftclass                = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                                interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                                differential exponential integral ellipsis function digit division factorial wrapped construct
                                dimension unary textpunctuation unspaced experimental fake numbergroup continuation

    rightclass               = tutti begin end unset ordinary operator binary relation open close punctuation variable active
                                interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary
                                differential exponential integral ellipsis function digit division factorial wrapped construct
                                dimension unary textpunctuation unspaced experimental fake numbergroup continuation

```

```

\setupmetadata [...*...]
* titolo                     = TEXT
  sottotitolo                = TEXT
  autore                      = TEXT
  parolachiave                = TEXT
  data                        = TEXT

```

\setupmixedcolumns [...¹,...] [...²,...]

```

1  NAME
2  griglia      = inherits: \definegridsnapping
   spessorelinea = DIMENSION
   metodo       = otr box
   prima        = BEFEHL
   dopo         = BEFEHL
   distanza     = DIMENSION
   n            = NUMMER
   altezzamax   = DIMENSION
   ampiezzamax  = DIMENSION
   passo        = DIMENSION
   profile      = NAME
   allinea      = inherits: \impostaallineamento
   setups       = NAME
   bilanciamento = si no
   splitmethod  = nessuno fisso
   alternativa  = locale globale
   internalgrid = riga mezzariga
   separatore   = linea
   strut        = si no
   colore       = COLOR
   colorelinea  = COLOR
   direzione    = normale invertito
   notes        = si no
   rigovuoto    = inherits: \rigovuoto
   rientro      = inherits: \impostarientro
   profile      = NAME
   define       = si no
   inherits: \impostaincorniciato

```

\setupmodule [...¹] [...²,...]

```

1  FILE
2  test = si no
   KEY  = VALUE

```

\setupmulticolumns [...¹,...] [...²,...]

```

1  NAME
2  n            = NUMMER
   distanza     = DIMENSION
   direzione    = destra invertito
   bilanciamento = si no
   rigovuoto    = inherits: \rigovuoto
   allinea      = inherits: \impostaallineamento
   ncima        = NUMMER

```

```

\setupnotation    [...,1...]    [...,2≡...,...]
1  NAME          OPT
2  titolo         = si no
   numero         = si no
   type           = note
   comandonumero  = \...#1
   distanzatitolo = DIMENSION
   stiletitolo    = STYLE BEFEHL
   coloretitolo   = COLOR
   titlecommand   = \...#1
   titleleft      = BEFEHL
   titleright     = BEFEHL
   sinistra       = BEFEHL
   destra         = BEFEHL
   simbolo        = BEFEHL
   starter        = BEFEHL
   stopper        = BEFEHL
   accoppiamento = NAME
   counter        = NAME
   livello        = NUMBER
   testo          = TEXT
   headcommand    = \...#1
   deeptextcommand = \...#1
   prima          = BEFEHL
   dopo           = BEFEHL
   tra            = BEFEHL
   alternativa    = sinistra destra inmargine insinistra indestra margine marginesinistro marginedestro margineinterno
                   margineesterno vicino sospeso cima comando note NAME
   allinea        = inherits: \impostaallineamento
   headalign      = inherits: \impostaallineamento
   rientro        = inherits: \impostarientro
   display        = si no
   rientrasuccessivo = si no auto
   ampiezza       = adatta ampio riga DIMENSION
   distanza       = nessuno DIMENSION
   dilata         = NUMBER
   shrink         = NUMBER
   sospendi       = adatta ampio nessuno margine NUMBER
   closesymbol    = BEFEHL
   closecommand   = \...#1
   espansione    = si no xml
   referenceprefix = + - TEXT
   campione       = TEXT
   margine        = si no standard DIMENSION
   stile          = STYLE BEFEHL
   colore         = COLOR
   stiletesta     = STYLE BEFEHL
   coloretesta    = COLOR
   allineatitolo  = si no
   headindenting  = si no
   attesa         = testo
   inherits: \setupcounter

```

```

\setupnotations  [...,1...]    [...,2≡...,...]
1  NAME          OPT
2  inherits: \setupnotation

```

\setupnote [...,¹...] [...,²...,...]

```
1 NAME OPT
2 interazione = si no numero testo tutti
  symbolcommand = \...#1
  comandotesto = \...#1
  indicatore = si no
  separatoretesto = BEFEHL
  ampiezza = DIMENSION
  altezza = DIMENSION
  distanza = DIMENSION
  rulecommand = BEFEHL
  linea = attivo disattivo normale sinistra destra comando capoverso
  separa = tollerante rigido moltorigido NUMMER
  fattore = NUMMER
  luogo = testo pagina elenco alto fondo nessuno colonne firstcolumn lastcolumn
  successivo = BEFEHL
  n = NUMMER
  colorelinea = COLOR
  spessorelinea = DIMENSION
  rulewidth = DIMENSION
  ruledistance = DIMENSION
  setups = NAME
  interlinea = NAME
  capoverso = si no
  prima = BEFEHL
  dopo = BEFEHL
  tra = BEFEHL
  scope = pagina
  distanzacolonne = DIMENSION
  continua = si no
  alternativa = griglia fisso colonne note nessuno
  criterio = pagina
  fonttesto = inherits: \impostafontdeltesto
  allinea = inherits: \impostaaallineamento
  stiletesto = STYLE BEFEHL
  coloretesto = COLOR
  anchor = successivo
  range = si
  spazioprima = inherits: \rigovuoto
  spaceinbetween = inherits: \rigovuoto
  inherits: \impostaincorniciato
```

\setupnotes [...,¹...] [...,²...,...]

```
1 NAME OPT
2 inherits: \setupnote
```

\setupoffset [...,^{*}...,...]

* inherits: \setupoffsetbox

\setupoffsetbox [...,^{*}...,...]

```
* x = DIMENSION
  y = DIMENSION
  offsetsinistro = DIMENSION
  offsetdestro = DIMENSION
  offsetcima = DIMENSION
  offsetfondo = DIMENSION
  metodo = fisso
  ampiezza = DIMENSION
  altezza = DIMENSION
  profondita = DIMENSION
  luogo = sinistra centro destra cima fondo riga l c r m t b g
```

\setupoptimize [...,¹...] [...,²...,...]

```
1 NAME OPT
2 sinistra = DIMENSION
  destra = DIMENSION
  righe = NUMMER
  distanza = DIMENSION
```

\setuporientation [...,¹...] [...,²...,...]

```
1 NAME OPT
2 orientation = up down sinistra destra cima fondo normale riga
  orizzontale = sinistra centro destra flushleft flushright normale
  verticale = riga cima centro fondo normale
```

```
\setupoutputroutine [...] [.,..2.,..]
```

\setupoutputroutine [...]

$$\backslash\mathrm{setuppagechecker} \quad [\dots,\overset{1}{\dots}] \quad [\dots,\overset{2}{\dots},\dots]$$
$$\backslash\mathrm{setuppagecolumns} \quad [\ldots,\overset{1}{\ldots}] \quad [\ldots,\overset{2}{\ldots},\ldots]$$
$$\backslash\mathrm{setuppageinjection} \quad [\dots, \overset{1}{\dots}] \quad [\dots, \overset{2}{\dots} \dots, \dots]$$
$$\backslash\mathrm{setuppageinjectionalternative} \quad [\dots,\dots] \quad [\dots,\dots] \quad [\dots,\dots]$$

`\setuppageshift` [¹...] [²...] [³...]

$$\backslash\mathrm{setuppagestate} \quad [\dots, \dots]^1 \quad [\dots, \dots]^2, \dots]$$
$$\backslash\mathrm{setuppairedbox} \quad [\dots,\overset{1}{\dots}] \quad [\dots,\overset{2}{\dots},\dots]$$

```
\impostaPAIREDBOX [...]
* inherits: \setuppairedbox
instances: legend
```

```
\impostalegend [...]
* inherits: \setuppairedbox
```

```
\setuppaper [...]
* inherits: \impostadimensionicarta
```

```
\setupparagraph [...]
1 NAME
2 stile = STYLE BEFEHL
   colore = COLOR
   allinea = inherits: \impostaallineamento
   setups = NAME
```

```
\setupparagraphintro [...]
1 reimposta ogni primo successivo
2 BEFEHL
```

```
\setupparallel [...]
1 NAME
2 NAME
3 setups = NAME
   inizia = NUMMER
   n = NUMMER
   criterio = tutti
```

```
\setupparinsert [...]
1 NAME
2 xoffset = DIMENSION
   yoffset = DIMENSION
   distanza = DIMENSION
   righe = NUMMER
   luogo = sinistra destra
   opzione = profondita
   stile = STYLE BEFEHL
   colore = COLOR
```

```
\setupperiodkerning [...]
1 NAME
2 fattore = NUMMER
```

```
\setupperiods [...]
* n = NUMMER
   ampiezza = DIMENSION adatta
   distanza = DIMENSION
   simbolo = BEFEHL
```

```
\setupplaceholder [...]
1 NAME
2 prima = BEFEHL
   dopo = BEFEHL
   testo = TEXT
   stile = STYLE BEFEHL
   colore = COLOR
```

```
\setupplacement [...]
1 NAME
2 prima = BEFEHL
   dopo = BEFEHL
   sinistra = BEFEHL
   destra = BEFEHL
   griglia = inherits: \snaptogrid
   correzioneriga = attivo disattivo
   correzioneprofondita = attivo disattivo
   margine = si no standard
```

\setuppositionbar [...,^{*}...]

* stile = STYLE BEFEHL
colore = COLOR
n = NUMMER
min = NUMMER
max = NUMMER
testo = TEXT
ampiezza = DIMENSION
altezza = DIMENSION
profondita = DIMENSION

\setupprocessor [...,¹...] [...,²...]

1 NAME OPT
2 stato = inizia termina
sinistra = BEFEHL
destra = BEFEHL
comando = \...#1
stile = STYLE BEFEHL
colore = COLOR

\setupprofile [...,¹...] [...,²...]

1 NAME OPT
2 altezza = DIMENSION
profondita = DIMENSION
distanza = DIMENSION
fattore = NUMMER
righe = NUMMER
metodo = rigido fisso nessuno
define = si no

\setupquotation [...,^{*}...]

* inherits: \setupdelimitedtext

\setuprealpagenumber [...,^{*}...]

* inherits: \setupcounter

\setupreferenceformat [...,¹...] [...,²...]

1 NAME OPT
2 etichetta = * NAME
sinistra = BEFEHL
destra = BEFEHL
type = implicito testo titolo numero pagina realpage
setups = NAME
autocase = si no
testo = TEXT
stile = STYLE BEFEHL
colore = COLOR

\setupreferenceprefix [...^{*}]

* + - TEXT

\setupreferencestructureprefix [...¹] [...²] [...,³...]

1 NAME ABSCHNITT OPT
2 implicito OPT
3 prefisso = si no
prefixseparatorset = NAME
prefixconversion = NAME
prefixconversionset = NAME
prefixstarter = BEFEHL PROCESSOR->BEFEHL
prefixstopper = BEFEHL PROCESSOR->BEFEHL
prefixset = NAME
prefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
ABSCHNITT:tutti corrente
numberconversion = NAME
numberconversionset = NAME
numberstarter = BEFEHL PROCESSOR->BEFEHL
numberstopper = BEFEHL PROCESSOR->BEFEHL
numbersegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti
numberseparatorset = NAME
prefixconnector = BEFEHL PROCESSOR->BEFEHL

```

\setupregisters      [1...] [2...,...2...,...]
1  NAME NAME:NUMBER      OPT
2  referencemethod      = avanti
   espansione           = si no xml
   numeroproprio         = si no
   xmlsetup              = NAME
   alternativa           = a b A B
   metodo                = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   compress              = si no tutti impaccato testo
   check                 = si no
   criterio              = locale testo corrente precedente tutti ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter     = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper     = BEFEHL PROCESSOR->BEFEHL
   pageprefixset         = NAME
   pageprefixsegments    = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente
   pageprefixconnector   = BEFEHL
   pageprefix            = si no
   pageseparatorset      = NAME
   pageconversionset     = NAME
   pagestarter           = BEFEHL PROCESSOR->BEFEHL
   pagestopper           = BEFEHL PROCESSOR->BEFEHL
   pagesegments          = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tutti
   ampiezzamax           = DIMENSION
   indicatore            = si no
   prima                 = BEFEHL
   dopo                  = BEFEHL
   comando               = \...#1
   comandotesto          = \...#1
   deeptextcommand       = \...#1
   comandopagina        = \...#1
   distanza              = DIMENSION
   interazione           = testo numeropagina
   numeropagina          = si no
   simbolo               = a n nessuno 1 2 BEFEHL
   language              = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   stile                 = STYLE BEFEHL
   colore                = COLOR
   stiletesto            = STYLE BEFEHL
   coloretesto           = COLOR
   stilepagina           = STYLE BEFEHL
   colorepagina          = COLOR
   pageleft              = BEFEHL
   pageright             = BEFEHL
   n                     = NUMMER
   bilanciamento        = si no
   allinea               = inherits: \impostaallineamento
   numberorder           = numeri
   pagemethod            = pagina capoverso

```



```

\setupregisters      [...,1...]      [...,2...]      [...,3...,...]
1  NAME              OPT              OPT
2  NUMMER
3  referencemethod   = avanti
   espansione       = si no xml
   numeroproprio     = si no
   xmlsetup          = NAME
   alternativa       = a b A B
   metodo            = implicito prima dopo primo ultimo ch mm zm pm mc zc pc uc
   compress          = si no tutti impaccato testo
   check             = si no
   criterio          = locale testo corrente precedente tutti ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper = BEFEHL PROCESSOR->BEFEHL
   pageprefixset      = NAME
   pageprefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tutti ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tutti corrente

   pageprefixconnector = BEFEHL
   pageprefix         = si no
   pageseparatorset   = NAME
   pageconversionset   = NAME
   pagestarter        = BEFEHL PROCESSOR->BEFEHL
   pagestopper        = BEFEHL PROCESSOR->BEFEHL
   pagesegments       = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tutti
   ampiezzamax        = DIMENSION
   indicatore         = si no
   prima              = BEFEHL
   dopo               = BEFEHL
   comando            = \...#1
   comandotesto       = \...#1
   deeptextcommand    = \...#1
   comandopagina      = \...#1
   distanza           = DIMENSION
   interazione        = testo numeropagina
   numeropagina       = si no
   simbolo            = a n nessuno 1 2 BEFEHL
   language           = implicito DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE
   stile              = STYLE BEFEHL
   colore             = COLOR
   stiletesto         = STYLE BEFEHL
   coloretesto        = COLOR
   stilepagina        = STYLE BEFEHL
   colorepagina       = COLOR
   pageleft           = BEFEHL
   pageright          = BEFEHL
   n                  = NUMBER
   bilanciamento     = si no
   allinea            = inherits: \impostaallineamento
   numberorder        = numeri
   pagemethod         = pagina capoverso

```

```

\setuprenderingwindow [...,1...]      [...,2...,...]
1  NAME              OPT
2  azioneapripagina  = REFERENCE
   azionechiudipagina = REFERENCE
   inherits: \impostaincorniciato

```

```

\setuprows      [...,1...]      [...,2...,...]
1  NAME              OPT
2  define            = si no
   n                 = NUMMER
   distanza          = DIMENSION
   ampiezza          = adatta DIMENSION
   allinea           = inherits: \impostaallineamento
   prima             = BEFEHL
   dopo              = BEFEHL
   alternativa       = tight
   order             = verticale
   altezza           = max DIMENSION
   profondita       = max DIMENSION

```

```

\setuprubry      [...1...]      [...2...,...]
1  NAME          OPT
2  luogo         = cima sinistra destra nessuno
   allinea       = auto flushleft centro flushright
   dilata        = si no
   hoffset       = DIMENSION
   voffset       = DIMENSION
   distanza      = nessuno DIMENSION
   sinistra      = BEFEHL
   destra        = BEFEHL
   stile         = STYLE BEFEHL
   colore        = COLOR

```

```
\setups      [...,*,...]
*  NAME
```

```
\setupsavebuffer    [...1,...]    [...2,...]
```

```
1  NAME                                     OPT
```

```
2  elenco      = BUFFER
```

```
   file        = FILE
```

```
   prefisso    = si no
```

```
   opzione     = append
```

```
   directory   = TEXT
```

```

\setupscale [1...][2...][...]
1 NAME OPT
2 scala = NUMBER
  xscale = NUMBER
  yscale = NUMBER
  ampiezza = DIMENSION
  altezza = DIMENSION
  profondita = si no
  righe = NUMBER
  fattore = adatta ampio max min auto implicito
  wfactor = adatta ampio max min auto implicito
  wfactor = adatta ampio max min auto implicito
  ampiezzamax = DIMENSION
  altezzamax = DIMENSION
  s = NUMBER
  sx = NUMBER
  sy = NUMBER
  equalwidth = DIMENSION
  equalheight = DIMENSION
  griglia = si adatta altezza profondita mezzariga

```

```
\setupscript      [...1...]  [...2...]
1  NAME
   OPT
2  metodo         = hangul hanzi nihongo ethiopic thai tibetan test
   preimpostato   = NAME
   features       = auto
```

```
\setupscripts    [...,1...]    [...,2=...,...]
```

```
1  NAME                OPT
```

```
2  inherits: \setupscrip
```

```
\setupselector      [..1]    [...,2..2,...]
```

```
1 NAME
```

```
2 n = NUMBER
```

```
   max = NUMBER
```

```
\setupshadow    [...1,...]    [...,2...,...]
```

1	NAME		OPT
2	stile	=	STYLE BEFEHL
	colore	=	COLOR
	colorecontrasto	=	COLOR
	continua	=	si no tutti
	unita	=	ex em pt in cm mm sp bp pc dd cc nc
	weight	=	NUMMER
	dx	=	NUMMER
	dy	=	NUMMER

\setupshapedparagraph [...,¹...,...]

* mp = NAME
ripeti = si no
elenco = NAME
metodo = cycle shift
voffset = DIMENSION
hoffset = DIMENSION
distanza = DIMENSION
righe = NUMMER
ampiezza = DIMENSION
testo = TEXT

\setupshift [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 continua = si no
unita = ex em pt in cm mm sp bp pc dd cc nc
metodo = NUMMER
dy = NUMMER
allinea = inherits: \impostaaallineamento
stile = STYLE BEFEHL
colore = COLOR

\setupsidebar [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 spessorelinea = DIMENSION
colorelinea = COLOR
alternativa = NUMMER
offsetcima = DIMENSION
offsetfondo = DIMENSION
distanza = DIMENSION
distanzamarginesinistro = DIMENSION
livello = NUMMER
luogo = sinistra destra interno esterno

\setupspellchecking [...,^{*}...,...]

* stato = inizia termina
metodo = 1 2 3
elenco = NAME

\setupstacking [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 define = si no
criterio = NAME
numero = NUMMER

\setupstretched [...,^{*}...,...]

* inherits: \setupcharacterkerning

\setupstyle [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 metodo = comando
stile = STYLE BEFEHL
colore = COLOR

\setupsubcolumnset [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 cima = BEFEHL
fondo = BEFEHL
spazioprima = riga
spaziodopo = riga
prima = BEFEHL
dopo = BEFEHL
language = SPRACHE
stile = STYLE BEFEHL
colore = COLOR
allinea = inherits: \impostaaallineamento

\setupsubformula [...,¹...] [...,²...,...]

1 NAME ^{OPT}
2 inherits: \setupsubformulas

```
\setupsubformulas [...1,...] [...2,...]
1 NAME OPT
2 rientrasuccessivo = si no auto
```

```
\setupsymbols [...*,...]
* stylealternative = testo math
```

```
\setupsynchronize [...1,...] [...2,...]
1 NAME OPT
2 distanza = DIMENSION
elenco = NAME
separa = TEXT
buffer = NAME
testo = TEXT
stile = STYLE BEFEHL
colore = COLOR
```

```
\setupsynchronizecontent [...1,...] [...2,...]
1 NAME OPT
2 sinistra = BEFEHL
destra = BEFEHL
language = SPRACHE
stile = STYLE BEFEHL
colore = COLOR
```

```
\setupsyntex [...*,...]
* stato = inizia termina ripeti
metodo = min max
compress = si no
```

```
\setups {...*,...}
* NAME
```

```
\setupTABLE [...1,...] [...2,...] [...3,...]
1 r c x y row colonnaOPBPrimo ultimo iOPBzOPBia intestazione ogni dispari pari uno NUMBER -NUMBER
2 primo least ogni due dispari pari NUMBER -NUMBER
3 extras = BEFEHL
sinistra = BEFEHL
destra = BEFEHL
coloretesta = COLOR
stiletesta = STYLE BEFEHL
distanzamarginesinistro = DIMENSION
distanzamarginedestro = DIMENSION
distanzacolonne = DIMENSION
ampiezzamax = DIMENSION
setups = NAME
ampiezzatesto = DIMENSION locale
separa = si no ripeti pagina auto
intestazione = ripeti
opzione = dilata tight
prima = BEFEHL
dopo = BEFEHL
stessapagina = prima dopo entrambi
spaceinbetween = inherits: \rigovuoto
splitoffset = DIMENSION
allineacarattere = si no
carattereallineamento = TEXT number->TEXT text->TEXT
distanza = DIMENSION
colore = COLOR
stile = math STYLE BEFEHL
synchronize = sfondo
direzione = normale invertito
inherits: \impostaincorniciato
```

```
\setupTEXpage [...*,...]
* inherits: \setupfittingpage
```

```

\setuptabulatemove [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 xoffset = DIMENSION
  yoffset = altezza profondita DIMENSION
  orientation = NUMMER

```

```

\setuptagging [...] * [...]
* stato = inizia termina attivo disattivo
  metodo = auto
  preimpostato = basic demo mkiv uac
  livello = NUMMER
  comment = TEXT
  opzione = interazione

```

```

\setuptextbackground [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 stato = inizia termina
  luogo = testo capoverso sempre nessuno
  criterio = NUMMER
  alternativa = NUMMER
  mp = NAME
  metodo = NAME
  sfondo = colore
  coloresfondo = COLOR
  angolo = rettangolare rotondo
  livello = NUMMER
  offsetsfondo = DIMENSION
  prima = BEFEHL
  dopo = BEFEHL
  allinea = inherits: \impostaallineamento
  dash = NUMMER
  raggio = DIMENSION
  cornice = attivo disattivo
  colorecornice = COLOR
  spessorelinea = DIMENSION
  voffset = DIMENSION
  offsetcornice = DIMENSION
  offsetsinistro = si no standard DIMENSION
  offsetdestro = si no standard DIMENSION
  offsetcima = piccolo medio grande riga DIMENSION
  offsetfondo = piccolo medio grande riga DIMENSION
  stile = STYLE BEFEHL
  colore = COLOR

```

```

\setuptextdisplay [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 prima = BEFEHL
  dopo = BEFEHL
  fattore = NUMMER

```

```

\setuptextflow [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 ampiezza = DIMENSION
  stile = STYLE BEFEHL
  colore = COLOR

```

```

\setuptextnote [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 linea = NAME
  note = NAME
  n = * NUMMER
  vuoto = si no nessuno numero

```

```

\setuptooltip [...] 1 [...] [...] 2 [...]
1 NAME OPT
2 luogo = sinistra centro destra
  inherits: \impostaincorniciato

```

```

\setuptransliteration [...] 1 [...] 2 [...]
1 NAME OPT
2 define = si no
  stile = STYLE BEFEHL
  colore = COLOR
  language = SPRACHE
  vector = NAME
  prima = BEFEHL
  dopo = BEFEHL
  sinistra = BEFEHL
  destra = BEFEHL

```

```

\setuptweakedfont [...] 1 [...] 2 [...]
1 NAME OPT
2 stile = STYLE BEFEHL
  scala = NUMMER
  xscale = NUMMER
  yscale = NUMMER
  xoffset = DIMENSION
  yoffset = DIMENSION

```

```

\setupunit [...] 1 [...] 2 [...]
1 NAME OPT
2 metodo = 1 2 3 4 5 6
  language = SPRACHE
  alternativa = testo matematica
  order = invertito normale
  separatore = piccolo medio grande normale nessuno NAME
  spazio = piccolo medio grande normale nessuno NAME
  stile = STYLE BEFEHL
  colore = COLOR
  opzione = mantieni

```

```

\setupuserdata [...] 1 [...] 2 [...]
1 NAME OPT
2 prima = BEFEHL
  dopo = BEFEHL
  allinea = inherits: \impostaallineamento
  setups = NAME
  stile = STYLE BEFEHL
  colore = COLOR
  alternativa = implicito NAME
  KEY = VALUE

```

```

\setupuserdataalternative [...] 1 [...] 2 [...]
1 NAME OPT
2 renderingsetup = NAME
  KEY = VALUE

```

```

\setupuserpagenumber [...] 1 [...]
* viewerprefix = TEXT
  stato = inizia termina nessuno mantieni vuoto
  etichetta = TEXT
  inherits: \setupcounter

```

```

\setupversion [...]
* concetto file temporaneo finale NAME

```

```

\setupverticalbox [...] 1 [...] 2 [...]
1 NAME OPT OPT
2 ampiezza = locale DIMENSION
  altezza = max DIMENSION
  direzione = normale invertito lefttoright righttoleft
  xoffset = DIMENSION
  yoffset = DIMENSION
  stile = STYLE BEFEHL
  colore = COLOR
  cima = BEFEHL
  fondo = BEFEHL
  strut = si no
  allinea = inherits: \impostaallineamento
  rientro = inherits: \impostarientro

```

\setupviewerlayer [...^{*}...]

* titolo = TEXT
stato = inizia termina
export = si no
stampabile = si no
scope = locale globale
metodo = nessuno comando

\setupvspacing [...^{*}...]

* inherits: \vspacing ^{OPT}

\setupwithargument {...¹} {...²}

1 NAME
2 CONTENT

\setupwithargumentswapped {...¹} {...²}

1 CONTENT
2 NAME

\setupxml [...^{*}...]

* implicito = nascosto nessuno testo
compress = si no
entities = si no

\setupxtable [...¹...] [...²...]

1 NAME ^{OPT}
2 ampiezzatesto = DIMENSION locale
fonttesto = inherits: \impostafontdeltesto
spaceinbetween = inherits: \rigovuoto
opzione = tight max dilata ampiezza altezza fisso
altezzatesto = DIMENSION
ampiezzamax = DIMENSION
distanzacolonne = DIMENSION
distanzamarginesinistro = DIMENSION
distanzamarginedestro = DIMENSION
intestazione = ripeti
piedipagina = ripeti
spessorelinea = DIMENSION
separa = si no ripeti auto
splitoffset = DIMENSION
stessapagina = prima dopo entrambi
distanza = DIMENSION
allineacarattere = si no
alignmentleftsample = TEXT
alignmentrightsample = TEXT
alignmentleftwidth = DIMENSION
alignmentrightwidth = DIMENSION
caratterereallineamento = TEXT
inherits: \impostaincorniciato

\setuvalue {...¹} {...²}

1 NAME
2 CONTENT

\setuxvalue {...¹} {...²}

1 NAME
2 CONTENT

\setvalue {...¹} {...²}

1 NAME
2 CONTENT

\setvariable {...¹} {...²} {...³}

1 NAME
2 KEY
3 VALUE

<pre> \setvariables [.¹.] [...,²...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \setvboxregister .¹. {..².} 1 CSNAME NUMBER 2 CONTENT </pre>
<pre> \setvisualizerfont [.[*].] * FONT OPT </pre>
<pre> \setvtopregister .¹. {..².} 1 CSNAME NUMBER 2 CONTENT </pre>
<pre> \setwidthof .¹. \to \..². 1 TEXT 2 CSNAME </pre>
<pre> \setxmeasure {..¹.} {..².} 1 NAME 2 DIMENSION </pre>
<pre> \setxvalue {..¹.} {..².} 1 NAME 2 CONTENT </pre>
<pre> \setxvariable {..¹.} {..².} {..³.} 1 NAME 2 KEY 3 VALUE </pre>
<pre> \setxvariables [.¹.] [...,²...,...] 1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE </pre>
<pre> \sfondo {..[*].} * CONTENT </pre>
<pre> \SFONDO {..[*].} * CONTENT instances: sfondo </pre>
<pre> \SHADOW {..[*].} * CONTENT instances: shadowed </pre>
<pre> \shadowed {..[*].} * CONTENT </pre>
<pre> \shapecorrection [.[*].] * sinistra destra entrambi </pre>
<pre> \shapedhbox {..[*].} * CONTENT </pre>

\shiftbox {.. 1 CONTENT
\SHIFT {.. * CONTENT instances: shiftup shiftdown
\shiftdown {.. * CONTENT
\shiftup {.. * CONTENT
\showallmakeup
\showattributes
\showbalancepoints [...,.. * inherits: \impostacolonne OPT
\showboxes
\showbreakpoints [...,.. * inherits: \impostacolonne OPT
\showbtxdatasetauthors [...,.. * specification = NAME OPT dataset = NAME field = address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\showbtxdatasetauthors [.. * NAME OPT
\showbtxdatasetcompleteness [...,.. * specification = NAME OPT dataset = NAME field = address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\showbtxdatasetcompleteness [.. * NAME OPT
\showbtxdatasetfields [...,.. * specification = NAME OPT dataset = NAME field = address assignee autore booktitle capitolo giorno dayfiled edition editor howpublished institution journal language mese monthfiled nationality note numero uno due organization pages publisher school series titolo type volume anno yearfiled NAME
\showbtxdatasetfields [.. * NAME OPT
\showbtxfields [...,.. * rotazione = NUMBER OPT specification = NAME

\showbtxfields	[...]	
* NAME		OPT
\showbtxhashedauthors	[...]	
* TEXT		OPT
\showbtxtables	[...]	
* TEXT		OPT
\showchardata	{...}	
* TEXT		
\showcharfreq		
\showcharratio	{...}	
* TEXT		
\showcolorbar	[...]	
* COLOR		
\showcolorcomponents	[...]	
* COLOR		
\showcolorset	[...]	
* COLOR		
\showcolorstruts		
\showcounter	[...]	
* NAME		
\showcurrentfont	[...]	
* NUMMER		OPT
\showdirectives		
\showdirlsinmargin		
\showedebuginfo		
\showexperiments		
\showfont	[...] ¹	[...] ² ,...]
1 FONT		OPT
2 NUMMER		
\showfontdata		
\showfontexpansion		
\showfontitalics		
\showfontkerns		
\showfontparameters		

\showfontstrip [...] * inherits: \impostafontdeltesto
\showfontstyle [...] 1 inherits: \impostafontdeltesto 2 rm ss tt mm hw cg 3 tf bf it sl bi bs 4 tutti NUMMER
\showglyphdata
\showglyphs
\showgridsnapping
\showhelp {...} [...] 1 TEXT 2 REFERENCE
\showhyphenationtrace [...] [...] 1 SPRACHE 2 TEXT
\showhyphens {...} * TEXT
\showinjector [...] * NAME
\showjustification
\showkerning {...} * TEXT
\showlayoutcomponents
\showligature {...} * TEXT
\showligatures [...] * FONT
\showlogcategories
\showluatables
\showmargins
\showmathstate [...] {...} 1 DIMENSION 2 C M P S r f n d
\showmathstyles
\showmessage {...} {...} {..., ...} 1 NAME 2 NAME NUMMER 3 TEXT

\showminimalbaseline
\shownextbox \ ¹ ... { ² ...} 1 CSNAME 2 CONTENT
\showotfcomposition { ¹ ...} { ² ...} { ³ ...} 1 FONT 2 -1 1 +1 l2r r2l 3 TEXT
\showpageprogress [[*] ...] * si no tutti OPT
\showparentchain \ ¹ ... { ² ...} 1 CSNAME 2 NAME
\showparwrapperstate { [*] ...} * NAME
\showraggedrules { [*] ...} * NUMMER
\showrivers [..., [*] ...,...] * inherits: \addriversto86x
\showsetupsdefinition [[*] ...] * NAME
\showtimer { [*] ...} * TEXT
\showtokens [[*] ...] * NAME
\showtrackers
\showvalue { [*] ...} * NAME
\showvariable { ¹ ...} { ² ...} 1 NAME 2 KEY
\showwarning { ¹ ...} { ² ...} {..., ³ ...} 1 NAME 2 NAME NUMMER 3 TEXT
\signalcharacteralign { ¹ ...} { ² ...} 1 NUMMER 2 NUMMER
\signalrightpage
\simbolo [¹ ...] 1 NAME OPT 2 NAME

* NAME

1 TEXT

```
1      TEXT
2      TEXT
```

1 DIMENSION

2 sinistra destra centro flushleft flushright interno esterno

3 CONTENT

1 DIMENSION

2 sinistra destra centro flushleft flushright interno esterno

3 TEXT

4 CONTENT

1 DIMENSION

```

1  DIMENSION
2  sinistra destra centro flushleft flushright interno esterno

```

3 CONTENT

1 BEFEHL

2 BEFEHL

1 CSNAME.

```

1 CSNAME
2 CSNAME

```

1 DIMENSION

2 sinistra destra centro flushleft flushright interno esterno

3 CONTENT

1 DIMENSION

```

1  DIMENSION
2  sinistra destra centro flushleft flushright interno esterno

```

3 TEXT

4 CONTENT

```
1 inherits: \setupsynchronizeOPT
```

1	INDEX
2	CONTENT

2 CONTENT

3 CONTENT

```
instances: paralleltext
```

```
1 inherits: \setupsynchronizeGPT
```

2 CONTENT

3 CONTENT

\singlebond

* \{ \[\(\ \backslashgroup \lparent \lparenthesis \lparen \lbracket \lbrack \lbrace \lceil \lceil \lceil \lfloor \ulcorner
\llcorner \lmoustache \llbracket \langle \llangle \lgroup \lvert \singleverticalbar \doubleverticalbar \tripleverticalbar
\lvert \lVert \linterval \llointerval CHARACTER

`\sixthofsixarguments` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $\{.^6.\}$

1 TEXT
2 TEXT
3 TEXT
4 TEXT
5 TEXT
6 TEXT

`\skiphere` $\{.^*.\}$

* + - DIMENSION NUMMER pagina stessapagina

`\slantedface`

`\slashed` $\{.^1.\}$ $\{.^2.\}$

1 tutti begin ~~end~~ unset ordinary operator binary relation open close punctuation variable active interno under over fraction radical centro prime accent fenced ghost vcenter explicit imaginary differential exponential integral ellipsis function digit division factorial wrapped construct dimension unary textpunctuation unspaced experimental fake numbergroup continuation
2 CONTENT

`\slicepages` $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$

1 FILE
2 offset = DIMENSION
 hoffset = DIMENSION
 voffset = DIMENSION
 ampiezza = DIMENSION
 altezza = DIMENSION
 n = NUMMER
3 offset = DIMENSION
 hoffset = DIMENSION
 voffset = DIMENSION
 ampiezza = DIMENSION
 altezza = DIMENSION
 n = NUMMER

`\slovenianNumerals` $\{.^*.\}$

* NUMMER

`\sloveniannumerals` $\{.^*.\}$

* NUMMER

`\smallbreak`

`\smallcappedcharacters` $\{.^*.\}$

* NUMMER

`\smallcappedromannumerals` $\{.^*.\}$

* NUMMER

`\smaller`

`\smallinfofont`

`\smallinfofontbold`

`\smallmathsymbol` $\{.^*.\}$

* TEXT

`\smallskip`

$\backslash\text{smash}$ $[.^1.]$ $\{.^2.\}$ 1 <code>w h d t b</code> ^{OPT} 2 <code>CONTENT</code>
$\backslash\text{smashbox}$ $.^*$ * <code>CSNAME NUMBER</code>
$\backslash\text{smashboxed}$ $.^*$ * <code>CSNAME NUMBER</code>
$\backslash\text{smashedhbox}$ $.^1.$ $\{.^2.\}$ 1 <code>TEXT</code> ^{OPT} 2 <code>CONTENT</code>
$\backslash\text{smashedvbox}$ $.^1.$ $\{.^2.\}$ 1 <code>TEXT</code> ^{OPT} 2 <code>CONTENT</code>
$\backslash\text{snappedmath}$ $\{.^*.\}$ * <code>CONTENT</code>
$\backslash\text{snaptogrid}$ $[.^1.]$ $\backslash.^2.$ $\{.^3.\}$ 1 normale standard ^{OPT} rigido tollerante cima fondo entrambi ampio adatta primo ultimo alto uno basso nessuno riga strut box min max centro math math:riga math:mezzariga math:-line math:-halfline NAME 2 <code>CSNAME</code> 3 <code>CONTENT</code>
$\backslash\text{snaptogrid}$ $[.^1.,.^1.,.^1.]$ $\backslash.^2.$ $\{.^3.\}$ 1 inherits: $\backslash\text{definegrid}$ snapping 2 <code>CSNAME</code> 3 <code>CONTENT</code>
$\backslash\text{someheadnumber}$ $[.^1.]$ $[.^2.]$ 1 <code>ABSCHNITT</code> 2 precedente corrente successivo primo ultimo
$\backslash\text{somekindoftab}$ $[.^1.,.^1.,.^1.,.^1.,.^1.,.^1.]$ * alternativa = orizzontale ^{OPT} verticale ampiezza = DIMENSION altezza = DIMENSION n = NUMMER m = NUMMER
$\backslash\text{somelocalfloat}$
$\backslash\text{somenamedheadnumber}$ $\{.^1.\}$ $\{.^2.\}$ 1 <code>ABSCHNITT</code> 2 precedente corrente successivo primo ultimo
$\backslash\text{someplace}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $[.^6.]$ 1 <code>TEXT</code> 2 <code>TEXT</code> 3 <code>TEXT</code> 4 <code>TEXT</code> 5 <code>TEXT</code> 6 <code>REFERENCE</code>
$\backslash\text{SORTING}$ $[.^1.]$ $\{.^2.\}$ 1 <code>NAME</code> ^{OPT} 2 <code>CONTENT</code> instances: logo

\logo [...] ¹ {...} ² 1 NAME OPT 2 CONTENT
\sottopaginasuccessiva
\spaceddigits {...} * NUMMER
\spaceddigitismethod
\spaceddigitseparator
\spaceddigitssymbol
\spaceorpar
\spanishNumerals {...} * NUMMER
\spanishnumerals {...} * NUMMER
\spazifissi
\spazio
\spaziobianco
\spaziofisso
\spessoreriga
\spezzaoggettoomobile [...,... ¹ ...,...] {...} ² {...} ³ 1 inherits: \impostaspezzamentooggettoomobile ^{OPT} 2 BEFEHL 3 CONTENT
\splitatasterisk ... ¹ \... ² \... ³ 1 TEXT 2 CSNAME 3 CSNAME
\splitatcolon ... ¹ \... ² \... ³ 1 TEXT 2 CSNAME 3 CSNAME
\splitatcolons ... ¹ \... ² \... ³ 1 TEXT 2 CSNAME 3 CSNAME
\splitatcomma ... ¹ \... ² \... ³ 1 TEXT 2 CSNAME 3 CSNAME

<code>\splitatperiod</code> ¹ ... \ ² ... \ ³ ... 1 TEXT 2 CSNAME 3 CSNAME
<code>\splitfilename</code> {...} * FILE
<code>\splitoffbase</code>
<code>\splitofffull</code>
<code>\splitoffkind</code>
<code>\splitoffname</code>
<code>\splitoffpath</code>
<code>\splitoffroot</code>
<code>\splitofftokens</code> ¹ ... \from ² ... \to \ ³ ... 1 TEXT 2 TEXT 3 CSNAME
<code>\splitofftype</code>
<code>\splitsequence</code> {... ¹ } {... ² } 1 si no TEXT 2 TEXT
<code>\splitstring</code> ¹ ... \at ² ... \to \ ³ ... \and \ ⁴ ... 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\splitsymbol</code> {...} * si no TEXT
<code>\spreadhbox</code> ... * CSNAME NUMBER
<code>\stackcampi</code> [... ¹] [..., ² ...] [..., ³ ...,...] 1 NAME 2 NAME 3 inherits: \setupfieldcategory
<code>\stacking</code> [... ¹] {... ² } 1 NUMBER 2 CONTENT
<code>\STACKING</code> [... ¹] {... ² } 1 NUMBER 2 CONTENT
<code>\stackrel</code> {... ¹ } {... ² } 1 CONTENT 2 CONTENT

\stackscripts
\inizialINENOTE [¹ ...] { ² ...} 1 REFERENCE 2 TEXT instances: linenote
\inizialinenote [¹ ...] { ² ...} 1 REFERENCE 2 TEXT
\startregister [¹ ...] [² ...] [³ ...] [⁴ ...] { ⁵ ...+...+...} ... ⁶ \stopregister [⁷ ...] [⁸ ...] 1 NAME 2 NAME 3 TEXT 4 TEXT PROCESSOR->TEXT 5 INDEX 6 CONTENT 7 NAME 8 NAME
\STARTSTOP { [*] ...} * CONTENT
\STARTSTOP [..., ¹ ...=...,...] { ² ...} 1 inherits: \impostainfZiatermina ^{OPT} 2 CONTENT
\startstructurepageregister [¹ ...] [² ...] [..., ³ ...=...,...] [..., ⁴ ...=...,...] ... ⁵ \stopstructurepageregister [...] ⁶ [...] ⁷ 1 NAME 2 NAME 3 etichetta = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT processors = PROCESSOR keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternativa = TEXT processors:1 = PROCESSOR processors:2 = PROCESSOR processors:3 = PROCESSOR 4 KEY = VALUE 5 CONTENT 6 NAME 7 NAME
\stirato [..., ¹ ...=...,...] { ² ...} 1 inherits: \setupst ^{OPT} etched 2 TEXT
\terminalINENOTE [[*] ...] * REFERENCE instances: linenote
\terminalinenote [[*] ...] * REFERENCE
\strictdoifelsenextoptional { ¹ ...} { ² ...} 1 TRUE 2 FALSE

\strictdoifnextoptionalelse {...} {...} 1 TRUE 2 FALSE
\stripcharacter . ¹ \from . ² \to \. ³ 1 CHARACTER 2 TEXT 3 CSNAME
\strippedcsname *. * CSNAME
\strippedcsname . * TEXT
\stripspaces \from . ¹ \to \. ² 1 TEXT 2 CSNAME
\structurelistnumber
\structurelistrawnnumber {...} * LISTE
\structurelistrawpagenumber {...} * LISTE
\structurelistrawrealpagenumber {...} * LISTE
\structurelistrealpagenumber
\structurelistuserpagenumber
\structurelistuservariable {...} * KEY
\structurenumber
\structuretitle
\structureuservariable {...} * KEY
\structurevariable {...} * KEY
\strut
\strutdp
\strutgap
\strutht
\struthtdp

<code>\struttedbox {...}</code> <code>* CONTENT</code>
<code>\strutwd</code>
<code>\style [...¹...²...] {...}</code> <code>1 inherits: \setupstyle</code> <code>2 TEXT</code>
<code>\styleinstance [...]</code> <code>* NAME</code>
<code>\style [...¹] {...²}</code> <code>1 NAME FONT</code> <code>2 TEXT</code>
<code>\STYLE {...}</code> <code>* TEXT</code>
<code>\subpagenumber</code>
<code>\subparagraph</code>
<code>\subprescr [...¹] {...²}</code> <code>1 DIMENSION OPT</code> <code>2 TEXT</code>
<code>\subscr [...¹] {...²}</code> <code>1 DIMENSION OPT</code> <code>2 TEXT</code>
<code>\subsentence {...}</code> <code>* CONTENT</code>
<code>\substituteincommalist {...¹} {...²} \...³</code> <code>1 TEXT</code> <code>2 TEXT</code> <code>3 CSNAME</code>
<code>\subsupprescr [...¹] {...²} {...³}</code> <code>1 DIMENSION OPT</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\subsupscr [...¹] {...²} {...³}</code> <code>1 DIMENSION OPT</code> <code>2 TEXT</code> <code>3 TEXT</code>
<code>\subtractfeature [...[*]]</code> <code>* NAME</code>
<code>\subtractfeature {...[*]}</code> <code>* NAME</code>
<code>\suppresscr [...¹] {...²}</code> <code>1 DIMENSION OPT</code> <code>2 TEXT</code>

$\backslash\supscr$ [...] ¹ {...} ² 1 DIMENSION OPT 2 TEXT
$\backslash\supsubprescr$ [...] ¹ {...} ² {...} ³ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\supsubscr$ [...] ¹ {...} ² {...} ³ 1 DIMENSION OPT 2 TEXT 3 TEXT
$\backslash\swapcounts$ \... ¹ \... ² 1 CSNAME 2 CSNAME
$\backslash\swapdimens$ \... ¹ \... ² 1 CSNAME 2 CSNAME
$\backslash\swapface$
$\backslash\swapmacros$ \... ¹ \... ² 1 CSNAME 2 CSNAME
$\backslash\swaptypesface$
$\backslash\switchstyleonly$ [...] [*] * rm ss tt hw cg roman serif regolare sans sansserif supporto type teletype mono grafiamanuale calligrafico
$\backslash\switchstyleonly$ \... [*] * CSNAME
$\backslash\switchtocolour$ [...] * COLOR
$\backslash\switchtointerlinespace$ [...] ¹ ,... [...] ² ,... 1 NAME OPT 2 inherits: \impostainterlinea
$\backslash\switchtointerlinespace$ [...] [*] ,... * attivo disattivo reimposta auto piccolo medio grande NUMMER DIMENSION
$\backslash\switchtointerlinespace$ [...] [*] * NAME
$\backslash\symbolreference$ [...] [*] * REFERENCE
$\backslash\sync$ {...} ¹ ... ² 1 NAME 2 NUMMER
$\backslash\syncanchor$ {...} ¹ {...} ² {...} ³ 1 NAME 2 NUMMER 3 NUMMER

<code>\abbreviation</code> $[...]$ $[...]$ $\{...\}$ $\{...\}$ 1 NAME OPT OPT 2 TEXT 3 TEXT 4 CONTENT
<code>\systemlog</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 FILE 2 TEXT 3 TEXT
<code>\systemlogfirst</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 FILE 2 TEXT 3 TEXT
<code>\systemloglast</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 FILE 2 TEXT 3 TEXT
<code>\systemsetups</code> $\{...\}$ * NAME
<code>\TABLE</code>
<code>\TaBlE</code>
<code>\TEX</code>
<code>\TeX</code>
<code>\TheNormalizedFontSize</code>
<code>\TransparencyHack</code>
<code>\tabulateautoline</code>
<code>\tabulateautorule</code>
<code>\tabulateline</code>
<code>\tabulaterule</code>
<code>\taggedctxcommand</code> $\{...\}$ * BEFEHL
<code>\taggedlabeltexts</code> $\{...\}$ $\{...\}$ $\{...\}$ 1 NAME 2 NAME 3 CONTENT
<code>\tamilnumerals</code> $\{...\}$ * NUMMER
<code>\tbox</code> $\{...\}$ * CONTENT

$\backslash\mathrm{tcontainer}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\mathrm{telugunumerals}$ $\{\dots\}$ * NUMBER
$\backslash\mathrm{terminariga}$ $[\dots]$ * REFERENCE
$\backslash\mathrm{testandsplitstring}$ $\overset{1}{\dots}$ $\backslash\mathrm{at}$ $\overset{2}{\dots}$ $\backslash\mathrm{to}$ $\overset{3}{\dots}$ $\backslash\mathrm{and}$ $\overset{4}{\dots}$ 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
$\backslash\mathrm{testcolumn}$ $[\overset{1}{\dots}]$ $[\overset{2}{\dots}]$ 1 NUMBER OPT 2 DIMENSION
$\backslash\mathrm{testfeature}$ $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ 1 NUMBER 2 CONTENT
$\backslash\mathrm{testfeatureonce}$ $\{\overset{1}{\dots}\}$ $\{\overset{2}{\dots}\}$ 1 NUMBER 2 CONTENT
$\backslash\mathrm{testoaiuto}$ $[\overset{1}{\dots}]$ $\{\overset{2}{\dots}\}$ $\{\overset{3}{\dots}\}$ 1 REFERENCE OPT 2 TEXT 3 TEXT
$\backslash\mathrm{LABELtesto}$ $\{\dots\}$ * KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\mathrm{btxlabeltesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{headtesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{labeltesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{mathlabeltesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{operatorortesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{prefixtesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{suffixtesto}$ $\{\dots\}$ * KEY
$\backslash\mathrm{taglabeltesto}$ $\{\dots\}$ * KEY

<code>\unittesto {...}</code> * KEY
<code>\FRAMEDTEXT [...,..¹...,..²] {...}</code> 1 inherits: \setupframedtext 2 CONTENT instances: framedtext
<code>\framedtext [...,..¹...,..²] {...}</code> 1 inherits: \setupframedtext 2 CONTENT
<code>\testonotapdp [...,..¹...,..²] {...}</code> 1 REFERENCE OPT 2 TEXT
<code>\testonotapdp [...,..²...,...]</code> * titolo = TEXT segnalibro = TEXT elenco = TEXT riferimento = REFERENCE referencetext = TEXT
<code>\testoriempimento [...,..¹...,..²] {...} {...³}</code> 1 inherits: \impostalineeriempimento OPT OPT 2 TEXT 3 TEXT
<code>\testpage [...¹] [...²]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testpageonly [...¹] [...²]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testpagesync [...¹] [...²]</code> 1 NUMMER OPT 2 DIMENSION
<code>\testtokens [...]</code> * NAME
<code>\tex {...}</code> * CONTENT
<code>\texbuffer [...]</code> * BUFFER OPT
<code>\texbuffer {...}</code> * BUFFER
<code>\texdefinition {...}</code> * NAME
<code>\texsetup {...}</code> * NAME
<code>\TEXTBACKGROUND {...}</code> * CONTENT

<pre> \textcitation [...] [¹...] [²] 1 riferimento = REFERENCE^{OPT} alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcitation [¹] [²] 1 implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \textcitation [...] [¹...] [...] [²...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \textcite [...] [¹...] [²] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 REFERENCE </pre>
<pre> \textcite [¹] [²] 1 implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear 2 REFERENCE </pre>
<pre> \textcite [...] [¹...] [...] [²...] 1 riferimento = REFERENCE alternativa = implicito category entry short pagina num textnum anno indiceanalitico tag keywords autore authoryears authornum authoryear prima = BEFEHL dopo = BEFEHL sinistra = BEFEHL destra = BEFEHL inherits: \setupbtx 2 KEY = VALUE </pre>
<pre> \textcontrolspace </pre>
<pre> \textflowcollector {...} * NAME </pre>
<pre> \textthere [...] {...} 1 sinistra destra^{OPT}prima dopo tra 2 CONTENT </pre>
<pre> \textmath {...} * CONTENT </pre>
<pre> \textminus </pre>

$\backslash\text{textnote}$ [$\dots$] ¹ $\dots$] [$\dots$] ² $\dots$ - inherits: $\backslash\text{setuptextnote}$ - TEXT
$\backslash\text{textormathchar}$ [$\dots$] NUMBER
$\backslash\text{textormathchars}$ [$\dots$] CHARACTER
$\backslash\text{textplus}$
$\backslash\text{textstacker}$ [$\dots$] ¹ [$\dots$] ² [$\dots$] ³ [$\dots$] ⁴ - invertito $\overset{\text{OFF}}{\text{matematica}}$ testo chemistry - NUMBER - TEXT - TEXT
$\backslash\text{textvisiblespace}$
$\backslash\text{thainumerals}$ [$\dots$] NUMBER
$\backslash\text{thedatavalue}$ [$\dots$] NAME
$\backslash\text{thefirstcharacter}$ [$\dots$] TEXT
$\backslash\text{thenormalizedbodyfontsize}$ [$\dots$] DIMENSION
$\backslash\text{theorientation}$ [$\dots$] normale up down sinistra destra cima fondo NAME
$\backslash\text{theremainingcharacters}$ [$\dots$] TEXT
$\backslash\text{thickspace}$
$\backslash\text{thinspace}$
$\backslash\text{thirdoffivearguments}$ [$\dots$] ¹ [$\dots$] ² [$\dots$] ³ [$\dots$] ⁴ [$\dots$] ⁵ - TEXT - TEXT - TEXT - TEXT - TEXT
$\backslash\text{thirdoffourarguments}$ [$\dots$] ¹ [$\dots$] ² [$\dots$] ³ [$\dots$] ⁴ - TEXT - TEXT - TEXT - TEXT

\thirdofsixarguments {...} {...} {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\thirdofthreearguments {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\thirdofthreeunexpanded {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\threedigitrounding {...} * NUMMER
\tibetannumerals {...} * NUMMER
\tieniblocchi [..., ¹ ...] [..., ² ...] [...] 1 NAME 2 NAME OPT
\tightfitboundary
\tightfitcompensation
\tightlayer [...] * NAME
\time [..., [*] ...] * metodo = iniZia qui corrente h = NUMMER m = NUMMER s = NUMMER
\tinyfont
\tinyinfofont
\tinyinfofontbold
\tlap {...} * CONTENT
\tochar {...} * e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
\tolinenote [...] * REFERENCE
\TOOLTIP [..., ¹ ...] {...} {...} 1 inherits: \setuptooltip 2 TEXT 3 TEXT instances: tooltip

<code>\TOOLTIP</code> [...] ¹ {...} ² {...} ³ 1 sinistra cent ^{OPT} o destra 2 TEXT 3 TEXT instances: tooltip
<code>\tooltip</code> [...] ¹ {...} ² {...} ³ 1 sinistra cent ^{OPT} o destra 2 TEXT 3 TEXT
<code>\tooltip</code> [..., ¹ ...] ₁ {...} ² {...} ³ 1 inherits: \setuptooltip 2 TEXT 3 TEXT
<code>\topbox</code> {...} * CONTENT
<code>\topleftbox</code> {...} * CONTENT
<code>\toplinebox</code> {...} * CONTENT
<code>\toprightbox</code> {...} * CONTENT
<code>\topskippedbox</code> {...} * CONTENT
<code>\tracecatcodetables</code>
<code>\tracedfontname</code> {...} * FONT
<code>\tracedpagestate</code>
<code>\traceoutputroutines</code>
<code>\tracepositions</code>
<code>\tracingall</code>
<code>\tracingnone</code>
<code>\tracingprocess</code>
<code>\tracingtypesetting</code>
<code>\traduci</code> [..., [*] ...] ₁ * SPRACHE = TEXT ^{OPT}
<code>\transliterate</code> [...] ¹ {...} ² 1 NAME 2 TEXT

$\backslash$ transliteratebuffer [...] ¹ {...} ² 1 NAME 2 BUFFER
$\backslash$ transliterated [...] ¹ {...} ² 1 NAME 2 TEXT
$\backslash$ transliteratedbuffer [...] ¹ {...} ² 1 NAME 2 BUFFER
$\backslash$ transliteration [...] ¹ {...} ² 1 NAME 2 TEXT
$\backslash$ transliterationexception [...] ¹ {...} ² {...} ³ 1 NAME 2 TEXT 3 TEXT
$\backslash$ transliteration {...} ¹ {...} ² 1 NAME 2 TEXT
$\backslash$ transparencycomponents {...} [*] * COLOR
$\backslash$ transparent [...] ¹ {...} ² 1 COLOR 2 CONTENT
$\backslash$ traverseblock {...} ¹ {...} ² 1 digitsarabicindc digitsbold digitsdoublestruck digitsextendedarabicindc digitslatin digitsmonospace digitsnormal digitssansserifbold digitssansserifnormal geometricshapes letterlikesymbols lowercasebold lowercaseboldfraktur lowercasebolditalic lowercaseboldscript lowercasedoublestruck lowercasefraktur lowercasegreekbold lowercasegreekbolditalic lowercasegreekitalic lowercasegreeknormal lowercasegreekssansserifbold lowercasegreekssansserifbolditalic lowercaseitalic lowercasemonospace lowercasenormal lowercasesansserifbold lowercasesansserifbolditalic lowercasesansserifitalic lowercasesansserifnormal lowercasescript mathematicalalphanumericsymbols mathematicaloperators miscellaneousmathematicalsymbolsa miscellaneousmathematicalsymbolsb miscellaneoussymbols miscellaneoussymbolsandarrows miscellaneoustechnical supplementalarrowsa supplementalarrowsb supplementalarrowsc supplementalmathematicaloperators uppercasebold uppercaseboldfraktur uppercasebolditalic uppercaseboldscript uppercasedoublestruck uppercasefraktur uppercasegreekbold uppercasegreekbolditalic uppercasegreekitalic uppercasegreeknormal uppercasegreekssansserifbold uppercasegreekssansserifbolditalic uppercaseitalic uppercasemonospace uppercasenormal uppercasesansserifbold uppercasesansserifbolditalic uppercasesansserifitalic uppercasesansserifnormal uppercasescript lowersecalligraphic uppersecalligraphic lowercaseboldcalligraphic uppercaseboldcalligraphic lowercasesansgreek uppercasesansgreek lowercaseitalicsansgreek uppercaseitalicsansgreek lowercaseblackboarditalic uppercaseblackboarditalic 2 BEFEHL
$\backslash$ traversemath {...} ¹ {...} ² {...} ³ {...} ⁴ 1 regolare sansserif monospaced fraktur script calligrafico blackboard 2 normale grassetto grassetto corsivo corsivo 3 ucletters lcletters digits ucgreek lcgreek symbols 4 BEFEHL
$\backslash$ triggergroupedcommand {...} [*] * BEFEHL
$\backslash$ triggergroupedcommandcs {...} [*] * CSNAME
$\backslash$ triplebond

\truefilename {...} * FILE
\truefontname {...} * FONT
\ttraggedright
\TWEAKEDFONT
\twodigitrounding {...} * NUMMER
\tx
\txx
\typ [..., ¹ ...,...] {... ² } 1 inherits: \impostatype 2 CONTENT
\type [..., ¹ ...,...] {... ² } 1 inherits: \impostatype 2 CONTENT
\typebuffer [..., ¹ ...] [..., ² ...,...] 1 BUFFER OPT OPT 2 inherits: \impostatyping
\typeBUFFER [..., [*] ...,...] * inherits: \impostatyping ^{OPT}
\typedefinedbuffer [¹ ...] [..., ² ...,...] 1 BUFFER OPT 2 inherits: \impostatyping
\typeface
\typefile [¹] [..., ² ...,...] {... ³ } 1 NAME OPT OPT 2 inherits: \impostatyping 3 FILE
\typeinlinebuffer [..., ¹ ...] [..., ² ...,...] 1 BUFFER OPT OPT 2 inherits: \impostatype
\typescriptone
\typescriptprefix {...} * NAME
\typescriptthree
\typescripttwo

```

1  * DEFER
2  inherits: \setupexternalfigure

```

```

*      * BUFFER
OPT

```

```
1 NAME FILE
2 FILE TEXT
3 inherits: \setupeexternalfigure
```

```

1  DOTTED
2  inherits: \impostatyping
instances: typing LUA MP PARSEDXML TEX XML

```

```
1  BOPPER
2  inherits: \impostatyping
```

```
1  BORRER
2  inherits: \impostatyping
```

```
1  BUFFER
2  inherits: \impostatyping
```

```
1  BUFFER
2  inherits: \impostatyping
```

```
1  BORRER
2  inherits: \impostatyping
```

```
1 BUFFER
2 inherits: \impostatyping
```

```

1  inherits: \impostatyping
2  FILE
instances: typing LUA MP PARSEDXML TEX XML

```

2 FILE

1 inner
2 FILE

2 FILE

1 inner
2 FILE

<code>\typetypingfile</code> [...,.. ¹ ...,...] {...} 1 inherits: \impostatyping^{OPT} 2 FILE
<code>\typeXMLfile</code> [...,.. ¹ ...,...] {...} 1 inherits: \impostatyping^{OPT} 2 FILE
<code>\type</code> [...,.. ¹ ...,...] <<.. ² >> 1 inherits: \imp^{OPT}statype 2 ANGLES
<code>\TYPE</code> [...,.. ¹ ...,...] {...} 1 inherits: \imp^{OPT}statype 2 CONTENT
<code>\TYPE</code> [...,.. ¹ ...,...] <<.. ² >> 1 inherits: \imp^{OPT}statype 2 ANGLES
<code>\typ</code> [...,.. ¹ ...,...] <<.. ² >> 1 inherits: \imp^{OPT}statype 2 ANGLES
<code>\uchexnumber</code> {...} * NUMMER
<code>\uchexnumbers</code> {...} * NUMMER
<code>\uconvertnumber</code> {... ¹ } {... ² } 1 inherits: \convertinunero 2 NUMMER
<code>\uedcatcodecommand</code> \.. ¹ .. ² {... ³ } 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
<code>\ultimasottopagina</code>
<code>\undefinevalue</code> {...} * NAME
<code>\undepthed</code> {...} * CONTENT
<code>\underset</code> {... ¹ } {... ² } 1 TEXT 2 TEXT
<code>\undoassign</code> [... ¹] [... ² ...] 1 TEXT 2 KEY = VALUE
<code>\unexpandeddocumentvariable</code> {...} * KEY

<code>\unhhbox ¹... \with ²{...}</code> 1 CSNAME NUMBER 2 BEFEHL
<code>\unicodechar {...}</code> * TEXT
<code>\unicodehexnumber {...}</code> * NUMBER
<code>\unicodenummer {...}</code> * NUMBER
<code>\unihex {...}</code> * NUMBER
<code>\uniqueMPgraphic ¹{...} ²{...,..._{OPT}...,...}</code> 1 NAME 2 KEY = VALUE
<code>\uniqueMPgraphic [..._{OPT}...,...] ²{...}</code> 1 instance = metafun minifun _{OPT} extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metapost nofun scaledpost doublepost binarypost decimalpost simplefun descriptiontext = TEXT alternativetext = TEXT KEY = VALUE 2 NAME
<code>\uniqueMPpagegraphic ¹{...} ²{...,..._{OPT}...,...}</code> 1 NAME 2 KEY = VALUE
<code>\UNIT {...}</code> * CONTENT instances: unit
<code>\unit {...}</code> * CONTENT
<code>\unknownchar</code>
<code>\unprotect ... \protect</code>
<code>\unprotected ¹... \par</code> * CONTENT
<code>\unregisterhyphenationpattern ¹[...] ²[...]</code> 1 SPRACHE 2 TEXT
<code>\unregisterparwrapper {...}</code> * NAME
<code>\unspaceafter \¹... ²{...}</code> 1 CSNAME 2 TEXT
<code>\unspaceargument ¹... \to ²...</code> 1 TEXT 2 CSNAME

<code>\unspaced {...}</code> <code>* TEXT</code>
<code>\unspacestring ... \to ...</code> <code>1 TEXT</code> <code>2 CSNAME</code>
<code>\unstacking [...]</code> <code>* NUMMER</code>
<code>\unstackscripts</code>
<code>\untexargument {...} \to ...</code> <code>1 TEXT</code> <code>2 CSNAME</code>
<code>\untexcommand {...} \to ...</code> <code>1 CSNAME</code> <code>2 CSNAME</code>
<code>\upcomingnofitems {...}></code> <code>* NAME</code> <code>></code>
<code>\updateparagraphdemerits</code>
<code>\updateparagraphpenalties</code>
<code>\updateparagraphproperties</code>
<code>\updateparagraphshapes</code>
<code>\uppercased {...}</code> <code>* TEXT</code>
<code>\uppercasestring ... \to ...</code> <code>1 TEXT</code> <code>2 CSNAME</code>
<code>\uppercasing</code>
<code>\upperlefthdoubleninequote</code>
<code>\upperlefthdoublesixquote</code>
<code>\upperleftsingleninequote</code>
<code>\upperleftsinglesixquote</code>
<code>\upperrighthdoubleninequote</code>
<code>\upperrighthdoublesixquote</code>
<code>\upperrightsingleninequote</code>
<code>\upperrightsinglesixquote</code>

\url [...] * NAME
\usablocco [... ¹ ,...] [... ² ,...] [... ³ ,...,...] 1 NAME 2 NAME 3 criterio = testo ABSCHNITT
\usacartella [...*,...] * PATH
\usadocumentoesterno [... ¹] [... ²] [... ³] 1 NAME 2 FILE 3 TEXT
\usafiguraesterna [... ¹] [... ²] [... ³] [... ⁴ ,...,...] 1 NAME 2 FILE 3 NAME 4 inherits: \setupexternalfigure
\usaJSscripts [... ¹] [... ² ,...] 1 FILE 2 NAME
\usamodulo [... ¹] [... ² ,...] [... ³ ,...,...] 1 m p s x t 2 FILE 3 KEY = VALUE
\usasimboli [...*] * FILE
\usaURL [... ¹] [... ²] [... ³] [... ⁴] 1 NAME 2 URL 3 FILE 4 TEXT
\usaur1 [... ¹] [... ²] [... ³] [... ⁴] 1 NAME 2 URL 3 FILE 4 TEXT
\usealignparameter *.. * CSNAME
\useblankparameter *.. * CSNAME
\usebodyfont [...*,...] * inherits: \impostafontdeltesto
\usebodyfontparameter *.. * CSNAME
\usebtxdataset [... ¹] [... ²] [... ³ ,...,...] 1 NAME 2 FILE 3 specification = NAME

\usebtxdefinitions [...] * FILE
\usecitation [...] * REFERENCE
\usecitation {...} * REFERENCE
\usecolors [...] * FILE
\useCOMANDOcolorparameter {...} * KEY
\useCOMANDObstyleandcolor {...} {...} 1 KEY 2 KEY
\useCOMANDObstyleparameter {...} * KEY
\usecomponent [...] * FILE
\usedadaptivealternative
\usedadaptivebox
\usedadaptivecolor
\usedadaptivedepth
\usedadaptiveheight
\usedadaptivesize
\usedadaptiveline
\usedadaptivetotal
\usedadaptivewidth
\usedummycolorparameter {...} * KEY
\usedummystyleandcolor {...} {...} 1 KEY 2 KEY
\usedummystyleparameter {...} * KEY
\useenvironment [...] * FILE

\useexternalrendering [...] ¹ [...] ² [...] ³ [...] ⁴ 1 NAME 2 NAME 3 FILE 4 auto embed
\usefigurebase [...] * reimposta FILE
\usefile [...] ¹ [...] ² [...] ³ 1 NAME 2 FILE 3 TEXT
\usefontpath [...;...] * PATH
\usegridparameter *.. * CSNAME
\usehyphensparameter *.. * CSNAME
\useindentingparameter *.. * CSNAME
\useindentnextparameter *.. * CSNAME
\useinterlinespaceparameter *.. * CSNAME
\uselanguageparameter *.. * CSNAME
\uselist [...] ¹ [...] ² [...] ³ 1 NAME 2 FILE 3 TEXT
\uselua module [...] * FILE
\uselua table *.. * CSNAME
\useMPenvironmentbuffer [...] * NAME
\useMPgraphic {...} ¹ {..., ² ...} 1 NAME 2 KEY = VALUE
\useMPgraphic [..., ¹ ...] ¹ {...} ² 1 instance = metafun minifun extrafun lessfun scaledfun doublefun binaryfun decimalfun positfun mprun metafont minifont extrafont lessfont scaledfont doublefont binaryfont decimalfont simplefont descriptiontext = TEXT alternativetext = TEXT 2 NAME

<code>\useMPLibrary [...]</code> <code>* FILE</code>
<code>\useMPPrun {...} {...}</code> <code>1 NAME</code> <code>2 NUMMER</code>
<code>\useMPvariables [...]¹ [...;²...]</code> <code>1 NAME</code> <code>2 KEY</code>
<code>\usemathstyleparameter \...</code> <code>* CSNAME</code>
<code>\useproduct [...]</code> <code>* FILE</code>
<code>\useprofileparameter \...</code> <code>* CSNAME</code>
<code>\useproject [...]</code> <code>* FILE</code>
<code>\userferenceparameter \...</code> <code>* CSNAME</code>
<code>\userregister [...]¹ [...]² [...]³ [...]⁴</code> <code>1 NAME</code> <code>2 FILE</code> <code>3 NAME</code> <code>4 TEXT</code>
<code>\userpagenumber</code>
<code>\usesetupparameter \...</code> <code>* CSNAME</code>
<code>\usestaticMPfigure [...,¹...,...]^{OPT} [...]²</code> <code>1 inherits: \setupscale</code> <code>2 NAME</code>
<code>\usesubpath [...,*,...]</code> <code>* PATH</code>
<code>\usetexmodule [...]¹ [...;²...] [...;³...,...]^{OPT}</code> <code>1 m p s x t</code> <code>2 FILE</code> <code>3 KEY = VALUE</code>
<code>\setransliteration [...,*,...]</code> <code>* FILE</code>
<code>\usetypescript [...]¹ [...]² [...]³</code> <code>1 serif sans mono math⁰handwriting calligraphy casual tutti</code> <code>2 NAME fallback implicit dtp simple</code> <code>3 dimensione nome</code>
<code>\usetypescriptfile [...]</code> <code>* reimposta FILE</code>

$\backslash$ vspace [¹ ...] [² ...] 1 NAME OPT OPT 2 NAME
$\backslash$ vspacing [...,*...] * preferenza stessa ^{OPT} pagina max forza enable disattiva nobianco impaccato dietro sovrapponi sempre mantieni weak strong implicito prima tra dopo fisso flessibile nessuno piccolo medio grande riga mezzariga halflinebefore halflineafter quarterline formula bianco altezza profondita standard NUMMER*piccolo NUMMER*medio NUMMER*grande NUMMER*riga NUMMER*mezzariga NUMMER*quarterline NUMMER*formula NUMMER*bianco NUMMER*altezza NUMMER*profondita category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME
$\backslash$ WidthSpanningText { ¹ ...} { ² ...} { ³ ...} 1 TEXT 2 DIMENSION 3 FONT
$\backslash$ wdofstring {...} * TEXT
$\backslash$ widthhofstring {...} * TEXT
$\backslash$ widthspanningtext { ¹ ...} { ² ...} { ³ ...} 1 TEXT 2 DIMENSION 3 FONT
$\backslash$ wipedtokens { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash$ wipetokens { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash$ withoutpt {...} * DIMENSION
$\backslash$ words {...} * TEXT
$\backslash$ wordtonumber { ¹ ...} { ² ...} 1 uno due tre quattro cinque 2 TEXT
$\backslash$ wrapupparinsert
$\backslash$ writedatatolist [¹ ...] [..., ² ...,...] ^{OPT} [..., ³ ...,...] ^{OPT} 1 LISTE 2 inherits: \impostaelenco 3 KEY = VALUE
$\backslash$ writestatus { ¹ ...} { ² ...} 1 TEXT 2 TEXT
$\backslash$ XETEX
$\backslash$ XeTeX

\defconvertedargument \ ¹ ... { ² ...} 1 CSNAME 2 TEXT
\xmladdindex { [*] ...} * NODE
\xmlafterdocumentsetup { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 SETUP 3 SETUP
\xmlaftersetup { ¹ ...} { ² ...} 1 SETUP 2 SETUP
\xmlall { ¹ ...} { ² ...} 1 NODE 2 LPATH
\xmlappenddocumentsetup { ¹ ...} { ² ...} 1 NAME 2 SETUP
\xmlappendsetup { [*] ...} * SETUP
\xmlapplyselectors { [*] ...} * NODE
\xmlatt { ¹ ...} { ² ...} 1 NODE 2 NAME
\xmlattdef { ¹ ...} { ² ...} { ³ ...} 1 NODE 2 NAME 3 TEXT
\xmlattribute { ¹ ...} { ² ...} { ³ ...} 1 NODE 2 LPATH 3 NAME
\xmlattributedef { ¹ ...} { ² ...} { ³ ...} { ⁴ ...} 1 NODE 2 LPATH 3 NAME 4 TEXT
\xmlbadinclusions { [*] ...} * NODE
\xmlbeforedocumentsetup { ¹ ...} { ² ...} { ³ ...} 1 NAME 2 SETUP 3 SETUP
\xmlbeforesetup { ¹ ...} { ² ...} 1 SETUP 2 SETUP

\xmlchainatt {...} {...} 1 NODE 2 NAME
\xmlchainattdef {...} {...} {...} 1 NODE 2 NAME 3 TEXT
\xmlchecknamespace {...} {...} {...} 1 NODE 2 NAME 3 NAME
\xmlcommand {...} {...} {...} 1 NODE 2 LPATH 3 XMLSETUP
\xmlconcat {...} {...} {...} 1 NODE 2 LPATH 3 TEXT
\xmlconcatrange {...} {...} {...} {...} {...} 1 NODE 2 LPATH 3 TEXT 4 FIRST 5 LAST
\xmlcontext {...} {...} 1 NODE 2 LPATH
\xmlcount {...} {...} 1 NODE 2 LPATH
\xmldata {...} * TEXT
\xmldefaulttotext {...} * NODE
\xmldelete {...} {...} 1 NODE 2 LPATH
\xmldepth {...} * NODE
\xmldirect {...} * NODE
\xmldirectives {...} * NODE
\xmldirectivesafter {...} * NODE

```
\xmldirectivesbefore {...}  
* NODE
```

```
\xmldisplayverbatim {...}  
* NODE
```

```
\xmldocument
```

```
\xmldoif {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE
```

```
\xmldoifatt {...} {...} {...} {...}  
1 NODE  
2 TEXT  
3 TEXT  
4 TRUE
```

```
\xmldoifelse {...} {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelseatt {...} {...} {...} {...} {...}  
1 NODE  
2 TEXT  
3 TEXT  
4 TRUE  
5 FALSE
```

```
\xmldoifelseempty {...} {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelseselfempty {...} {...} {...}  
1 NODE  
2 TRUE  
3 FALSE
```

```
\xmldoifelsesetText {...} {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

```
\xmldoifelsevalue {...} {...} {...} {...}  
1 CATEGORY  
2 NAME  
3 TRUE  
4 FALSE
```

```
\xmldoifempty {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE
```

```
\xmldoifemptyelse {...} {...} {...} {...}  
1 NODE  
2 LPATH  
3 TRUE  
4 FALSE
```

\xmldoifnot { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 TRUE
\xmldoifnotatt { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 TEXT 3 TEXT 4 TRUE
\xmldoifnotempty { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 TRUE
\xmldoifnotselfempty { ¹ ..} { ² ..} 1 NODE 2 TRUE
\xmldoifnottext { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 TRUE
\xmldoifselfempty { ¹ ..} { ² ..} 1 NODE 2 TRUE
\xmldoifselfemptyelse { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 TRUE 3 FALSE
\xmldoiftext { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 TRUE
\xmldoiftextelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 LPATH 3 TRUE 4 FALSE
\xmldoifvalueelse { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 CATEGORY 2 NAME 3 TRUE 4 FALSE
\xmlelement { ¹ ..} { ² ..} 1 NODE 2 NUMMER
\xmlfileline { [*] ..} * NODE
\xmlfilename { [*] ..} * NODE
\xmlfilter { ¹ ..} { ² ..} 1 NODE 2 LPATH

\xmlfirst {...} {...} 1 NODE 2 LPATH
\xmlflush {...} * NODE
\xmlflushcontext {...} * NODE
\xmlflushdocumentsetups {...} {...} 1 NAME 2 SETUP
\xmlflushlinewise {...} * NODE
\xmlflushpure {...} * NODE
\xmlflushsetups {...} * NAME
\xmlflushspacewise {...} * NODE
\xmlflushtext {...} * NODE
\xmlfunction {...} {...} 1 NODE 2 NAME
\xmlinclude {...} {...} {...} 1 NODE 2 LPATH 3 NAME
\xmlincludeoptions {...} {...} {...} {..., 1 NODE 2 LPATH 3 NAME 4 recurse prepare rootpath resolve basename
\xmlinclusion {...} * NODE
\xmlinclusionbase {...} * NODE
\xmlinclusions {...} * NODE
\xmlindex {...} {...} {...} 1 NODE 2 LPATH 3 NUMMER
\xmlinfo {...} * NODE

\xmlinjector {...} * NAME
\xmllineprettyprint {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context nessuno NAME
\xmllineprettyprinttext {...} {...} 1 NODE 2 mp lua xml parsed-xml nested tex context nessuno NAME
\xmllineverbatim {...} * NODE
\xmlinstalldirective {...} {...} 1 NAME 2 CSNAME
\xmllast {...} {...} 1 NODE 2 LPATH
\xmllastatt
\xmllastmatch
\xmllastpar
\xmlload {...} {...} 1 NAME 2 FILE
\xmlloadbuffer {...} {...} 1 BUFFER 2 NAME
\xmlloaddata {...} {...} 1 NAME 2 TEXT
\xmlloaddirectives {...} * FILE
\xmlloadfile {...} {...} 1 NAME 2 FILE
\xmlloadonly {...} {...} {...} 1 NAME 2 FILE 3 XMLSETUP
\xmlmain {...} * NODE
\xmlmapval {...} {...} {...} 1 CATEGORY 2 NAME 3 TEXT

\xmlmapvalue { ¹ ..} { ² ..} { ³ ..} 1 CATEGORY 2 NAME 3 TEXT
\xmlmatch { [*] ..} * NODE
\xmlname { [*] ..} * NODE
\xmlnamespace { [*] ..} * NODE
\xmlnonspace { ¹ ..} { ² ..} 1 NODE 2 LPATH
\xmlpar { ¹ ..} { ² ..} 1 NODE 2 NAME
\xmlparam { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 NAME
\xmlpath { [*] ..} * NODE
\xmlpos { [*] ..} * NODE
\xmlposition { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 LPATH 3 NUMMER
\xmlprependdocumentsetup { ¹ ..} { ² ..} 1 NAME 2 SETUP
\xmlprependsetup { [*] ..} * SETUP
\xmlprettyprint { ¹ ..} { ² ..} 1 NODE 2 mp lua xml parsed-xml nested tex context nessuno NAME
\xmlprettyprinttext { ¹ ..} { ² ..} 1 NODE 2 mp lua xml parsed-xml nested tex context nessuno NAME
\xmlprocess { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 FILE 3 XMLSETUP

\xmlprocessbuffer { ¹ ..} { ² ..} { ³ ..} 1 BUFFER 2 NAME 3 XMLSETUP
\xmlprocessdata { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 TEXT 3 XMLSETUP
\xmlprocessfile { ¹ ..} { ² ..} { ³ ..} 1 NAME 2 FILE 3 XMLSETUP
\xmlpure { ¹ ..} { ² ..} 1 NODE 2 LPATH
\xmlpushmatch ... \xmlpopmatch
\xmlraw { [*] ..} * NODE
\xmlrefatt { ¹ ..} { ² ..} 1 NODE 2 NAME
\xmlregisterdocumentsetup { ¹ ..} { ² ..} 1 NAME 2 SETUP
\xmlregisterreddocumentsetups { ¹ ..} { ² ..} 1 NAME 2 SETUP
\xmlregisteredsetups
\xmlregisterns { ¹ ..} { ² ..} 1 NAME 2 URL
\xmlregistersetup { [*] ..} * SETUP
\xmlremapname { ¹ ..} { ² ..} { ³ ..} { ⁴ ..} 1 NODE 2 LPATH 3 NAME 4 NAME
\xmlremapnamespace { ¹ ..} { ² ..} { ³ ..} 1 NODE 2 NAME 3 NAME
\xmlremoveddocumentsetup { ¹ ..} { ² ..} 1 NAME 2 SETUP
\xmlremovesetup { [*] ..} * SETUP

\xmlresetdocumentsetups {...} * NAME
\xmlresetinjectors
\xmlresetsetups
\xmls {...} {...} 1 NODE 2 SETUP
\xmlsave {...} {...} 1 NODE 2 FILE
\xmlsetatt {...} {...} {...} 1 NODE 2 NAME 3 TEXT
\xmlsetAttribute {...} {...} {...} {...} 1 NODE 2 LPATH 3 NAME 4 TEXT
\xmlsetentity {...} {...}
\xmlsetfunction {...} {...} {...} 1 NODE 2 LPATH 3 LUAFUNCTION
\xmlsetinjectors [...;...]
\xmlsetpar {...} {...} {...} 1 NODE 2 NAME 3 TEXT
\xmlsetparam {...} {...} {...} {...} 1 NODE 2 LPATH 3 NAME 4 TEXT
\xmlsetsetup {...} {...} {...} 1 NAME 2 LPATH 3 SETUP
\xmlsetup {...} {...}
\xmlshow {...}

\xmlsnippet {...} {...}

1 NODE
2 NUMMER

\xmlstartraw ... \xmlstopraw

\xmlstarttiming ... \xmlstoptiming

\xmlstrip {...} {...}

1 NODE
2 LPATH

\xmlstripanywhere {...} {...}

1 NODE
2 LPATH

\xmlstripeverything {...} {...}

1 NODE
2 LPATH

\xmlstripnolines {...} {...}

1 NODE
2 LPATH

\xmlstripped {...} {...}

1 NODE
2 LPATH

\xmlstrippednolines {...} {...}

1 NODE
2 LPATH

\xmltag {...}

* NODE

\xmltexatt {...} {...}

1 NODE
2 NAME

\xmltexentity {...} {...}

1 NAME
2 TEXT

\xmltext {...} {...}

1 NODE
2 LPATH

\xmltobuffer {...} {...} {...}

1 NODE
2 LPATH
3 BUFFER

\xmltobuffertextonly {...} {...} {...}

1 NODE
2 LPATH
3 BUFFER

\xmltobufferverbose {...} {...} {...}

1 NODE
2 LPATH
3 BUFFER

\xmltofile {...} {...} {...}

1 NODE
2 LPATH
3 FILE

\xmltoparameters {...}

* NODE

\xmlval {...} {...} {...}

1 CATEGORY
2 NAME
3 TEXT

\xmlvalue {...} {...} {...}

1 CATEGORY
2 NAME
3 TEXT

\xmlverbatim {...}

* NODE

\xmlw {...} {...}

1 SETUP
2 NODE

\xsplitstring {...} {...}

1 CSNAME
2 TEXT

\xypos {...}


* NAME

\yiddishnumerals {...}

* NUMMER

\zeronumberconversion {...}

* NUMMER

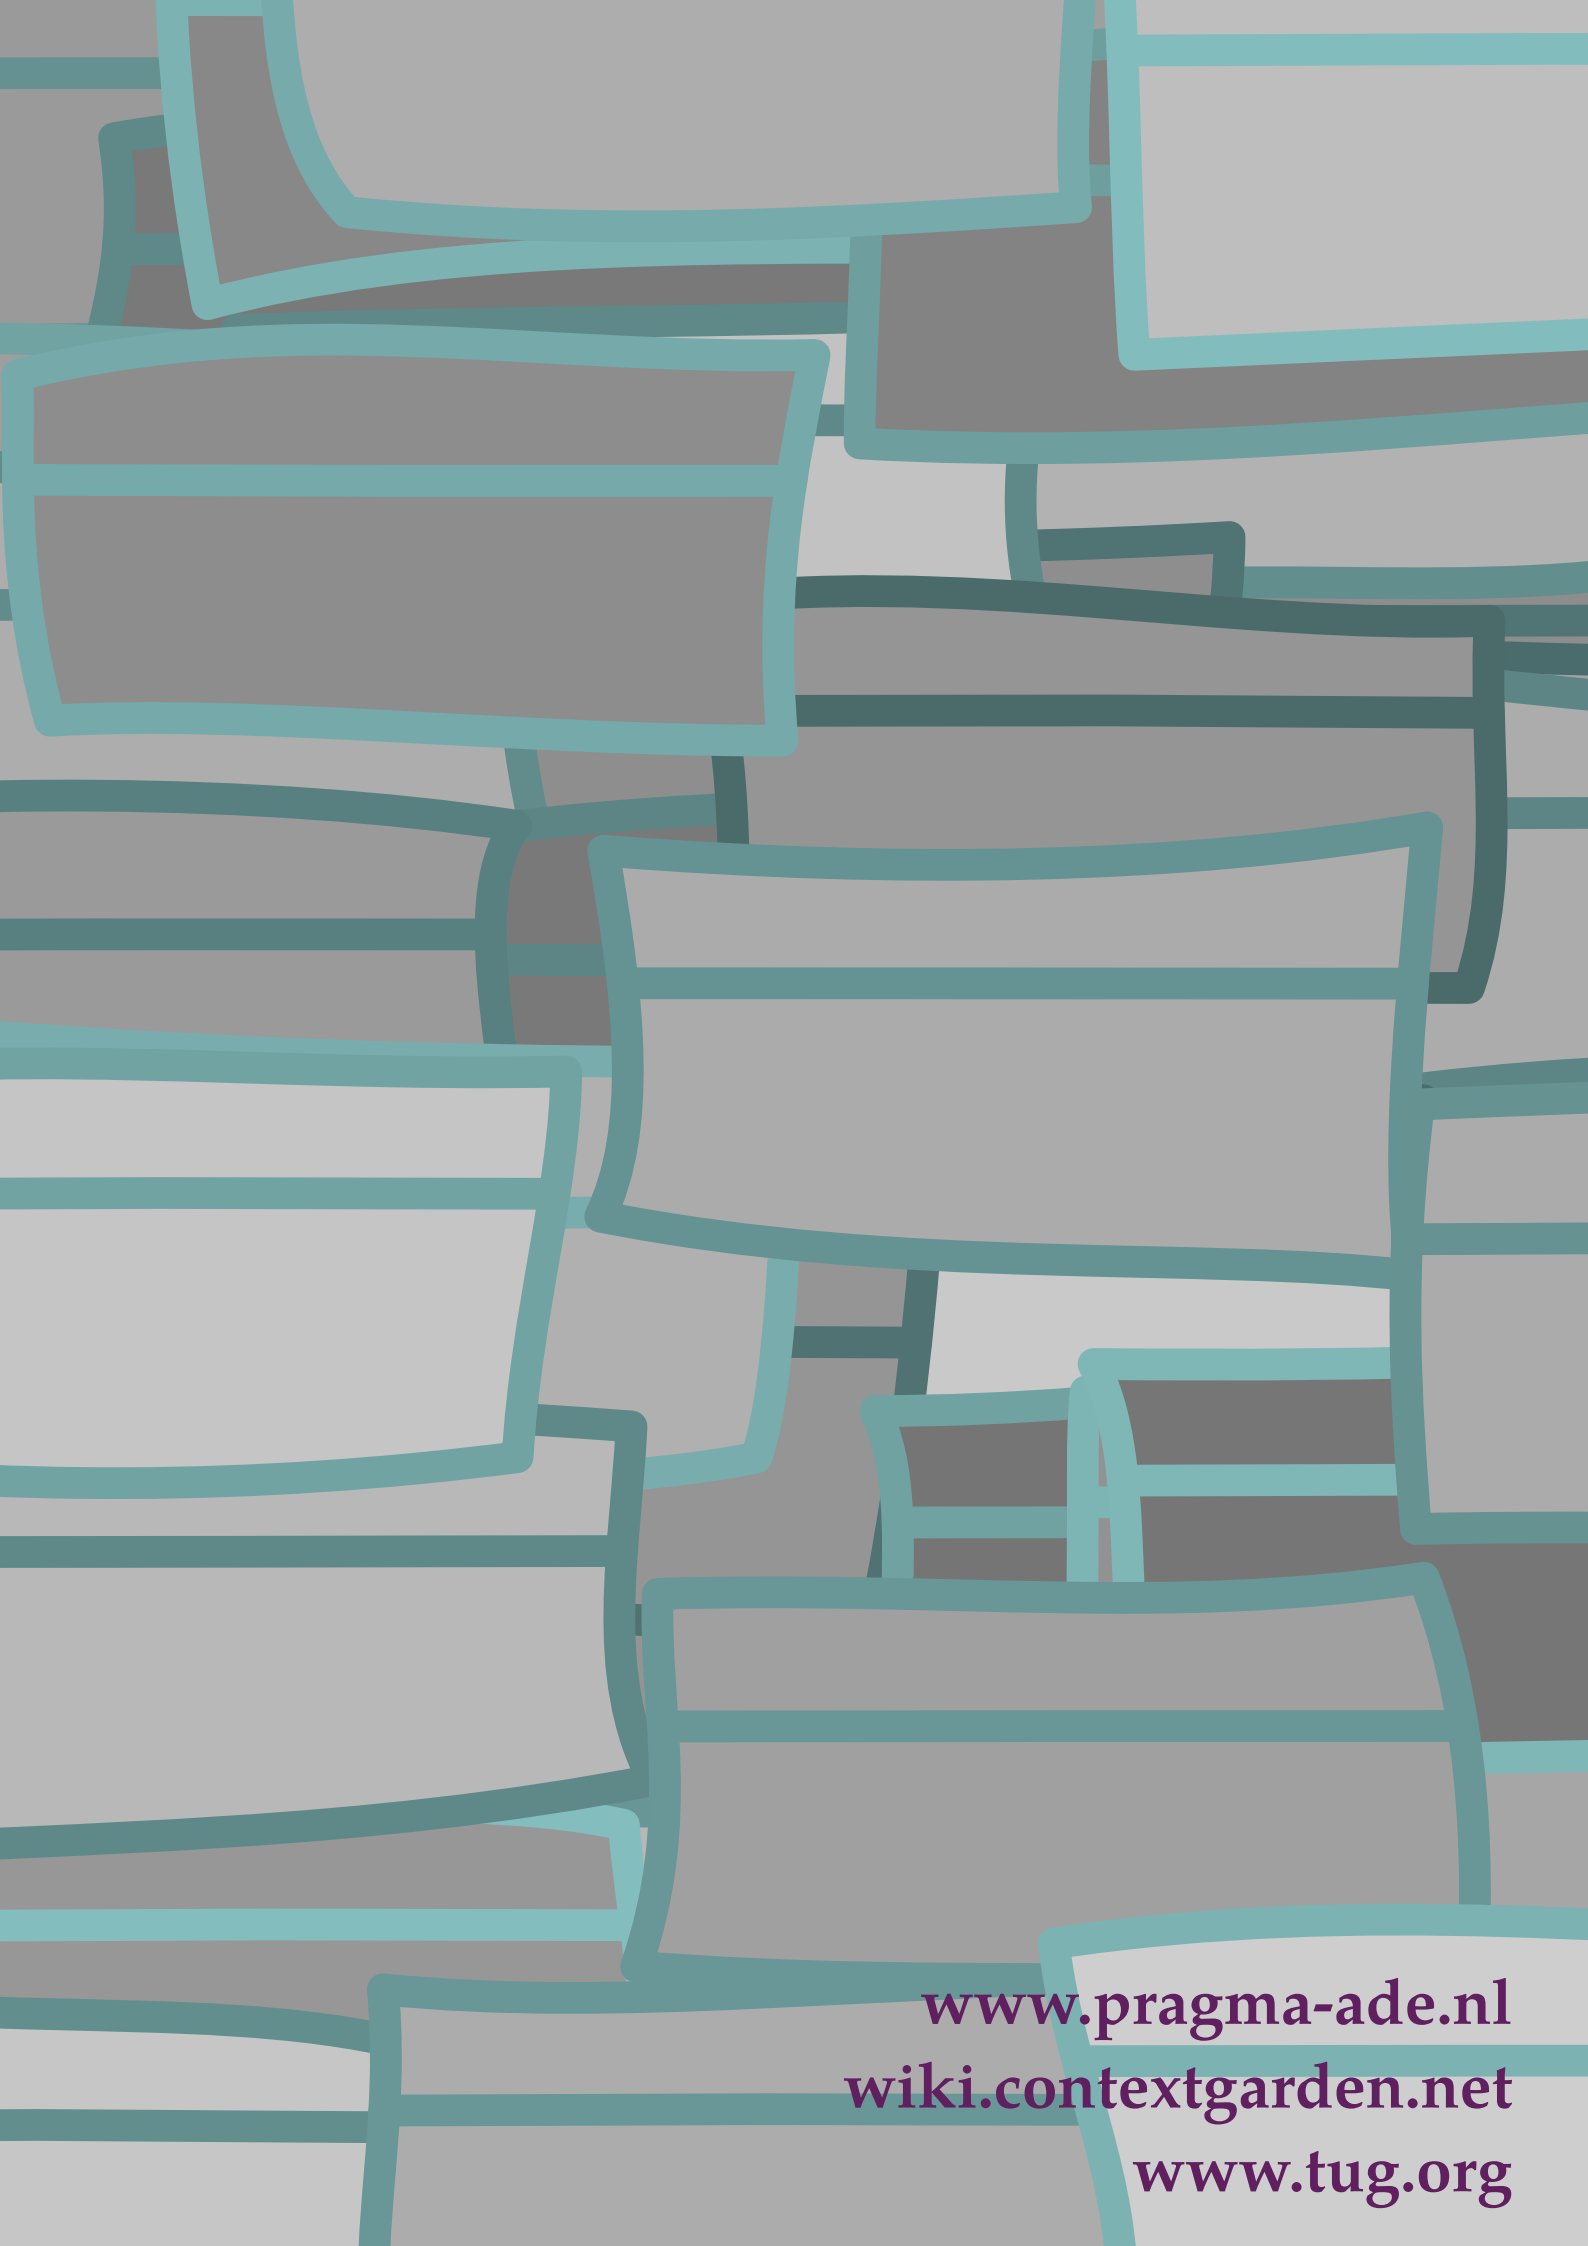

www.pragma-ade.nl
wiki.contextgarden.net
www.tug.org