

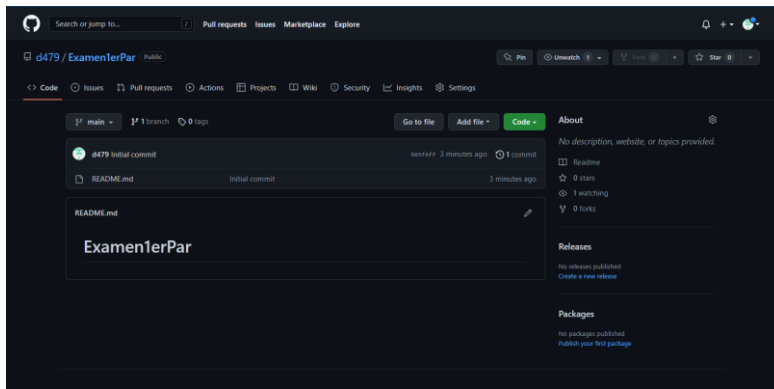
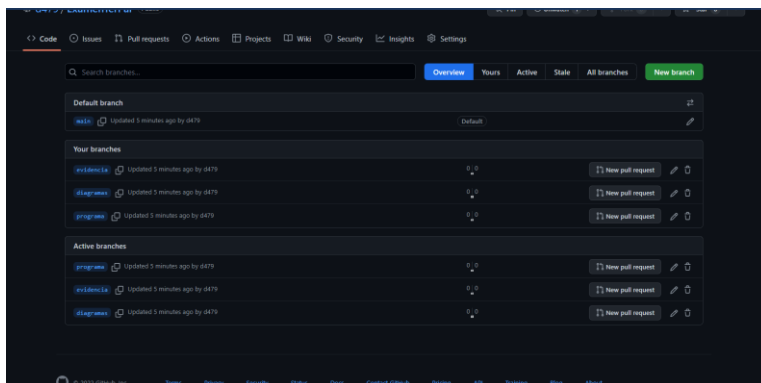


1.- Creación del repositorio

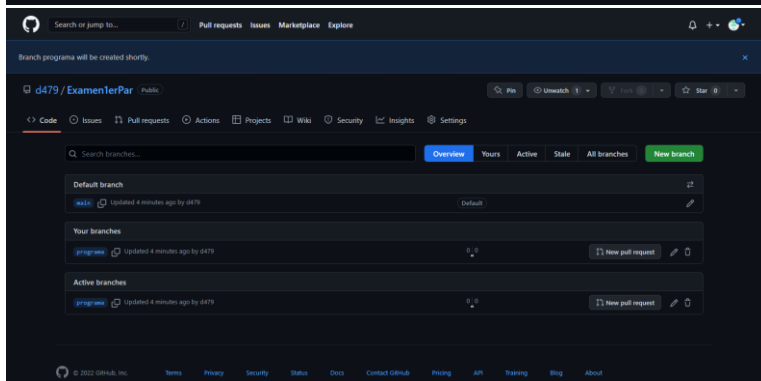

2.- Creación de las 3 ramas

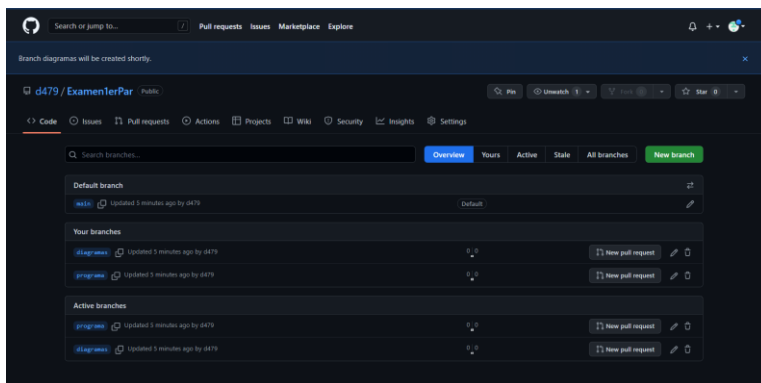

3.- GitBash. Clonamos el repositorio que tenemos en github

```
MINGW64~/Users/david/Documents/Github/Examen1erPar
david@Dave-R MINGW64 ~ (master)
$ cd Documents

david@Dave-R MINGW64 ~/Documents (master)
$ cd Github

david@Dave-R MINGW64 ~/Documents/Github (master)
$ git remote add origin https://github.com/Flores1904/Examen1erPar.git
error: remote origin already exists.

david@Dave-R MINGW64 ~/Documents/Github (master)
$ git clone https://github.com/Flores1904/Examen1erPar.git
Cloning into 'Examen1erPar'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.

david@Dave-R MINGW64 ~/Documents/Github (master)
$ cd Examen1erPar

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (main)
$ git checkout -b evidencia
```

```
MINGW64~/Users/david/Documents/Github/Examen1erPar
david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (evidencia)
$ git init
Reinitialized existing Git repository in C:/Users/david/Documents/Github/Examen1erPar/.git/

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (evidencia)
$ git add .

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (evidencia)
$ git commit -m "Subiendo"
[evidencia e0ee902] Subiendo
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Evidencias.pdf

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (evidencia)
$ git push -u origin evidencia
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 443.88 KiB | 20.18 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Flores1904/Examen1erPar.git
03ab541..e0ee902 evidencia -> evidencia

MINGW64~/Users/david/Documents/Github/Examen1erPar
branch 'evidencia' set up to track 'origin/evidencia'.

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (evidencia)
$ git checkout -b diagramas
Switched to a new branch 'diagramas'

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git init
Reinitialized existing Git repository in C:/Users/david/Documents/Github/Examen1erPar/.git/

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git commit -m "Subiendo"
On branch diagramas
Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        deleted:    Evidencias.pdf

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        DiagramaDeActividades.mdj
        DiagramaDeClases.mdj
        Entrega de comida.bpm
```

```
MINGW64~/Users/david/Documents/Github/Examen1erPar
david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git push -u origin diagramas
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Flores1904/Examen1erPar.git
03ab541..e0ee902 diagramas -> diagramas
branch 'diagramas' set up to track 'origin/diagramas'.

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git status
On branch diagramas
Your branch is up to date with 'origin/diagramas'.

Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        deleted:    Evidencias.pdf

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        DiagramaDeActividades.mdj
        DiagramaDeClases.mdj
        Entrega de comida.bpm

MINGW64~/Users/david/Documents/Github/Examen1erPar (diagramas)
$ git add .
warning: in the working copy of 'DiagramaDeActividades.mdj', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'DiagramaDeClases.mdj', LF will be replaced by CRLF the next time Git touches it

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git push -u origin diagramas
Everything up-to-date
branch 'diagramas' set up to track 'origin/diagramas'.

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git init
Reinitialized existing Git repository in C:/Users/david/Documents/Github/Examen1erPar/.git/

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git commit -m "Archivos subidos"
[diagramas caa0557] Archivos subidos
4 files changed, 8569 insertions(+)
create mode 100644 DiagramaDeActividades.mdj
create mode 100644 DiagramaDeClases.mdj
create mode 100644 Entrega de comida.bpm
```

```
MINGW64~/Users/david/Documents/Github/Examen1erPar
create mode 100644 Entrega de comida.bpm
delete mode 100644 Evidencias.pdf

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git add .

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git status
On branch diagramas
Your branch is ahead of 'origin/diagramas' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git push -u origin diagramas
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 4 threads
Compressing objects: 100% (5/5), 27.02 KiB | 4.50 MiB/s, done.
Total 5 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/Flores1904/Examen1erPar.git

MINGW64~/Users/david/Documents/Github/Examen1erPar
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/Flores1904/Examen1erPar.git
e0ee902..caa0557 diagramas -> diagramas
branch 'diagramas' set up to track 'origin/diagramas'.

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (diagramas)
$ git checkout -b programa
Switched to a new branch 'programa'

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (programa)
$ git init
Reinitialized existing Git repository in C:/Users/david/Documents/Github/Examen1erPar/.git/




david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (programa)
$ git add .

david@Dave-R MINGW64 ~/Documents/Github/Examen1erPar (programa)
$ git status
On branch programa
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   Banco.java
        new file:   Cliente.java
```


```
MINGW64/c/Users/david/Documents/Github/Examen1erPar
$ git status
On branch programa
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   Banco.java
        new file:   Cliente.java
        deleted:    DiagramaDeActividades.mdj
        deleted:    DiagramaDeClases.mdj
        deleted:    Entrega de comida.bpm
        new file:   EntregaComida.java
        new file:   Main.java
        new file:   Repartidor.java

david@dave-R MINGW64 ~/Documents/Github/Examen1erPar (programa)
$ git push -u origin programa
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Flores1904/Examen1erPar.git
   03ab541..caa0557  programa -> programa
branch 'programa' set up to track 'origin/programa'.

david@dave-R MINGW64 ~/Documents/Github/Examen1erPar (programa)
```

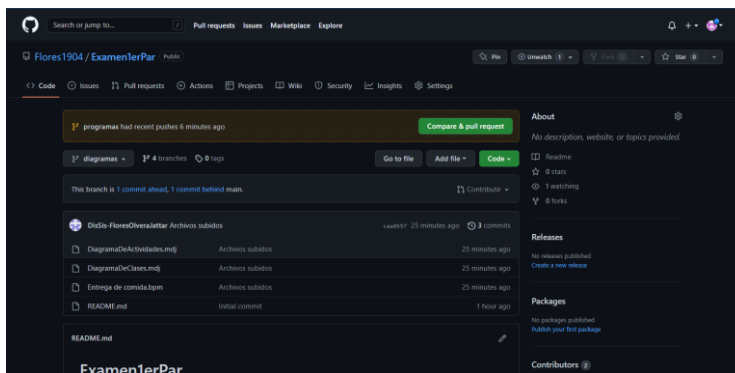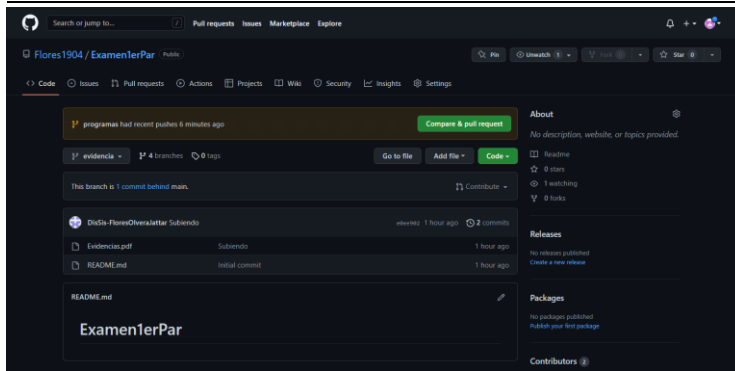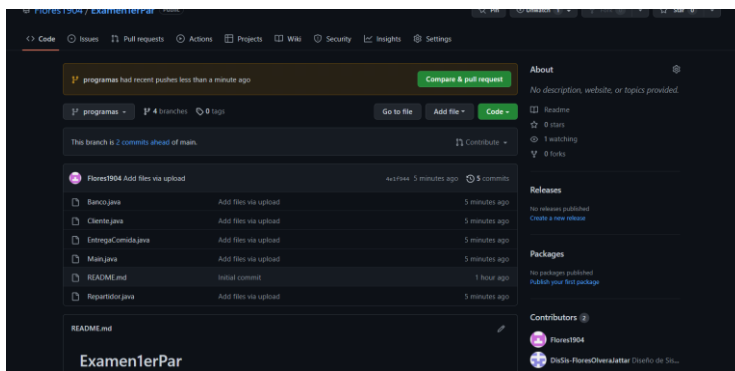

Código

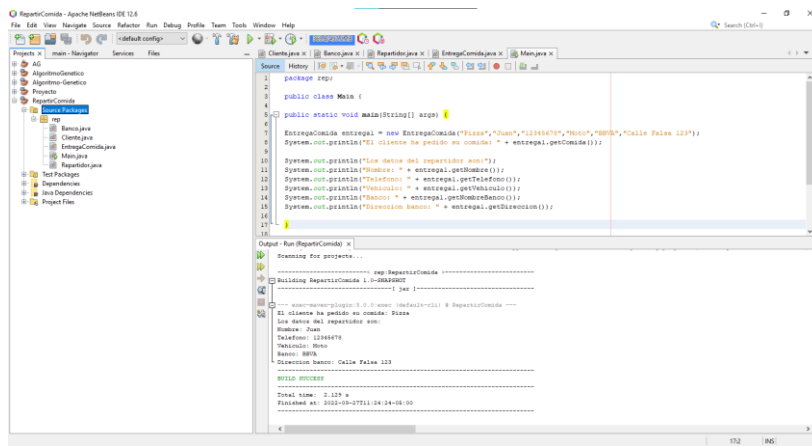

```
1 package rep;
2
3 public class Main {
4
5     public static void main(String[] args) {
6
7         EntregaComida entrega1 = new EntregaComida("Piza", "Juan", "12345678", "Bono", "BBB", "Calle Paise 123");
8         System.out.println("El cliente ha pedido su comida" + entrega1.getComida());
9
10        System.out.println("Los datos del repartidor son:");
11        System.out.println("Nombre: " + entrega1.getRepartidor());
12        System.out.println("Telefono: " + entrega1.getTelefono());
13        System.out.println("Vehiculo: " + entrega1.getVehiculo());
14        System.out.println("Banco: " + entrega1.getBanco());
15        System.out.println("Direccion Banco: " + entrega1.getDireccion());
16    }
17 }
```

Diagramas

