
BiblioteQ

A Library Application

Document Version 1.00

Table of Contents

Introduction.....	3
Accessing an Existing SQLite Database.....	4
Connecting to a Database.....	5
Creating a PostgreSQL Database.....	6
Creating an SQLite Database.....	7
Disconnecting from a Database.....	8
Translations.....	9

Introduction


The purpose of this document is to detail all of the functionality of BiblioteQ.

BiblioteQ is a complex, elegant, highly-configurable, and mature library application. The application supports large, medium, and small institutions as well as individuals.

BiblioteQ should be functional on any operating system where Qt 4.8.x (or Qt 5.x), SQLite, and YAZ are supported. Additionally, BiblioteQ also supports the PostgreSQL database engine.


The source is readily available at <https://github.com/textbrowser/biblioteq>.

Installation instructions are not described in this document. Please refer to the Administrator Guide document for installation information.

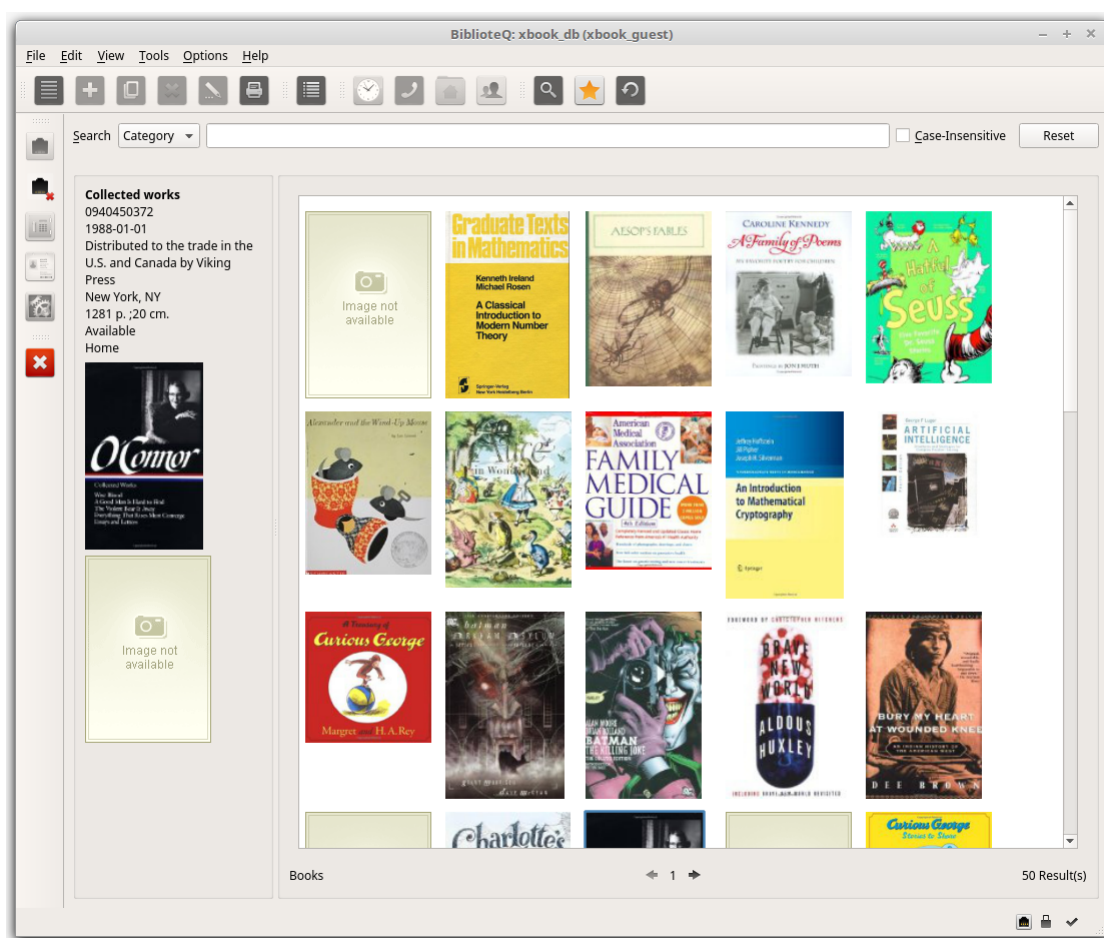


Accessing an Existing SQLite Database

An existing SQLite database file may be opened via two methods. The first method involves the Recent SQLite Files option of the File menu.

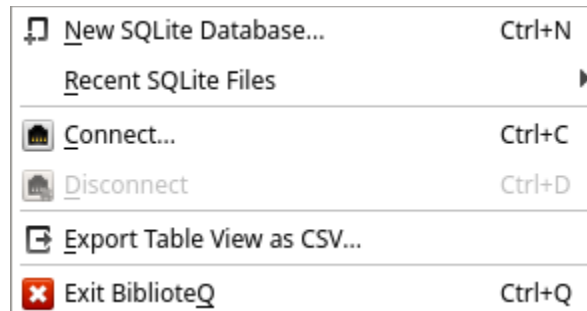

The Recent SQLite Files sub-menu contains a list of BiblioteQ's recently-accessed SQLite files. If an SQLite file is selected, the specified SQLite database is opened. Please note that BiblioteQ will first close an existing database, if one is open, before opening the new one. A Clear option is also included in the sub-menu. If Clear is activated, the list of the recently-accessed SQLite files is cleared.


The second method of accessing an SQLite database involves the Branch Selection dialog. The dialog may be accessed via the Connect option of the File menu.

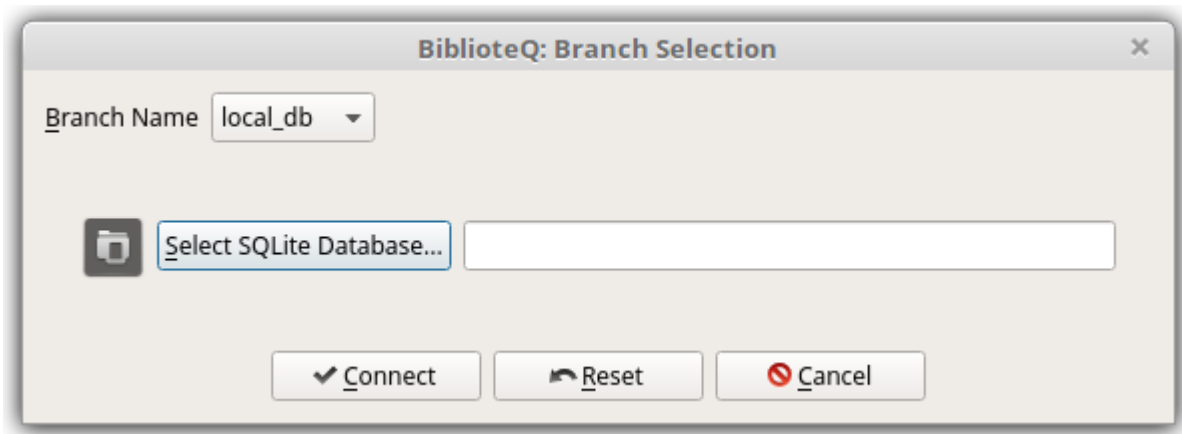


After opening the Branch Selection dialog, select local_db as the Branch Name in order to prepare the dialog for accessing SQLite databases. Afterwards, click on the Select SQLite Database button to launch a file-selection dialog.

Connecting to a Database

BiblioteQ supports both the PostgreSQL and the SQLite database engines. This section will cover the details involved in connecting to a PostgreSQL database.

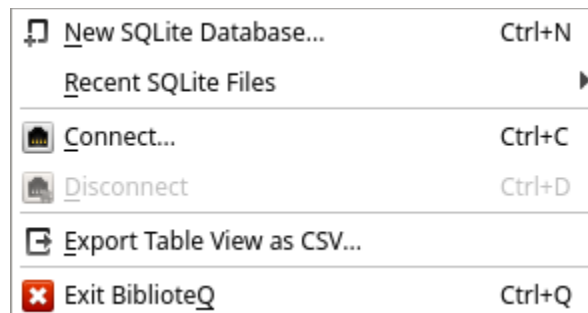

Click the Connect option of the File menu.

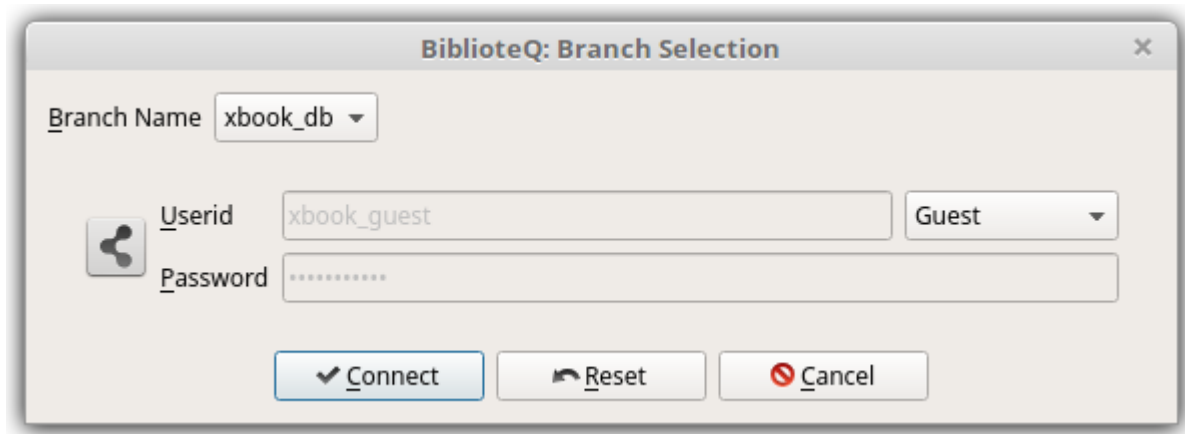

Then, select the appropriate non-local_db Branch Name if one is available. Provide the Password and Userid information, if applicable, and press the Connect button.

Note: The sections Accessing an Existing SQLite Database and Creating an SQLite Database cover the details of accessing and creating SQLite databases, respectively.


Creating a PostgreSQL Database

BiblioteQ supports PostgreSQL 8.x, 9.x, and newer. Please follow the PostgreSQL-provided documentation for installing PostgreSQL. After installing the required PostgreSQL packages, please perform the following operations:

1. Create the xbook_db database via `createdb xbook_db -E UTF8` or via the PostgreSQL-recommended procedure. Please note that xbook_db is only a suggestion.
2. Execute `createlang plpgsql -d xbook_db` or the PostgreSQL recommended procedure for adding a new programming language to the xbook_db database.
3. If desired, replace all instances of the default administrator xbook_admin in postgresql_create_schema.sql file.
4. Log into your PostgreSQL xbook_db database and load the postgresql_create_schema.sql file via `\i postgresql_create_schema.sql`.

Creating an SQLite Database

A new BiblioteQ SQLite database file may be created via the New SQLite Database option of the File menu.

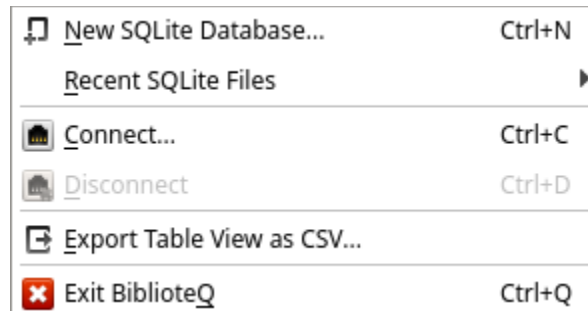


After the option is selected, a file-selection dialog is displayed. An existing or a new file may be specified. A confirmation dialog is displayed if an existing file is selected.

Once the SQLite database file has been initialized, BiblioteQ will open it. If a database is already open, a confirmation prompt is displayed. If confirmed, the current database is closed and the newly-created database is opened.

Disconnecting from a Database

To disconnect from a connected database, click the File menu. Then click the Disconnect option.

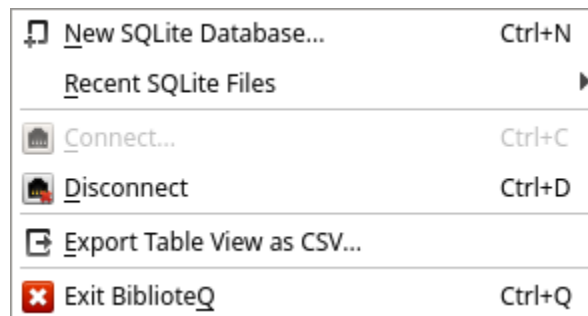

Translations

Translations are incomplete. Translating BiblioteQ is quite simple. Please download and install Qt from <https://download.qt.io>, download BiblioteQ's source, and become an expert in Qt's Linguist. Linguist documentation is available at <https://doc.qt.io/qt-5/qtlinguist-index.html>.

Index

Accessing an Existing SQLite Database.....	5	plpgsql.....	6
Branch Name.....	4p.	PostgreSQL.....	5p.
Branch Selection.....	4	postgresql_create_schema.sql.....	6
Clear.....	4	Qt.....	9
Connect.....	4p.	Qt 4.8.x.....	3
createdb.....	6	Qt 5.x.....	3
createlang.....	6	Recent SQLite Files.....	4
Creating an SQLite Database.....	5	Select SQLite Database.....	4
Disconnect.....	8	SQLite.....	3pp., 7
File.....	4p., 7p.	Translations.....	9
Linguist.....	9	Userid.....	5
local_db.....	4p.	xbook_admin.....	6
New SQLite Database.....	7	xbook_db.....	6
Password.....	5	YAZ.....	3