

# **BiblioteQ**

A Library Application

Document Version 1.00

## Table of Contents

Introduction.....	3
Accessing an Existing SQLite Database.....	4
Administrator Browser.....	5
Change Password.....	6
Connecting to a Database.....	7
Creating a PostgreSQL Database.....	8
Creating an SQLite Database.....	9
Custom Query.....	10
Database Enumerations Browser.....	11
Disconnecting from a Database.....	12
Document Changes.....	13
Version 1.00.....	13
Exporting a Table View to a CSV File.....	14
Main Window Tool Buttons.....	15
Member's Reservation History.....	18
PostgreSQL Accounts.....	19
Preparing biblioteq.conf.....	21
Translations.....	24
Upgrading an SQLite Database Schema.....	25


## Introduction

BiblioteQ is a complex, highly-configurable, and mature library application. The application supports large, medium, and small institutions. Personal libraries are also supported.

BiblioteQ should be functional on any operating system where Qt 4.8.x (or Qt 5.x and newer), SQLite, and YAZ are supported. BiblioteQ also supports the PostgreSQL database engine.


The source is available at <https://github.com/textbrowser/biblioteq>.

The purpose of this document is to detail the functionality of BiblioteQ. Installation instructions are not described in this document. Please refer to the Administrator Guide document for installation information.

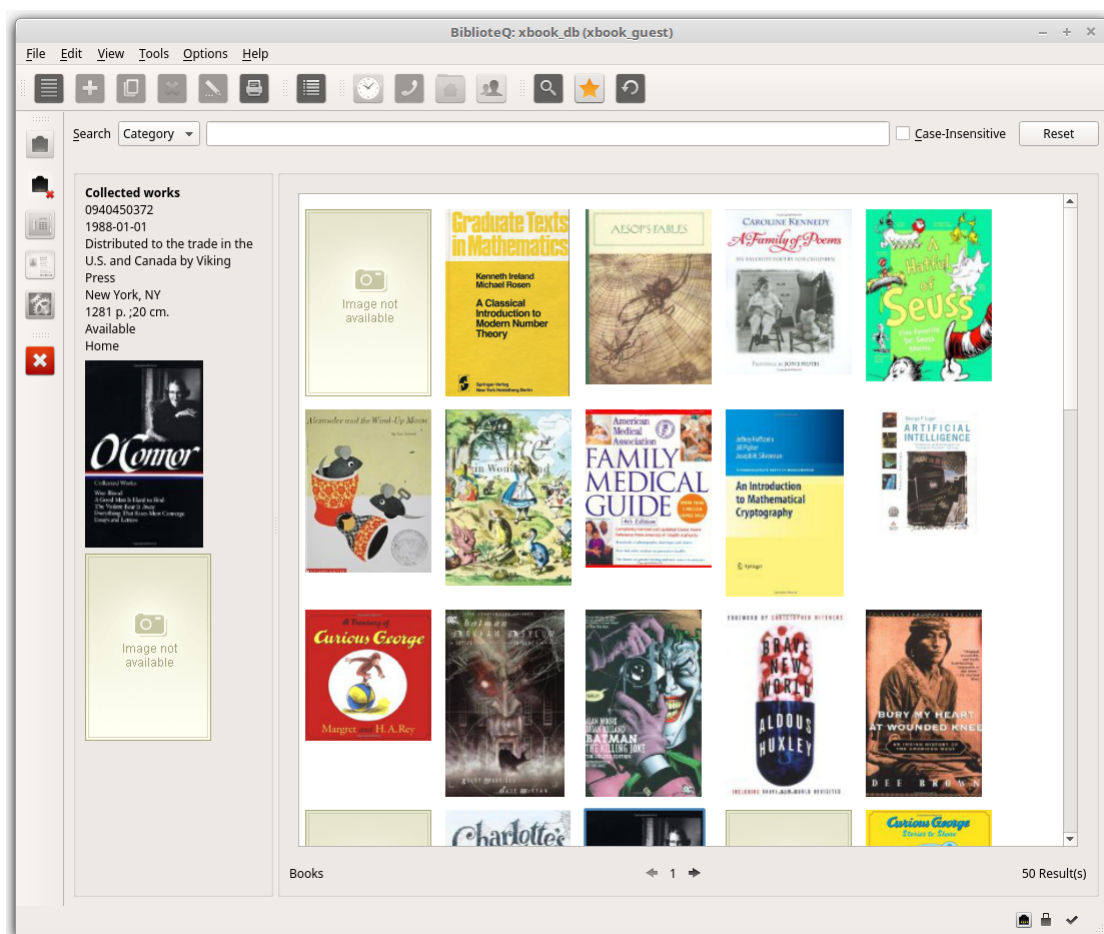


## Accessing an Existing SQLite Database

An existing SQLite database file may be opened via two methods. The first method involves the Recent SQLite Files option of the File menu.

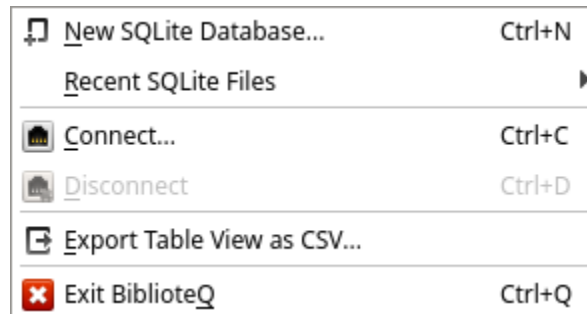

The Recent SQLite Files sub-menu contains a list of BiblioteQ's recently-accessed SQLite files. If an SQLite file is selected, the specified SQLite database is opened. Please note that BiblioteQ will first close an existing database, if one is open, before opening the specified database. A Clear option is also included in the sub-menu. If Clear is activated, the list of the recently-accessed SQLite files is cleared.

The second method of accessing an SQLite database involves the Branch Selection dialog. The dialog may be accessed via the Connect option of the File menu.

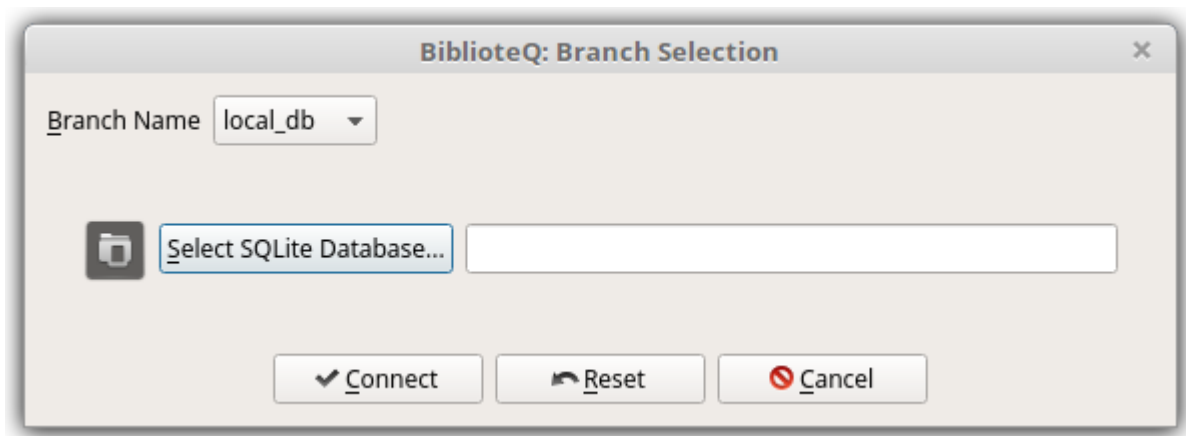

After opening the Branch Selection dialog, select local\_db as the Branch Name in order to prepare the dialog for accessing SQLite databases. Afterwards, click on the Select SQLite Database button to launch a file-selection dialog.

## Administrator Browser

The Administrator Browser is available if an administrator is connected to a PostgreSQL database. The browser may be accessed via the Create Administrator Privileges tool button.

Four roles are available. Changes must be committed via the Save Changes button.

The process of committing changes to the PostgreSQL database is as follows:

1. The current state is inspected. Administrators without privileges as well as duplicate administrators are discovered. If a discrepancy is revealed, the process is aborted.
2. A database transaction is prepared. If an error occurs, the process is aborted.
3. Deleted accounts are removed from the admin database table as well as from the PostgreSQL database. If an error occurs with either statement, the process is aborted and previous changes are reverted.
4. Existing admin table entries are updated. New accounts are inserted into the admin table. If an error occurs, the process is aborted and previous changes are reverted.
5. Existing admin table entries are granted assigned privileges after all potential privileges are revoked. New accounts are created in the PostgreSQL database and assigned the appropriate privileges. If an error occurs, the process is aborted and the previous changes are reverted.
6. If all of the aforementioned statements execute correctly, the transaction is committed.

Please note that leading and trailing spaces will be removed from user names during the database-recording process.


Please use lower-case IDs.

	Item Creation	Item Deletion	Item Reservations	Item Returns	Item Updates	Member Creation	Member Deletion	Member Updates
Administrator	✓	✓	✓	✓	✓	✓	✓	✓
Circulation			✓	✓				
Librarian	✓	✓			✓			

ID	Administrator	Circulation	Librarian	Membership
1 circulation	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2 librarian	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3 membership	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
4 xbook_admin	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

## Change Password

A PostgreSQL account's password may be changed via the Password Selection dialog. A password must contain at least eight characters.

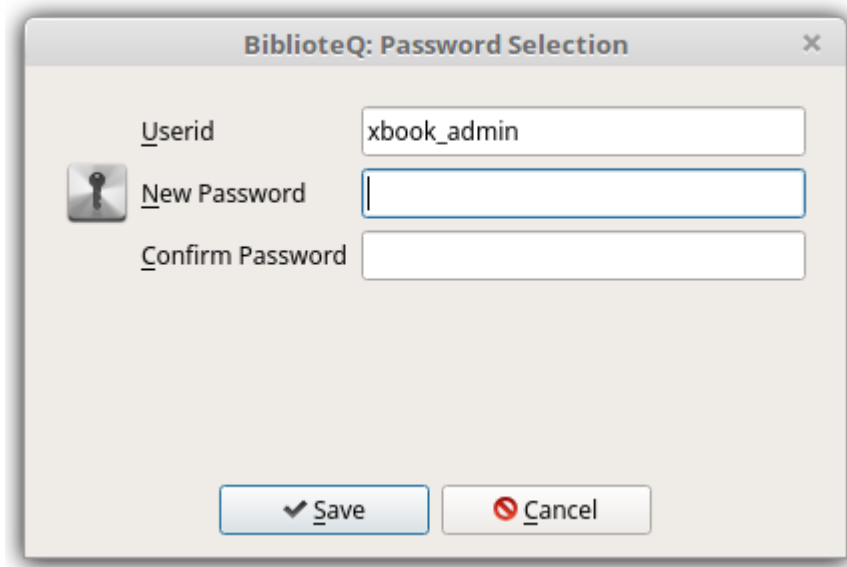


The image shows a dialog box titled "BiblioteQ: Password Selection" with a close button (X) in the top right corner. The dialog contains three input fields: "Userid" with the text "xbook\_admin", "New Password" (with a key icon to its left), and "Confirm Password". At the bottom, there are two buttons: "Save" (with a checkmark icon) and "Cancel" (with a red circle and slash icon).

## Connecting to a Database

BiblioteQ supports both the PostgreSQL and the SQLite database engines. This section will cover the details involved in connecting to a PostgreSQL database.



Click the Connect option of the File menu.

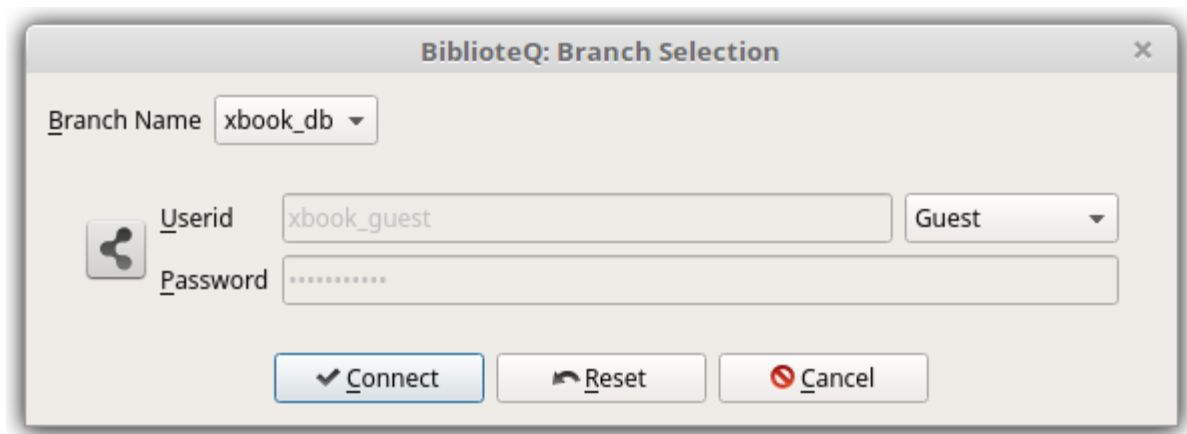

Then, select the appropriate non-local\_db Branch Name if one is available. Provide the Password and Userid information, if applicable, and press the Connect button.

Note: The sections Accessing an Existing SQLite Database and Creating an SQLite Database cover the details of accessing and creating SQLite databases, respectively.

## Creating a PostgreSQL Database


BiblioteQ supports PostgreSQL 8.x, 9.x, and newer. Please follow the PostgreSQL-provided documentation for installing PostgreSQL. After installing the required PostgreSQL packages, please perform the following operations:

1. Create the xbook\_db database via `createdb xbook_db -E UTF8` or via the PostgreSQL-recommended procedure. Please note that xbook\_db is only a suggestion.
2. Execute `createlang plpgsql -d xbook_db` or the PostgreSQL-recommended procedure for adding a new programming language to the xbook\_db database.
3. If desired, replace all instances of the default administrator xbook\_admin in postgresql\_create\_schema.sql file.
4. Log into your PostgreSQL xbook\_db database and load the postgresql\_create\_schema.sql file via `\i postgresql_create_schema.sql`.



## Creating an SQLite Database

A new BiblioteQ SQLite database file may be created via the New SQLite Database option of the File menu.

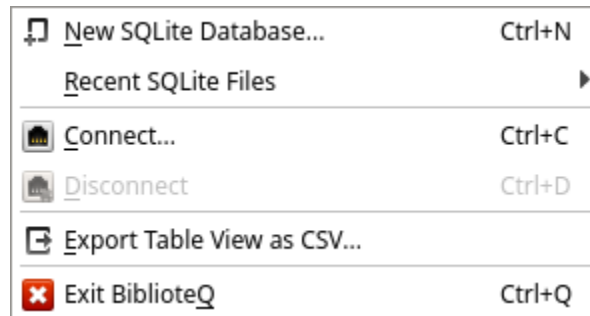


After the option is selected, a file-selection dialog is displayed. An existing or a new file may be specified. A confirmation dialog is displayed if an existing file is selected.

Once the SQLite database file has been initialized, BiblioteQ will open it. If a database is already open, a confirmation prompt is displayed. If confirmed, the current database is closed and the newly-created database is opened.

## Custom Query

Custom SQL queries may be performed via the Custom Query window.

After a successful query is performed, the main table's columns will be set according to the query statement.

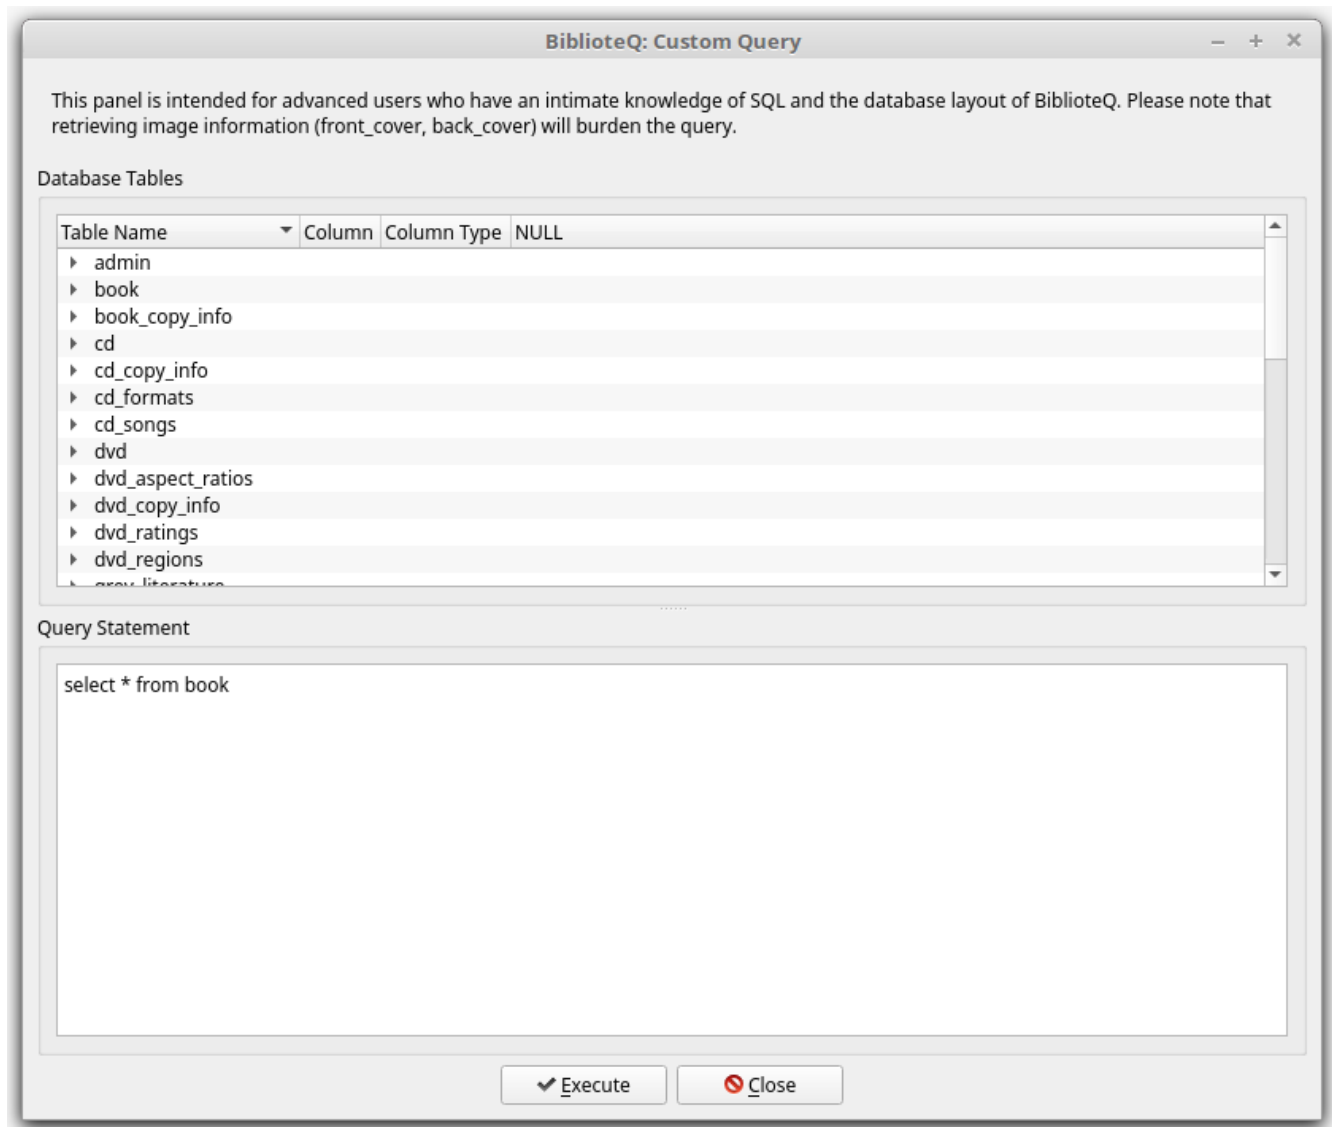

## Database Enumerations Browser

The Database Enumerations Browser is available to accounts having administrator or librarian privileges and is accessible via the Database Enumerations tool button. The browser contains configurable item values.

The process of committing changes to a database is as follows:

1. For each sub-panel (Book Binding Types, etc.), prepare a database transaction. If an error occurs, iterate to the next sub-panel.
2. Delete all items in the respective database table. For example, for the Book Binding Types sub-panel, all entries from the `book_binding_types` database table are deleted. If the process fails, revert the changes and proceed to the next sub-panel.
3. Insert the new values into the respective database table. If the process fails, revert the changes and proceed to the next sub-panel.
4. Commit the current database transaction.

BiblioteQ: Database Enumerations Browser

Book Binding Types

Hardcover
Paperback

CD Formats

DVD Aspect Ratios

DVD Ratings

DVD Regions

Languages

English
---------

Locations

Type	Location
1 Book	Home
2 Music CD	Home
3 DVD	Home
4 Journal	Home
5 Magazine	Home
6 Photograph Collection	Home

Monetary Units

Dollar
--------

Reservations Minimum Days

Type	Days
1 Books	1
2 DVDs	1
3 Journals	1
4 Magazines	1
5 Music CDs	1
6 Video Games	1

Video Game Platforms


Gamecube
Nintendo
Nintendo DS
PlayStation 2
Wii
XBox

Video Game Ratings

Everyone
Mature
Teen

## Disconnecting from a Database

To disconnect from a connected database, click the File menu. Then click the Disconnect option.

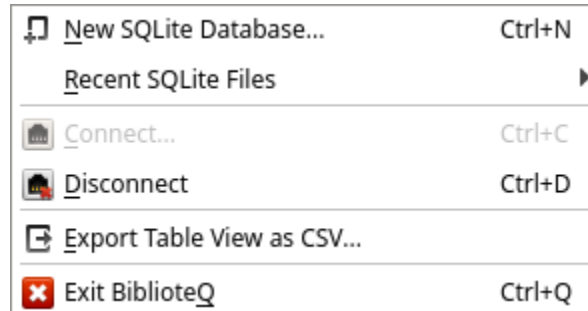


## Document Changes

### Version 1.00

- Initial version.

## Exporting a Table View to a CSV File

The current table view's contents may be exported to a CSV file via the Export Table View as CSV option of the File menu.

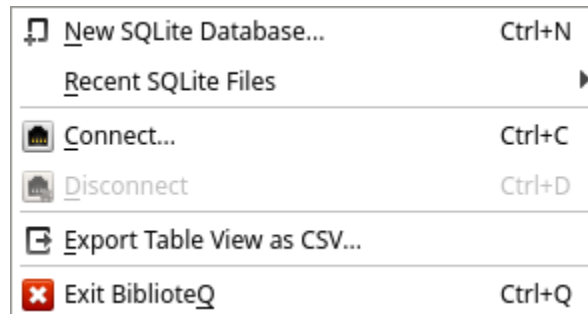

If clicked, a file-selection dialog is displayed.

The generated CSV file will contain comma-separated values. Values which contain commas will be encased in double-quotes. For example, *A book of abstract algebra,"Pinter, Charles C.",McGraw-Hill,1990-01-01,New York,2,"Algebra, Abstract.",English,0070501386,0.00,Dollar,1,Hardcover,Home,9780070501386,89035355,QA162 .P56 1990,512/.02,1,0,Original,As New,.*

The first line of the generated file contains the exported view's header strings.

## Main Window Tool Buttons

This page will describe the various tool buttons which are present on the main window.



The tool buttons are described from left to right.

### View Selected Item(s)

Open the detail window(s) of the selected item(s). A confirmation prompt is displayed if the number of selected items exceeds four. The option is not available if the current account has administrator privileges.

### Add Item

Add an item. The option is not available if the current account does not have Item Creation privileges.

### Duplicate Selected Item(s)

Open the detail window(s) of the selected item(s). A confirmation prompt is displayed if the number of selected items exceeds four. The option is not available if the current account does not have Item Creation privileges.

### Delete Selected Item(s)

Delete the selected item(s). A confirmation prompt is displayed. The option is not available if the current account does not have Item Deletion privileges.

### Modify Selected Item(s)

Modify the selected item(s). A confirmation prompt is displayed if the number of selected items exceeds four. The option is not available if the current account does not have Item Updates privileges.

### Print Current View

Print the items in the current view. A Print dialog is displayed.

### Select Viewable Columns

Select the columns that are to be shown in the main window's table.

### View Member's Reservation History (Patrons Only)

Display the current patron's reserved items. The option is only available for patrons.

### Request Selected Item(s) / Cancel Selected Request(s)

## BiblioteQ

Available for patrons, these options allow for the requesting of items as well as for the canceling of requested items.

### Reserve Selected Item

Reserve the selected item. The option is not available if the current account does not have Item Reservations privileges.

### Display Members Browser

Display the Members Browser window. Only available for Administrator, Circulation, and Membership accounts.

### Database Search

Activates a context menu containing various search options.

### Custom Database Query

Display the Custom Query window.

### Refresh Table

Reload the current view.



Again, the tool buttons are described from left to right.

### Connect

Display the Branch Selection dialog.

### Disconnect

Disconnect from the current database.

### Change Password

Display the Password Selection dialog. Not available for guest accounts.

### Configure Administrator Privileges

Display the Administrator Browser window. Only available for Administrator accounts.

### Database Enumerations

Display the Database Enumerations Browser window. Only available for Administrator and Librarian accounts.




BiblioteQ

Exit BiblioteQ

Terminate the application.

# Member’s Reservation History

A patron’s reservation history may be accessed via the Member’s Reservation History window. Reservation histories are initially disabled.

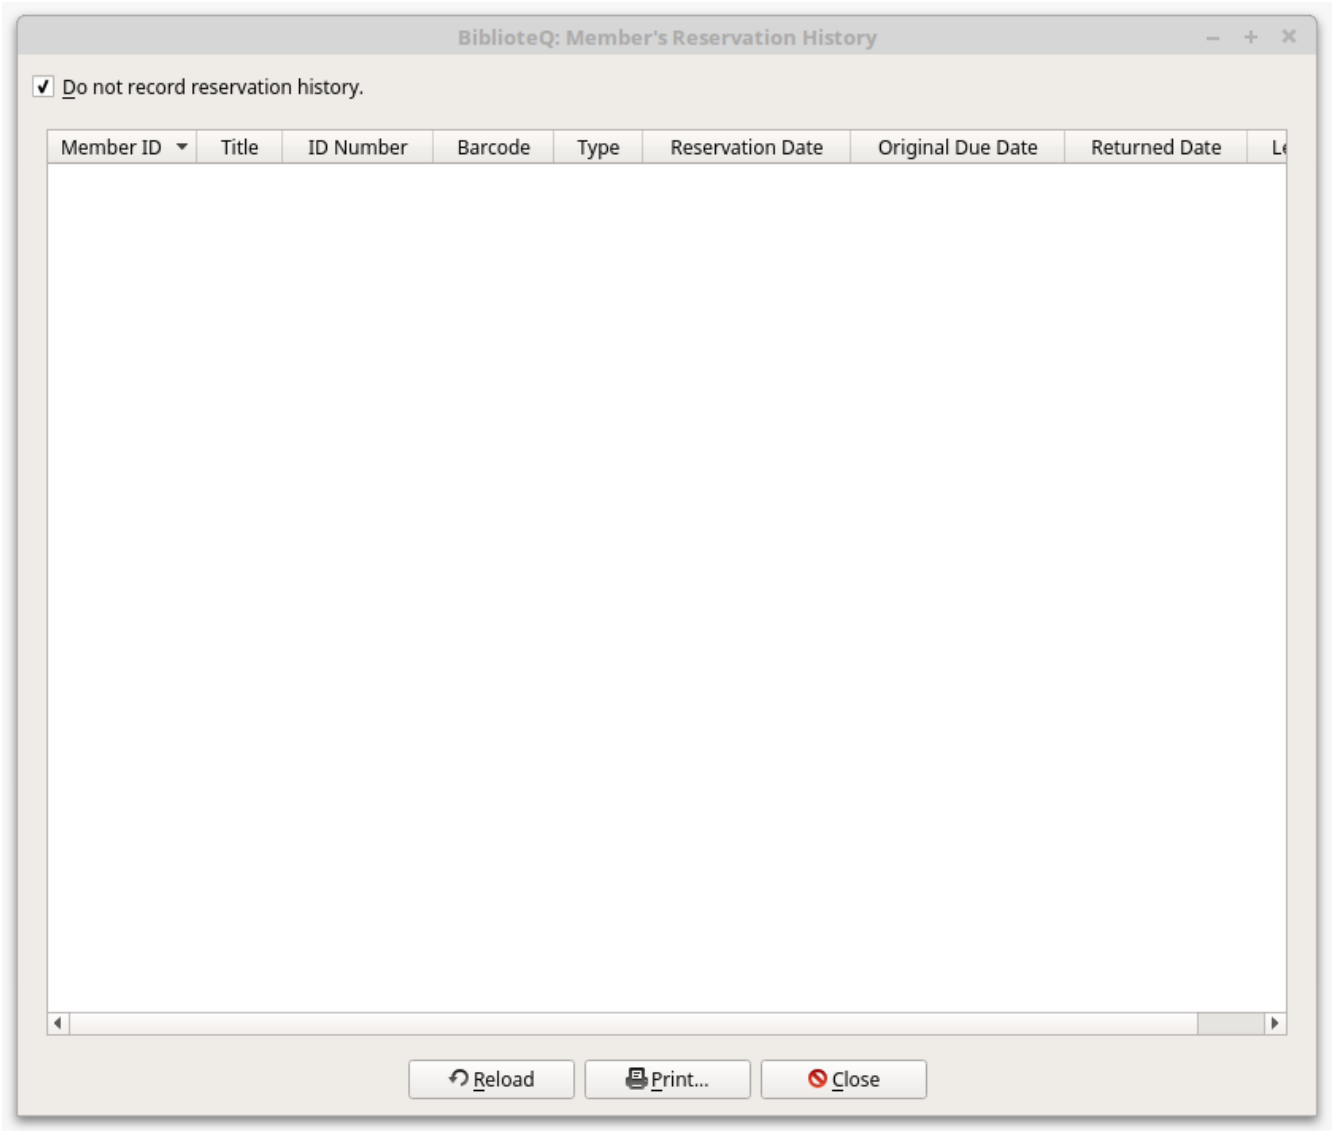


## PostgreSQL Accounts

BiblioteQ provides three tiers of PostgreSQL database roles: administrator, guest, and patron.

Initially, the postgresql\_create\_schema.sql script may be used to create the administrator account xbook\_admin.

Guest roles are provided a read-only interface. Patron roles are granted reservation permissions.

PostgreSQL accounts may thereafter be modified via the Administrator Browser. Please note that the Administrator Browser is only available within an administrator role.

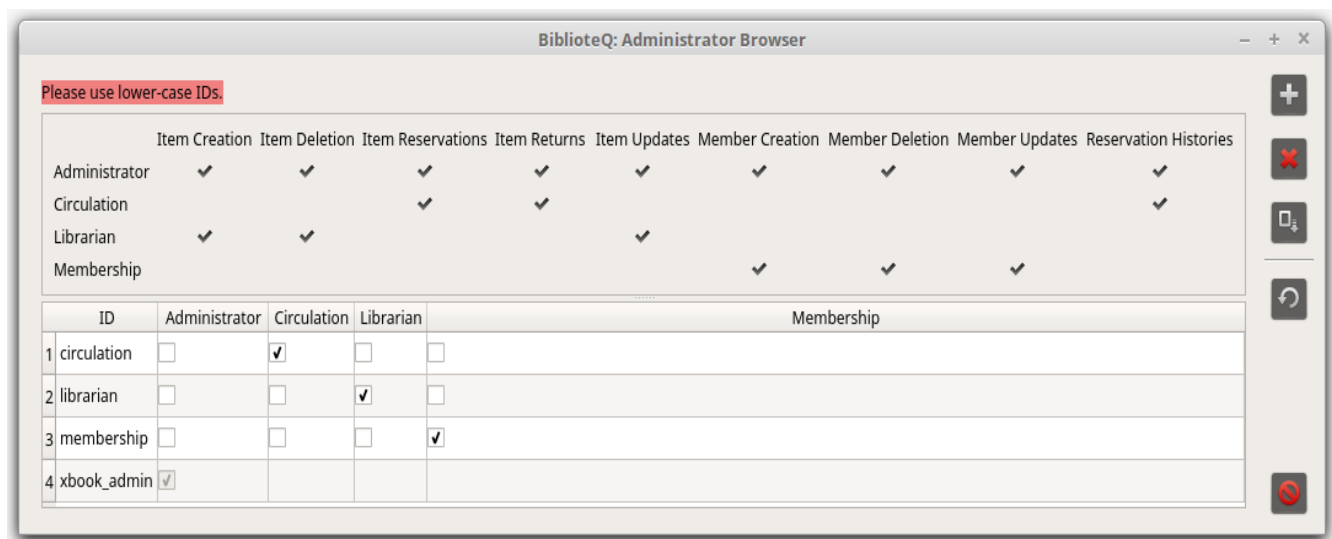

Additionally, there are four administrator levels: Administrator, Circulation, Librarian, and Membership. The abilities of each level is described next.

Administrator permissions:

- Item Creation  
Ability to create books, etc.
- Item Deletion  
Ability to remove books, etc.
- Item Reservations  
Ability to reserve items.
- Item Returns  
Ability to process returned items.

## BiblioteQ

- Item Updates  
Ability to modify books, etc.
- Member Creation  
Ability to create administrators and patrons.
- Member Deletion  
Ability to remove administrators and patrons.
- Member Updates  
Ability to update information of patrons and permissions of administrators.
- Reservation Histories  
Ability to read reservation histories of patrons.

### Circulation permissions:

- Item Reservations
- Item Returns
- Reservation Histories

### Librarian permissions:

- Item Creation
- Item Deletion
- Item Updates

### Membership permissions:

- Member Creation
- Member Deletion
- Member Updates

## Preparing biblioteq.conf

The biblioteq.conf file contains non-user settings. The location of the file varies with distribution. This page will describe the various properties which may be defined in the biblioteq.conf file.

### [Amazon Front Cover Images]

Describes required settings for retrieving book front-cover images from amazon.com.

host

Host name of the Amazon image server.

path

Path of the image file. BiblioteQ substitutes the respective ISBN in the percent sign.

The optional properties proxy\_host, proxy\_password, proxy\_port, proxy\_type, and proxy\_username are also supported. The proxy\_type property supports values of HTTP, None, Socks5, and System.

### [Amazon Back Cover Images]

Describes required settings for retrieving book back-cover images from amazon.com.

host

Host name of the Amazon image server.

path

Path of the image file. BiblioteQ substitutes the respective ISBN in the percent sign.

The optional properties proxy\_host, proxy\_password, proxy\_port, proxy\_type, and proxy\_username are also supported. The proxy\_type property supports values of HTTP, None, Socks5, and System.

### [Branch-1]

The first database branch.

connection\_options

PostgreSQL-specific connection options. An example is *connect\_timeout=10;sslmode=verify-full*.

database\_name

The name of the database as it will appear in the Branch Selection dialog.

database\_type

The database's type. Must be set to postgresql or sqlite.

## BiblioteQ

### hostname

The host name of the PostgreSQL database server. Both IP addresses and fully-qualified domain names may be assigned.

### port

The port value of the PostgreSQL database server.

### ssl\_enabled

If false, SSL/TLS communications are disabled.

### [SRU-1]

Describes the first SRU site.

### name

Name of the site as it will appear in the application.

### url\_isbn

Complete URL of the site for retrieving data via ISBNs. The tokens %1 and %2 are replaced by the ISBN-10 and ISBN-13 fields.

### url\_issn

Complete URL of the site for retrieving data via ISSNs. The token %1 is replaced by the ISSN field.

The optional properties proxy\_host, proxy\_password, proxy\_port, proxy\_type, and proxy\_username are also supported. The proxy\_type property supports values of HTTP, None, Socks5, and System.

### [Z39.50-1]

Describes the first Z39.50 site. Please also see <http://www.indexdata.com/yaz/doc/zoom.records.html>.

### database\_name

The remote database name.

### format

Render format. An example: *marc8,utf-8*.

### name

Name of the site as it will appear in the application.

### port

BiblioteQ

The remote database's port number.

record\_syntax

Preferred record syntax. Example: *MARC21*.

The optional properties password, proxy\_host, proxy\_port, and username are also supported.



## Translations

Translations are incomplete. Translating BiblioteQ is quite simple. Please download and install Qt from <https://download.qt.io>, download BiblioteQ's source, and become an expert in Qt's Linguist. Linguist documentation is available at <https://doc.qt.io/qt-5/qtlinguist-index.html>.



## Upgrading an SQLite Database Schema

It may be necessary to upgrade an existing BiblioteQ SQLite database schema after a software release. The upgrade tool is available off of the Tools menu. A confirmation prompt is displayed before the process is initiated. After the upgrade process is completed, a dialog containing abnormalities will be displayed.

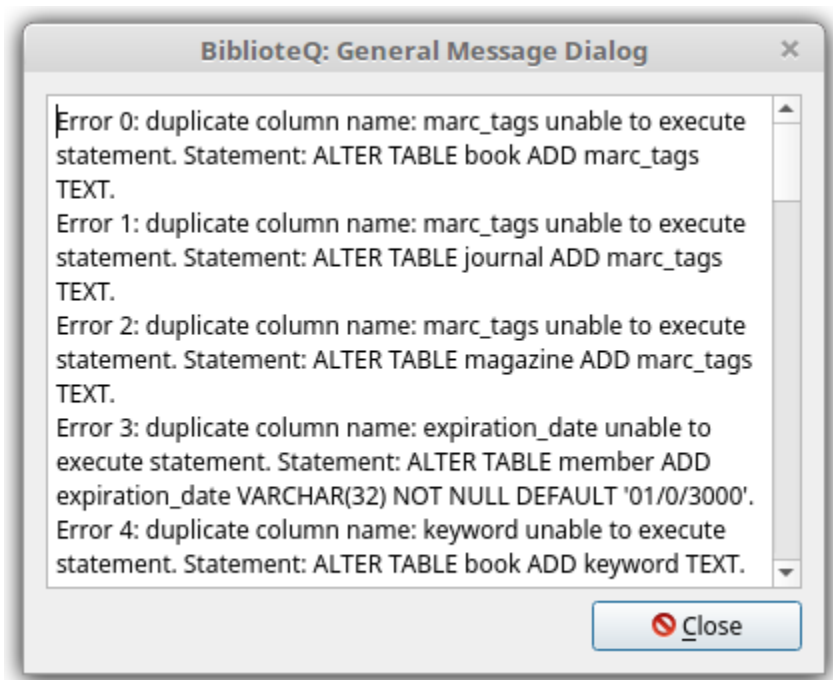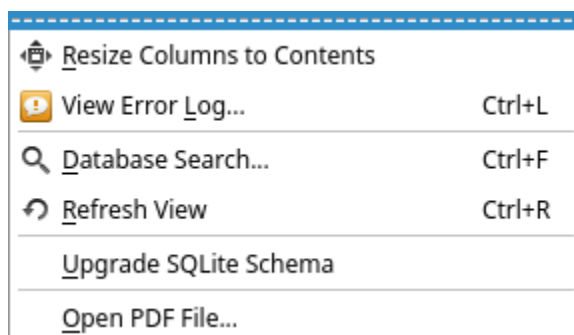

## Index

Accessing an Existing SQLite Database.....	7	Item Deletion.....	15, 19p.
Add Item.....	15	Item Reservations.....	16, 19p.
admin.....	5	Item Returns.....	19p.
administrator.....	11, 19	Item Updates.....	15, 20
Administrator.....	16, 19	librarian.....	11
Administrator Browser.....	5, 16, 19	Librarian.....	16, 19
Administrator Guide.....	3	Linguist.....	24
biblioteq.conf.....	21	local_db.....	4, 7
Book Binding Types.....	11	Member Creation.....	20
Branch Name.....	4, 7	Member Deletion.....	20
Branch Selection.....	4, 16, 21	Member Updates.....	20
Change Password.....	16	Member's Reservation History.....	18
Circulation.....	16, 19	Membership.....	16, 19
Clear.....	4	Modify Selected Item(s).....	15
Configure Administrator Privileges.....	16	name.....	22
Connect.....	4, 7, 16	New SQLite Database.....	9
connection_options.....	21	None.....	21p.
Create Administrator Privileges.....	5	password.....	6, 23
createdb.....	8	Password.....	7
createlang.....	8	Password Selection.....	6, 16
Creating an SQLite Database.....	7	path.....	21
CSV.....	14	patron.....	19
Custom Database Query.....	16	plpgsql.....	8
Custom Query.....	10	port.....	22
Database Enumerations.....	11, 16	postgresql.....	21
Database Enumerations Browser.....	11, 16	PostgreSQL.....	5, 7p., 19
Database Search.....	16	postgresql_create_schema.sql.....	8, 19
database_name.....	21p.	Print Current View.....	15
database_type.....	21	proxy_host.....	21p.
Delete Selected Item(s).....	15	proxy_password.....	21p.
Disconnect.....	12, 16	proxy_port.....	21p.
Display Members Browser.....	16	proxy_type.....	21p.
Duplicate Selected Item(s).....	15	proxy_username.....	21p.
Exit BiblioteQ.....	17	Qt.....	24
Export Table View as CSV.....	14	Qt 4.8.x.....	3
File.....	4, 7, 9, 12, 14	Qt 5.x.....	3
format.....	22	Recent SQLite Files.....	4
guest.....	19	record_syntax.....	23
host.....	21	Refresh Table.....	16
hostname.....	22	Request Selected Item(s) / Cancel Selected	
HTTP.....	21p.	Request(s).....	15
Item Creation.....	15, 19p.	Reservation Histories.....	20

## BiblioteQ

Reserve Selected Item.....	16	Userid.....	7
Select SQLite Database.....	4	username.....	23
Select Viewable Columns.....	15	View Member's Reservation History (Patrons	
Socks5.....	21	p. Only).....	15
sqlite.....	21	View Selected Item(s).....	15
SQLite.....	3p., 7, 9, 25	xbook_admin.....	8, 19
ssl_enabled.....	22	xbook_db.....	8
System.....	21	p. YAZ.....	3
Tools.....	25	[Amazon Back Cover Images].....	21
Translations.....	24	[Amazon Front Cover Images].....	21
upgrade.....	25	[Branch-1].....	21
url_isbn.....	22	[SRU-1].....	22
url_issn.....	22	[Z39.50-1].....	22